

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2152.8 cd per klm. 0.0 degrees vertical 1.0 degrees horizontal
Beam Spread	At 10% of Imax	66.4V x 65.4H
	At 50% of Imax	36.3V x 37.6H
	At 90% of Imax	13.9V x 16.4H
Beam Flux	Total	999.5 lumens per klm.
	To 10% of Imax	877.7 lumens per klm.
	To 50% of Imax	500.9 lumens per klm.
	To 90% of Imax	94.3 lumens per klm.
Upward LOR		0.0 %
Downward LOR		100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H_(b) Range:-90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-11-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.14V I:0.0981A P:10.202W PF:0.4723 Freq:50.00Hz Lamp Flux:620.161x1 lm		
NAME:6856	TYPE:	WEIGHT:266g
SPEC.:10W	DIM.: 13.7*3.5*7cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:35°

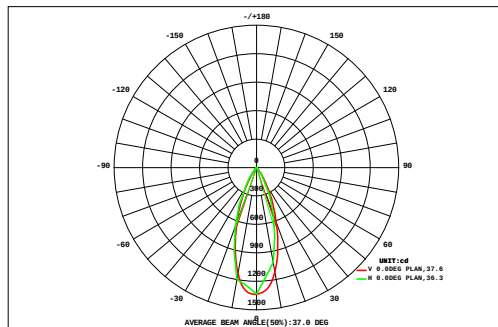

DATA OF LAMP		Eff:60.79lm/W	
MODEL		Imax(cd)	1335
NOMINAL POWER(W)		AVAILABILITY(%)	89.0
RATED VOLTAGE(V)		Avai. FLUX(lm)	551.7
NOMINAL FLUX(lm)	620.161	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	620.2
TEST VOLTAGE(V)	0	q @50%(H,V)	38,36DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				F t	F a
	90	80	70	60	50	40	30	20	10	0	-10	-20	-30	-40	-50	-60	-70	-80	-90			
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
	0.01	0.02	0.03	0.04	0.06	0.08	0.12	0.14	0.16	0.16	0.15	0.12	0.08	0.06	0.04	0.03	0.02	0.01	1.29			
	0.00	0.01	0.02	0.05	0.09	0.14	0.17	0.20	0.21	0.21	0.20	0.18	0.14	0.08	0.04	0.02	0.01	0.00	1.79			
	0.00	0.01	0.03	0.08	0.13	0.18	0.23	0.26	0.28	0.28	0.26	0.23	0.19	0.13	0.07	0.02	0.01	0.00	2.40			
	0.00	0.01	0.04	0.10	0.17	0.22	0.28	0.45	0.60	0.64	0.53	0.34	0.22	0.16	0.09	0.03	0.01	0.00	3.92			
	0.00	0.02	0.06	0.13	0.20	0.29	0.69	1.70	3.01	3.29	2.28	0.97	0.39	0.19	0.12	0.05	0.01	0.00	13.4			
	0.00	0.02	0.08	0.16	0.23	0.64	2.34	6.54	11.1	11.9	8.12	3.58	0.97	0.27	0.15	0.07	0.02	0.00	46.1			
	0.00	0.03	0.09	0.18	0.30	1.32	5.82	15.4	24.9	26.6	18.7	8.26	2.04	0.42	0.17	0.08	0.02	0.00	104			
	0.00	0.03	0.10	0.20	0.40	2.02	9.10	22.5	36.3	38.4	26.9	12.0	3.03	0.56	0.18	0.09	0.02	0.00	152			
	0.00	0.03	0.10	0.20	0.42	2.11	8.94	21.7	34.2	36.3	25.7	11.5	2.95	0.56	0.18	0.09	0.02	0.00	145			
	0.00	0.03	0.09	0.18	0.36	1.49	5.80	14.0	21.8	22.8	16.0	7.17	1.79	0.40	0.17	0.08	0.02	0.00	92.2			
	0.00	0.02	0.08	0.16	0.26	0.76	2.42	5.83	8.88	9.19	6.39	2.75	0.82	0.24	0.15	0.07	0.02	0.00	38.0			
	0.00	0.02	0.06	0.14	0.21	0.34	0.79	1.35	2.05	2.10	1.46	0.72	0.33	0.19	0.13	0.05	0.01	0.00	9.95			
	0.00	0.01	0.05	0.11	0.18	0.24	0.25	0.44	0.50	0.50	0.43	0.27	0.21	0.19	0.10	0.04	0.01	0.00	3.55			
	0.00	0.01	0.04	0.09	0.15	0.21	0.27	0.27	0.26	0.25	0.25	0.26	0.22	0.15	0.07	0.02	0.01	0.00	2.54			
	0.00	0.01	0.02	0.06	0.11	0.16	0.20	0.23	0.25	0.26	0.24	0.21	0.16	0.10	0.04	0.02	0.01	0.00	2.09			
	0.00	0.01	0.02	0.03	0.05	0.08	0.11	0.14	0.15	0.15	0.14	0.12	0.08	0.04	0.02	0.02	0.01	0.00	1.18			
	0.00	0.00	0.01	0.01	0.01	0.01	0.02	0.03	0.03	0.04	0.03	0.02	0.01	0.01	0.01	0.01	0.00	0.00	0.27			
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL (DEG) 20 30 40 50 60 70 80 90																						
F t	0.07	0.29	0.93	1.90	3.32	10.3	37.6	91.2	145	153	108	48.7	13.6	3.76	1.74	0.77	0.23	0.06	620	---		
F a	0.00	0.00	0.00	0.00	0.00	2.08	29.3	84.8	139	148	102	42.0	4.76	0.00	0.00	0.00	0.00	0.00	---	552		

one-half-peak spread: U:16.7,D:19.9 , L:20.0,R:17.9


NEMA Beam Type: Type 4

H_b) Range: -90 - 90DEG
H_b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-11-10

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.14V I:0.0981A P:10.202W PF:0.4723 Freq:50.00Hz Lamp Flux:620.161x1 lm		
NAME:6856	TYPE:	WEIGHT:266g
SPEC.:10W	DIM.: 13.7*3.5*7cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:35°

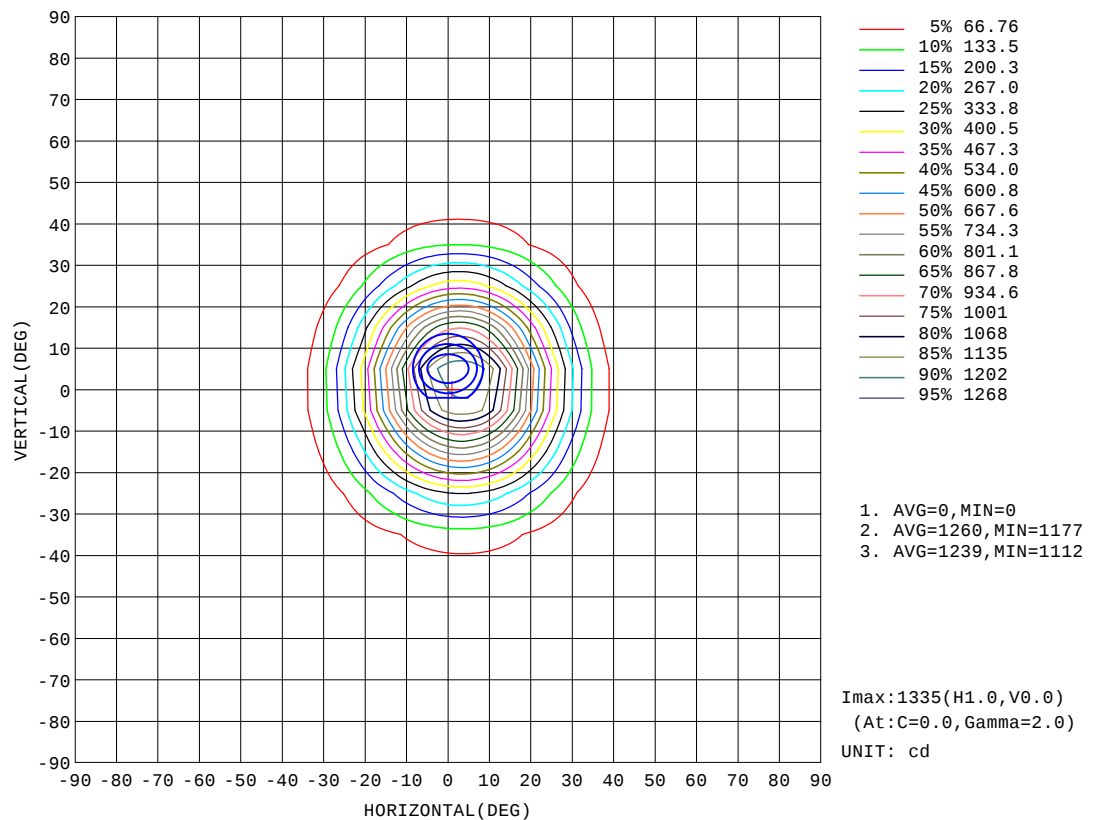


H_(b) Range:-90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-11-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.14V I:0.0981A P:10.202W PF:0.4723 Freq:50.00Hz Lamp Flux:620.16lx1 lm		
NAME:6856	TYPE:	WEIGHT:266g
SPEC.:10W	DIM.: 13.7*3.5*7cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:35°

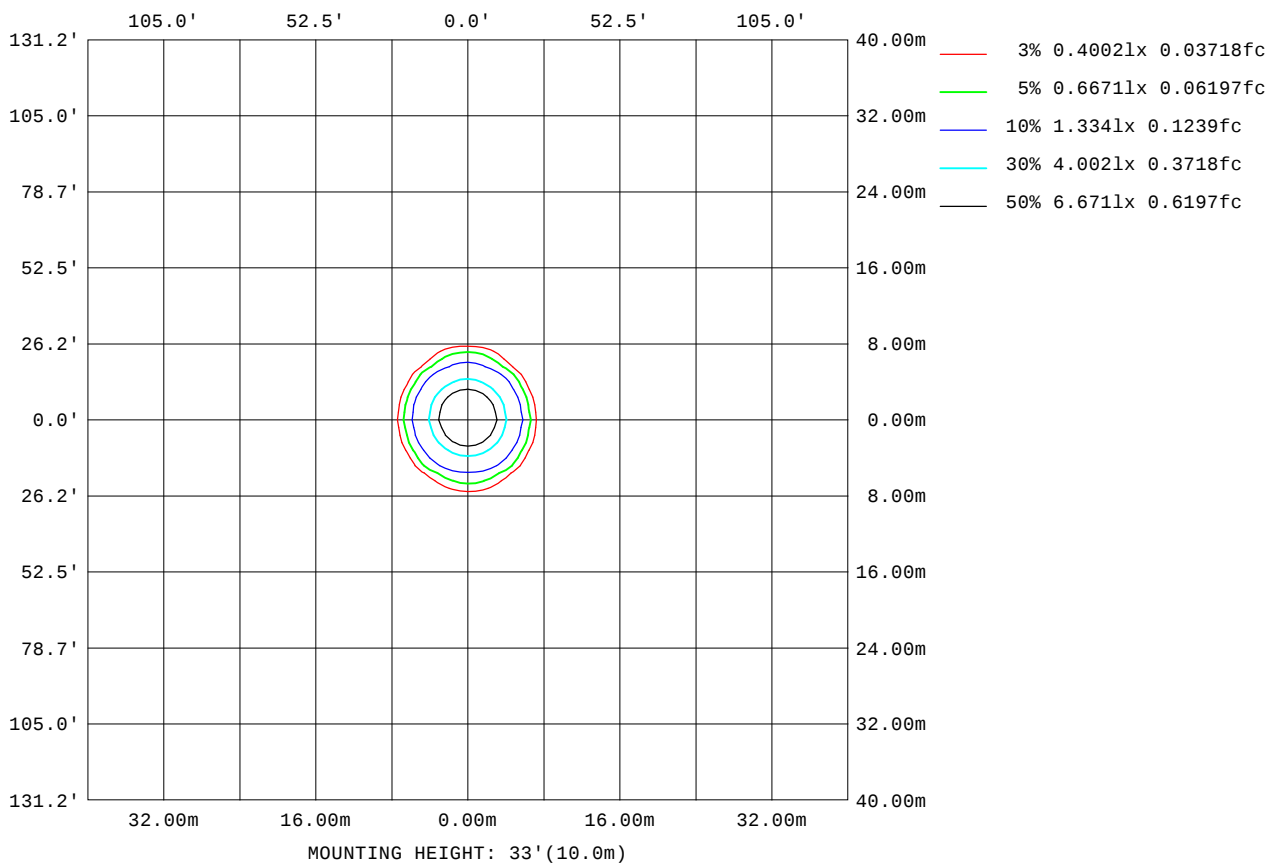

H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: NORDECOR
Test Date: 2024-11-10

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 5.780m [K=1.0000]
Remarks:

Planar Illuminance Curve

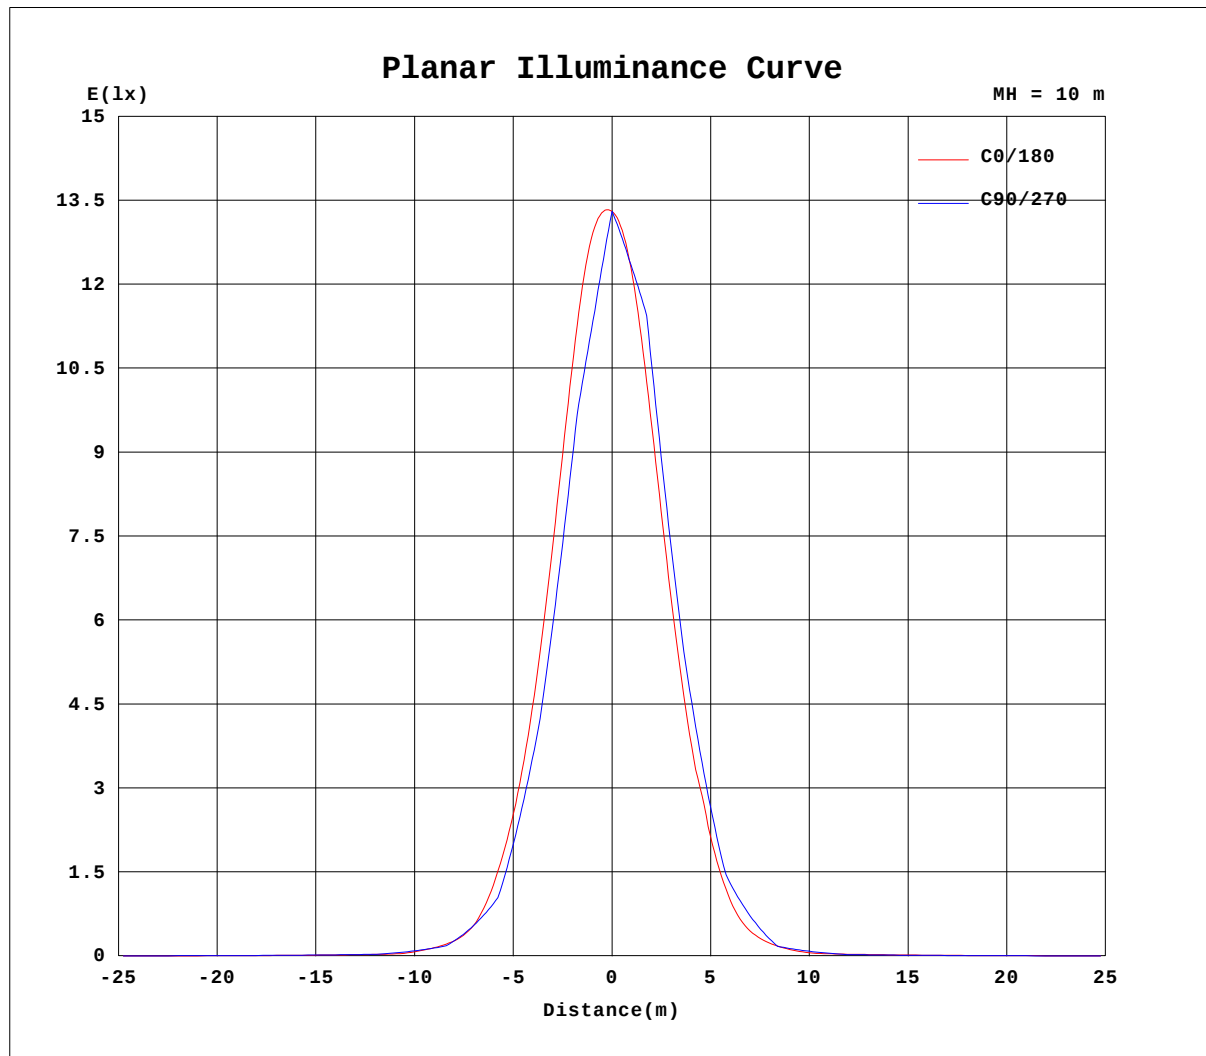


H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: NORDECOR
Test Date: 2024-11-10

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 5.780m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.14V I:0.0981A P:10.202W PF:0.4723 Freq:50.00Hz Lamp Flux:620.16lx1 lm		
NAME:6856	TYPE:	WEIGHT:266g
SPEC.:10W	DIM.: 13.7*3.5*7cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:35°

Flux out:310.2 lm

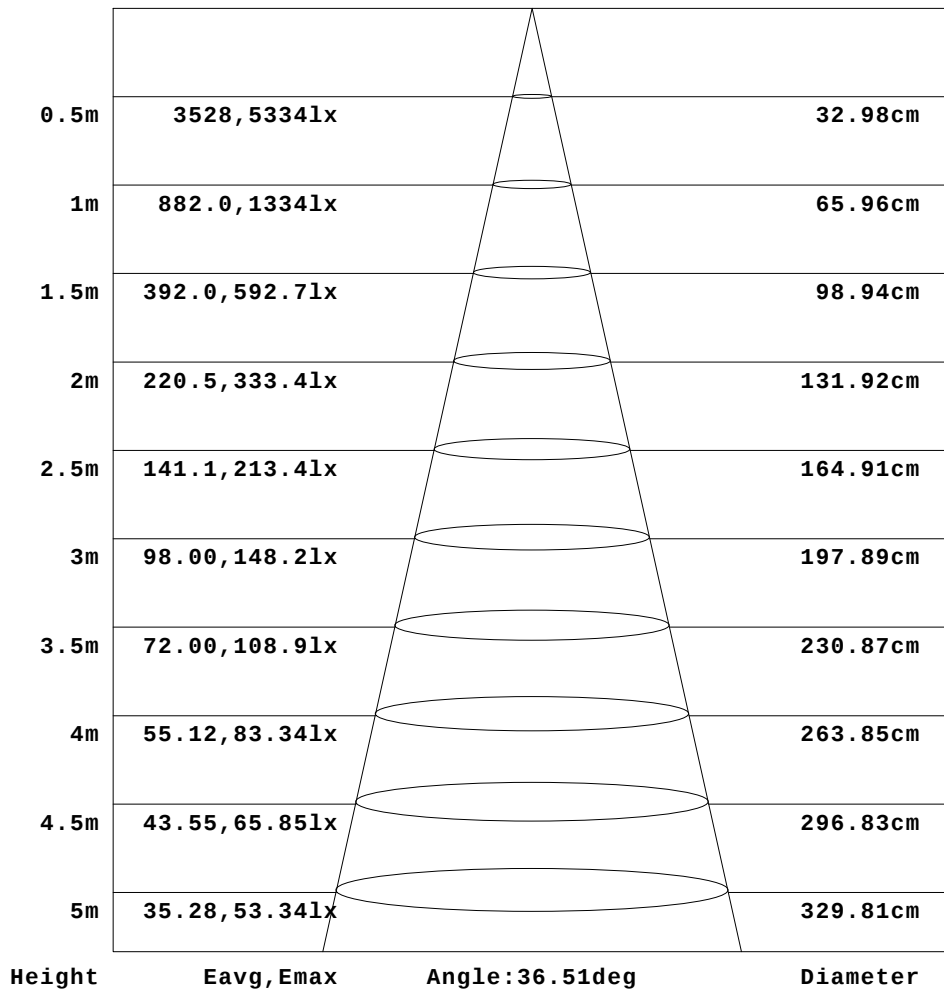

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-11-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.14V I:0.0981A P:10.202W PF:0.4723 Freq:50.00Hz Lamp Flux:620.161x1 lm					
NAME:6856			TYPE:		WEIGHT:266g
SPEC.:10W			DIM.: 13.7*3.5*7cm		SERIAL No.:01
MFR.: NORDECOR			SUR.:		Shielding Angle:35°

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	1.22	1.26	1.29	1.29	1.32	1.33	1.35	1.37	1.39	1.42	1.52	1.79	2.12	2.45	2.75	2.95	3.07	3.16	3.21
-75	1.25	1.31	1.36	1.39	1.41	1.42	1.46	1.61	1.90	2.28	2.70	3.15	3.57	3.94	4.27	4.53	4.71	4.85	4.94
-70	1.35	1.42	1.46	1.50	1.53	1.56	1.69	2.17	2.84	3.62	4.41	5.04	5.48	5.82	6.12	6.36	6.52	6.67	6.74
-65	1.36	1.42	1.49	1.52	1.55	1.68	2.07	2.75	3.61	4.50	5.31	6.01	6.59	7.06	7.45	7.79	8.06	8.26	8.38
-60	1.44	1.51	1.55	1.60	1.66	2.23	3.21	4.35	5.45	6.37	7.09	7.71	8.27	8.77	9.21	9.57	9.85	10.0	10.1
-55	1.42	1.47	1.53	1.56	1.68	2.25	3.30	4.53	5.70	6.70	7.54	8.28	8.95	9.55	10.1	10.6	10.9	11.2	11.4
-50	1.47	1.51	1.54	1.61	2.25	3.48	4.88	6.16	7.20	8.08	8.89	9.66	10.4	11.0	11.5	12.0	12.4	12.6	12.7
-45	1.45	1.50	1.54	1.59	2.04	3.23	4.71	6.10	7.24	8.20	9.08	9.89	10.7	11.3	13.7	18.4	22.3	24.8	26.4
-40	1.49	1.55	1.60	1.92	3.14	4.75	6.27	7.47	8.45	9.39	10.2	11.0	11.8	13.5	21.6	29.8	35.5	39.2	40.9
-35	1.49	1.56	1.61	1.74	2.75	4.41	6.07	7.46	8.57	9.53	10.4	11.4	18.3	26.7	38.0	54.0	71.9	88.3	98.9
-30	1.55	1.64	1.72	2.52	4.29	6.09	7.63	8.82	9.85	10.8	11.6	18.5	35.0	52.0	72.9	99.5	129	152	161
-25	1.55	1.64	1.74	2.05	3.61	5.57	7.36	8.78	9.95	10.9	12.5	22.4	40.3	68.8	119	179	241	295	330
-20	1.66	1.78	1.93	3.22	5.29	7.27	8.90	10.2	11.3	12.3	24.0	45.3	75.9	141	238	332	421	487	513
-15	1.61	1.72	1.87	2.39	4.36	6.51	8.42	9.95	11.3	12.4	19.7	42.3	77.7	155	270	407	551	673	749
-10	1.67	1.87	2.06	3.77	6.05	8.14	9.88	11.3	12.6	17.0	40.8	75.3	160	300	467	656	835	965	1016
-5	1.63	1.75	1.93	2.60	4.75	7.03	9.02	10.7	12.1	13.4	27.4	56.7	116	247	415	626	853	1047	1156
0	1.71	1.88	2.14	3.90	6.23	8.41	10.2	11.7	13.1	20.0	45.6	95.1	215	397	610	870	1119	1283	1334
5	1.63	1.74	1.92	2.59	4.73	7.01	9.00	10.6	12.1	13.4	26.7	57.2	121	262	441	667	916	1130	1248
10	1.68	1.83	2.06	3.74	6.01	8.10	9.84	11.3	12.6	16.6	40.3	80.1	183	341	535	764	988	1145	1200
15	1.60	1.70	1.85	2.36	4.30	6.46	8.36	9.90	11.2	12.3	19.0	43.1	84.4	179	319	489	666	822	914
20	1.63	1.75	1.91	3.16	5.23	7.17	8.79	10.1	11.2	12.1	24.1	47.3	85.5	177	303	426	541	628	656
25	1.55	1.61	1.72	2.01	3.54	5.47	7.22	8.63	9.75	10.7	12.2	22.6	42.5	78.7	146	229	313	390	434
30	1.52	1.61	1.70	2.45	4.20	5.94	7.43	8.56	9.51	10.3	10.9	19.4	36.1	55.2	85.8	132	181	214	224
35	1.47	1.52	1.59	1.71	2.66	4.26	5.84	7.16	8.17	9.00	9.71	10.8	18.1	26.8	40.3	63.1	91.7	117	130
40	1.46	1.51	1.58	1.83	2.99	4.52	5.92	7.02	7.88	8.60	9.22	9.78	10.2	12.7	20.3	28.0	34.1	37.9	39.2
45	1.43	1.45	1.50	1.55	1.92	3.03	4.39	5.65	6.66	7.46	8.13	8.71	9.24	9.79	12.3	16.6	20.3	23.0	24.5
50	1.41	1.44	1.48	1.52	2.06	3.16	4.43	5.55	6.44	7.15	7.74	8.30	8.79	9.21	9.56	9.85	10.1	10.2	10.2
55	1.42	1.43	1.47	1.50	1.59	2.05	3.01	4.09	5.09	5.94	6.63	7.19	7.67	8.10	8.46	8.76	8.99	9.14	9.23
60	1.43	1.46	1.50	1.53	1.57	2.01	2.88	3.87	4.81	5.59	6.20	6.67	7.08	7.43	7.72	7.95	8.12	8.22	8.25
65	1.46	1.47	1.50	1.54	1.58	1.65	1.99	2.57	3.31	4.07	4.76	5.37	5.84	6.19	6.48	6.71	6.88	6.99	7.07
70	1.50	1.53	1.55	1.59	1.61	1.64	1.74	2.15	2.75	3.40	4.11	4.67	5.03	5.29	5.51	5.68	5.80	5.87	5.91
75	1.54	1.54	1.56	1.59	1.62	1.64	1.66	1.78	2.04	2.37	2.70	3.13	3.53	3.86	4.17	4.39	4.52	4.60	4.65
80	1.56	1.58	1.61	1.62	1.64	1.65	1.67	1.69	1.71	1.73	1.82	2.09	2.42	2.81	3.11	3.27	3.34	3.40	3.43
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: NORDECOR
Test Date: 2024-11-10

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 5.780m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.14V I:0.0981A P:10.202W PF:0.4723 Freq:50.00Hz Lamp Flux:620.161x1 lm		
NAME:6856	TYPE:	WEIGHT:266g
SPEC.:10W	DIM.: 13.7*3.5*7cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:35°

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	3.23	3.22	3.10	2.66	2.20	1.77	1.49	1.43	1.40	1.38	1.36	1.32	1.31	1.29	1.26	1.23	1.20	1.15
-75	4.98	4.96	4.91	4.70	4.36	3.94	3.39	2.84	2.32	1.88	1.57	1.44	1.39	1.36	1.32	1.30	1.26	1.22
-70	6.72	6.64	6.53	6.32	6.05	5.45	4.61	3.63	2.68	1.96	1.57	1.49	1.43	1.38	1.36	1.32	1.26	1.17
-65	8.40	8.34	8.20	7.98	7.68	7.27	6.64	5.81	4.75	3.68	2.70	1.97	1.55	1.42	1.37	1.34	1.30	1.27
-60	10.0	9.90	9.64	9.29	8.86	8.36	7.76	6.75	5.53	4.18	2.86	1.89	1.45	1.39	1.36	1.32	1.29	1.25
-55	11.4	11.3	11.0	10.6	10.2	9.64	9.04	8.29	7.30	6.02	4.60	3.19	2.03	1.47	1.34	1.31	1.29	1.27
-50	12.6	12.4	12.0	11.5	10.9	10.2	9.49	8.70	7.59	6.17	4.61	3.01	1.81	1.33	1.30	1.29	1.26	1.23
-45	26.8	25.8	23.3	19.6	14.9	11.5	10.5	9.74	8.89	7.79	6.35	4.73	3.08	1.82	1.33	1.29	1.29	1.27
-40	40.2	36.6	30.6	22.2	14.1	11.4	10.6	9.80	8.95	7.75	6.18	4.44	2.68	1.54	1.31	1.29	1.29	1.29
-35	101	93.6	78.3	58.5	40.2	27.3	18.9	11.7	9.95	9.07	7.84	6.21	4.38	2.60	1.52	1.38	1.36	1.34
-30	155	134	103	71.9	49.2	32.8	17.6	10.7	9.95	9.04	7.61	5.82	3.87	2.11	1.47	1.43	1.41	1.35
-25	335	310	259	196	132	75.7	42.4	23.4	12.6	10.2	9.16	7.60	5.68	3.63	1.97	1.55	1.51	1.47
-20	492	430	340	243	142	73.3	42.1	21.7	11.0	10.2	8.94	7.14	5.06	2.92	1.72	1.63	1.55	1.51
-15	760	702	586	442	297	170	82.6	43.0	20.5	11.2	10.2	8.74	6.76	4.56	2.49	1.75	1.67	1.60
-10	975	847	662	464	289	149	67.7	35.8	14.2	11.1	9.87	8.04	5.86	3.55	1.97	1.79	1.66	1.62
-5	1172	1093	907	672	448	266	126	57.4	28.8	12.0	10.8	9.36	7.37	5.09	2.85	1.90	1.80	1.69
0	1303	1136	874	603	375	201	84.8	41.8	17.2	11.4	10.2	8.39	6.18	3.83	2.08	1.88	1.78	1.69
5	1261	1167	958	703	466	275	128	57.1	28.6	11.9	10.7	9.30	7.32	5.06	2.82	1.91	1.81	1.70
10	1138	968	739	509	317	157	67.5	35.0	14.1	10.9	9.74	7.94	5.79	3.50	1.97	1.81	1.71	1.61
15	919	835	681	503	331	184	84.5	42.4	20.1	10.9	10.00	8.56	6.64	4.48	2.44	1.76	1.67	1.59
20	620	530	411	288	161	76.2	41.7	21.2	10.7	9.88	8.69	6.97	4.95	2.85	1.69	1.60	1.53	1.49
25	435	393	318	232	150	80.7	42.2	22.7	12.1	9.71	8.78	7.34	5.53	3.53	1.92	1.54	1.49	1.44
30	209	172	122	77.6	49.7	31.8	16.8	9.94	9.34	8.54	7.25	5.60	3.72	2.04	1.45	1.42	1.38	1.34
35	130	117	92.1	63.8	40.7	26.3	17.6	10.7	9.09	8.38	7.31	5.87	4.17	2.48	1.47	1.35	1.33	1.31
40	37.8	34.1	27.9	20.2	12.5	9.75	9.29	8.70	8.05	7.06	5.73	4.15	2.51	1.46	1.27	1.26	1.24	1.23
45	24.6	23.3	20.9	17.3	13.0	9.75	8.97	8.44	7.82	6.94	5.75	4.34	2.86	1.71	1.27	1.25	1.23	1.22
50	10.1	9.97	9.71	9.37	8.97	8.53	8.04	7.45	6.61	5.48	4.12	2.70	1.67	1.26	1.24	1.23	1.21	1.20
55	9.22	9.12	8.96	8.70	8.39	8.02	7.60	7.04	6.29	5.27	4.08	2.86	1.87	1.39	1.30	1.28	1.25	1.24
60	8.21	8.09	7.92	7.67	7.38	7.03	6.55	5.76	4.78	3.67	2.53	1.73	1.38	1.35	1.32	1.29	1.29	1.29
65	7.07	7.02	6.91	6.75	6.54	6.21	5.72	5.05	4.21	3.31	2.47	1.87	1.53	1.43	1.41	1.38	1.35	1.34
70	5.89	5.84	5.74	5.60	5.36	4.83	4.14	3.35	2.53	1.90	1.60	1.56	1.52	1.48	1.46	1.43	1.41	1.41
75	4.66	4.65	4.60	4.40	4.10	3.71	3.23	2.78	2.36	1.96	1.70	1.61	1.58	1.55	1.53	1.50	1.49	1.47
80	3.44	3.44	3.27	2.87	2.41	2.01	1.76	1.71	1.69	1.67	1.65	1.63	1.62	1.59	1.57	1.55	1.53	1.54
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: NORDECOR
Test Date: 2024-11-10

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 5.780m [K=1.0000]
Remarks: