

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		4502.9 cd per klm. 0.0 degrees vertical -3.0 degrees horizontal
Beam Spread	At 10% of Imax	46.2V x 44.8H
	At 50% of Imax	26.1V x 25.4H
	At 90% of Imax	8.0V x 10.2H
Beam Flux	Total	993.4 lumens per klm.
	To 10% of Imax	850.0 lumens per klm.
	To 50% of Imax	463.0 lumens per klm.
	To 90% of Imax	51.0 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	99.3 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-11-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.27V I:0.1797A P:18.205W PF:0.4600 Freq:50.00Hz Lamp Flux:1115.93x1 lm		
NAME:6858	TYPE:	WEIGHT:460g
SPEC.:18W	DIM.: 8.1*8.1*9.6cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

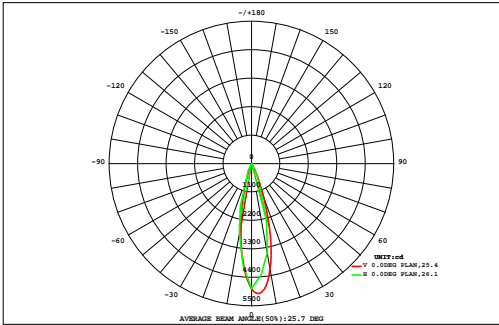

DATA OF LAMP		Eff:61.30lm/W	
MODEL		Imax(cd)	5025
NOMINAL POWER(W)		AVAILABILITY(%)	86.7
RATED VOLTAGE(V)		Avai. FLUX(lm)	967.9
NOMINAL FLUX(lm)	1115.93	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1116
TEST VOLTAGE(V)	0	q @50%(H,V)	25,26DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM															UNIT:lm		F t	F a	
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.01	0.03	0.05	0.08	0.11	0.15	0.18	0.20	0.21	0.21	0.19	0.17	0.14	0.10	0.07	0.05	0.03	0.01	2.00	0.00
70	0.01	0.02	0.05	0.09	0.13	0.18	0.23	0.27	0.29	0.28	0.26	0.21	0.16	0.12	0.08	0.04	0.02	0.01	2.44	0.00
60	0.01	0.02	0.06	0.11	0.16	0.23	0.31	0.38	0.41	0.40	0.35	0.28	0.20	0.14	0.09	0.05	0.02	0.00	3.22	0.00
50	0.01	0.03	0.07	0.12	0.19	0.28	0.39	0.50	0.57	0.56	0.47	0.35	0.25	0.16	0.10	0.05	0.02	0.00	4.12	0.00
40	0.01	0.03	0.08	0.15	0.23	0.34	0.52	0.82	1.12	1.11	0.79	0.48	0.30	0.20	0.12	0.06	0.03	0.01	6.40	0.00
30	0.01	0.04	0.11	0.20	0.30	0.48	1.03	3.51	7.29	6.91	3.16	0.98	0.43	0.25	0.16	0.08	0.03	0.01	25.0	2.27
20	0.01	0.05	0.13	0.25	0.41	0.76	3.64	19.9	42.1	37.5	14.5	2.73	0.66	0.33	0.20	0.10	0.04	0.01	123	103
10	0.01	0.06	0.14	0.29	0.51	1.19	10.2	55.9	112	96.1	35.4	5.65	0.89	0.39	0.23	0.12	0.05	0.01	319	304
0	0.01	0.06	0.15	0.30	0.53	1.42	13.4	70.7	136	114	40.2	6.11	0.90	0.41	0.24	0.12	0.05	0.01	385	370
-10	0.01	0.05	0.14	0.27	0.45	1.05	7.83	38.0	70.2	56.8	19.0	2.88	0.68	0.35	0.22	0.11	0.04	0.01	198	183
-20	0.01	0.05	0.11	0.21	0.34	0.54	1.54	5.39	9.18	7.88	3.21	0.85	0.44	0.28	0.18	0.09	0.04	0.01	30.3	6.32
-30	0.01	0.04	0.09	0.16	0.24	0.37	0.47	0.55	0.78	0.81	0.57	0.41	0.30	0.21	0.13	0.07	0.03	0.01	5.25	0.00
-40	0.01	0.03	0.07	0.12	0.20	0.30	0.43	0.53	0.52	0.49	0.45	0.35	0.25	0.16	0.10	0.06	0.02	0.01	4.10	0.00
-50	0.01	0.03	0.06	0.11	0.18	0.27	0.37	0.46	0.50	0.48	0.40	0.31	0.21	0.14	0.09	0.05	0.02	0.01	3.68	0.00
-60	0.01	0.02	0.05	0.09	0.14	0.20	0.27	0.32	0.34	0.33	0.29	0.22	0.16	0.11	0.07	0.04	0.02	0.01	2.71	0.00
-70	0.01	0.02	0.04	0.06	0.09	0.12	0.15	0.17	0.18	0.18	0.16	0.13	0.10	0.07	0.05	0.03	0.02	0.00	1.58	0.00
-80	0.00	0.01	0.01	0.02	0.02	0.03	0.04	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.01	0.01	0.01	0.00	0.40	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
F t	0.13	0.59	1.41	2.62	4.25	7.93	41.0	198	381	324	119	22.2	6.10	3.44	2.13	1.14	0.48	0.11	1116	---
F a	0.00	0.00	0.00	0.00	0.00	0.00	18.9	179	365	304	98.8	2.18	0.00	0.00	0.00	0.00	0.00	0.00	---	968


one-half-peak spread: U:14.6,D:11.7 , L:13.0,NEMA Beam Type: Type 3 x 4 (H x V)

H(h) Range:-90 - 90DEG
H(h) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-11-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.27V I:0.1797A P:18.205W PF:0.4600 Freq:50.00Hz Lamp Flux:1115.93x1 lm		
NAME:6858	TYPE:	WEIGHT:460g
SPEC.:18W	DIM.: 8.1*8.1*9.6cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

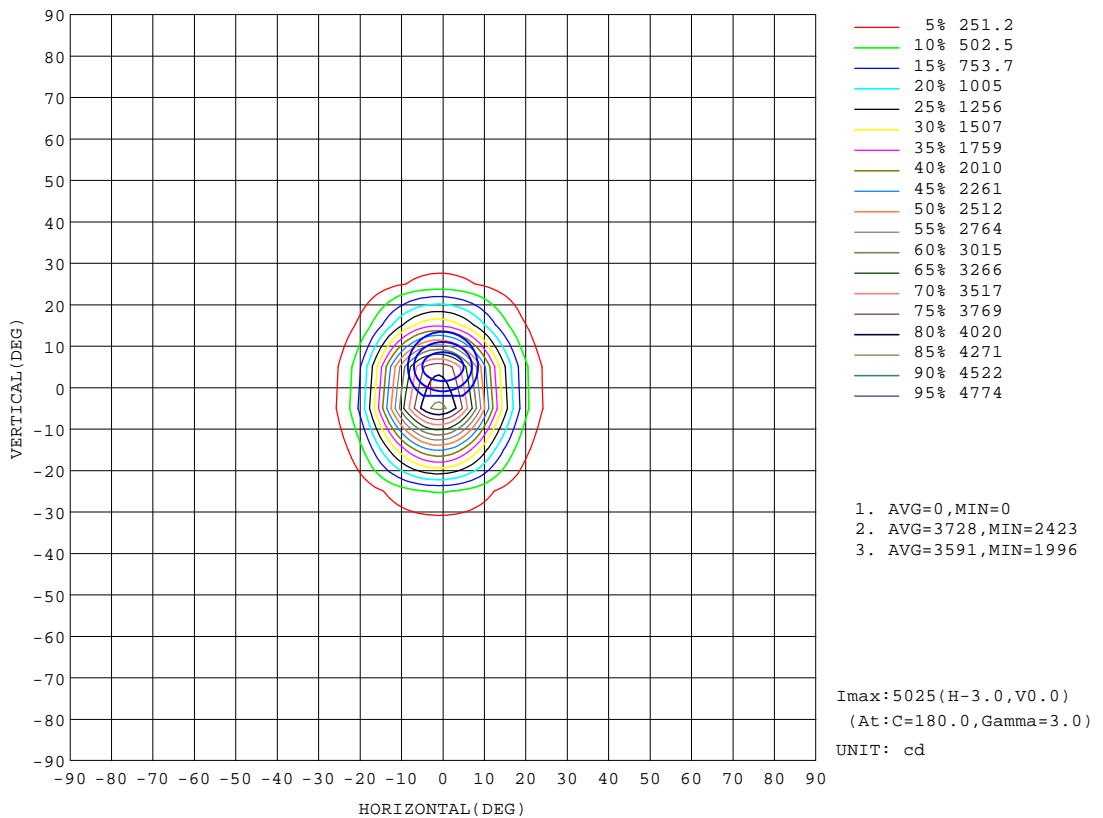


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:NORDECOR
 Test Date:2024-11-10

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:220.27V I:0.1797A P:18.205W PF:0.4600 Freq:50.00Hz Lamp Flux:1115.93x1 lm		
NAME:6858	TYPE:	WEIGHT:460g
SPEC.:18W	DIM.: 8.1*8.1*9.6cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

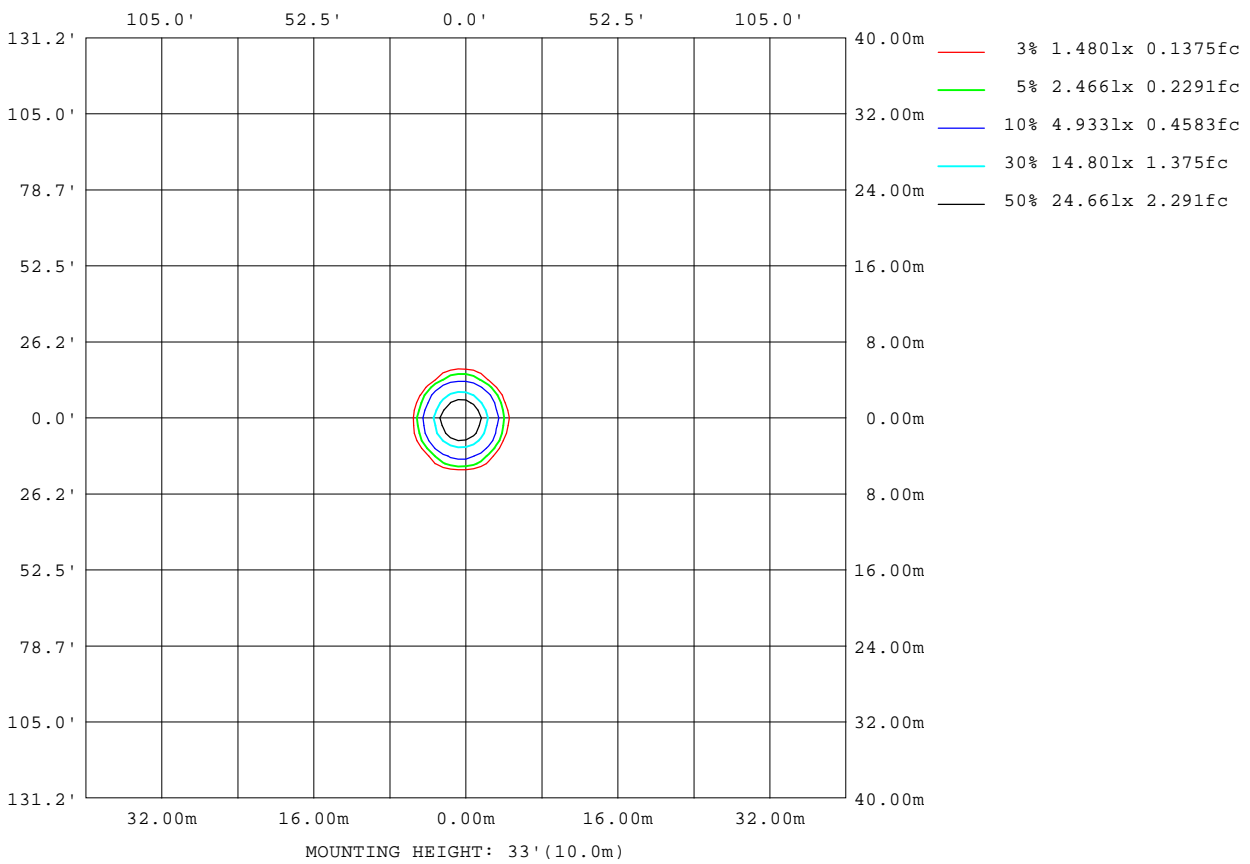

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:NORDECOR
 Test Date:2024-11-10

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

Planar Illuminance Curve

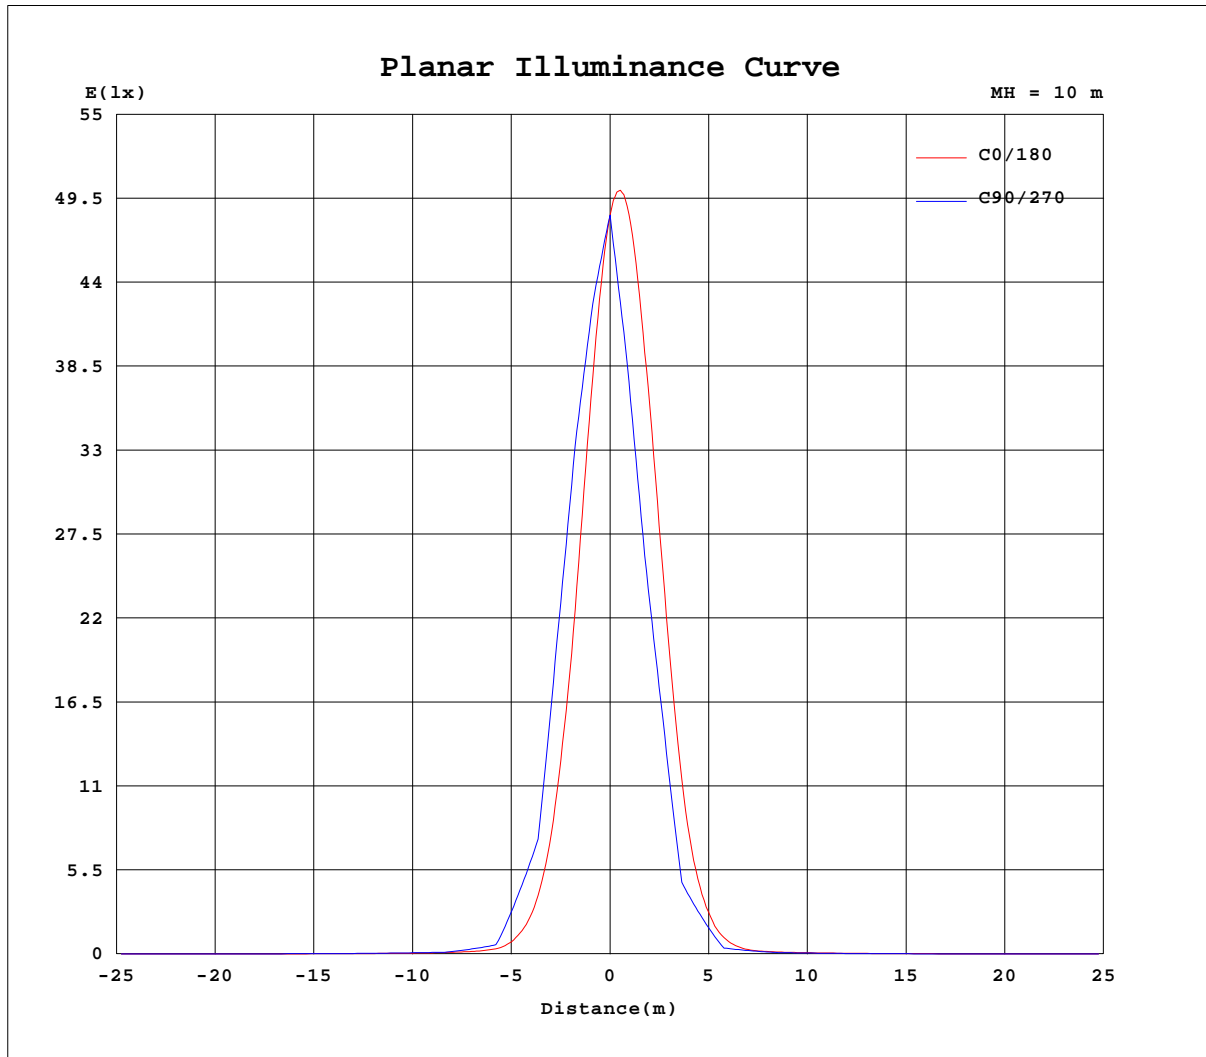


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:NORDECOR
 Test Date:2024-11-10

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.27V I:0.1797A P:18.205W PF:0.4600 Freq:50.00Hz Lamp Flux:1115.93x1 lm		
NAME:6858	TYPE:	WEIGHT:460g
SPEC.:18W	DIM.: 8.1*8.1*9.6cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

Flux out:537.8 lm

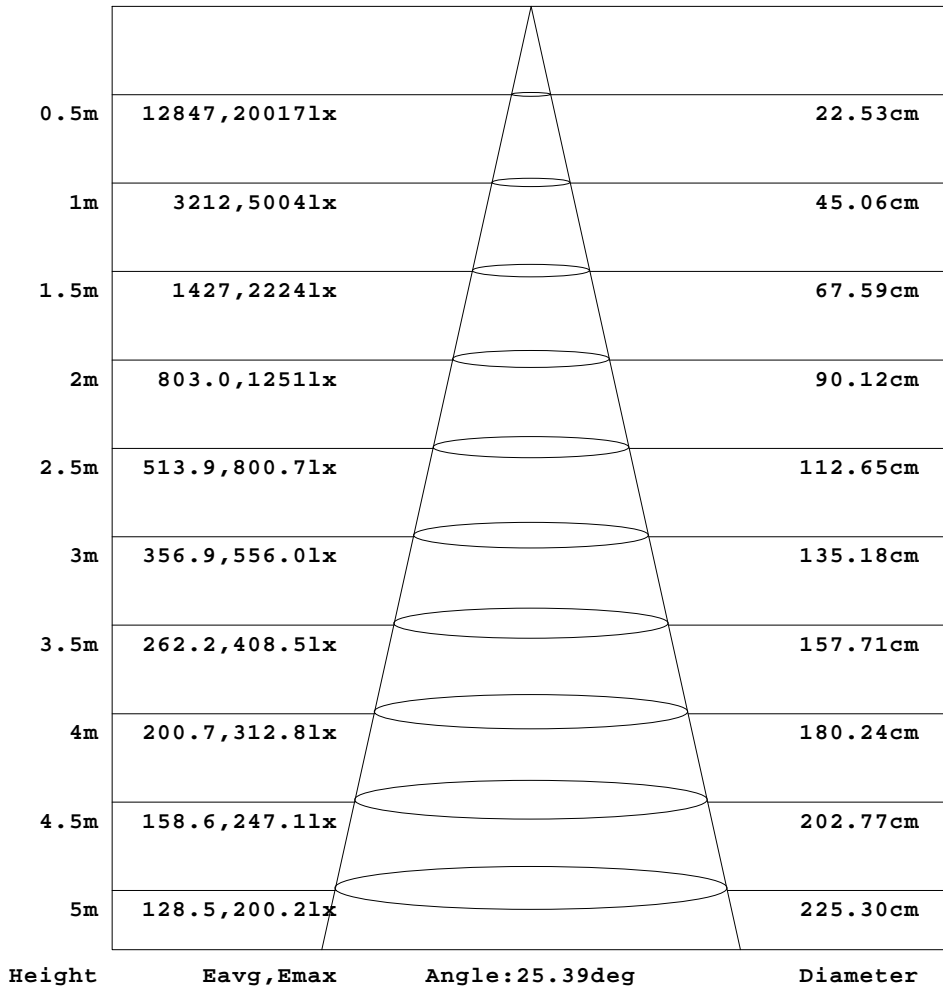

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:NORDECOR
 Test Date:2024-11-10

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.27V I:0.1797A P:18.205W PF:0.4600 Freq:50.00Hz Lamp Flux:1115.93x1 lm		
NAME:6858	TYPE:	WEIGHT:460g
SPEC.:18W	DIM.: 8.1*8.1*9.6cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

Table--1

UNIT: cd

H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	1.73	1.90	1.96	2.05	2.13	2.17	2.20	2.36	2.57	2.72	3.06	3.27	3.42	3.52	3.65	3.80	4.04	4.04	4.04
-75	1.95	2.12	2.27	2.37	2.51	2.78	2.99	3.37	3.73	3.96	4.38	4.73	5.05	5.31	5.62	5.90	6.09	6.23	6.23
-70	2.25	2.41	2.69	2.79	3.17	3.51	4.07	4.70	5.09	5.49	5.95	6.44	6.94	7.39	7.80	8.13	8.37	8.45	8.38
-65	2.26	2.39	2.67	2.89	3.25	3.91	4.49	5.13	5.73	6.35	7.03	7.79	8.56	9.33	10.0	10.6	11.0	11.3	11.3
-60	2.40	2.53	2.78	3.38	3.86	4.78	5.42	6.07	6.83	7.73	8.69	9.75	10.8	11.8	12.7	13.5	14.0	14.1	14.0
-55	2.26	2.34	2.64	3.10	3.81	4.65	5.38	6.09	6.95	7.94	9.08	10.3	11.7	13.1	14.4	15.5	16.4	16.8	16.8
-50	2.22	2.37	2.72	3.40	4.46	5.16	5.88	6.78	7.83	9.03	10.4	12.0	13.7	15.4	17.0	18.4	19.2	19.6	19.3
-45	2.21	2.34	2.69	3.39	4.51	5.32	6.06	6.96	8.00	9.13	10.5	12.0	13.7	15.8	18.2	20.7	22.5	23.6	23.8
-40	2.43	2.55	3.34	4.18	5.31	6.02	6.88	7.92	8.99	10.2	11.7	13.4	15.2	17.9	21.5	24.7	26.9	28.0	27.8
-35	2.40	2.64	3.27	4.26	5.68	6.62	7.67	8.84	10.0	11.2	12.5	14.6	17.2	20.7	27.6	37.8	49.8	58.6	61.7
-30	2.66	3.05	4.09	5.59	6.84	7.98	9.33	10.7	12.0	13.2	14.6	17.8	21.6	28.5	40.4	61.4	80.5	93.1	94.0
-25	2.70	2.98	3.96	5.35	6.97	8.34	9.96	11.7	13.4	14.9	17.0	20.4	27.4	51.1	109	231	376	489	517
-20	2.87	3.34	4.65	6.65	8.18	9.92	12.0	14.1	16.1	18.0	21.8	26.8	44.6	109	257	519	778	929	909
-15	2.82	3.15	4.41	6.10	7.92	9.77	12.0	14.4	16.9	19.4	23.4	30.2	59.9	166	440	1005	1647	2151	2279
-10	2.96	3.60	5.05	7.25	9.07	11.3	14.0	16.8	19.6	23.7	28.8	44.7	131	386	1007	2023	2978	3583	3492
-5	2.87	3.22	4.59	6.47	8.39	10.5	13.1	16.0	19.0	22.5	27.8	38.1	94.2	301	827	1895	3132	4072	4311
0	3.01	3.68	5.14	7.39	9.28	11.6	14.5	17.6	20.8	25.6	31.5	53.8	166	527	1380	2786	4125	4958	4841
5	2.85	3.18	4.57	6.44	8.34	10.4	12.9	15.7	18.7	22.0	27.2	37.0	84.2	270	741	1704	2854	3716	3921
10	2.97	3.60	5.00	7.19	8.94	11.1	13.5	16.2	18.9	22.5	27.5	39.6	98.4	295	756	1564	2356	2825	2735
15	2.74	3.05	4.32	6.00	7.77	9.48	11.6	13.8	16.1	18.3	22.0	28.1	47.8	122	315	725	1236	1624	1712
20	2.81	3.37	4.53	6.46	7.94	9.53	11.4	13.3	15.1	16.6	20.2	24.7	34.7	65.3	146	302	476	574	568
25	2.56	2.79	3.77	5.11	6.70	7.95	9.42	11.0	12.6	14.0	15.8	18.8	24.6	35.9	67.0	134	231	302	322
30	2.49	2.85	3.84	5.25	6.46	7.52	8.74	10.00	11.2	12.5	13.6	16.5	20.2	24.8	32.5	41.9	52.7	59.8	61.0
35	2.31	2.43	2.98	3.97	5.36	6.28	7.24	8.34	9.49	10.7	11.9	13.5	16.0	18.7	23.3	28.8	35.3	40.4	42.5
40	2.20	2.40	3.04	3.85	5.06	5.79	6.60	7.60	8.66	9.87	11.1	12.5	13.9	15.6	18.1	20.7	22.6	23.5	23.5
45	2.13	2.19	2.47	3.20	4.18	5.11	5.83	6.63	7.61	8.69	9.83	11.1	12.4	13.7	15.3	17.2	18.6	19.4	19.7
50	2.11	2.25	2.48	3.14	4.17	5.00	5.67	6.44	7.37	8.38	9.51	10.7	11.9	13.0	14.0	14.9	15.5	15.7	15.7
55	2.23	2.27	2.53	2.92	3.61	4.45	5.24	5.85	6.58	7.38	8.29	9.24	10.2	11.1	12.0	12.7	13.3	13.6	13.7
60	2.37	2.49	2.72	3.20	3.66	4.52	5.30	5.83	6.36	7.07	7.80	8.52	9.27	9.96	10.6	11.1	11.5	11.6	11.6
65	2.52	2.56	2.80	2.98	3.37	3.96	4.54	5.08	5.65	6.07	6.62	7.15	7.71	8.24	8.73	9.13	9.47	9.67	9.69
70	2.65	2.74	3.04	3.16	3.38	3.85	4.22	4.83	5.27	5.49	5.89	6.16	6.57	6.93	7.17	7.45	7.67	7.74	7.72
75	2.78	2.81	2.93	3.08	3.20	3.50	3.65	3.94	4.35	4.54	4.80	5.11	5.42	5.62	5.81	5.97	6.15	6.25	6.27
80	2.89	2.93	2.97	3.10	3.23	3.27	3.30	3.39	3.66	3.74	4.00	4.28	4.43	4.45	4.52	4.61	4.71	4.79	4.78
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H_(h) Range:-90 - 90DEG
H_(h) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-11-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.27V I:0.1797A P:18.205W PF:0.4600 Freq:50.00Hz Lamp Flux:1115.93x1 lm		
NAME:6858	TYPE:	WEIGHT:460g
SPEC.:18W	DIM.: 8.1*8.1*9.6cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

Table--2

UNIT: cd

H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	3.92	3.72	3.47	3.29	3.13	2.99	2.75	2.45	2.36	2.16	2.09	2.04	1.86	1.81	1.82	1.78	1.64	1.44
-75	6.08	5.85	5.54	5.19	4.81	4.48	4.12	3.74	3.46	3.23	2.93	2.62	2.42	2.16	2.10	1.91	1.83	1.66
-70	8.14	7.77	7.31	6.80	6.24	5.73	5.20	4.76	4.43	4.07	3.54	3.04	2.68	2.48	2.20	2.01	1.90	1.75
-65	11.0	10.5	9.86	9.09	8.28	7.44	6.66	5.94	5.32	4.79	4.29	3.75	3.31	2.75	2.43	2.13	1.93	1.85
-60	13.5	12.8	11.8	10.7	9.63	8.54	7.53	6.60	5.79	5.12	4.63	4.13	3.38	2.89	2.41	2.03	1.94	1.89
-55	16.3	15.4	14.2	12.9	11.5	10.1	8.83	7.66	6.64	5.76	5.07	4.50	3.92	3.21	2.57	2.22	1.85	1.85
-50	18.5	17.2	15.6	13.9	12.3	10.6	9.16	7.87	6.75	5.80	5.01	4.44	3.92	3.02	2.46	2.13	1.77	1.79
-45	23.0	21.3	19.0	16.3	13.9	12.1	10.6	9.13	7.90	6.83	5.90	5.12	4.51	3.84	2.92	2.29	1.83	1.82
-40	26.4	23.8	20.3	16.5	14.1	12.4	10.8	9.39	8.16	7.08	6.10	5.28	4.64	3.89	2.86	2.28	1.84	1.87
-35	57.5	47.3	35.5	26.6	19.6	15.9	12.9	11.2	10.0	8.80	7.66	6.58	5.68	4.89	3.75	2.84	2.09	1.98
-30	81.7	61.0	43.2	30.2	21.7	16.9	13.4	12.1	10.9	9.60	8.33	7.10	6.07	5.14	3.75	2.82	2.17	2.15
-25	452	322	181	85.1	42.8	25.8	18.8	15.0	13.1	11.8	10.2	8.70	7.30	6.14	4.86	3.66	2.58	2.31
-20	729	461	229	98.1	45.3	27.7	20.7	15.8	14.4	12.7	10.9	9.14	7.54	6.26	4.70	3.46	2.60	2.44
-15	1954	1337	718	301	115	46.1	27.8	20.4	16.4	14.7	12.6	10.6	8.69	7.15	5.78	4.39	3.18	2.78
-10	2731	1678	814	310	111	43.5	28.1	20.8	17.1	15.1	12.7	10.5	8.50	7.01	5.50	4.18	3.24	2.90
-5	3702	2530	1365	575	209	69.9	35.2	24.7	18.4	16.3	13.9	11.6	9.40	7.69	6.31	4.88	3.71	3.20
0	3826	2363	1177	465	164	53.7	31.5	22.8	17.8	15.7	13.2	10.8	8.80	7.30	5.82	4.49	3.54	3.16
5	3367	2316	1264	547	200	67.8	34.8	24.2	17.9	15.7	13.5	11.3	9.19	7.56	6.22	4.79	3.67	3.14
10	2148	1352	678	267	100	42.0	27.3	19.7	15.9	14.1	12.0	10.0	8.20	6.82	5.26	3.92	3.03	2.84
15	1469	1021	566	257	101	42.8	26.9	19.4	15.2	13.5	11.7	9.87	8.16	6.80	5.51	4.15	3.05	2.65
20	465	300	159	76.9	40.2	26.5	19.6	14.6	13.1	11.5	9.95	8.38	7.01	5.88	4.36	3.18	2.43	2.34
25	287	210	125	66.0	37.2	24.1	17.9	14.0	12.1	10.7	9.33	7.91	6.69	5.68	4.45	3.31	2.41	2.17
30	55.6	45.7	36.2	27.3	20.6	15.9	12.6	11.4	10.1	8.79	7.54	6.41	5.51	4.62	3.32	2.53	2.01	1.98
35	40.8	35.8	29.5	23.3	18.3	15.1	12.3	10.7	9.45	8.21	7.07	6.03	5.20	4.42	3.28	2.48	1.91	1.83
40	22.7	20.8	17.9	14.9	13.2	11.9	10.5	9.10	7.84	6.70	5.71	4.96	4.30	3.42	2.58	2.08	1.68	1.75
45	19.3	18.2	16.5	14.4	12.7	11.4	10.1	8.80	7.61	6.52	5.59	4.85	4.23	3.43	2.58	2.06	1.67	1.67
50	15.2	14.5	13.5	12.4	11.2	9.92	8.68	7.54	6.51	5.57	4.84	4.25	3.60	2.66	2.16	1.94	1.68	1.63
55	13.4	12.9	12.2	11.3	10.3	9.32	8.29	7.28	6.37	5.58	4.93	4.37	3.71	2.99	2.42	2.12	1.80	1.81
60	11.3	10.8	10.2	9.49	8.69	7.85	7.02	6.29	5.60	5.05	4.56	3.98	3.16	2.74	2.36	2.01	1.92	1.91
65	9.56	9.27	8.89	8.30	7.69	7.06	6.44	5.88	5.36	4.90	4.40	3.88	3.35	2.89	2.55	2.29	2.14	2.12
70	7.56	7.27	7.02	6.61	6.18	5.73	5.35	5.06	4.78	4.37	3.78	3.44	3.00	2.83	2.52	2.35	2.33	2.26
75	6.20	6.05	5.87	5.53	5.27	5.02	4.71	4.39	4.20	3.89	3.58	3.30	3.05	2.79	2.68	2.50	2.49	2.46
80	4.68	4.54	4.39	4.23	4.17	4.07	3.79	3.56	3.42	3.15	3.12	3.01	2.78	2.70	2.67	2.64	2.62	2.58
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(h) Range:-90 - 90DEG
H(h) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-11-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks: