

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		1885.3 cd per klm. 0.0 degrees vertical -3.0 degrees horizontal
Beam Spread	At 10% of Imax	74.1V x 72.1H
	At 50% of Imax	38.2V x 34.2H
	At 90% of Imax	10.7V x 12.8H
Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	806.0 lumens per klm.
	To 50% of Imax	398.2 lumens per klm.
	To 90% of Imax	42.5 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2024-04-11

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.17V I:0.0989A P:10.039W PF:0.4611 Freq:50.00Hz Lamp Flux:213.449x1 lm		
NAME: 6422	TYPE:	WEIGHT:370g
SPEC.:10W	DIM.: $\phi 10 \times 7$ cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

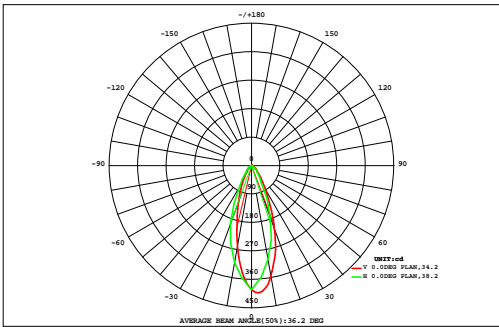

DATA OF LAMP		Eff:21.26lm/W	
MODEL		I <sub>max</sub> (cd)	402.4
NOMINAL POWER(W)		AVAILABILITY(%)	80.4
RATED VOLTAGE(V)		Avai. FLUX(lm)	171.7
NOMINAL FLUX(lm)	213.449	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	213.4
TEST VOLTAGE(V)	0	q @50%(H,V)	34,38DEG


VERTICAL( DEG )	AREA FLUX DIAGRAM															UNIT:lm		F t	F a	
	90	80	70	60	50	40	30	20	10	0	10	20	30	40	50	60	70	80	90	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.01	0.02	0.03	0.04	0.05	0.05	0.06	0.06	0.06	0.06	0.05	0.04	0.04	0.03	0.02	0.01	0.00	0.64	0.00
70	0.00	0.01	0.02	0.03	0.04	0.06	0.08	0.09	0.10	0.10	0.09	0.07	0.05	0.04	0.03	0.02	0.01	0.00	0.85	0.00
60	0.00	0.01	0.02	0.04	0.06	0.10	0.16	0.25	0.31	0.27	0.26	0.21	0.12	0.06	0.03	0.02	0.01	0.00	1.92	0.00
50	0.00	0.01	0.02	0.05	0.10	0.21	0.38	0.60	0.69	0.61	0.66	0.49	0.27	0.12	0.05	0.02	0.01	0.00	4.30	0.00
40	0.00	0.01	0.03	0.07	0.20	0.42	0.74	1.10	1.35	1.42	1.26	0.79	0.47	0.24	0.08	0.03	0.01	0.00	8.22	3.19
30	0.00	0.01	0.04	0.11	0.33	0.63	1.27	2.53	3.57	3.70	2.60	1.32	0.68	0.38	0.12	0.03	0.01	0.00	17.3	14.4
20	0.00	0.01	0.04	0.15	0.40	0.91	2.27	5.17	7.37	7.26	4.60	2.21	0.98	0.43	0.16	0.04	0.01	0.00	32.0	29.7
10	0.00	0.01	0.05	0.19	0.47	1.17	3.24	7.19	10.3	10.1	6.20	2.84	1.13	0.48	0.19	0.04	0.01	0.00	43.6	41.6
0	0.00	0.01	0.05	0.19	0.48	1.21	3.15	6.89	10.7	10.2	6.07	2.71	1.06	0.47	0.19	0.04	0.01	0.00	43.4	41.2
-10	0.00	0.01	0.04	0.17	0.44	1.00	2.25	4.83	7.22	6.64	4.10	1.98	0.85	0.44	0.17	0.04	0.01	0.00	30.2	27.7
-20	0.00	0.01	0.04	0.14	0.37	0.67	1.33	2.36	3.34	3.13	2.05	1.14	0.61	0.39	0.11	0.03	0.01	0.00	15.7	12.6
-30	0.00	0.01	0.03	0.09	0.25	0.48	0.83	0.94	1.03	1.02	0.85	0.66	0.49	0.25	0.06	0.03	0.01	0.00	7.04	1.26
-40	0.00	0.01	0.02	0.05	0.12	0.32	0.52	0.54	0.66	0.64	0.57	0.49	0.30	0.09	0.04	0.02	0.01	0.00	4.41	0.00
-50	0.00	0.01	0.02	0.04	0.06	0.11	0.23	0.37	0.44	0.42	0.37	0.20	0.08	0.05	0.03	0.02	0.01	0.00	2.46	0.00
-60	0.00	0.01	0.02	0.03	0.04	0.06	0.06	0.06	0.06	0.07	0.06	0.05	0.04	0.04	0.03	0.02	0.01	0.00	0.64	0.00
-70	0.00	0.01	0.01	0.02	0.03	0.04	0.04	0.05	0.05	0.04	0.04	0.04	0.03	0.03	0.02	0.01	0.01	0.00	0.47	0.00
-80	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.18	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
F t	0.05	0.19	0.47	1.39	3.45	7.46	16.6	33.0	47.3	45.7	29.8	15.3	7.23	3.54	1.34	0.43	0.18	0.05	213	---
F a	0.00	0.00	0.00	0.00	0.04	3.16	12.6	29.4	43.7	42.4	26.3	11.3	2.72	0.00	0.00	0.00	0.00	0.00	---	172

one-half-peak spread: U:18.4,D:20.1 , L:18.0,R:16.5 NEMA Beam Type: Type 5

H <sub>(h)</sub> Range:-90 - 90DEG	V(B) Range:-80 - 80DEG
H <sub>(h)</sub> Interval: 1.0DEG	V(B) Interval: 5.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Temperature:25.3DEG	Humidity:65.0%
Operators:AED	Test Distance:5.780m [K=1.0000]
Test Date:2024-04-11	Remarks:

ISOCANDELA DIAGRAM

Test:U:220.17V I:0.0989A P:10.039W PF:0.4611 Freq:50.00Hz Lamp Flux:213.449x1 lm		
NAME: 6422	TYPE:	WEIGHT:370g
SPEC.:10W	DIM.: $\phi 10*7$ cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

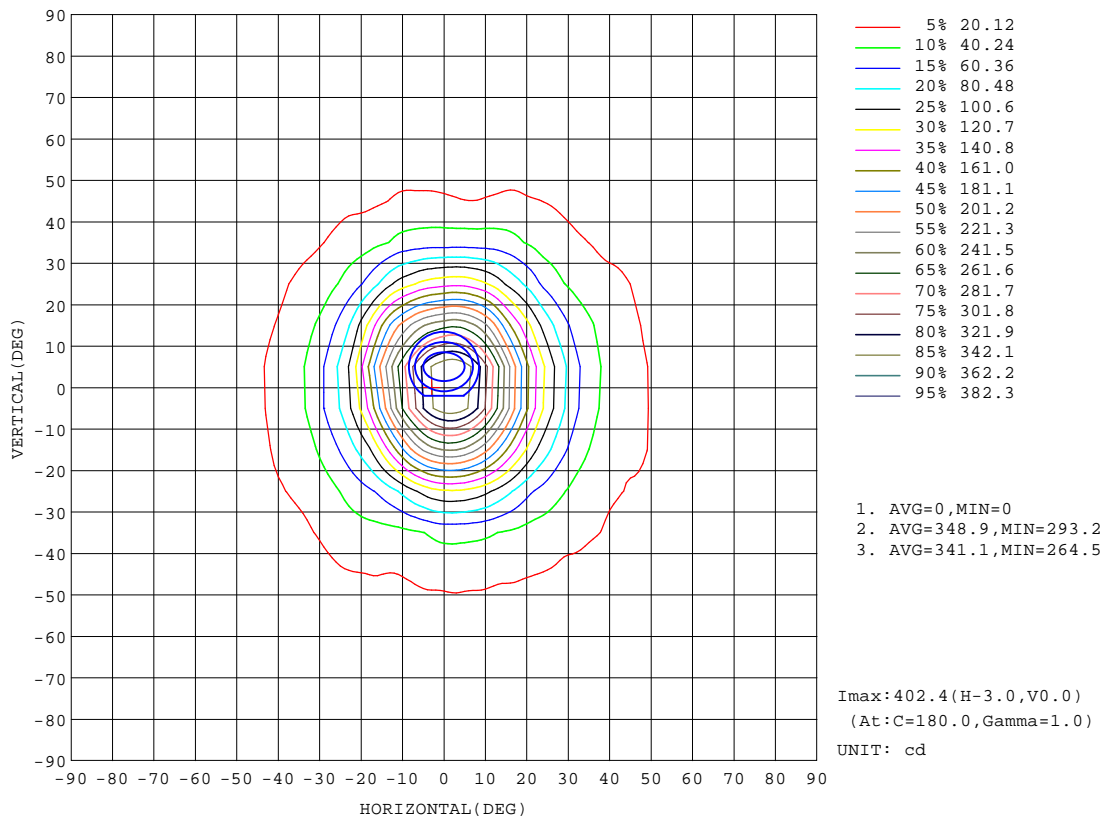


H( $\beta$ ) Range:-90 - 90DEG  
 H( $\beta$ ) Interval: 1.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:AED  
 Test Date:2024-04-11

V(B) Range:-80 - 80DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:5.780m [K=1.0000]  
 Remarks:

ISOLUX DIAGRAM


Test:U:220.17V I:0.0989A P:10.039W PF:0.4611 Freq:50.00Hz Lamp Flux:213.449x1 lm		
NAME: 6422	TYPE:	WEIGHT:370g
SPEC.:10W	DIM.: $\phi 10 \times 7 \text{cm}$	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

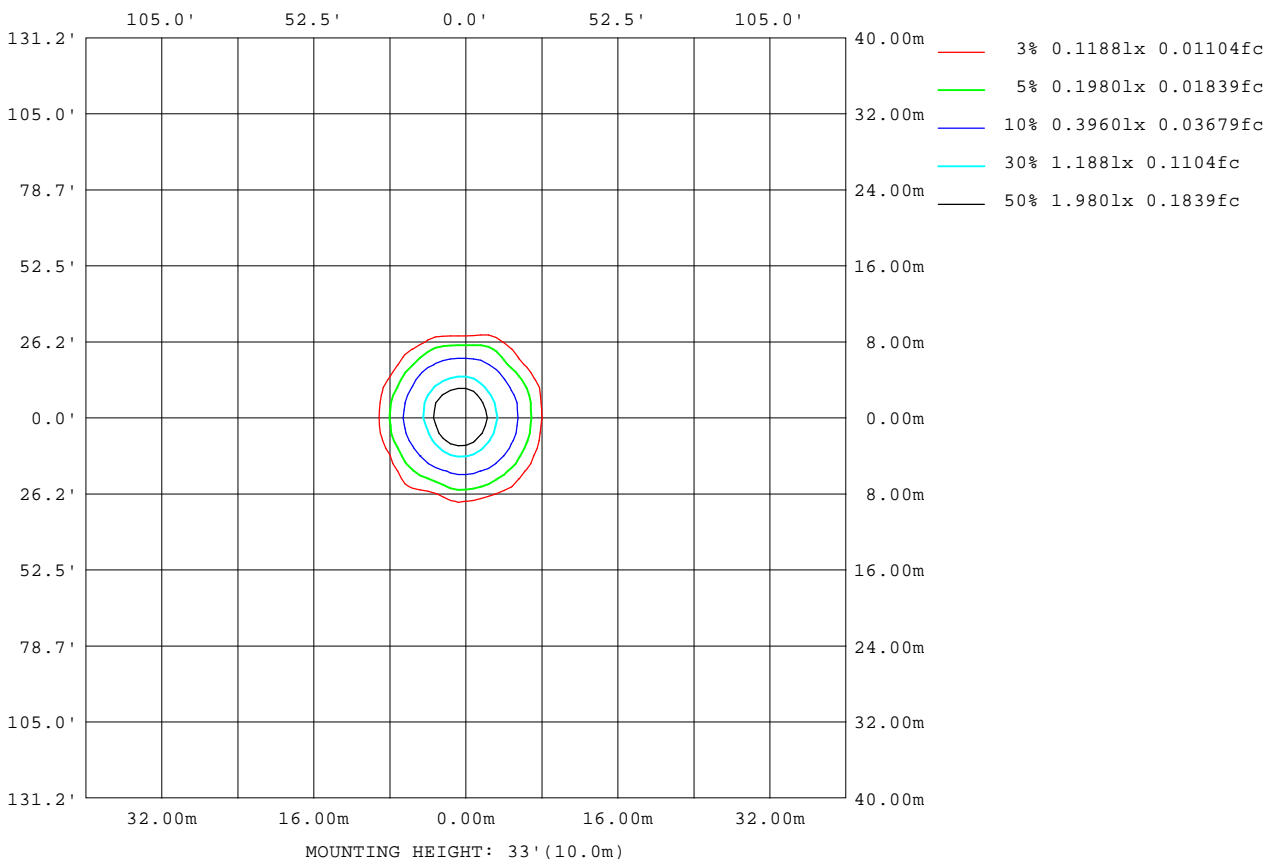

H( $\beta$ ) Range:-90 - 90DEG  
 H( $\beta$ ) Interval: 1.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:AED  
 Test Date:2024-04-11

V(B) Range:-80 - 80DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:5.780m [K=1.0000]  
 Remarks:

Planar Illuminance Curve

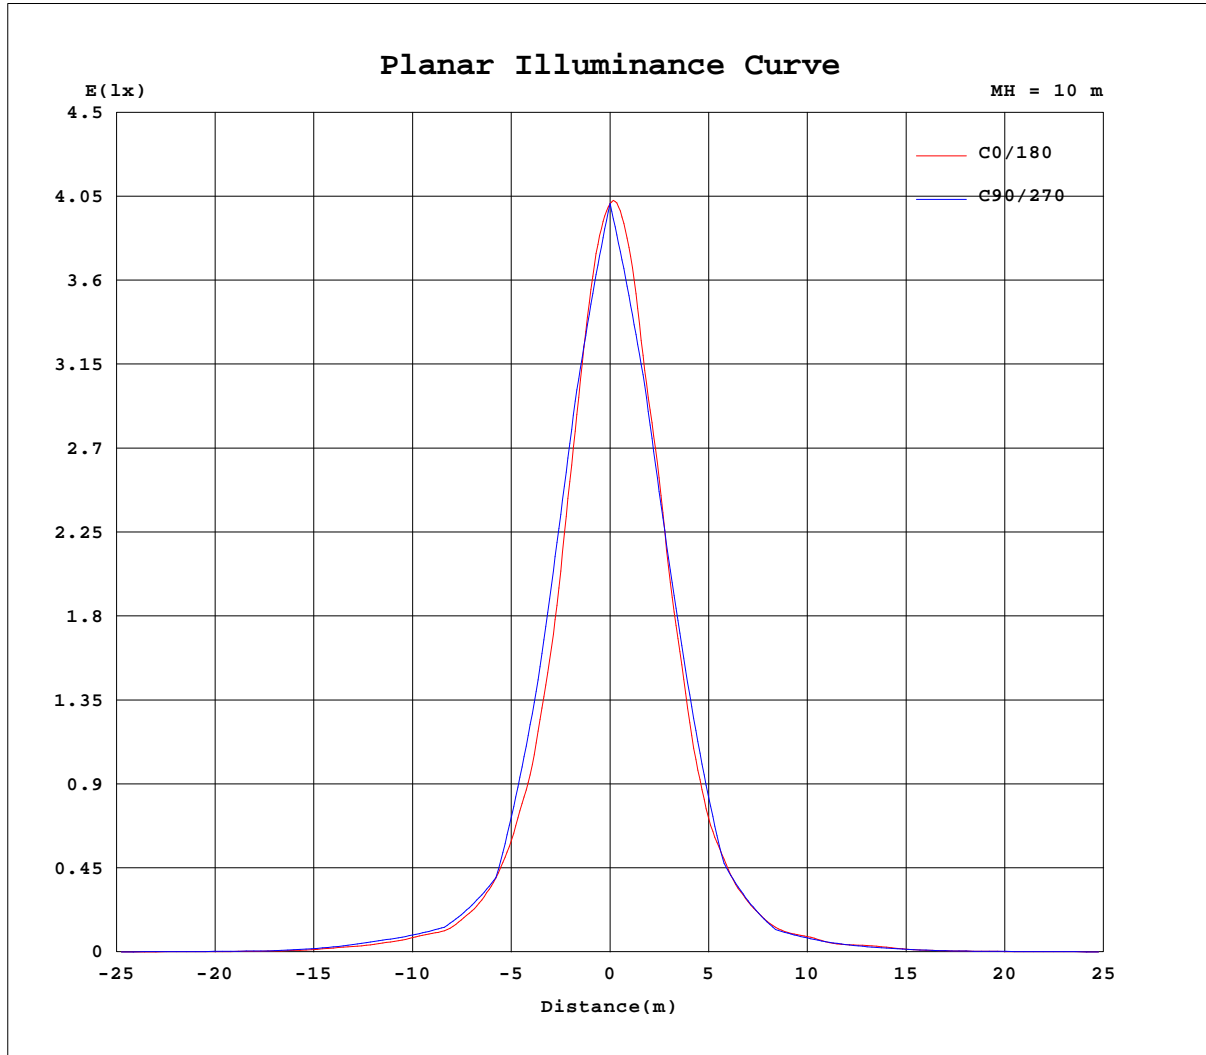


H( $\beta$ ) Range:-90 - 90DEG  
 H( $\beta$ ) Interval: 1.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:AED  
 Test Date:2024-04-11

V(B) Range:-80 - 80DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:5.780m [K=1.0000]  
 Remarks:

AAI Figure

Test:U:220.17V I:0.0989A P:10.039W PF:0.4611 Freq:50.00Hz Lamp Flux:213.449x1 lm		
NAME: 6422	TYPE:	WEIGHT:370g
SPEC.:10W	DIM.: $\phi$ 10*7cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

Flux out:82.06 lm

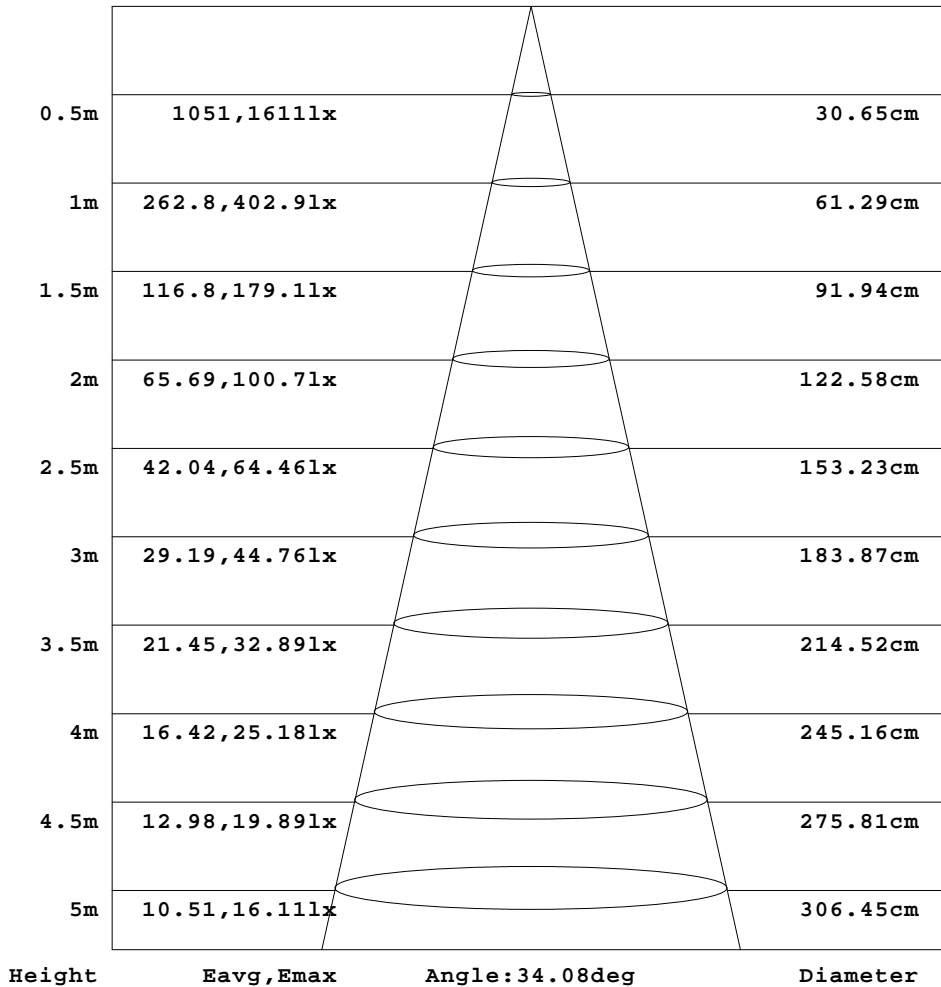

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2024-04-11

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.17V I:0.0989A P:10.039W PF:0.4611 Freq:50.00Hz Lamp Flux:213.449x1 lm		
NAME: 6422	TYPE:	WEIGHT:370g
SPEC.:10W	DIM.: $\phi$ 10*7cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

Table--1

UNIT: cd

H( DEG) V( DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.89	0.96	0.99	1.01	1.02	1.03	1.07	1.09	1.11	1.15	1.16	1.19	1.21	1.24	1.26	1.26	1.27	1.28	1.28
-75	0.90	0.90	0.99	1.02	1.06	1.08	1.13	1.19	1.25	1.31	1.38	1.44	1.51	1.57	1.62	1.66	1.69	1.72	1.73
-70	0.92	1.01	1.05	1.11	1.15	1.23	1.31	1.41	1.51	1.62	1.72	1.82	1.93	2.00	2.07	2.13	2.16	2.17	2.15
-65	0.91	0.93	1.02	1.09	1.16	1.23	1.35	1.48	1.63	1.81	2.01	2.23	2.46	2.69	2.88	3.07	3.27	3.39	3.48
-60	0.93	1.04	1.12	1.21	1.32	1.47	1.64	1.86	2.12	2.41	2.74	3.10	3.45	3.75	4.06	4.41	4.63	4.79	5.22
-55	0.93	0.94	1.05	1.15	1.27	1.42	1.61	1.87	2.19	2.60	3.10	3.73	5.44	7.28	9.05	10.8	11.7	13.3	12.8
-50	0.94	1.06	1.19	1.33	1.51	1.76	2.09	2.52	3.08	3.79	4.73	7.79	11.1	14.4	17.6	19.0	22.1	20.8	21.3
-45	0.96	0.96	1.10	1.25	1.41	1.64	1.96	2.42	3.08	4.04	6.30	9.35	13.6	18.1	19.8	20.2	20.7	23.8	25.3
-40	0.98	1.14	1.30	1.50	1.76	2.17	2.75	3.65	4.99	8.82	14.0	19.5	25.2	25.2	22.9	22.4	25.5	29.7	28.9
-35	0.98	0.99	1.16	1.34	1.57	1.90	2.41	3.25	5.02	9.05	12.7	16.8	21.7	28.4	32.2	33.1	35.0	39.9	45.5
-30	0.99	1.19	1.38	1.65	2.04	2.66	3.76	6.40	13.1	16.5	19.7	23.9	31.6	39.3	43.2	47.5	54.3	61.2	61.4
-25	0.95	1.01	1.21	1.43	1.74	2.19	2.98	4.50	9.16	14.7	18.4	22.3	28.6	40.8	52.8	65.8	85.2	107	118
-20	1.02	1.24	1.47	1.83	2.35	3.30	5.24	11.9	16.3	20.3	24.9	33.3	49.9	66.3	88.3	123	159	175	172
-15	0.99	1.02	1.25	1.51	1.89	2.48	3.57	6.18	12.6	16.0	23.3	28.8	43.1	62.1	86.7	126	178	223	243
-10	1.03	1.27	1.54	1.95	2.61	3.84	7.11	13.2	15.7	26.3	32.8	52.8	74.2	107	164	234	288	311	301
-5	1.04	1.05	1.29	1.57	2.00	2.68	3.93	6.89	14.2	16.4	25.6	34.7	55.5	81.9	124	188	262	321	354
0	1.07	1.32	1.61	2.05	2.75	4.02	6.67	15.1	17.2	24.9	36.7	58.1	89.6	141	212	291	355	398	392
5	1.03	1.06	1.30	1.59	2.03	2.73	3.96	6.60	14.3	16.9	24.1	35.5	55.2	85.4	137	208	275	327	357
10	1.04	1.29	1.58	2.02	2.71	3.89	6.53	13.4	16.6	23.3	34.4	52.4	81.3	134	203	259	298	316	312
15	1.01	1.04	1.28	1.55	1.96	2.60	3.65	5.74	11.5	15.8	21.1	31.0	43.9	67.1	107	161	208	240	255
20	1.03	1.27	1.53	1.91	2.48	3.41	4.96	9.57	15.0	18.8	27.6	35.5	52.9	79.2	118	157	182	193	195
25	0.98	1.01	1.23	1.47	1.81	2.33	3.12	4.40	8.09	13.1	17.4	23.2	29.1	42.1	59.3	85.0	110	126	134
30	1.00	1.19	1.41	1.72	2.17	2.83	3.84	6.60	11.3	15.9	18.8	22.7	31.2	39.4	51.7	64.2	70.9	73.6	73.4
35	0.98	0.99	1.18	1.37	1.64	2.03	2.58	3.38	5.20	8.35	11.9	14.6	19.0	25.7	30.7	37.6	46.1	49.4	50.2
40	0.99	1.17	1.33	1.56	1.88	2.32	2.93	3.80	5.37	7.96	10.5	15.2	20.2	22.0	23.5	28.0	27.9	26.7	27.2
45	0.97	0.98	1.15	1.28	1.48	1.74	2.11	2.59	3.27	4.36	6.06	7.84	11.0	14.2	15.7	18.7	23.0	23.0	22.1
50	0.98	1.12	1.23	1.39	1.61	1.89	2.26	2.73	3.35	4.16	5.19	6.78	8.06	9.40	14.0	17.9	18.0	17.4	13.6
55	0.96	0.98	1.12	1.21	1.34	1.51	1.74	2.02	2.37	2.82	3.38	4.07	5.08	5.91	6.75	9.21	11.3	11.5	11.2
60	0.99	1.11	1.18	1.29	1.41	1.58	1.78	2.01	2.28	2.61	2.96	3.38	3.77	4.11	4.43	4.77	4.99	5.02	4.87
65	0.99	1.00	1.10	1.16	1.24	1.32	1.46	1.60	1.77	1.96	2.18	2.41	2.67	2.91	3.12	3.32	3.51	3.63	3.66
70	1.00	1.10	1.14	1.19	1.24	1.33	1.43	1.53	1.63	1.75	1.85	1.97	2.05	2.13	2.21	2.25	2.28	2.29	2.26
75	1.01	1.00	1.09	1.12	1.15	1.19	1.25	1.31	1.37	1.44	1.51	1.59	1.66	1.71	1.76	1.81	1.83	1.84	1.85
80	1.00	1.08	1.09	1.12	1.13	1.16	1.19	1.22	1.26	1.27	1.32	1.34	1.36	1.38	1.40	1.41	1.41	1.41	1.41
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(h) Range:-90 - 90DEG  
H(h) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2024-04-11

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.17V I:0.0989A P:10.039W PF:0.4611 Freq:50.00Hz Lamp Flux:213.449x1 lm		
NAME: 6422	TYPE:	WEIGHT:370g
SPEC.:10W	DIM.: $\phi$ 10*7cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

Table--2

UNIT: cd

H( DEG) V( DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	1.27	1.27	1.24	1.24	1.21	1.18	1.17	1.13	1.11	1.09	1.07	1.05	1.03	1.00	0.98	0.96	0.88	0.88
-75	1.72	1.69	1.67	1.62	1.58	1.52	1.46	1.41	1.34	1.29	1.23	1.17	1.13	1.08	1.04	1.01	0.97	0.89
-70	2.12	2.07	2.00	1.92	1.84	1.75	1.66	1.55	1.47	1.37	1.28	1.21	1.14	1.07	1.04	0.98	0.89	0.90
-65	3.69	3.49	3.21	2.97	2.73	2.54	2.33	2.12	1.92	1.75	1.58	1.45	1.32	1.22	1.13	1.07	1.00	0.90
-60	4.86	4.36	3.94	3.55	3.24	2.91	2.59	2.29	2.03	1.80	1.61	1.43	1.31	1.19	1.10	1.02	0.90	0.92
-55	13.2	13.0	12.0	10.9	9.36	6.34	4.94	3.69	2.95	2.47	2.08	1.80	1.56	1.39	1.23	1.11	1.03	0.90
-50	21.1	19.7	17.9	15.2	9.44	6.97	4.79	3.61	2.91	2.36	1.99	1.69	1.47	1.28	1.12	1.04	0.90	0.76
-45	25.1	24.2	22.5	21.0	19.1	15.6	13.4	10.2	6.18	3.71	2.79	2.25	1.86	1.58	1.35	1.17	1.06	0.91
-40	27.3	25.2	24.1	23.1	21.8	19.8	15.7	8.75	4.52	3.23	2.51	2.03	1.68	1.43	1.23	1.08	0.92	0.90
-35	45.1	43.0	38.4	33.4	29.7	25.4	22.2	17.7	13.4	8.55	4.09	2.84	2.22	1.80	1.49	1.27	1.11	0.93
-30	58.8	51.7	42.7	36.3	29.1	24.6	19.7	18.0	12.6	4.94	3.16	2.41	1.91	1.56	1.30	1.13	0.94	0.95
-25	117	105	86.7	65.8	51.4	38.7	28.9	22.3	19.5	15.6	7.97	3.72	2.62	2.02	1.63	1.34	1.15	0.94
-20	152	122	88.9	66.5	48.2	33.1	24.9	21.0	18.6	11.0	4.27	2.84	2.13	1.69	1.38	1.16	0.95	0.94
-15	237	207	163	119	84.9	59.0	40.1	27.9	21.4	19.0	12.5	5.05	3.03	2.23	1.75	1.43	1.20	0.97
-10	262	204	149	103	69.7	47.0	30.9	21.9	19.4	13.9	5.82	3.23	2.33	1.82	1.48	1.23	1.00	0.98
-5	347	301	232	164	112	75.0	49.5	32.3	23.1	19.3	13.8	6.41	3.35	2.38	1.83	1.48	1.23	1.00
0	340	259	179	120	80.4	51.9	33.7	24.4	19.3	13.7	6.99	3.48	2.42	1.85	1.49	1.23	1.00	0.97
5	352	308	235	166	114	77.3	51.2	32.3	24.2	19.3	14.1	6.56	3.42	2.40	1.85	1.49	1.24	1.01
10	276	211	153	109	74.2	50.5	30.8	24.0	19.4	14.4	6.12	3.36	2.37	1.84	1.49	1.25	1.02	1.02
15	254	225	172	128	89.5	61.4	43.5	28.5	23.3	17.1	12.0	5.55	3.16	2.27	1.77	1.45	1.21	0.99
20	174	133	102	70.4	48.7	36.6	26.2	22.5	14.9	9.49	4.98	2.95	2.16	1.70	1.40	1.18	0.96	0.97
25	134	123	98.7	76.4	53.1	38.4	29.8	23.3	20.1	13.7	7.78	4.15	2.69	2.03	1.63	1.35	1.16	0.95
30	70.8	64.5	50.6	35.8	28.0	23.0	20.4	17.6	12.4	6.06	3.31	2.43	1.90	1.56	1.31	1.13	0.94	0.93
35	50.3	49.8	47.4	39.0	29.9	24.5	19.9	17.0	13.5	8.93	4.62	2.89	2.21	1.78	1.48	1.25	1.10	0.92
40	28.9	30.3	27.4	24.1	20.9	16.9	13.5	9.42	5.42	3.17	2.46	2.00	1.65	1.40	1.20	1.07	0.90	0.94
45	20.4	21.1	23.3	21.6	19.4	15.8	12.6	9.04	6.36	4.07	2.74	2.22	1.85	1.57	1.36	1.19	1.07	0.92
50	13.3	16.3	15.8	14.7	10.6	8.38	4.54	3.30	2.73	2.31	1.97	1.70	1.49	1.31	1.17	1.07	0.95	0.91
55	9.25	9.23	10.4	9.88	9.12	6.88	5.60	3.52	2.77	2.36	2.05	1.80	1.59	1.42	1.27	1.15	1.07	0.93
60	5.16	4.59	3.94	3.51	3.14	2.81	2.50	2.24	2.00	1.80	1.63	1.47	1.34	1.23	1.13	1.06	0.90	0.85
65	3.56	3.68	3.37	3.00	2.75	2.52	2.30	2.10	1.93	1.76	1.62	1.48	1.37	1.26	1.18	1.10	1.05	0.93
70	2.21	2.14	2.06	1.98	1.89	1.80	1.71	1.61	1.52	1.43	1.34	1.26	1.19	1.12	1.07	1.03	0.95	0.88
75	1.83	1.80	1.76	1.71	1.66	1.61	1.55	1.49	1.43	1.37	1.30	1.25	1.20	1.15	1.10	1.05	1.01	0.96
80	1.39	1.37	1.36	1.34	1.32	1.30	1.28	1.25	1.22	1.18	1.15	1.14	1.11	1.08	1.02	1.00	0.96	0.98
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2024-04-11

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks: