

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		5096.2 cd per klm. 0.0 degrees vertical -4.0 degrees horizontal
Beam Spread	At 10% of Imax	44.0V x 39.8H
	At 50% of Imax	27.1V x 23.7H
	At 90% of Imax	8.4V x 9.8H
Beam Flux	Total	978.5 lumens per klm.
	To 10% of Imax	879.0 lumens per klm.
	To 50% of Imax	494.1 lumens per klm.
	To 90% of Imax	54.9 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	97.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.23V I:0.0506A P:5.0675W PF:0.4551 Freq:50.00Hz Lamp Flux:242.257x1 lm		
NAME: 6442	TYPE:Indoor Lighting	WEIGHT:0.14kg
SPEC.:5W	DIM.: φ6.5*4.5cm	SERIAL No.:02
MFR.: NORDECOR	SUR.:3cm	Shielding Angle:24°

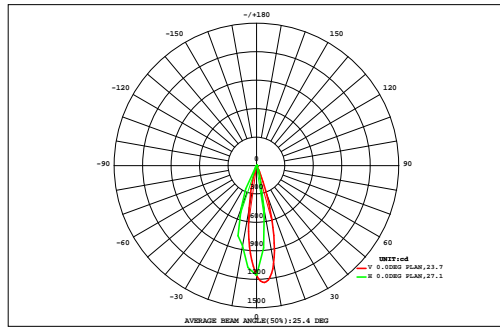

DATA OF LAMP		Eff:47.81lm/W	
MODEL		Imax(cd)	1235
NOMINAL POWER(W)	5W	AVAILABILITY(%)	92.3
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	223.6
NOMINAL FLUX(lm)	242.257	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	242.3
TEST VOLTAGE(V)	220.2	q @50%(H,V)	24,27DEG

AREA FLUX DIAGRAM													UNIT:lm					F t	F a			
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	0.00	0.00	0.00	0.00	0.00	0.02	0.19	0.52	0.48	0.16	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.37	0.00
	0.00	0.00	0.00	0.00	0.01	0.01	0.19	1.86	5.58	5.50	1.85	0.22	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	15.2	12.4
	0.00	0.00	0.00	0.01	0.02	0.07	1.01	7.99	20.5	18.2	5.59	0.64	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	54.1	51.2
	0.00	0.00	0.00	0.01	0.03	0.11	1.65	12.7	29.6	25.6	8.02	0.85	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	78.7	76.2
	0.00	0.00	0.00	0.01	0.03	0.14	2.11	13.9	28.1	23.0	6.62	0.69	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	74.6	72.4
	0.00	0.00	0.00	0.00	0.01	0.05	0.78	4.09	5.67	2.77	0.71	0.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	14.2	11.5
	0.00	0.00	0.00	0.00	0.00	0.01	0.18	0.80	1.47	1.01	0.32	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.84	0.00
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.04	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL( DEG)	20	30	40	50	60	70	80	90					
F t	0.00	0.00	0.01	0.05	0.11	0.40	5.96	41.6	91.5	76.6	23.3	2.61	0.14	0.01	0.00	0.00	0.00	0.00	0.00	0.00	242	---
F a	0.00	0.00	0.00	0.00	0.00	0.00	2.67	38.5	88.6	73.9	19.7	0.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	---	224


one-half-peak spread: U:8.8,D:18.5 , L:11.8,R:12.1 NEMA Beam Type: Type 3

H(h) Range:-90 - 90DEG  
 H(h) Interval: 1.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:AED  
 Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:5.780m [K=1.0000]  
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.23V I:0.0506A P:5.0675W PF:0.4551 Freq:50.00Hz Lamp Flux:242.257x1 lm		
NAME: 6442	TYPE:Indoor Lighting	WEIGHT:0.14kg
SPEC.:5W	DIM.: φ6.5*4.5cm	SERIAL No.:02
MFR.: NORDECOR	SUR.:3cm	Shielding Angle:24°

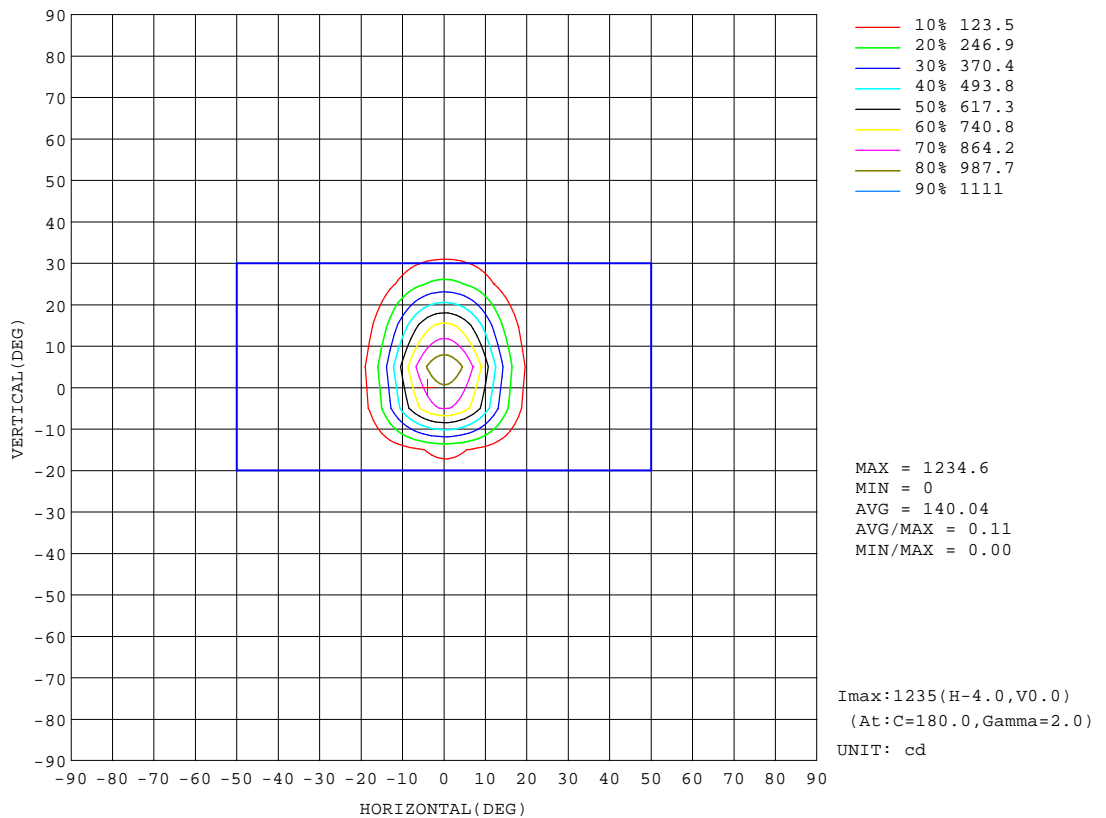


H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

ISOLUX DIAGRAM


Test:U:220.23V I:0.0506A P:5.0675W PF:0.4551 Freq:50.00Hz Lamp Flux:242.257x1 lm		
NAME: 6442	TYPE:Indoor Lighting	WEIGHT:0.14kg
SPEC.:5W	DIM.: φ6.5*4.5cm	SERIAL No.:02
MFR.: NORDECOR	SUR.:3cm	Shielding Angle:24°

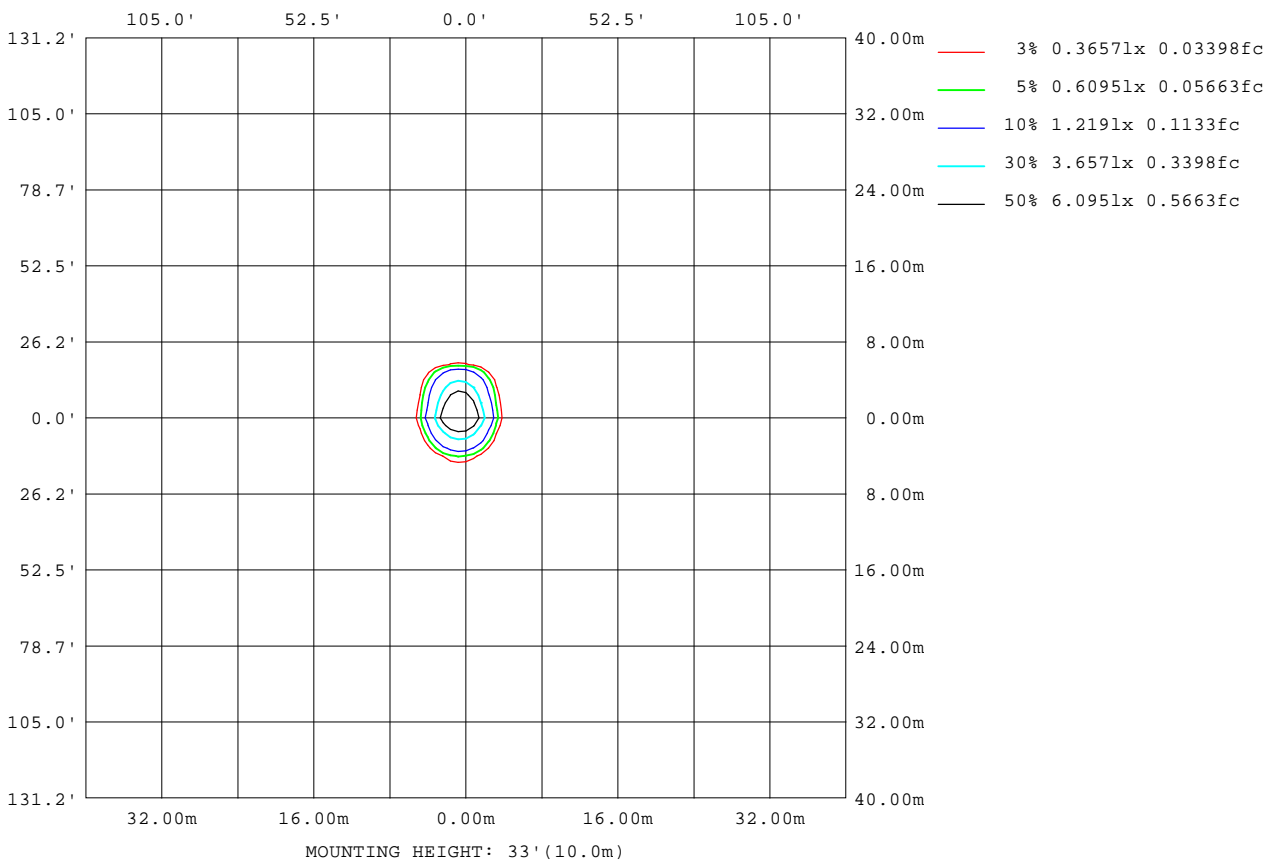

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

Planar Illuminance Curve

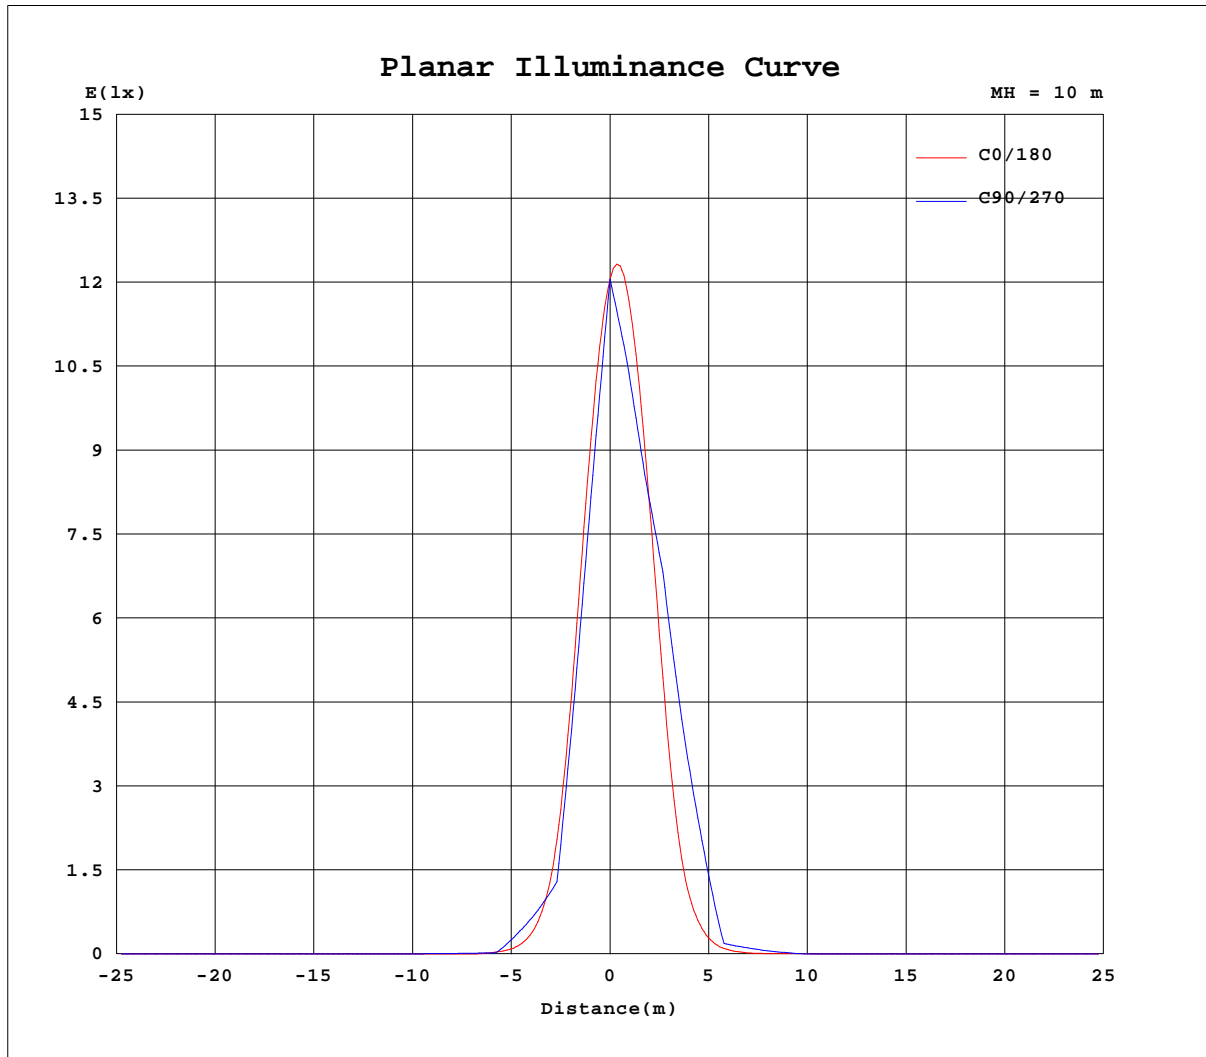


H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

AAI Figure

Test:U:220.23V I:0.0506A P:5.0675W PF:0.4551 Freq:50.00Hz Lamp Flux:242.257x1 lm		
NAME: 6442	TYPE:Indoor Lighting	WEIGHT:0.14kg
SPEC.:5W	DIM.: φ6.5*4.5cm	SERIAL No.:02
MFR.: NORDECOR	SUR.:3cm	Shielding Angle:24°

Flux out:111.5 lm

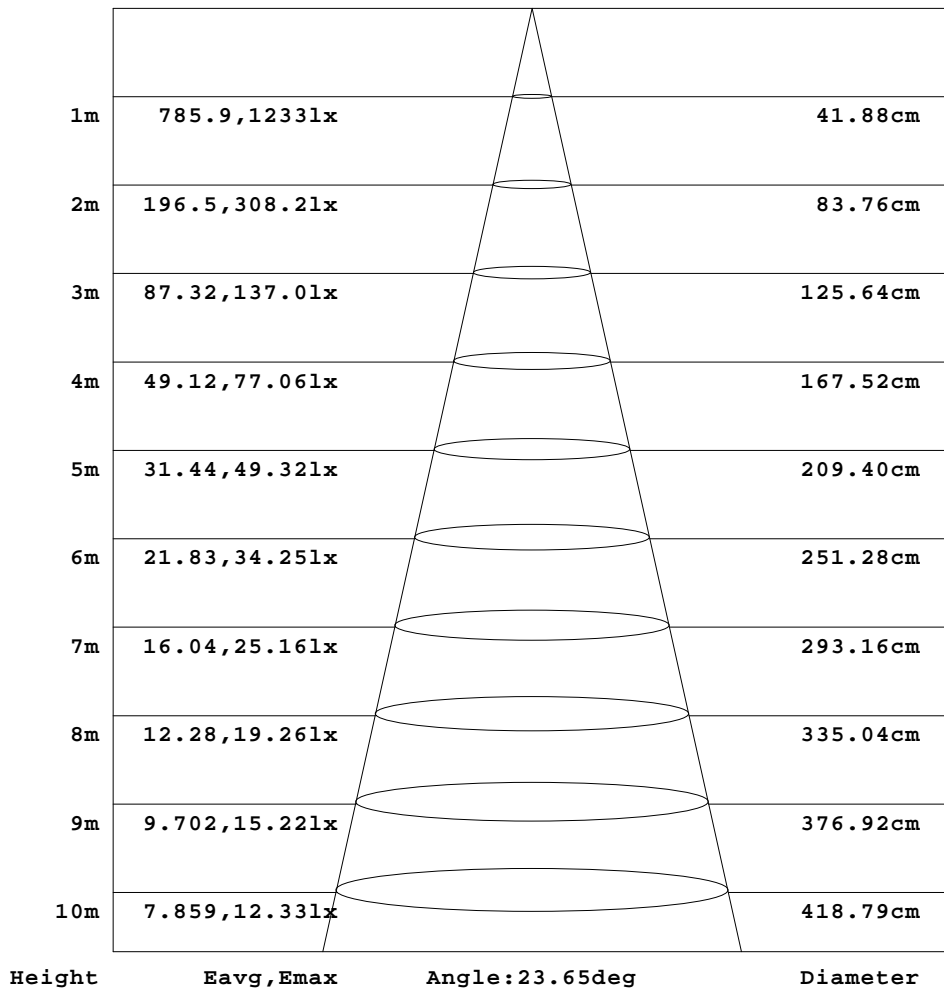

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.23V I:0.0506A P:5.0675W PF:0.4551 Freq:50.00Hz Lamp Flux:242.257x1 lm		
NAME: 6442	TYPE:Indoor Lighting	WEIGHT:0.14kg
SPEC.:5W	DIM.: φ6.5*4.5cm	SERIAL No.:02
MFR.: NORDECOR	SUR.:3cm	Shielding Angle:24°

Table--1

UNIT: cd

H( DEG) V( DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.16	0.48	0.80	1.07	1.22	1.25
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.38	0.79	1.21	1.59	2.05	1.89
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.43	0.94	1.50	2.25	2.86
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.30	0.88	1.58	2.40	3.65	3.33
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.06	0.10	0.14	0.14	0.19	0.27	1.94	5.97	14.0	27.4	42.4	50.5
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.17	0.26	0.28	0.36	0.48	2.93	9.48	23.2	47.4	76.5	96.3	90.2
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.17	0.29	0.41	0.43	0.56	0.81	5.80	17.1	40.1	78.7	122	144
-10	0.00	0.00	0.00	0.00	0.03	0.11	0.30	0.50	0.73	0.89	1.11	2.53	10.8	39.4	119	272	424	504	475
-5	0.00	0.00	0.00	0.00	0.00	0.09	0.26	0.52	0.81	1.13	1.42	1.77	5.65	22.8	81.8	249	532	773	871
0	0.00	0.00	0.00	0.00	0.09	0.33	0.63	0.99	1.41	1.82	2.25	6.14	23.6	90.0	288	676	1045	1228	1156
5	0.00	0.00	0.00	0.00	0.00	0.10	0.33	0.63	0.99	1.36	1.73	2.14	6.89	26.7	98.3	300	650	955	1078
10	0.00	0.00	0.00	0.00	0.04	0.23	0.51	0.84	1.15	1.47	1.82	4.22	16.8	64.8	201	480	767	916	857
15	0.00	0.00	0.00	0.00	0.00	0.05	0.23	0.49	0.81	1.10	1.35	1.67	4.53	17.4	66.5	192	431	668	765
20	0.00	0.00	0.00	0.00	0.01	0.12	0.30	0.51	0.69	0.86	1.07	2.17	9.00	35.4	107	259	426	517	481
25	0.00	0.00	0.00	0.00	0.00	0.02	0.08	0.16	0.27	0.37	0.45	0.56	1.51	5.99	23.7	69.1	154	239	275
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.18	1.60	6.36	13.8	23.3	29.8	27.5
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.17	1.52	5.09	10.4	16.8	20.1
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.53	2.12	4.60	7.82	9.99	9.20
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.08
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(h) Range:-90 - 90DEG  
H(h) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.23V I:0.0506A P:5.0675W PF:0.4551 Freq:50.00Hz Lamp Flux:242.257x1 lm		
NAME: 6442	TYPE:Indoor Lighting	WEIGHT:0.14kg
SPEC.:5W	DIM.: φ6.5*4.5cm	SERIAL No.:02
MFR.: NORDECOR	SUR.:3cm	Shielding Angle:24°

Table--2

UNIT: cd

H( DEG) V( DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	1.13	0.87	0.53	0.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	1.22	0.72	0.26	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	2.45	1.35	0.71	0.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	1.79	0.95	0.27	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	44.5	29.5	16.0	6.95	2.65	0.61	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	63.4	35.8	16.6	6.45	1.94	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	127	85.4	46.5	20.6	7.94	1.82	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	350	187	70.6	22.8	6.35	1.19	0.19	0.11	0.06	0.02	0.00	0.00	0.00	0.00	0.01	0.05	0.04	0.03
-5	784	550	270	92.8	28.1	7.52	1.48	0.33	0.18	0.09	0.01	0.00	0.00	0.00	0.00	0.04	0.11	0.07
0	860	454	162	49.0	13.2	3.41	0.58	0.32	0.17	0.05	0.00	0.00	0.00	0.00	0.02	0.15	0.13	0.08
5	967	671	325	112	33.3	9.00	1.71	0.43	0.22	0.10	0.01	0.00	0.00	0.00	0.00	0.04	0.11	0.07
10	621	319	119	36.9	9.90	1.97	0.41	0.20	0.10	0.02	0.00	0.00	0.00	0.00	0.01	0.05	0.04	0.03
15	676	450	211	79.1	23.6	6.27	0.71	0.28	0.12	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	341	171	66.7	20.8	5.49	0.83	0.21	0.10	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	243	161	76.4	28.7	8.02	2.09	0.24	0.09	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	18.6	10.2	4.38	0.67	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	17.4	11.1	5.94	2.30	0.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	6.21	3.41	1.46	0.22	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks: