

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2970.5 cd per klm. 0.0 degrees vertical -1.0 degrees horizontal
Beam Spread	At 10% of Imax	56.7V x 54.5H
	At 50% of Imax	35.6V x 33.9H
	At 90% of Imax	8.2V x 14.2H
Beam Flux	Total	992.4 lumens per klm.
	To 10% of Imax	922.7 lumens per klm.
	To 50% of Imax	541.3 lumens per klm.
	To 90% of Imax	58.0 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	99.2 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.27V I:0.0919A P:9.4715W PF:0.4677 Freq:50.00Hz Lamp Flux:508.693x1 lm		
NAME: 6444	TYPE:Indoor lighting	WEIGHT:0.24kg
SPEC.:10W	DIM.: φ62*81*84	SERIAL No.:03
MFR.: NORDECOR	SUR.:3cm	Shielding Angle:24°

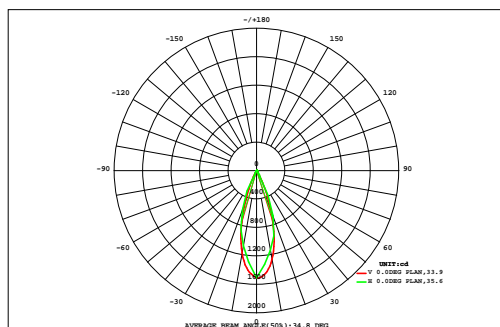

DATA OF LAMP		Eff:53.71lm/W	
MODEL		Imax(cd)	1511
NOMINAL POWER(W)	10W	AVAILABILITY(%)	94.3
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	479.6
NOMINAL FLUX(lm)	508.693	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	508.7
TEST VOLTAGE(V)	220.2	q @50%(H,V)	34,36DEG

VERTICAL( DEG)	AREA FLUX DIAGRAM																	UNIT:lm		F t	F a
	90	80	70	60	50	40	30	20	10	0	10	20	30	40	50	60	70	80	90		
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.00	
30	0.00	0.00	0.01	0.02	0.02	0.04	0.09	0.25	0.91	0.97	0.34	0.02	0.00	0.00	0.00	0.00	0.00	0.00	2.55	0.00	
	0.00	0.01	0.02	0.03	0.05	0.12	2.60	12.1	23.4	24.1	13.0	3.03	0.15	0.02	0.01	0.01	0.00	0.00	78.7	75.3	
	0.00	0.01	0.02	0.04	0.07	0.39	5.51	21.2	36.2	36.6	22.2	6.04	0.49	0.03	0.02	0.01	0.00	0.00	129	126	
	0.00	0.01	0.02	0.05	0.08	0.57	6.76	24.4	40.2	40.4	24.7	6.63	0.54	0.03	0.02	0.01	0.00	0.00	144	141	
	0.00	0.01	0.02	0.04	0.06	0.29	3.86	14.9	26.7	26.7	14.5	3.37	0.24	0.02	0.01	0.01	0.00	0.00	90.8	87.4	
	0.00	0.00	0.01	0.02	0.03	0.14	1.62	6.22	11.0	10.7	5.38	1.14	0.08	0.01	0.00	0.00	0.00	0.00	36.3	31.2	
-30	0.00	0.00	0.01	0.01	0.01	0.02	0.03	0.38	0.98	1.04	0.54	0.10	0.01	0.00	0.00	0.00	0.00	0.00	3.12	0.00	
-40	0.00	0.00	0.00	0.00	0.00	0.02	0.06	0.22	0.33	0.24	0.09	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.97	0.00	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL( DEG)	20	30	40	50	60	70	80	90				
F t	0.01	0.04	0.10	0.21	0.34	1.60	21.1	82.9	147	148	84.6	21.2	1.56	0.10	0.06	0.03	0.01	0.00	509	---	
F a	0.00	0.00	0.00	0.00	0.00	0.00	14.7	80.4	143	145	81.9	14.5	0.00	0.00	0.00	0.00	0.00	0.00	---	480	


one-half-peak spread: U:18.8,D:17.1 , L:16.9,R:17.2 NEMA Beam Type: Type 4

H(h) Range:-90 - 90DEG  
H(h) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.27V I:0.0919A P:9.4715W PF:0.4677 Freq:50.00Hz Lamp Flux:508.693x1 lm		
NAME: 6444	TYPE:Indoor lighting	WEIGHT:0.24kg
SPEC.:10W	DIM.: φ62*81*84	SERIAL No.:03
MFR.: NORDECOR	SUR.:3cm	Shielding Angle:24°

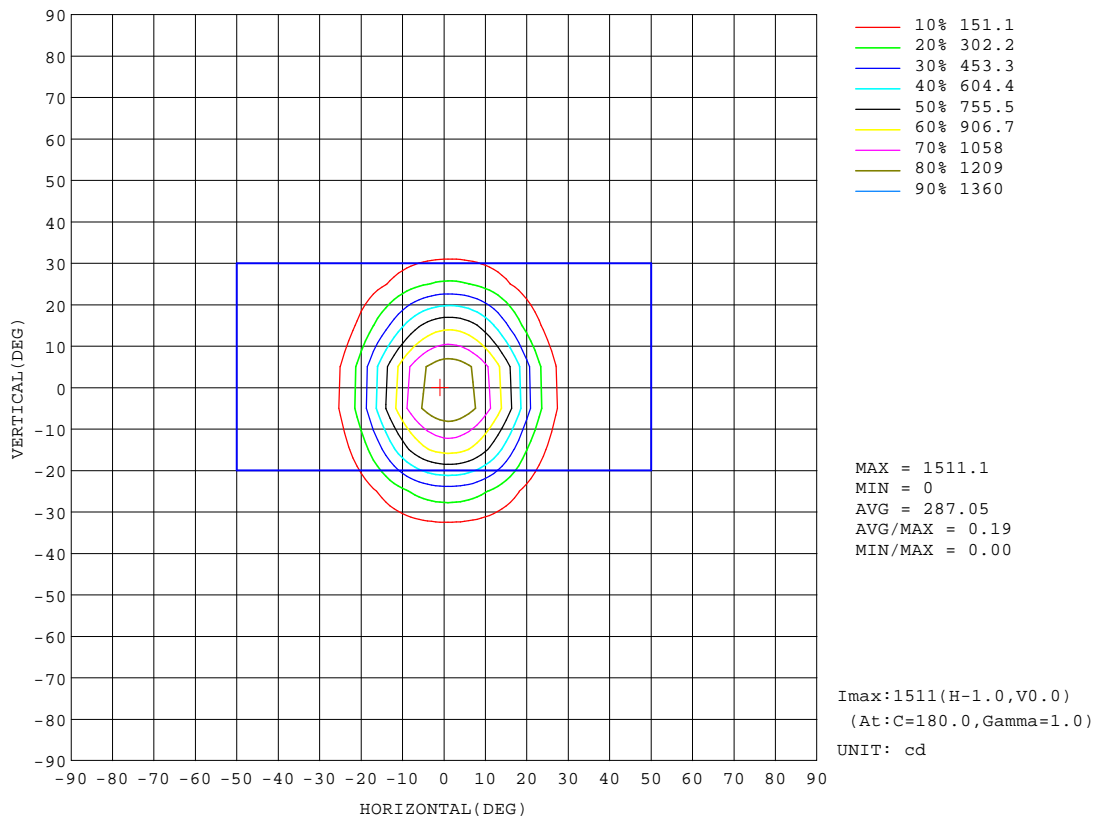


H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

ISOLUX DIAGRAM


Test:U:220.27V I:0.0919A P:9.4715W PF:0.4677 Freq:50.00Hz Lamp Flux:508.693x1 lm		
NAME: 6444	TYPE:Indoor lighting	WEIGHT:0.24kg
SPEC.:10W	DIM.: φ62*81*84	SERIAL No.:03
MFR.: NORDECOR	SUR.:3cm	Shielding Angle:24°

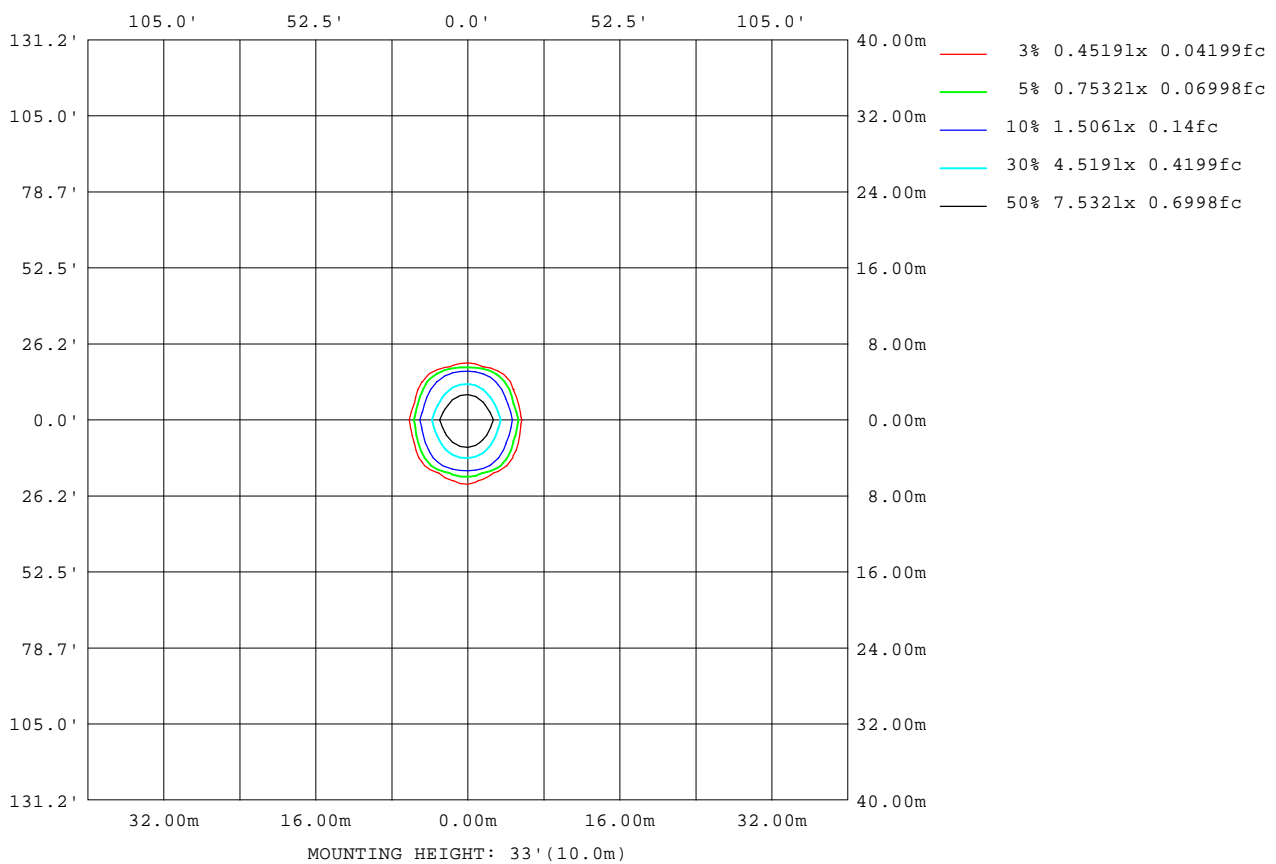

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

Planar Illuminance Curve

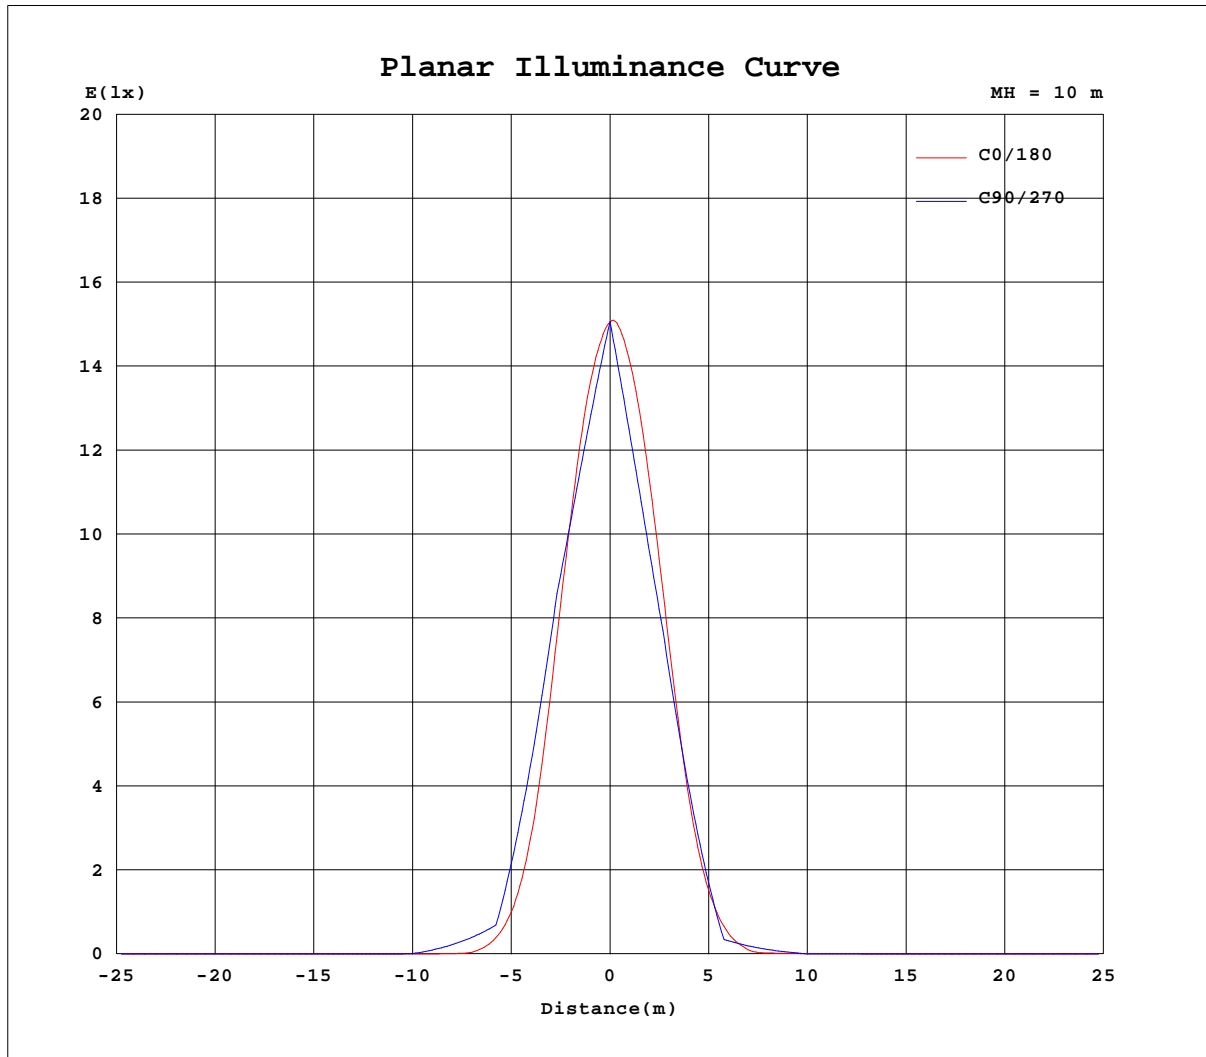


H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

AAI Figure

Test:U:220.27V I:0.0919A P:9.4715W PF:0.4677 Freq:50.00Hz Lamp Flux:508.693x1 lm		
NAME: 6444	TYPE:Indoor lighting	WEIGHT:0.24kg
SPEC.:10W	DIM.: φ62*81*84	SERIAL No.:03
MFR.: NORDECOR	SUR.:3cm	Shielding Angle:24°

Flux out:283.6 lm

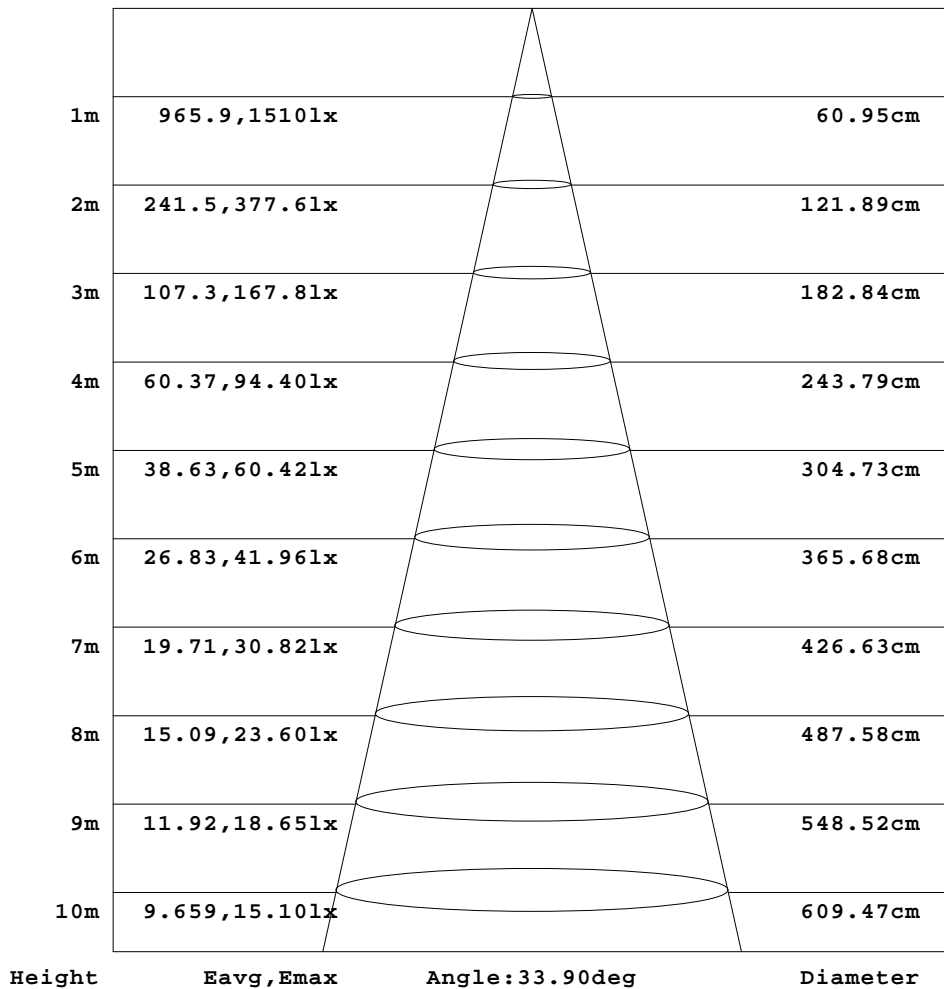

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.27V I:0.0919A P:9.4715W PF:0.4677 Freq:50.00Hz Lamp Flux:508.693x1 lm		
NAME: 6444	TYPE:Indoor lighting	WEIGHT:0.24kg
SPEC.:10W	DIM.: φ62*81*84	SERIAL No.:03
MFR.: NORDECOR	SUR.:3cm	Shielding Angle:24°

Table--1

UNIT: cd

H( DEG) V( DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.14	0.27	0.52	0.88	1.34	1.85	2.33	2.82	3.18	3.33
-40	0.02	0.05	0.09	0.13	0.17	0.20	0.23	0.29	0.32	0.41	0.59	0.88	1.42	2.45	8.96	18.6	28.8	36.2	37.7
-35	0.02	0.07	0.14	0.22	0.30	0.37	0.45	0.51	0.55	0.61	0.72	0.89	1.47	2.57	8.83	26.9	46.9	64.5	72.5
-30	0.05	0.15	0.26	0.38	0.50	0.60	0.70	0.78	0.81	0.88	0.98	1.33	2.15	4.26	22.8	50.7	80.5	102	107
-25	0.07	0.14	0.28	0.44	0.62	0.79	0.98	1.16	1.30	1.45	1.66	2.18	8.97	34.6	87.2	175	275	354	389
-20	0.13	0.26	0.42	0.64	0.87	1.12	1.41	1.66	1.91	2.12	2.62	4.31	31.0	98.1	218	380	542	646	672
-15	0.17	0.22	0.42	0.66	0.93	1.24	1.60	1.96	2.32	2.65	3.10	4.38	23.4	97.4	237	446	688	873	953
-10	0.18	0.35	0.55	0.83	1.14	1.51	1.93	2.34	2.78	3.12	3.97	10.3	64.0	190	407	684	938	1096	1139
-5	0.16	0.29	0.50	0.77	1.09	1.46	1.91	2.39	2.89	3.33	4.03	6.36	47.2	162	380	691	1001	1221	1322
0	0.22	0.40	0.65	0.95	1.32	1.76	2.27	2.82	3.40	3.90	5.05	19.3	101	281	591	962	1268	1452	1506
5	0.12	0.28	0.49	0.75	1.07	1.43	1.87	2.33	2.81	3.23	3.87	6.03	43.2	153	366	669	968	1187	1290
10	0.13	0.30	0.52	0.78	1.10	1.43	1.82	2.20	2.60	2.91	3.60	9.29	52.9	166	373	627	870	1029	1074
15	0.04	0.18	0.41	0.60	0.86	1.14	1.46	1.78	2.08	2.35	2.61	3.39	11.5	68.1	194	377	589	771	856
20	0.06	0.18	0.35	0.56	0.78	1.00	1.25	1.45	1.66	1.80	2.10	3.04	19.5	72.8	177	312	458	561	590
25	0.01	0.08	0.21	0.36	0.52	0.67	0.83	0.98	1.08	1.17	1.25	1.51	4.33	23.6	66.5	131	214	287	321
30	0.00	0.06	0.16	0.28	0.38	0.47	0.55	0.58	0.58	0.58	0.58	0.59	0.94	1.68	3.76	14.9	34.7	49.4	53.8
35	0.00	0.02	0.08	0.16	0.23	0.29	0.35	0.38	0.38	0.40	0.40	0.41	0.57	0.97	1.92	5.73	18.2	29.9	36.0
40	0.00	0.02	0.05	0.09	0.13	0.16	0.18	0.19	0.19	0.23	0.23	0.29	0.46	0.80	1.59	5.35	12.0	17.0	18.4
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.06	0.07	0.18	0.31	0.42	0.58	0.64	0.71	0.72
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H<sub>(h)</sub> Range:-90 - 90DEG  
H<sub>(h)</sub> Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.27V I:0.0919A P:9.4715W PF:0.4677 Freq:50.00Hz Lamp Flux:508.693x1 lm		
NAME: 6444	TYPE:Indoor lighting	WEIGHT:0.24kg
SPEC.:10W	DIM.: φ62*81*84	SERIAL No.:03
MFR.: NORDECOR	SUR.:3cm	Shielding Angle:24°

Table--2

UNIT: cd

H( DEG) V( DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	3.27	2.92	2.38	1.78	1.22	0.69	0.24	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	33.2	24.3	14.6	6.49	1.65	0.64	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	68.1	53.4	34.3	17.3	4.27	1.22	0.35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	93.3	67.5	39.4	16.4	2.95	0.93	0.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	375	312	216	118	50.9	17.1	2.77	0.51	0.29	0.27	0.24	0.21	0.18	0.15	0.12	0.09	0.06	0.03
-20	617	484	311	157	64.7	18.9	2.01	0.81	0.56	0.51	0.45	0.40	0.34	0.28	0.22	0.17	0.10	0.03
-15	923	778	548	305	141	48.2	7.50	1.54	0.88	0.80	0.71	0.63	0.55	0.46	0.37	0.28	0.19	0.09
-10	1054	854	578	307	129	38.6	4.64	1.47	1.01	0.90	0.78	0.69	0.58	0.48	0.37	0.28	0.18	0.09
-5	1279	1115	839	509	237	83.4	17.7	2.33	1.27	1.09	0.96	0.82	0.70	0.57	0.46	0.37	0.25	0.14
0	1404	1177	839	465	195	60.0	8.05	1.97	1.35	1.18	1.01	0.86	0.70	0.59	0.46	0.34	0.22	0.16
5	1247	1085	814	494	227	77.8	16.3	2.18	1.20	1.04	0.91	0.78	0.66	0.53	0.42	0.34	0.22	0.12
10	991	796	534	283	113	29.5	3.94	1.22	0.89	0.80	0.70	0.61	0.50	0.41	0.30	0.22	0.12	0.04
15	827	688	472	259	111	31.6	3.19	1.11	0.67	0.64	0.56	0.51	0.44	0.35	0.27	0.19	0.11	0.03
20	538	414	257	129	47.9	9.49	1.25	0.57	0.44	0.41	0.36	0.33	0.27	0.21	0.15	0.11	0.05	0.00
25	309	254	169	89.0	37.8	10.6	1.06	0.37	0.22	0.21	0.19	0.17	0.15	0.12	0.09	0.06	0.04	0.01
30	45.8	29.4	10.4	2.56	0.70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	33.7	24.6	11.9	2.73	0.84	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	15.7	10.2	3.72	0.96	0.23	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	0.68	0.59	0.44	0.25	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(h) Range:-90 - 90DEG  
H(h) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks: