

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		1941.5 cd per klm. 0.0 degrees vertical -4.0 degrees horizontal
Beam Spread	At 10% of Imax	71.6V x 71.0H
	At 50% of Imax	37.2V x 35.4H
	At 90% of Imax	20.1V x 13.5H
Beam Flux	Total	999.1 lumens per klm.
	To 10% of Imax	892.9 lumens per klm.
	To 50% of Imax	488.2 lumens per klm.
	To 90% of Imax	137.9 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.28V I:0.0673A P:6.9493W PF:0.4689 Freq:50.00Hz Lamp Flux:151.991x1 lm		
NAME: 6446	TYPE:Indoor Lighting	WEIGHT:0.16kg
SPEC.:7W	DIM.: φ6.5*7.4*4.6cm	SERIAL No.:04
MFR.: NORDECOR	SUR.:3.6cm	Shielding Angle:38°

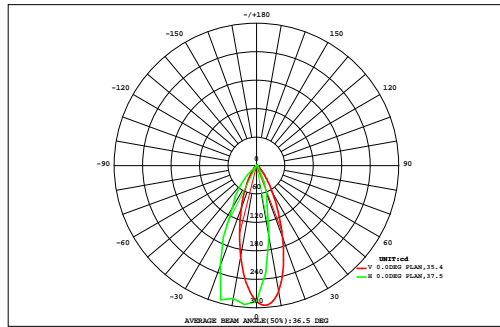

DATA OF LAMP		Eff:21.87lm/W	
MODEL		Imax(cd)	295.1
NOMINAL POWER(W)	7W	AVAILABILITY(%)	90.6
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	137.7
NOMINAL FLUX(lm)	151.991	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	152.0
TEST VOLTAGE(V)	220.2	q @50%(H,V)	35,37DEG

VERTICAL( DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	90	80	70	60	50	40	30	20	10	0	10	20	30	40	50	60	70	80	90	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
40	0.00	0.00	0.01	0.04	0.11	0.23	0.38	0.54	0.63	0.61	0.50	0.36	0.24	0.13	0.06	0.02	0.00	0.00	3.85	2.34
30	0.00	0.00	0.02	0.08	0.22	0.52	1.11	1.87	2.36	2.20	1.53	0.83	0.40	0.18	0.07	0.02	0.00	0.00	11.4	9.51
20	0.00	0.00	0.02	0.09	0.28	0.76	1.88	3.49	4.66	4.33	2.81	1.36	0.54	0.20	0.07	0.02	0.00	0.00	20.5	19.1
10	0.00	0.00	0.02	0.11	0.34	1.12	3.06	6.13	8.57	7.87	4.85	2.18	0.73	0.23	0.07	0.01	0.00	0.00	35.3	34.1
0	0.00	0.00	0.02	0.10	0.33	1.06	2.88	6.02	8.58	7.82	4.67	2.03	0.68	0.22	0.06	0.01	0.00	0.00	34.5	33.3
-10	0.00	0.00	0.02	0.09	0.28	0.87	2.35	4.97	7.11	6.41	3.76	1.64	0.57	0.18	0.05	0.00	0.00	0.00	28.3	27.1
-20	0.00	0.00	0.01	0.06	0.18	0.47	1.08	1.99	2.59	2.31	1.48	0.75	0.31	0.12	0.03	0.00	0.00	0.00	11.4	9.63
-30	0.00	0.00	0.00	0.03	0.10	0.24	0.51	0.89	1.16	1.06	0.71	0.37	0.17	0.06	0.01	0.00	0.00	0.00	5.31	2.77
-40	0.00	0.00	0.00	0.01	0.03	0.07	0.12	0.17	0.20	0.19	0.15	0.10	0.05	0.02	0.00	0.00	0.00	0.00	1.11	0.00
-50	0.00	0.00	0.00	0.00	0.01	0.03	0.05	0.07	0.08	0.07	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.38	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL( DEG)	20	30	40	50	60	70	80	90			
F t	0.00	0.00	0.11	0.60	1.87	5.37	13.4	26.1	35.9	32.9	20.5	9.64	3.69	1.34	0.42	0.08	0.00	0.00	152	---
F a	0.00	0.00	0.00	0.00	0.05	3.28	12.4	25.5	35.4	32.3	19.6	8.03	1.16	0.00	0.00	0.00	0.00	0.00	---	138


one-half-peak spread: U:15.5,D:21.9 , L:17.4,R:18.4 NEMA Beam Type: Type 5

H(h) Range:-90 - 90DEG  
H(h) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.28V I:0.0673A P:6.9493W PF:0.4689 Freq:50.00Hz Lamp Flux:151.99lx1 lm		
NAME: 6446	TYPE:Indoor Lighting	WEIGHT:0.16kg
SPEC.:7W	DIM.: φ6.5*7.4*4.6cm	SERIAL No.:04
MFR.: NORDECOR	SUR.:3.6cm	Shielding Angle:38°

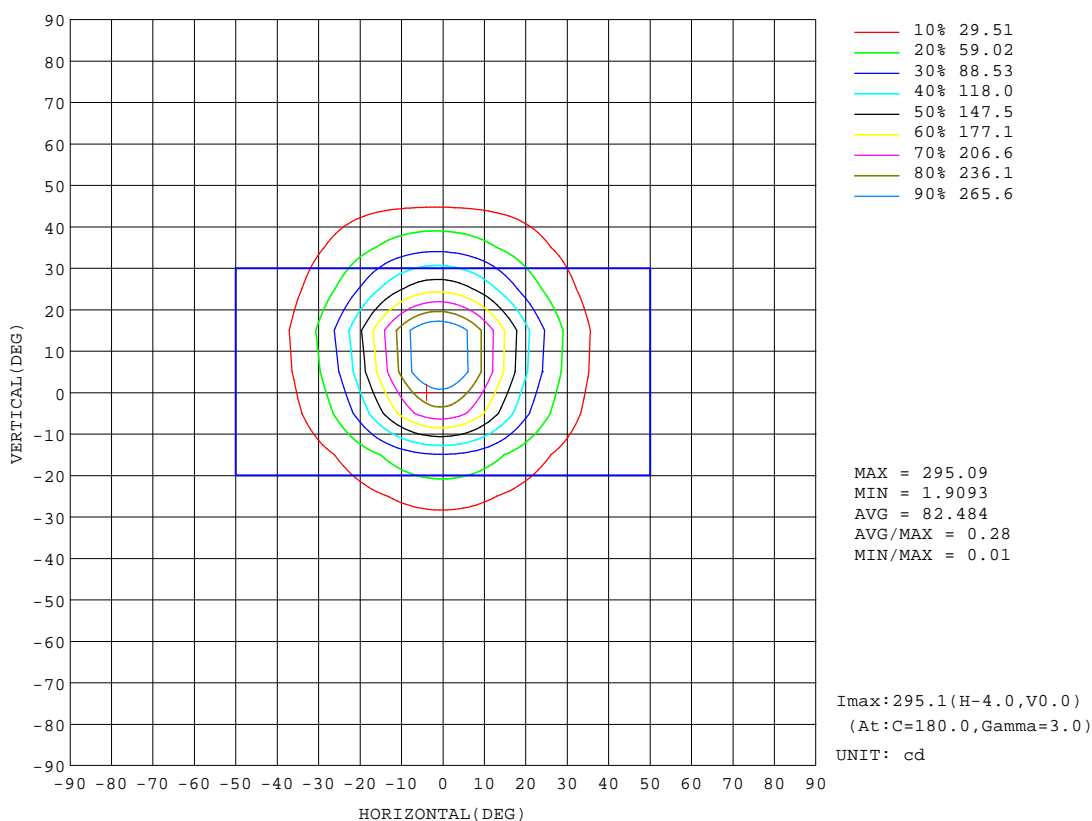


H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

ISOLUX DIAGRAM


Test:U:220.28V I:0.0673A P:6.9493W PF:0.4689 Freq:50.00Hz Lamp Flux:151.99lx1 lm		
NAME: 6446	TYPE:Indoor Lighting	WEIGHT:0.16kg
SPEC.:7W	DIM.: φ6.5*7.4*4.6cm	SERIAL No.:04
MFR.: NORDECOR	SUR.:3.6cm	Shielding Angle:38°

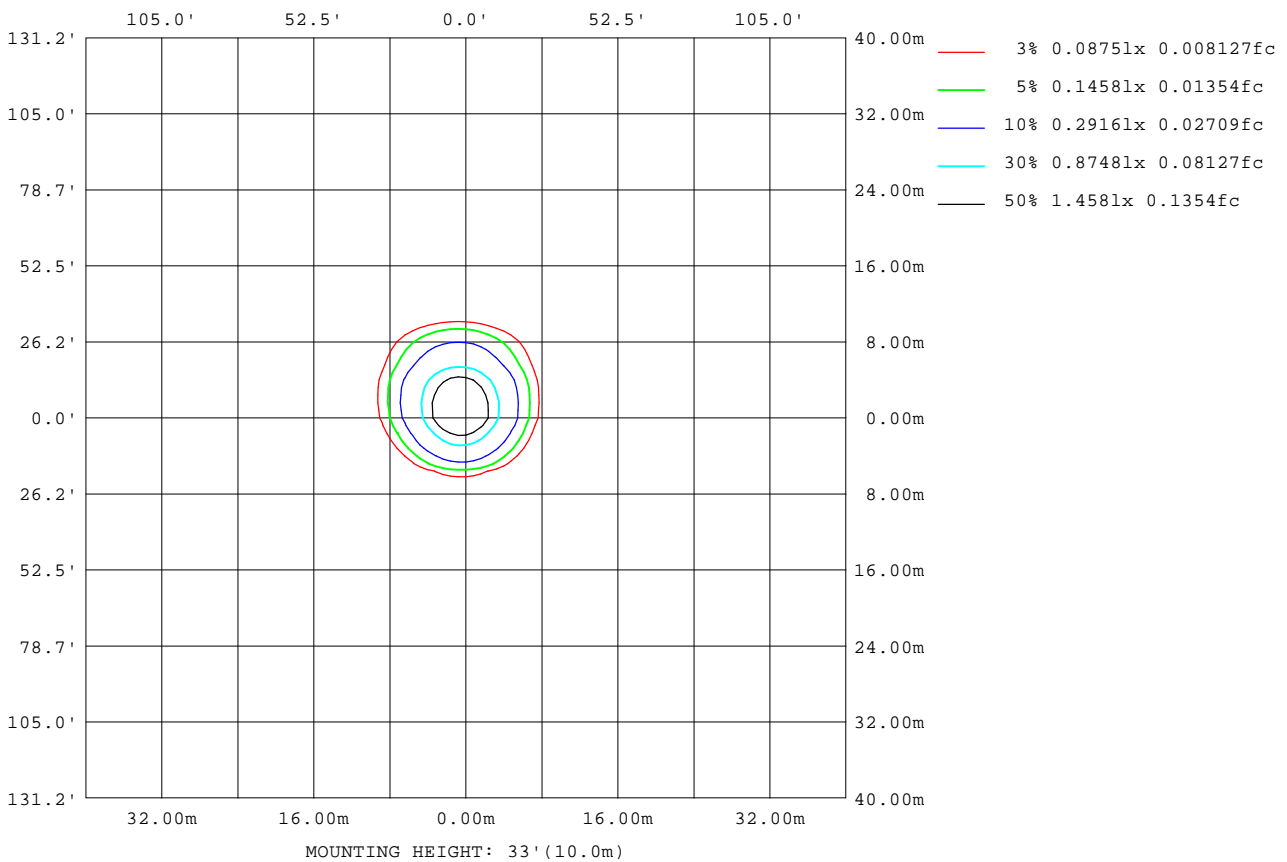

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

Planar Illuminance Curve

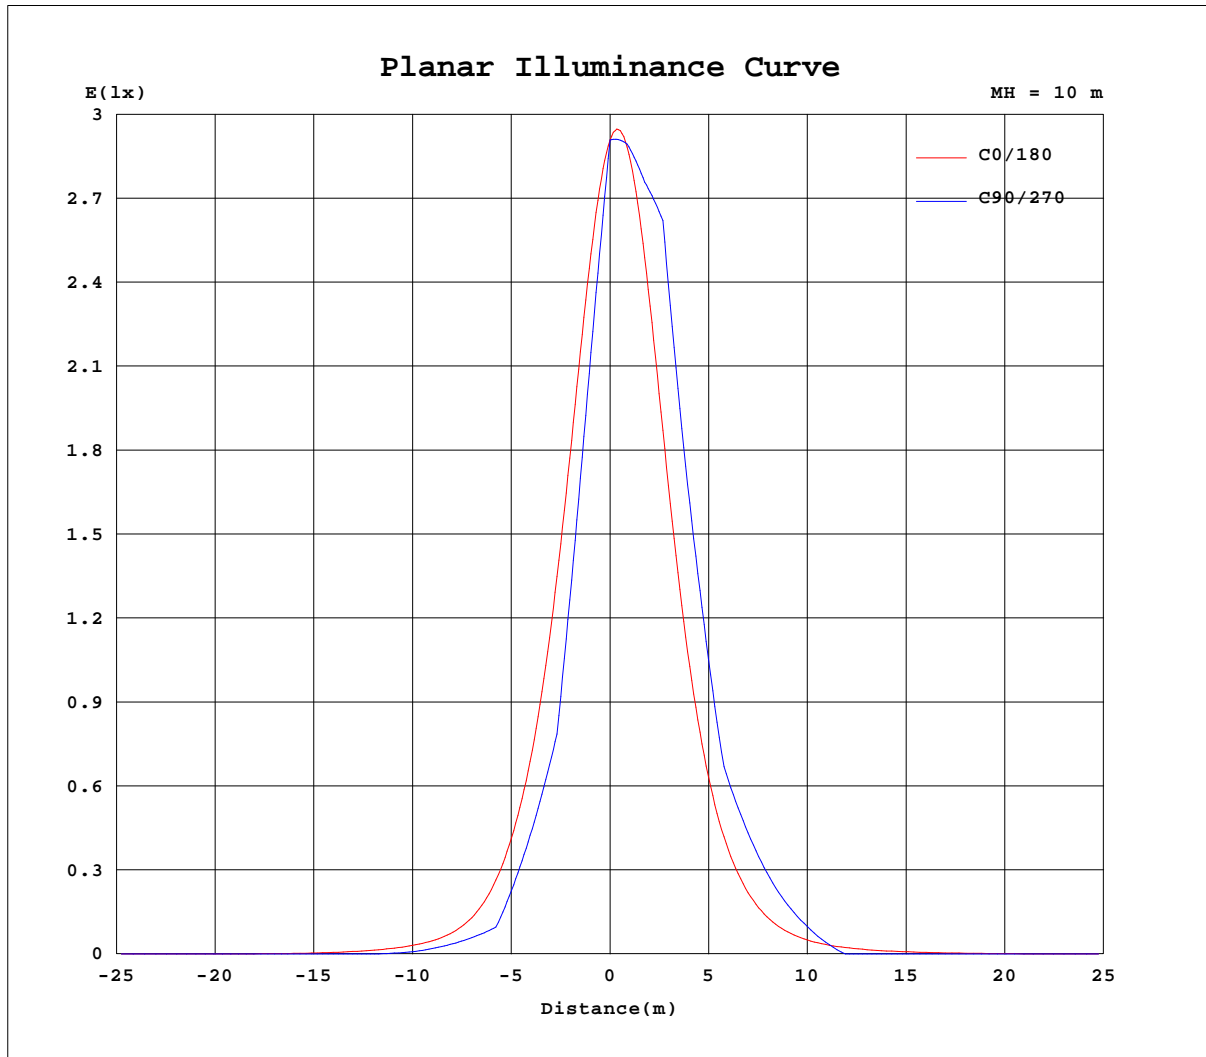


H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

AAI Figure

Test:U:220.28V I:0.0673A P:6.9493W PF:0.4689 Freq:50.00Hz Lamp Flux:151.99lx1 lm		
NAME: 6446	TYPE:Indoor Lighting	WEIGHT:0.16kg
SPEC.:7W	DIM.: φ6.5*7.4*4.6cm	SERIAL No.:04
MFR.: NORDECOR	SUR.:3.6cm	Shielding Angle:38°

Flux out:62.37 lm

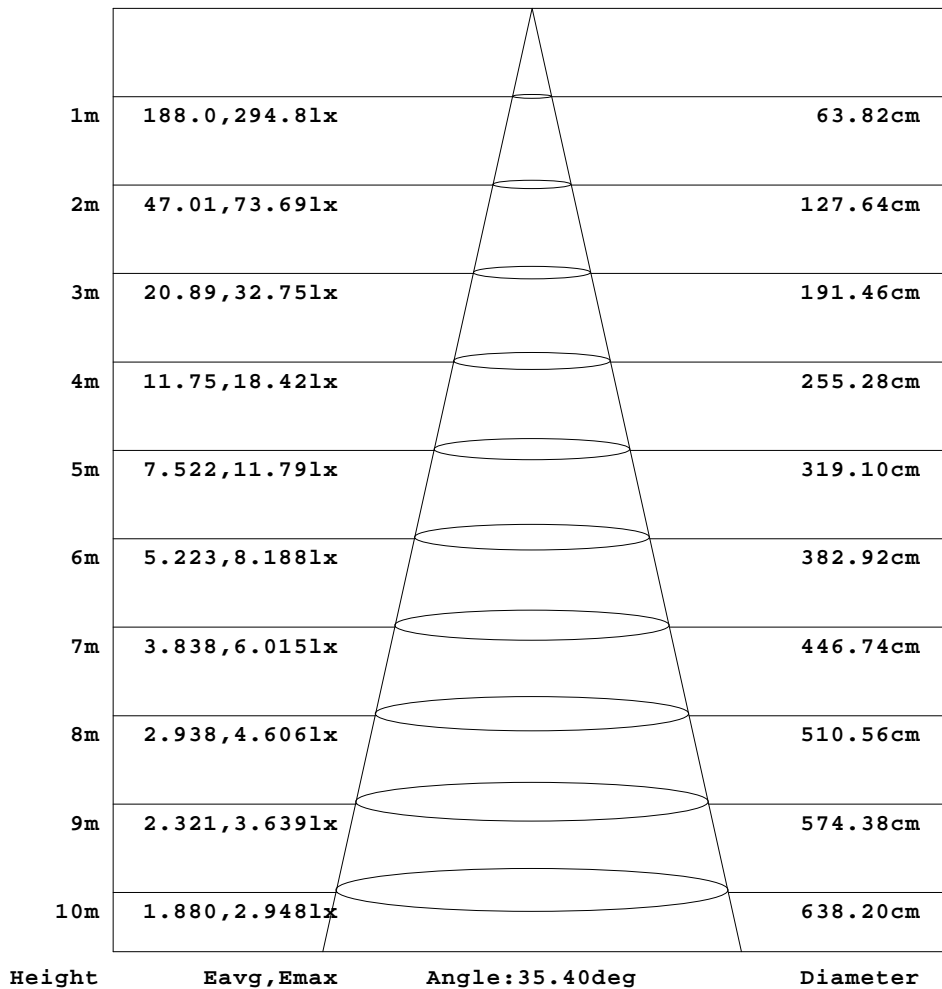

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.28V I:0.0673A P:6.9493W PF:0.4689 Freq:50.00Hz Lamp Flux:151.99lx1 lm		
NAME: 6446	TYPE:Indoor Lighting	WEIGHT:0.16kg
SPEC.:7W	DIM.: φ6.5*7.4*4.6cm	SERIAL No.:04
MFR.: NORDECOR	SUR.:3.6cm	Shielding Angle:38°

Table--1

UNIT: cd

H( DEG) V( DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.39	0.70	1.03	1.35	1.71	1.94	2.18	2.30	2.33
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.33	0.59	1.09	1.65	2.31	3.05	3.92	4.79	5.61	6.22	6.52	6.42
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.36	0.85	1.44	2.21	3.08	4.14	5.42	6.87	8.32	9.60	10.5	10.7
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.27	0.98	1.77	2.69	3.80	5.08	6.71	8.64	10.7	12.6	14.1	14.9	14.7
-25	0.00	0.00	0.00	0.00	0.00	0.03	0.34	1.18	2.27	3.62	5.44	7.90	11.2	15.7	21.2	27.4	33.3	37.6	39.1
-20	0.00	0.00	0.00	0.00	0.00	0.37	1.31	2.65	4.32	6.57	9.88	14.5	20.8	29.2	39.2	49.6	58.2	62.9	62.1
-15	0.00	0.00	0.00	0.00	0.00	0.09	1.01	2.45	4.26	6.63	10.1	15.2	22.3	32.1	44.8	59.3	73.3	83.7	87.4
-10	0.00	0.00	0.00	0.00	0.13	0.90	2.41	4.37	6.96	10.9	17.4	27.5	42.2	62.9	89.4	118	143	156	153
-5	0.00	0.00	0.00	0.00	0.02	0.53	1.88	3.83	6.34	10.0	16.3	26.8	43.2	67.3	101	143	185	216	226
0	0.00	0.00	0.00	0.00	0.37	1.58	3.58	6.13	9.70	15.8	26.5	44.2	70.9	110	161	219	269	294	286
5	0.00	0.00	0.00	0.00	0.04	0.81	2.42	4.72	7.69	12.2	20.1	34.2	56.8	89.3	134	188	243	283	294
10	0.00	0.00	0.00	0.00	0.48	1.75	3.89	6.65	10.5	17.0	28.8	49.1	79.0	120	171	225	271	293	284
15	0.00	0.00	0.00	0.00	0.06	0.95	2.63	5.11	8.31	13.1	21.6	37.3	63.1	98.3	144	197	248	284	292
20	0.00	0.00	0.00	0.00	0.53	1.74	3.78	6.48	10.1	15.9	26.2	43.6	69.0	102	142	182	215	230	223
25	0.00	0.00	0.00	0.00	0.08	0.91	2.29	4.45	7.24	11.0	16.9	27.0	42.8	64.1	90.5	119	146	164	167
30	0.00	0.00	0.00	0.00	0.52	1.55	3.24	5.61	8.54	12.5	18.5	27.8	40.9	56.8	74.0	89.7	101	105	102
35	0.00	0.00	0.00	0.00	0.07	0.81	1.96	3.67	5.95	8.86	12.8	18.6	26.8	37.5	49.7	61.9	72.1	78.3	79.2
40	0.00	0.00	0.00	0.00	0.41	1.33	2.59	4.33	6.67	9.60	13.5	18.5	25.0	32.5	40.3	47.1	51.9	53.7	52.3
45	0.00	0.00	0.00	0.00	0.03	0.65	1.62	2.75	4.45	6.67	9.23	12.1	15.2	18.4	21.6	24.5	26.6	27.8	27.9
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(h) Range:-90 - 90DEG  
H(h) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.28V I:0.0673A P:6.9493W PF:0.4689 Freq:50.00Hz Lamp Flux:151.99lx1 lm		
NAME: 6446	TYPE:Indoor Lighting	WEIGHT:0.16kg
SPEC.:7W	DIM.: φ6.5*7.4*4.6cm	SERIAL No.:04
MFR.: NORDECOR	SUR.:3.6cm	Shielding Angle:38°

Table--2

UNIT: cd

H( DEG) V( DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	2.20	1.93	1.63	1.33	1.02	0.70	0.40	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	5.93	5.18	4.33	3.47	2.66	1.94	1.28	0.75	0.40	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	10.3	9.37	8.07	6.64	5.28	4.03	2.95	1.98	1.20	0.54	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	13.7	12.0	10.1	8.15	6.35	4.79	3.41	2.24	1.19	0.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	37.3	32.9	27.0	20.9	15.6	11.1	7.71	5.13	3.29	1.85	0.69	0.19	0.00	0.00	0.00	0.00	0.00	0.00
-20	56.1	46.9	36.5	27.1	19.2	13.1	8.69	5.70	3.60	1.91	0.70	0.08	0.00	0.00	0.00	0.00	0.00	0.00
-15	83.2	72.5	58.5	44.2	31.9	22.0	14.7	9.55	6.28	3.92	1.99	0.58	0.01	0.00	0.00	0.00	0.00	0.00
-10	135	108	79.6	55.8	37.4	23.8	14.7	9.21	5.88	3.44	1.52	0.39	0.05	0.00	0.00	0.00	0.00	0.00
-5	211	176	134	94.7	63.7	40.8	24.6	14.7	9.15	5.74	3.22	1.34	0.39	0.02	0.00	0.00	0.00	0.00
0	249	194	139	94.3	60.8	36.7	21.4	12.8	8.04	4.88	2.46	0.92	0.16	0.00	0.00	0.00	0.00	0.00
5	273	228	173	122	81.4	51.2	30.2	17.7	10.9	6.92	4.05	1.91	0.79	0.19	0.01	0.00	0.00	0.00
10	248	196	143	98.1	63.6	38.2	22.3	13.5	8.61	5.35	2.86	1.35	0.55	0.13	0.00	0.00	0.00	0.00
15	272	229	176	126	85.0	53.3	31.4	18.6	11.6	7.45	4.48	2.31	1.21	0.51	0.03	0.00	0.00	0.00
20	196	157	117	81.4	53.7	33.2	20.2	12.9	8.43	5.34	3.03	1.69	0.86	0.21	0.00	0.00	0.00	0.00
25	156	134	105	77.4	54.1	35.9	23.0	15.0	10.1	6.73	4.16	2.44	1.46	0.67	0.04	0.00	0.00	0.00
30	91.6	76.5	59.6	44.1	31.4	21.8	15.2	10.7	7.49	4.86	2.98	1.95	1.09	0.27	0.00	0.00	0.00	0.00
35	74.6	65.7	54.1	42.1	31.6	23.1	16.7	12.3	8.91	6.25	4.16	2.75	1.73	0.77	0.04	0.00	0.00	0.00
40	47.8	41.3	34.0	27.0	21.0	16.2	12.6	9.56	7.01	4.98	3.47	2.32	1.20	0.25	0.00	0.00	0.00	0.00
45	27.0	25.1	22.7	20.1	17.4	14.9	12.6	10.3	8.07	6.00	4.49	3.22	2.00	0.81	0.02	0.00	0.00	0.00
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks: