

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		988.9 cd per klm. 0.0 degrees vertical 3.0 degrees horizontal
Beam Spread	At 10% of Imax	89.7V x 90.6H
	At 50% of Imax	58.3V x 55.9H
	At 90% of Imax	36.2V x 39.0H
Beam Flux	Total	996.4 lumens per klm.
	To 10% of Imax	805.1 lumens per klm.
	To 50% of Imax	618.9 lumens per klm.
	To 90% of Imax	318.4 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	99.6 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:NORDECOR  
Test Date:2024-11-12

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.25V I:0.0485A P:5.0430W PF:0.4725 Freq:50.00Hz Lamp Flux:189.713x1 lm		
NAME: 6451 60°	TYPE:	WEIGHT:150g
SPEC.:5W	DIM.: $\phi$ 7.5*7cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:60°

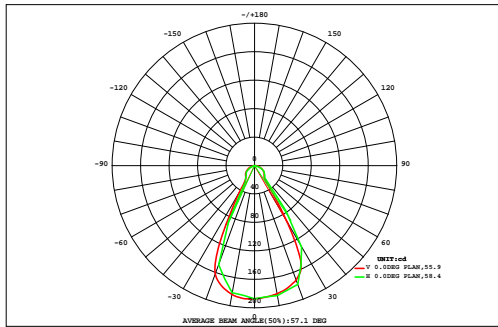

DATA OF LAMP		Eff:37.62lm/W	
MODEL		Imax(cd)	187.6
NOMINAL POWER(W)		AVAILABILITY(%)	80.4
RATED VOLTAGE(V)		Avai. FLUX(lm)	152.6
NOMINAL FLUX(lm)	189.713	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	189.7
TEST VOLTAGE(V)	0	q @50%(H,V)	56,58DEG

VERTICAL( DEG)	AREA FLUX DIAGRAM															UNIT:lm		F t	F a	
	90	80	70	60	50	40	30	20	10	0	10	20	30	40	50	60	70			80
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.01	0.02	0.03	0.04	0.06	0.07	0.07	0.06	0.05	0.05	0.05	0.04	0.02	0.01	0.01	0.00	0.67	0.00	
70	0.00	0.01	0.03	0.07	0.11	0.15	0.19	0.20	0.18	0.16	0.15	0.15	0.13	0.09	0.05	0.02	0.01	0.00	1.71	0.00
60	0.00	0.02	0.06	0.11	0.18	0.25	0.31	0.36	0.37	0.37	0.34	0.30	0.24	0.17	0.10	0.04	0.01	0.00	3.23	0.00
50	0.00	0.03	0.08	0.15	0.24	0.34	0.43	0.49	0.52	0.52	0.49	0.43	0.34	0.24	0.14	0.07	0.02	0.00	4.52	0.00
40	0.00	0.03	0.09	0.19	0.31	0.42	0.51	0.58	0.64	0.65	0.59	0.51	0.41	0.30	0.18	0.09	0.02	0.00	5.53	2.56
30	0.00	0.04	0.11	0.22	0.36	0.47	0.60	1.24	2.03	2.14	1.57	0.73	0.47	0.35	0.22	0.10	0.03	0.00	10.7	8.81
20	0.01	0.04	0.13	0.25	0.39	0.51	1.32	3.74	5.14	5.12	3.69	1.67	0.56	0.38	0.24	0.12	0.04	0.00	23.3	21.9
10	0.01	0.05	0.13	0.27	0.40	0.63	3.05	5.26	5.63	5.65	5.19	3.07	0.75	0.40	0.26	0.13	0.04	0.00	30.9	29.6
0	0.01	0.05	0.14	0.27	0.41	0.82	3.63	5.19	5.60	5.67	5.27	3.64	0.83	0.41	0.26	0.13	0.04	0.00	32.4	31.0
-10	0.01	0.05	0.13	0.26	0.40	0.78	3.03	4.92	5.45	5.50	5.06	3.01	0.64	0.40	0.26	0.13	0.04	0.00	30.1	28.6
-20	0.01	0.04	0.12	0.25	0.38	0.54	1.75	3.61	4.64	4.76	3.83	1.42	0.48	0.38	0.24	0.12	0.03	0.00	22.6	20.9
-30	0.00	0.04	0.11	0.22	0.35	0.46	0.57	1.41	2.44	2.37	1.20	0.45	0.44	0.34	0.21	0.10	0.03	0.00	10.8	8.45
-40	0.00	0.03	0.09	0.19	0.30	0.41	0.49	0.44	0.37	0.36	0.37	0.46	0.41	0.29	0.18	0.09	0.02	0.00	4.51	0.91
-50	0.00	0.03	0.08	0.15	0.24	0.34	0.42	0.47	0.50	0.50	0.48	0.42	0.33	0.23	0.14	0.06	0.01	0.00	4.40	0.00
-60	0.00	0.02	0.05	0.10	0.17	0.23	0.28	0.32	0.35	0.35	0.34	0.30	0.23	0.16	0.10	0.04	0.01	0.00	3.04	0.00
-70	0.00	0.01	0.03	0.05	0.08	0.10	0.11	0.11	0.12	0.14	0.15	0.14	0.11	0.08	0.04	0.02	0.01	0.00	1.29	0.00
-80	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.10	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
F t	0.06	0.49	1.41	2.79	4.35	6.52	16.8	28.4	34.0	34.3	28.8	16.8	6.44	4.25	2.64	1.27	0.37	0.04	190	---
F a	0.00	0.00	0.00	0.05	0.93	3.35	14.0	25.9	31.7	32.1	26.5	14.1	3.24	0.85	0.02	0.00	0.00	0.00	---	153


one-half-peak spread: U:33.9,D:24.6 , L:33.0,R:23.0 NEMA Beam Type: Type 5

H(h) Range:-90 - 90DEG  
H(h) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:NORDECOR  
Test Date:2024-11-12

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.25V I:0.0485A P:5.0430W PF:0.4725 Freq:50.00Hz Lamp Flux:189.713x1 lm		
NAME: 6451 60°	TYPE:	WEIGHT:150g
SPEC.:5W	DIM.: $\phi$ 7.5*7cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:60°

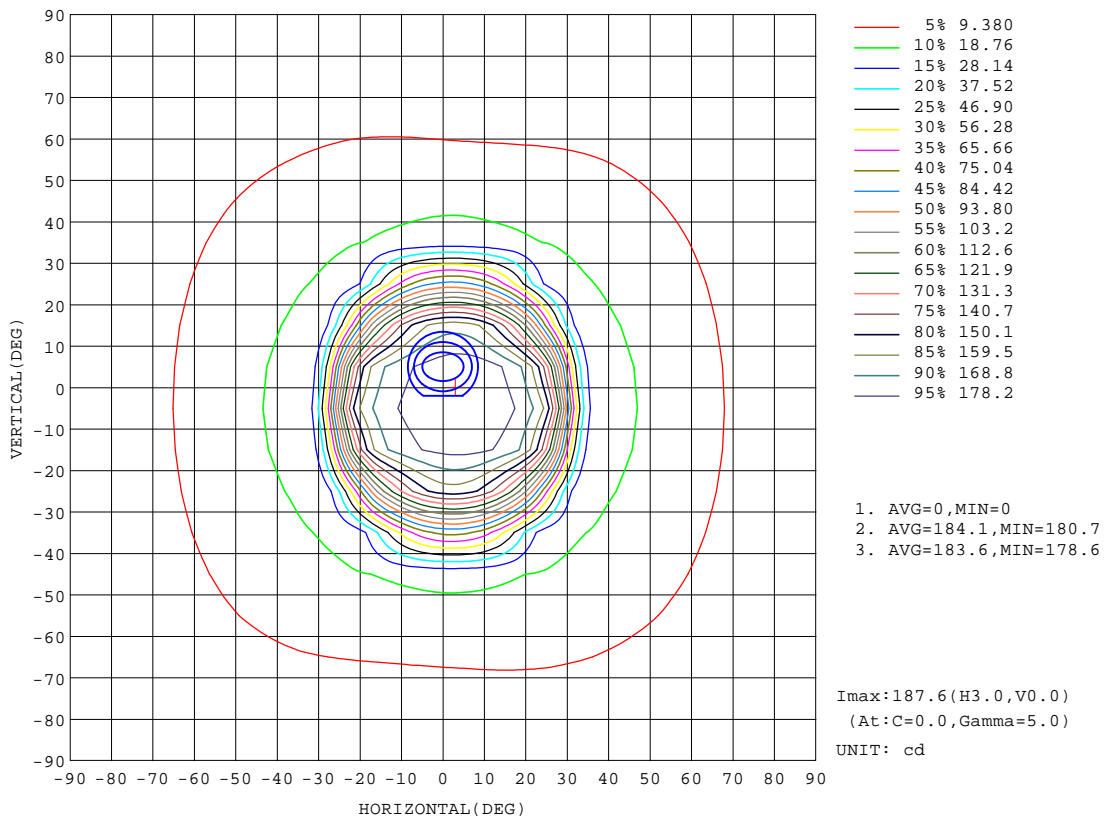


H( $\beta$ ) Range:-90 - 90DEG  
 H( $\beta$ ) Interval: 1.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:NORDECOR  
 Test Date:2024-11-12

V(B) Range:-80 - 80DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:5.780m [K=1.0000]  
 Remarks:

ISOLUX DIAGRAM


Test:U:220.25V I:0.0485A P:5.0430W PF:0.4725 Freq:50.00Hz Lamp Flux:189.713x1 lm		
NAME: 6451 60°	TYPE:	WEIGHT:150g
SPEC.:5W	DIM.: $\phi$ 7.5*7cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:60°

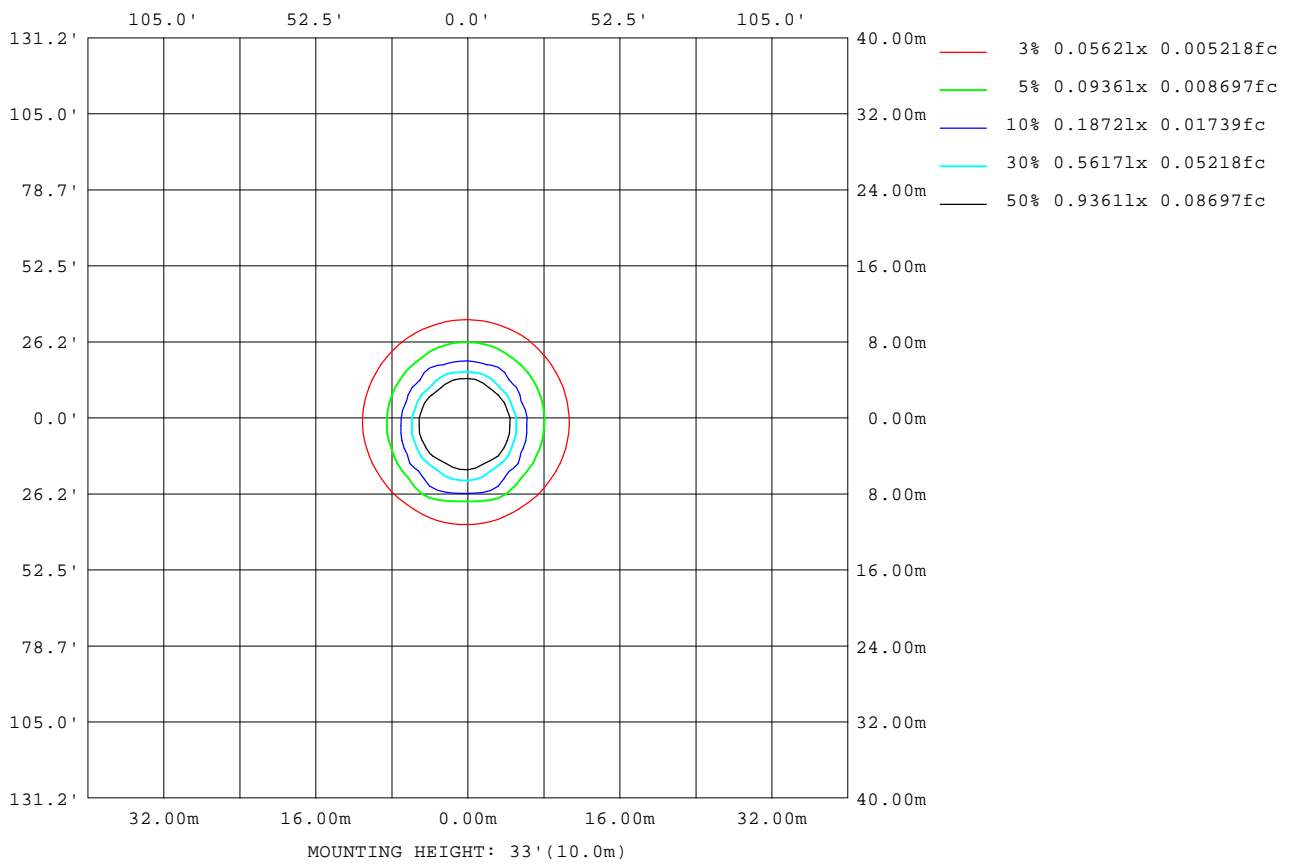

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:NORDECOR  
Test Date:2024-11-12

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

Planar Illuminance Curve

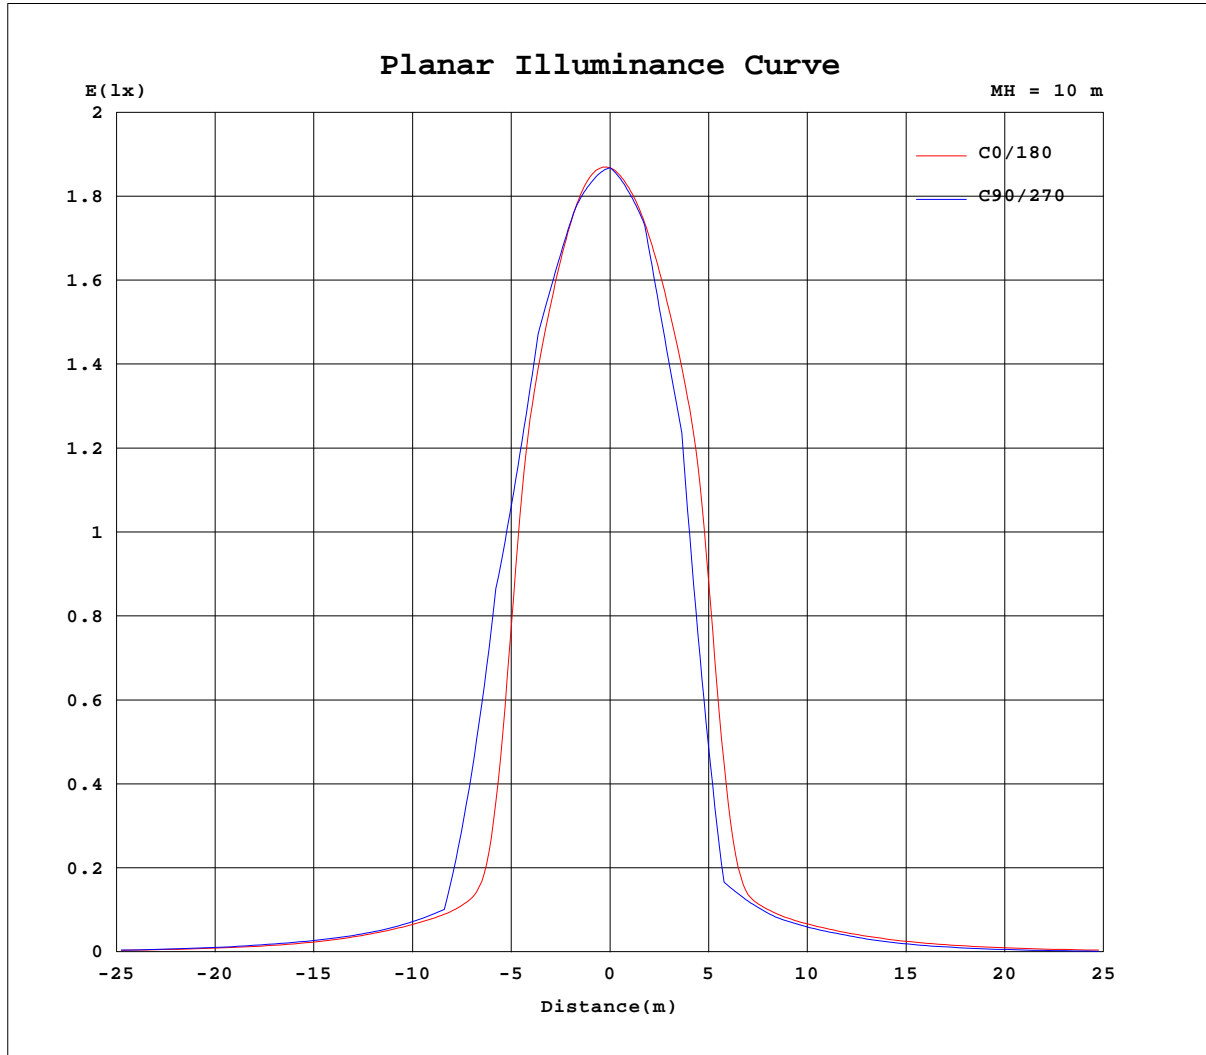


H( $\beta$ ) Range:-90 - 90DEG  
 H( $\beta$ ) Interval: 1.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:NORDECOR  
 Test Date:2024-11-12

V(B) Range:-80 - 80DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:5.780m [K=1.0000]  
 Remarks:

AAI Figure

Test:U:220.25V I:0.0485A P:5.0430W PF:0.4725 Freq:50.00Hz Lamp Flux:189.713x1 lm		
NAME: 6451 60°	TYPE:	WEIGHT:150g
SPEC.:5W	DIM.: $\phi$ 7.5*7cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:60°

Flux out:113.2 lm

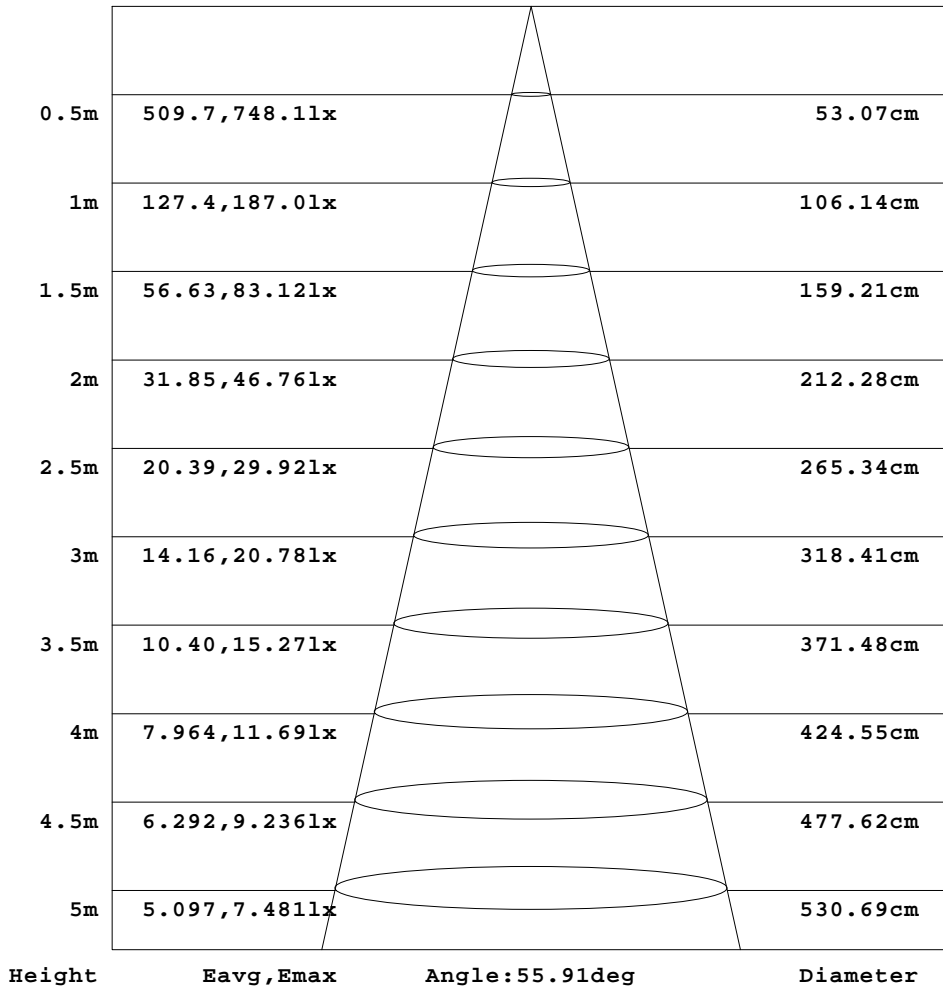

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:NORDECOR  
Test Date:2024-11-12

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.25V I:0.0485A P:5.0430W PF:0.4725 Freq:50.00Hz Lamp Flux:189.713x1 lm		
NAME: 6451 60°	TYPE:	WEIGHT:150g
SPEC.:5W	DIM.: $\phi$ 7.5*7cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:60°

Table--1

UNIT: cd

H( DEG) V( DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.78	0.82	0.84	0.94	1.17	1.42	1.65	1.81	1.89	1.90	1.86	1.77	1.63	1.48	1.31	1.16	1.07	1.11	1.24
-75	0.78	0.79	0.84	1.05	1.44	1.93	2.42	2.85	3.24	3.58	3.86	4.04	4.06	4.04	4.00	3.92	3.94	4.02	4.19
-70	0.79	0.85	1.16	1.77	2.49	3.25	3.89	4.52	5.13	5.71	6.18	6.36	6.46	6.54	6.55	6.69	6.92	7.19	7.50
-65	0.81	0.81	0.97	1.63	2.60	3.53	4.48	5.39	6.29	7.15	7.99	8.70	9.19	9.60	9.94	10.2	10.5	10.8	11.1
-60	0.82	0.95	1.78	3.04	4.20	5.35	6.51	7.70	8.83	9.93	11.0	11.8	12.6	13.2	13.8	14.2	14.6	14.9	14.9
-55	0.84	0.82	1.24	2.47	3.85	5.13	6.46	7.81	9.17	10.5	11.8	12.9	13.9	14.7	15.3	15.8	16.2	16.5	16.7
-50	0.82	1.19	2.57	4.12	5.55	7.04	8.56	10.1	11.6	13.1	14.4	15.6	16.5	17.2	17.7	18.1	18.3	18.4	18.4
-45	0.82	0.83	1.59	3.28	4.85	6.45	8.13	9.84	11.6	13.2	14.7	16.0	16.9	17.8	18.4	19.1	19.7	20.2	20.5
-40	0.84	1.47	3.28	4.95	6.71	8.54	10.4	12.3	14.1	15.7	17.0	18.0	18.7	19.4	20.2	21.1	21.9	22.5	22.6
-35	0.80	0.85	1.94	3.91	5.71	7.62	9.62	11.7	13.7	15.5	16.9	18.0	19.1	20.5	25.0	40.3	58.1	71.1	77.4
-30	0.85	1.74	3.82	5.72	7.75	9.89	12.1	14.2	16.1	17.6	18.7	19.7	21.6	27.3	53.2	88.6	116	131	133
-25	0.84	0.87	2.25	4.38	6.40	8.56	10.8	13.2	15.3	17.1	18.4	19.6	21.9	37.7	73.5	109	132	147	155
-20	0.87	1.95	4.16	6.25	8.48	10.9	13.3	15.6	17.4	18.7	20.0	22.6	43.3	104	153	167	173	176	177
-15	0.89	0.88	2.47	4.68	6.87	9.21	11.7	14.2	16.4	18.0	19.3	21.2	30.9	80.3	138	165	174	178	181
-10	0.87	2.07	4.38	6.59	8.97	11.5	14.0	16.3	18.1	19.4	21.4	30.8	91.4	154	171	178	182	184	186
-5	0.83	0.88	2.54	4.79	7.04	9.45	12.0	14.5	16.7	18.4	19.6	22.0	38.4	108	160	173	179	183	185
0	0.84	2.06	4.35	6.57	8.94	11.5	14.1	16.4	18.1	19.4	21.4	31.2	93.1	155	171	178	183	185	187
5	0.81	0.88	2.50	4.71	6.92	9.28	11.8	14.3	16.5	18.1	19.3	21.4	32.0	86.2	144	167	175	180	183
10	0.86	2.02	4.24	6.36	8.65	11.1	13.5	15.8	17.6	18.9	20.3	23.6	51.5	116	158	169	176	180	181
15	0.84	0.87	2.32	4.44	6.50	8.70	11.0	13.4	15.6	17.3	18.6	19.9	22.8	43.1	82.7	118	142	157	164
20	0.86	1.78	3.85	5.78	7.84	10.0	12.3	14.5	16.4	17.8	18.8	20.0	22.4	32.2	66.0	106	134	147	148
25	0.82	0.85	2.01	3.98	5.81	7.77	9.83	11.9	14.0	15.8	17.2	18.3	19.3	21.0	28.5	47.7	67.5	80.8	86.7
30	0.83	1.53	3.39	5.09	6.89	8.78	10.7	12.7	14.5	16.1	17.4	18.2	18.8	19.5	20.8	22.2	23.7	25.3	25.5
35	0.84	0.83	1.66	3.38	4.97	6.63	8.36	10.1	11.9	13.6	15.1	16.3	17.2	18.0	18.6	19.5	20.3	21.2	22.0
40	0.84	1.24	2.68	4.22	5.70	7.22	8.81	10.4	12.0	13.4	14.8	15.9	16.8	17.4	17.9	18.2	18.4	18.5	18.6
45	0.85	0.83	1.30	2.61	4.01	5.33	6.68	8.08	9.47	10.8	12.1	13.3	14.3	15.1	15.8	16.3	16.6	16.8	17.0
50	0.82	0.99	1.94	3.29	4.43	5.59	6.78	7.98	9.14	10.3	11.3	12.3	13.2	13.9	14.5	14.9	15.2	15.4	15.4
55	0.85	0.83	1.01	1.79	2.87	3.95	4.94	5.93	6.93	7.88	8.80	9.67	10.5	11.2	11.7	12.1	12.3	12.4	12.3
60	0.82	0.87	1.27	2.04	3.04	3.89	4.69	5.48	6.24	6.97	7.67	8.31	8.88	9.37	9.58	9.67	9.60	9.37	9.09
65	0.84	0.83	0.88	1.15	1.69	2.38	3.01	3.65	4.30	4.89	5.46	6.00	6.50	6.94	7.17	7.10	6.90	6.54	6.12
70	0.83	0.87	0.90	1.09	1.45	1.89	2.35	2.85	3.34	3.67	4.13	4.50	4.83	4.92	4.68	4.24	3.64	3.01	2.68
75	0.83	0.83	0.86	0.88	1.02	1.21	1.43	1.67	1.92	2.14	2.36	2.57	2.76	2.91	2.92	2.77	2.51	2.19	1.91
80	0.82	0.84	0.86	0.87	0.88	0.88	0.89	0.90	0.90	0.91	0.94	0.94	0.94	0.93	0.94	0.88	0.88	0.90	0.89
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(h) Range:-90 - 90DEG  
H(h) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:NORDECOR  
Test Date:2024-11-12

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.25V I:0.0485A P:5.0430W PF:0.4725 Freq:50.00Hz Lamp Flux:189.713x1 lm		
NAME: 6451 60°	TYPE:	WEIGHT:150g
SPEC.:5W	DIM.: Φ7.5*7cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:60°

Table--2

UNIT: cd

H( DEG) V( DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	1.42	1.61	1.77	1.89	1.97	1.98	1.91	1.78	1.59	1.38	1.16	0.93	0.83	0.80	0.80	0.79	0.77	0.74
-75	4.43	4.75	5.00	5.13	5.13	4.94	4.65	4.30	3.89	3.40	2.81	2.16	1.57	1.16	0.87	0.81	0.79	0.76
-70	7.96	8.31	8.45	8.40	8.00	7.45	6.83	6.16	5.42	4.48	3.44	2.42	1.63	1.03	0.82	0.81	0.77	0.76
-65	11.3	11.4	11.4	11.2	10.9	10.3	9.55	8.73	7.84	6.89	5.81	4.69	3.46	2.26	1.31	0.86	0.80	0.76
-60	14.8	14.6	14.1	13.5	12.8	11.9	11.0	9.89	8.76	7.59	6.40	5.01	3.36	1.91	1.02	0.81	0.78	0.78
-55	16.7	16.5	16.3	15.9	15.3	14.6	13.6	12.5	11.2	9.91	8.53	7.15	5.63	3.91	2.21	1.09	0.81	0.77
-50	18.3	18.1	17.8	17.3	16.6	15.7	14.5	13.1	11.6	10.0	8.45	6.88	5.21	3.13	1.50	0.81	0.79	0.77
-45	20.4	20.1	19.5	18.8	18.2	17.5	16.7	15.6	14.2	12.6	10.8	9.08	7.34	5.52	3.33	1.52	0.81	0.78
-40	22.1	21.2	20.0	19.3	18.7	18.1	17.2	15.9	14.2	12.3	10.4	8.48	6.61	4.43	2.10	0.87	0.79	0.78
-35	76.9	69.6	54.9	35.9	23.1	20.0	18.7	17.8	16.5	14.9	12.9	10.8	8.71	6.71	4.41	2.01	0.85	0.80
-30	121	95.6	59.3	30.1	21.9	19.7	18.7	17.7	16.2	14.2	12.0	9.77	7.60	5.41	2.71	1.02	0.83	0.80
-25	154	146	129	104	66.7	32.5	21.1	19.2	18.0	16.5	14.5	12.2	9.85	7.59	5.26	2.48	0.93	0.82
-20	176	171	160	119	54.0	23.9	20.1	18.9	17.5	15.6	13.3	10.9	8.44	6.15	3.28	1.15	0.82	0.86
-15	181	180	175	164	130	66.1	26.2	20.4	18.9	17.5	15.5	13.1	10.6	8.16	5.77	2.80	0.98	0.82
-10	185	182	175	160	105	36.2	21.7	19.5	18.1	16.3	13.9	11.4	8.83	6.42	3.50	1.22	0.84	0.80
-5	187	186	181	173	155	90.9	30.6	21.2	19.3	17.8	15.9	13.4	10.9	8.35	5.93	2.95	0.98	0.82
0	187	184	176	162	109	38.8	22.0	19.6	18.2	16.4	14.0	11.4	8.88	6.46	3.55	1.18	0.82	0.85
5	184	183	177	165	134	70.8	27.5	20.7	19.1	17.6	15.6	13.1	10.6	8.15	5.75	2.81	0.96	0.83
10	179	173	161	124	59.6	25.0	20.5	19.0	17.6	15.7	13.3	10.8	8.39	6.08	3.21	1.14	0.83	0.83
15	164	156	139	112	72.6	35.6	21.8	19.5	18.2	16.7	14.6	12.2	9.87	7.58	5.26	2.45	0.92	0.82
20	138	113	75.9	38.0	23.4	20.5	19.1	17.9	16.4	14.4	12.2	9.88	7.66	5.48	2.74	1.00	0.81	0.82
25	86.4	79.1	64.5	44.2	26.3	20.8	19.1	18.0	16.7	15.0	13.0	10.9	8.78	6.74	4.46	2.01	0.85	0.80
30	24.2	22.6	21.2	19.9	19.2	18.3	17.4	16.1	14.4	12.5	10.5	8.51	6.61	4.46	2.09	0.86	0.78	0.77
35	22.0	21.1	20.3	19.4	18.6	17.9	17.0	15.8	14.4	12.8	11.0	9.18	7.40	5.60	3.39	1.52	0.81	0.78
40	18.5	18.3	18.0	17.6	16.9	16.0	14.7	13.3	11.8	10.2	8.60	7.00	5.37	3.25	1.53	0.81	0.77	0.79
45	16.9	16.8	16.5	16.1	15.6	14.8	13.8	12.7	11.4	10.1	8.67	7.26	5.78	4.07	2.28	1.10	0.79	0.77
50	15.2	14.9	14.4	13.8	13.0	12.2	11.1	10.0	8.89	7.70	6.48	5.19	3.52	1.97	1.02	0.80	0.78	0.79
55	12.2	12.0	11.7	11.4	11.0	10.5	9.86	9.13	8.21	7.24	6.19	5.01	3.71	2.40	1.37	0.86	0.80	0.78
60	8.84	8.63	8.47	8.31	8.10	7.83	7.45	6.76	6.00	5.14	4.01	2.78	1.79	1.10	0.82	0.81	0.78	0.77
65	5.83	5.67	5.62	5.67	5.77	5.81	5.68	5.34	4.70	4.03	3.32	2.54	1.77	1.24	0.92	0.83	0.81	0.80
70	2.55	2.64	2.83	3.20	3.52	3.61	3.42	2.91	2.32	1.81	1.38	1.05	0.86	0.85	0.84	0.82	0.81	0.83
75	1.76	1.70	1.76	1.87	2.07	2.20	2.22	2.09	1.83	1.52	1.26	1.06	0.90	0.83	0.82	0.81	0.79	0.81
80	0.86	0.87	0.86	0.86	0.83	0.84	0.83	0.88	0.81	0.81	0.80	0.80	0.80	0.80	0.80	0.80	0.78	0.79
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:NORDECOR  
Test Date:2024-11-12

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks: