

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		8375.7 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	30.8V x 31.4H
	At 50% of Imax	16.2V x 14.7H
	At 90% of Imax	4.5V x 5.7H
Beam Flux	Total	990.2 lumens per klm.
	To 10% of Imax	678.8 lumens per klm.
	To 50% of Imax	306.7 lumens per klm.
	To 90% of Imax	27.6 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	99.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.33V I:0.0497A P:4.9871W PF:0.4551 Freq:50.00Hz Lamp Flux:103.895x1 lm		
NAME: 6451	TYPE:Indoor Lighting	WEIGHT:0.14kg
SPEC.:5W	DIM.: φ7.5*5.8*4.2	SERIAL No.:08
MFR.: NORDECOR	SUR.:3cm	Shielding Angle:15°

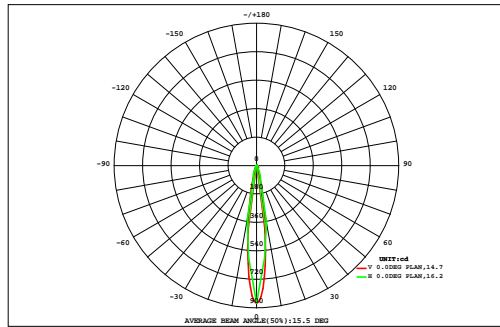

DATA OF LAMP		Eff:20.83lm/W	
MODEL		Imax(cd)	870.2
NOMINAL POWER(W)	5W	AVAILABILITY(%)	69.9
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	72.65
NOMINAL FLUX(lm)	103.895	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	103.9
TEST VOLTAGE(V)	220.2	q @50%(H,V)	15,16DEG

VERTICAL( DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	90	80	70	60	50	40	30	20	10	0	10	20	30	40	50	60	70	80	90	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
40	0.00	0.00	0.00	0.01	0.02	0.04	0.06	0.08	0.10	0.10	0.09	0.07	0.05	0.03	0.01	0.00	0.00	0.00	0.66	
30	0.00	0.00	0.01	0.02	0.05	0.09	0.15	0.21	0.26	0.28	0.23	0.16	0.10	0.05	0.02	0.01	0.00	0.00	1.63	
20	0.00	0.00	0.01	0.03	0.07	0.13	0.23	0.41	0.76	0.88	0.52	0.27	0.15	0.07	0.03	0.01	0.00	0.00	3.57	
10	0.00	0.00	0.01	0.04	0.09	0.17	0.35	0.88	2.05	2.35	1.14	0.44	0.20	0.10	0.04	0.02	0.00	0.00	7.89	
0	0.00	0.00	0.01	0.04	0.10	0.20	0.49	2.06	11.1	14.7	3.40	0.66	0.24	0.11	0.05	0.02	0.00	0.00	33.2	
-10	0.00	0.00	0.01	0.04	0.10	0.21	0.55	2.62	14.6	17.1	3.62	0.70	0.24	0.11	0.05	0.02	0.00	0.00	40.0	
-20	0.00	0.00	0.01	0.04	0.09	0.18	0.38	1.16	3.65	2.64	1.09	0.45	0.20	0.10	0.04	0.02	0.00	0.00	10.1	
-30	0.00	0.00	0.01	0.03	0.07	0.13	0.25	0.55	1.16	1.18	0.60	0.28	0.15	0.07	0.03	0.01	0.00	0.00	4.54	
-40	0.00	0.00	0.01	0.02	0.05	0.09	0.14	0.18	0.18	0.18	0.17	0.15	0.10	0.05	0.03	0.01	0.00	0.00	1.37	
-50	0.00	0.00	0.00	0.01	0.03	0.06	0.09	0.13	0.16	0.16	0.13	0.10	0.06	0.04	0.02	0.00	0.00	0.00	0.98	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL( DEG)	20	30	40	50	60	70	80	90			
F t	0.00	0.00	0.08	0.29	0.66	1.30	2.70	8.29	34.1	39.5	11.0	3.28	1.49	0.74	0.33	0.10	0.01	0.00	104	
F a	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.06	29.2	34.8	5.56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	---	


one-half-peak spread: U:8.4,D:8.1 , L:7.4,R:7.4 NEMA Beam Type: Type 3

H(h) Range:-90 - 90DEG  
H(h) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.33V I:0.0497A P:4.9871W PF:0.4551 Freq:50.00Hz Lamp Flux:103.895x1 lm		
NAME: 6451	TYPE:Indoor Lighting	WEIGHT:0.14kg
SPEC.:5W	DIM.: φ7.5*5.8*4.2	SERIAL No.:08
MFR.: NORDECOR	SUR.:3cm	Shielding Angle:15°

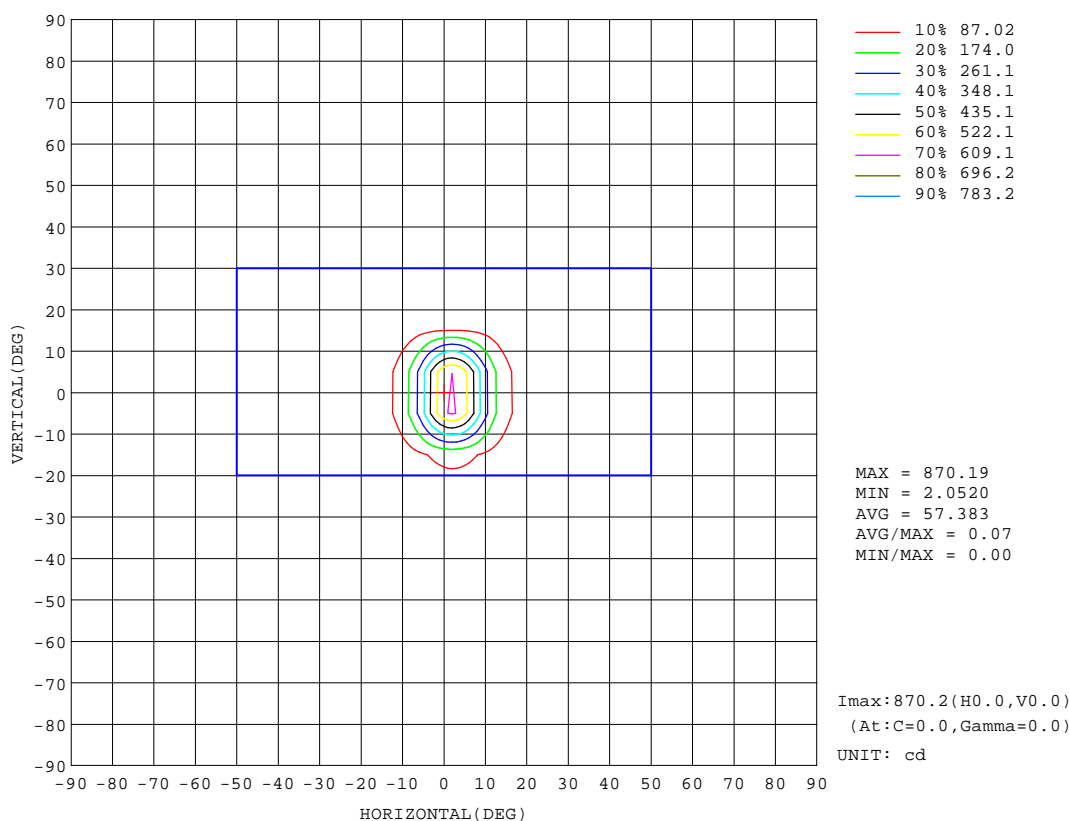


H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

ISOLUX DIAGRAM


Test:U:220.33V I:0.0497A P:4.9871W PF:0.4551 Freq:50.00Hz Lamp Flux:103.895x1 lm		
NAME: 6451	TYPE:Indoor Lighting	WEIGHT:0.14kg
SPEC.:5W	DIM.: φ7.5*5.8*4.2	SERIAL No.:08
MFR.: NORDECOR	SUR.:3cm	Shielding Angle:15°

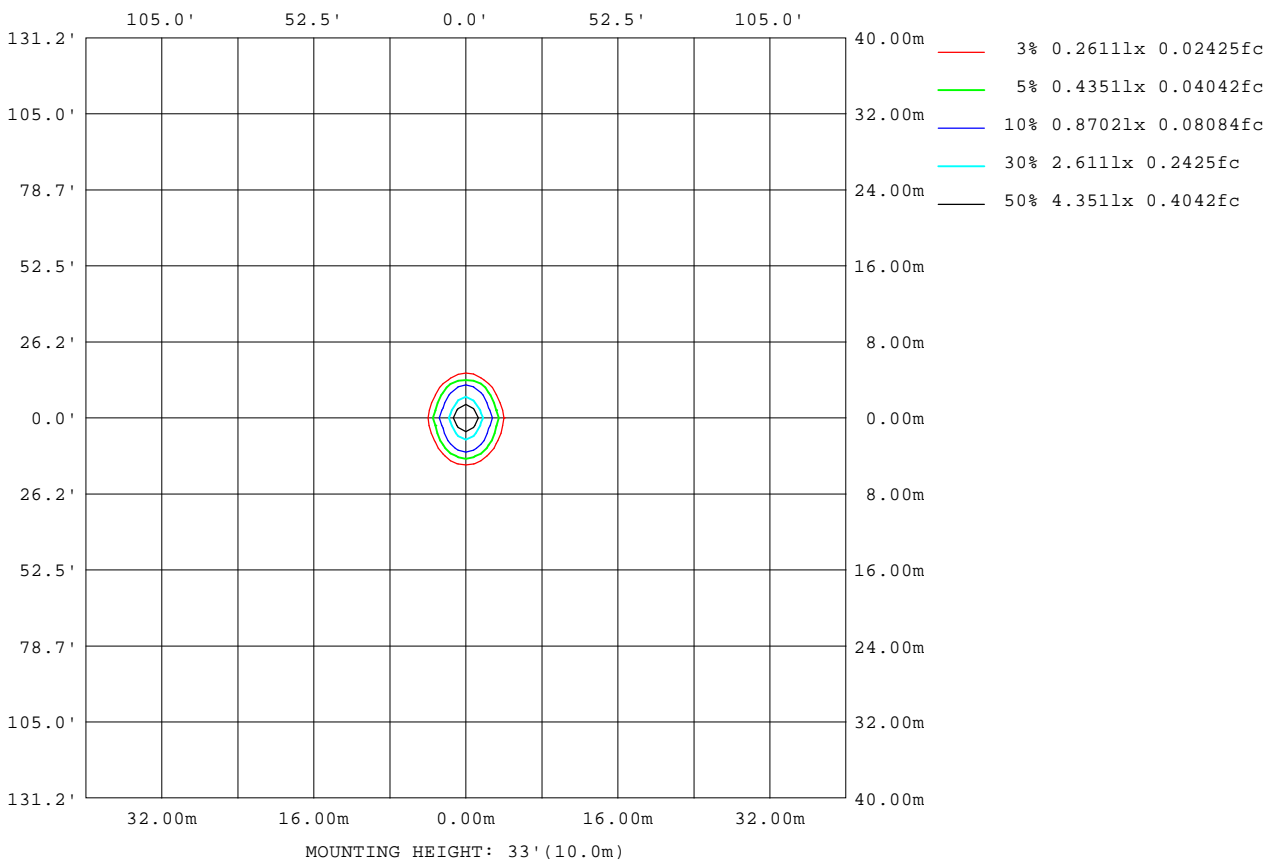

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

Planar Illuminance Curve

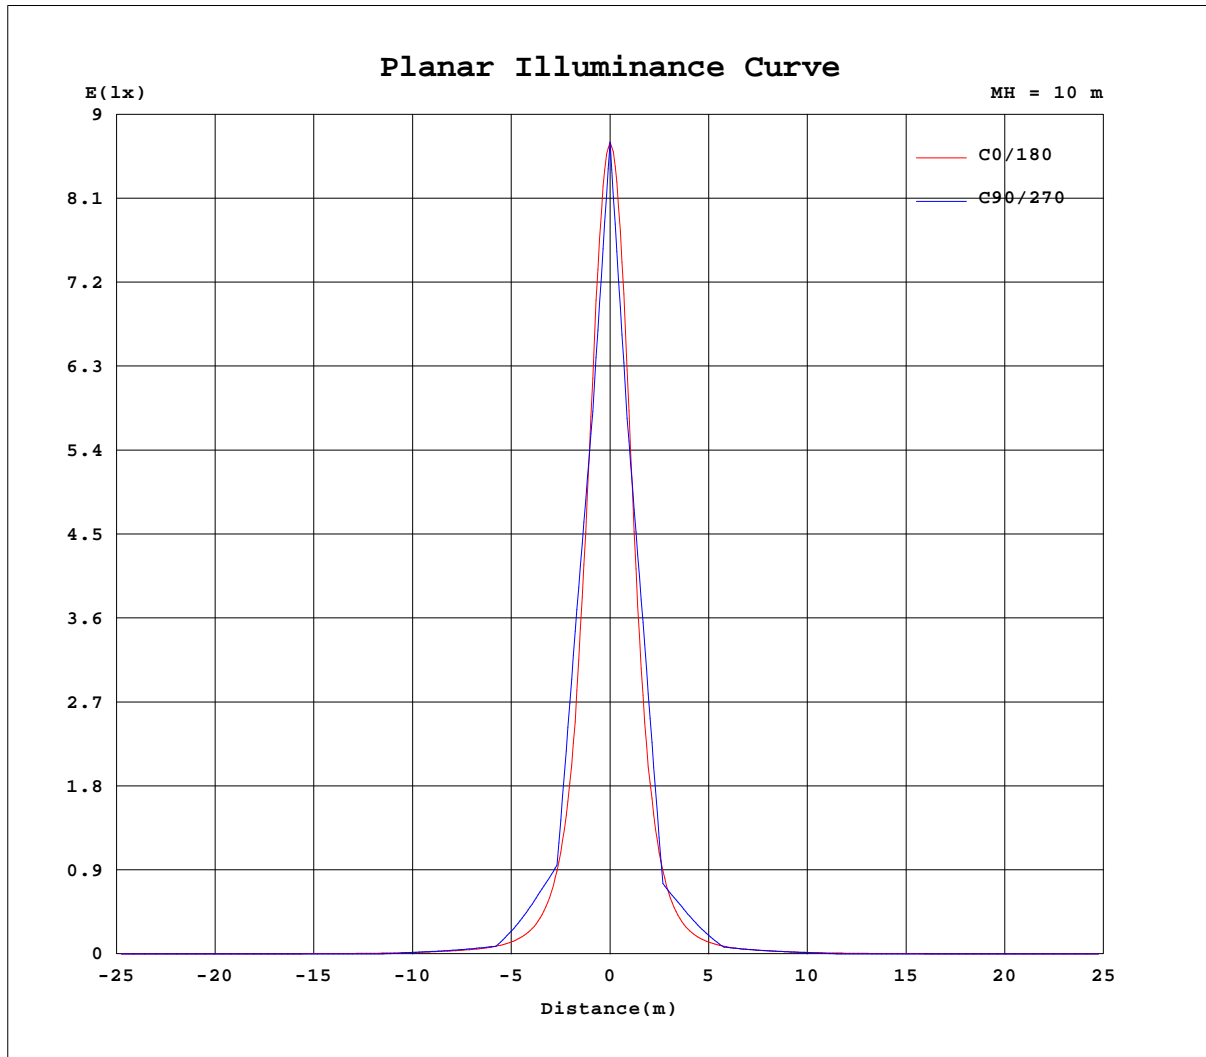


H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

AAI Figure

Test:U:220.33V I:0.0497A P:4.9871W PF:0.4551 Freq:50.00Hz Lamp Flux:103.895x1 lm		
NAME: 6451	TYPE:Indoor Lighting	WEIGHT:0.14kg
SPEC.:5W	DIM.: φ7.5*5.8*4.2	SERIAL No.:08
MFR.: NORDECOR	SUR.:3cm	Shielding Angle:15°

Flux out:31.42 lm

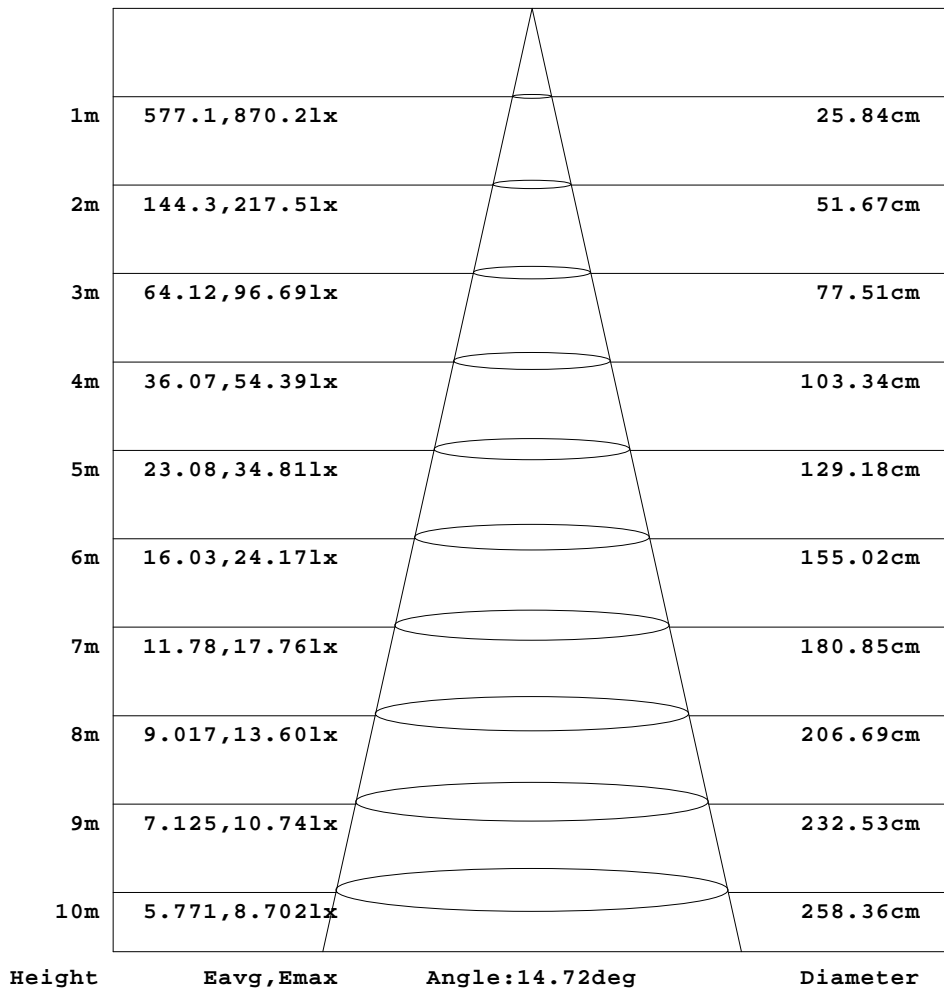

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.33V I:0.0497A P:4.9871W PF:0.4551 Freq:50.00Hz Lamp Flux:103.895x1 lm		
NAME: 6451	TYPE:Indoor Lighting	WEIGHT:0.14kg
SPEC.:5W	DIM.: φ7.5*5.8*4.2	SERIAL No.:08
MFR.: NORDECOR	SUR.:3cm	Shielding Angle:15°

Table--1

UNIT: cd

H( DEG) V( DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.23	0.62	0.94	1.32	1.73	2.16	2.62	3.10	3.62	4.15	4.66	5.04	5.24
-40	0.00	0.00	0.00	0.00	0.07	0.26	0.66	1.05	1.49	1.95	2.46	3.06	3.72	4.43	5.22	6.12	7.03	7.68	7.86
-35	0.00	0.00	0.00	0.00	0.05	0.33	0.71	1.19	1.65	2.17	2.74	3.45	4.28	5.16	6.16	7.34	8.68	9.89	10.5
-30	0.00	0.00	0.00	0.00	0.22	0.68	1.16	1.69	2.25	2.84	3.56	4.48	5.55	6.65	8.00	9.63	11.4	12.7	13.1
-25	0.00	0.00	0.00	0.00	0.13	0.59	1.10	1.68	2.29	3.00	3.88	4.93	6.25	8.09	11.0	15.8	23.9	35.2	44.0
-20	0.00	0.00	0.00	0.00	0.38	0.91	1.50	2.16	2.89	3.80	4.98	6.34	8.25	11.5	17.2	27.5	45.0	66.1	76.6
-15	0.00	0.00	0.00	0.00	0.25	0.79	1.40	2.09	2.86	3.81	5.15	6.60	8.52	11.9	18.1	29.4	50.2	81.0	106
-10	0.00	0.00	0.00	0.03	0.51	1.09	1.75	2.51	3.37	4.54	6.06	7.84	10.8	16.4	28.5	57.2	128	273	362
-5	0.00	0.00	0.00	0.00	0.35	0.91	1.56	2.29	3.15	4.24	5.78	7.52	10.2	15.4	26.8	55.7	135	336	588
0	0.00	0.00	0.00	0.10	0.63	1.23	1.93	2.75	3.70	5.07	6.79	8.97	13.1	21.4	42.0	98.8	260	634	870
5	0.00	0.00	0.00	0.00	0.35	0.91	1.55	2.28	3.13	4.21	5.73	7.51	10.2	15.4	26.6	54.9	133	331	581
10	0.00	0.00	0.00	0.03	0.50	1.07	1.73	2.47	3.32	4.46	6.01	7.81	10.7	16.2	27.7	54.7	121	261	347
15	0.00	0.00	0.00	0.00	0.23	0.77	1.37	2.05	2.80	3.71	4.99	6.59	8.44	11.7	17.4	27.0	43.0	65.4	83.9
20	0.00	0.00	0.00	0.00	0.36	0.87	1.45	2.10	2.80	3.68	4.88	6.27	8.23	11.4	16.4	24.7	37.8	53.2	61.2
25	0.00	0.00	0.00	0.00	0.10	0.56	1.07	1.62	2.22	2.89	3.73	4.81	6.21	8.16	10.8	14.7	20.8	29.0	35.6
30	0.00	0.00	0.00	0.00	0.20	0.63	1.11	1.62	2.15	2.72	3.40	4.35	5.65	6.82	7.90	9.01	10.1	11.1	11.6
35	0.00	0.00	0.00	0.00	0.03	0.30	0.68	1.13	1.58	2.08	2.63	3.31	4.22	5.22	6.08	6.94	7.83	8.62	9.14
40	0.00	0.00	0.00	0.00	0.07	0.24	0.60	0.99	1.42	1.86	2.36	2.94	3.65	4.31	4.98	5.58	6.18	6.67	6.90
45	0.00	0.00	0.00	0.00	0.00	0.00	0.22	0.58	0.89	1.27	1.68	2.07	2.48	2.89	3.31	3.70	4.07	4.38	4.55
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(h) Range:-90 - 90DEG  
H(h) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.33V I:0.0497A P:4.9871W PF:0.4551 Freq:50.00Hz Lamp Flux:103.895x1 lm		
NAME: 6451	TYPE:Indoor Lighting	WEIGHT:0.14kg
SPEC.:5W	DIM.: φ7.5*5.8*4.2	SERIAL No.:08
MFR.: NORDECOR	SUR.:3cm	Shielding Angle:15°

Table--2

UNIT: cd

H( DEG) V( DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	5.25	5.04	4.65	4.15	3.63	3.13	2.66	2.23	1.80	1.39	1.00	0.63	0.29	0.00	0.00	0.00	0.00	0.00
-40	7.66	7.05	6.26	5.44	4.64	3.93	3.20	2.54	2.00	1.53	1.09	0.68	0.31	0.05	0.00	0.00	0.00	0.00
-35	10.3	9.60	8.52	7.36	6.26	5.29	4.34	3.36	2.61	2.04	1.52	1.05	0.62	0.21	0.00	0.00	0.00	0.00
-30	12.6	11.3	9.86	8.42	7.07	5.91	4.63	3.52	2.75	2.14	1.57	1.05	0.61	0.15	0.00	0.00	0.00	0.00
-25	42.8	33.2	22.8	15.4	11.0	8.15	6.26	4.81	3.62	2.74	2.07	1.48	0.95	0.45	0.06	0.00	0.00	0.00
-20	66.6	46.3	29.1	18.4	12.3	8.73	6.60	5.10	3.71	2.79	2.08	1.45	0.89	0.37	0.01	0.00	0.00	0.00
-15	103	75.9	47.5	28.4	17.7	11.7	8.43	6.56	4.81	3.49	2.64	1.92	1.27	0.70	0.19	0.00	0.00	0.00
-10	270	129	58.8	29.8	17.2	11.1	8.05	6.22	4.42	3.23	2.40	1.69	1.06	0.49	0.03	0.00	0.00	0.00
-5	548	288	112	48.7	24.4	14.4	9.66	7.28	5.40	3.77	2.78	2.01	1.32	0.74	0.20	0.00	0.00	0.00
0	624	261	99.0	42.7	21.7	13.0	8.98	6.89	4.87	3.44	2.53	1.77	1.11	0.51	0.07	0.00	0.00	0.00
5	541	283	109	47.5	23.9	14.2	9.63	7.29	5.36	3.74	2.76	1.99	1.31	0.73	0.19	0.00	0.00	0.00
10	258	122	55.0	28.1	16.4	10.9	8.06	6.21	4.36	3.18	2.37	1.66	1.03	0.48	0.02	0.00	0.00	0.00
15	82.1	62.2	40.0	24.8	16.2	11.1	8.34	6.59	4.69	3.41	2.58	1.87	1.23	0.66	0.17	0.00	0.00	0.00
20	54.1	38.6	25.1	16.5	11.5	8.43	6.56	5.04	3.62	2.72	2.02	1.40	0.84	0.34	0.00	0.00	0.00	0.00
25	35.0	28.0	19.8	13.9	10.3	7.83	6.12	4.71	3.51	2.65	2.00	1.41	0.88	0.40	0.06	0.00	0.00	0.00
30	11.4	10.5	9.23	7.98	6.84	5.74	4.48	3.40	2.66	2.05	1.49	0.98	0.52	0.10	0.00	0.00	0.00	0.00
35	9.19	8.78	7.88	6.90	5.98	5.11	4.19	3.22	2.51	1.95	1.45	0.98	0.55	0.17	0.00	0.00	0.00	0.00
40	6.84	6.40	5.74	5.06	4.40	3.76	3.07	2.44	1.93	1.46	1.03	0.62	0.25	0.03	0.00	0.00	0.00	0.00
45	4.59	4.46	4.14	3.77	3.35	2.94	2.53	2.12	1.71	1.31	0.94	0.57	0.23	0.00	0.00	0.00	0.00	0.00
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(h) Range:-90 - 90DEG  
H(h) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks: