

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		6440.9 cd per klm. 0.0 degrees vertical 1.0 degrees horizontal
Beam Spread	At 10% of Imax	37.2V x 35.4H
	At 50% of Imax	18.7V x 18.9H
	At 90% of Imax	5.4V x 7.6H
Beam Flux	Total	991.9 lumens per klm.
	To 10% of Imax	720.6 lumens per klm.
	To 50% of Imax	349.0 lumens per klm.
	To 90% of Imax	36.1 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	99.2 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-11-12

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.27V I:0.1004A P:10.520W PF:0.4758 Freq:50.00Hz Lamp Flux:201.276x1 lm		
NAME: 6453 15°	TYPE:	WEIGHT:320g
SPEC.:10W	DIM.: φ9.5*7.6cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

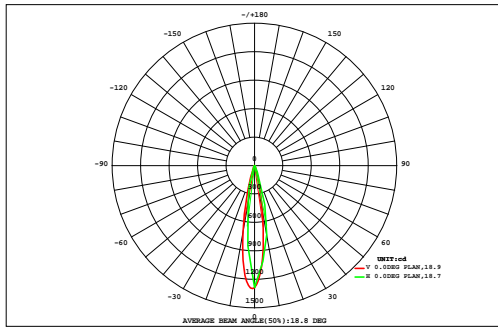

DATA OF LAMP		Eff:19.13lm/W	
MODEL		I _{max} (cd)	1296
NOMINAL POWER(W)		AVAILABILITY(%)	74.8
RATED VOLTAGE(V)		Avai. FLUX(lm)	150.5
NOMINAL FLUX(lm)	201.276	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	201.3
TEST VOLTAGE(V)	0	q @50%(H,V)	19,19DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM															UNIT:lm		F t	F a	
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.01	0.02	0.02	0.03	0.04	0.05	0.05	0.06	0.06	0.06	0.05	0.04	0.03	0.03	0.02	0.01	0.00	0.57	0.00
70	0.00	0.01	0.02	0.03	0.04	0.05	0.07	0.08	0.09	0.09	0.08	0.07	0.06	0.04	0.03	0.02	0.01	0.00	0.78	0.00
60	0.00	0.01	0.02	0.03	0.05	0.08	0.11	0.14	0.15	0.15	0.14	0.12	0.09	0.06	0.04	0.02	0.01	0.00	1.23	0.00
50	0.00	0.01	0.02	0.04	0.08	0.12	0.17	0.22	0.25	0.26	0.23	0.19	0.13	0.08	0.05	0.02	0.01	0.00	1.89	0.00
40	0.00	0.01	0.03	0.06	0.10	0.17	0.26	0.35	0.42	0.42	0.37	0.29	0.19	0.11	0.06	0.03	0.01	0.00	2.88	0.00
30	0.00	0.01	0.03	0.07	0.13	0.23	0.37	0.59	0.87	0.91	0.66	0.42	0.27	0.15	0.08	0.04	0.01	0.00	4.85	0.00
20	0.00	0.01	0.04	0.09	0.17	0.31	0.57	1.56	4.46	5.01	1.97	0.68	0.34	0.19	0.10	0.04	0.02	0.00	15.6	8.49
10	0.00	0.01	0.04	0.10	0.20	0.37	0.86	4.21	17.6	20.4	6.18	1.12	0.41	0.22	0.11	0.05	0.02	0.00	51.8	46.0
0	0.00	0.01	0.04	0.10	0.21	0.38	0.95	5.75	26.5	31.4	9.26	1.34	0.43	0.23	0.11	0.05	0.02	0.00	76.8	71.4
-10	0.00	0.01	0.04	0.09	0.19	0.33	0.69	2.63	9.70	11.8	4.07	0.92	0.38	0.21	0.10	0.05	0.02	0.00	31.2	24.6
-20	0.00	0.01	0.04	0.08	0.15	0.26	0.41	0.62	0.86	0.95	0.70	0.49	0.29	0.17	0.09	0.04	0.01	0.00	5.18	0.00
-30	0.00	0.01	0.03	0.06	0.11	0.19	0.29	0.36	0.37	0.37	0.37	0.31	0.22	0.13	0.07	0.03	0.01	0.00	2.95	0.00
-40	0.00	0.01	0.02	0.05	0.08	0.13	0.20	0.26	0.30	0.31	0.29	0.22	0.15	0.10	0.06	0.03	0.01	0.00	2.24	0.00
-50	0.00	0.01	0.02	0.04	0.06	0.10	0.14	0.17	0.20	0.21	0.18	0.15	0.11	0.07	0.04	0.02	0.01	0.00	1.54	0.00
-60	0.00	0.01	0.02	0.03	0.04	0.06	0.09	0.11	0.12	0.12	0.11	0.10	0.07	0.05	0.03	0.02	0.01	0.00	1.00	0.00
-70	0.00	0.01	0.01	0.02	0.03	0.04	0.05	0.06	0.06	0.06	0.06	0.05	0.04	0.03	0.02	0.02	0.01	0.00	0.58	0.00
-80	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.00	0.18	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
F t	0.04	0.18	0.44	0.92	1.70	2.88	5.27	17.2	62.1	72.4	24.8	6.54	3.25	1.90	1.02	0.50	0.20	0.05	201	---
F a	0.00	0.00	0.00	0.00	0.00	0.00	0.00	8.65	57.1	67.5	17.3	0.00	0.00	0.00	0.00	0.00	0.00	0.00	---	151


one-half-peak spread: U:11.8,D:7.0 , L:9.3,R:9.7 NEMA Beam Type: Type 3

H_(h) Range:-90 - 90DEG
H_(h) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-11-12

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.27V I:0.1004A P:10.520W PF:0.4758 Freq:50.00Hz Lamp Flux:201.276x1 lm		
NAME: 6453 15°	TYPE:	WEIGHT:320g
SPEC.:10W	DIM.: Φ9.5*7.6cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

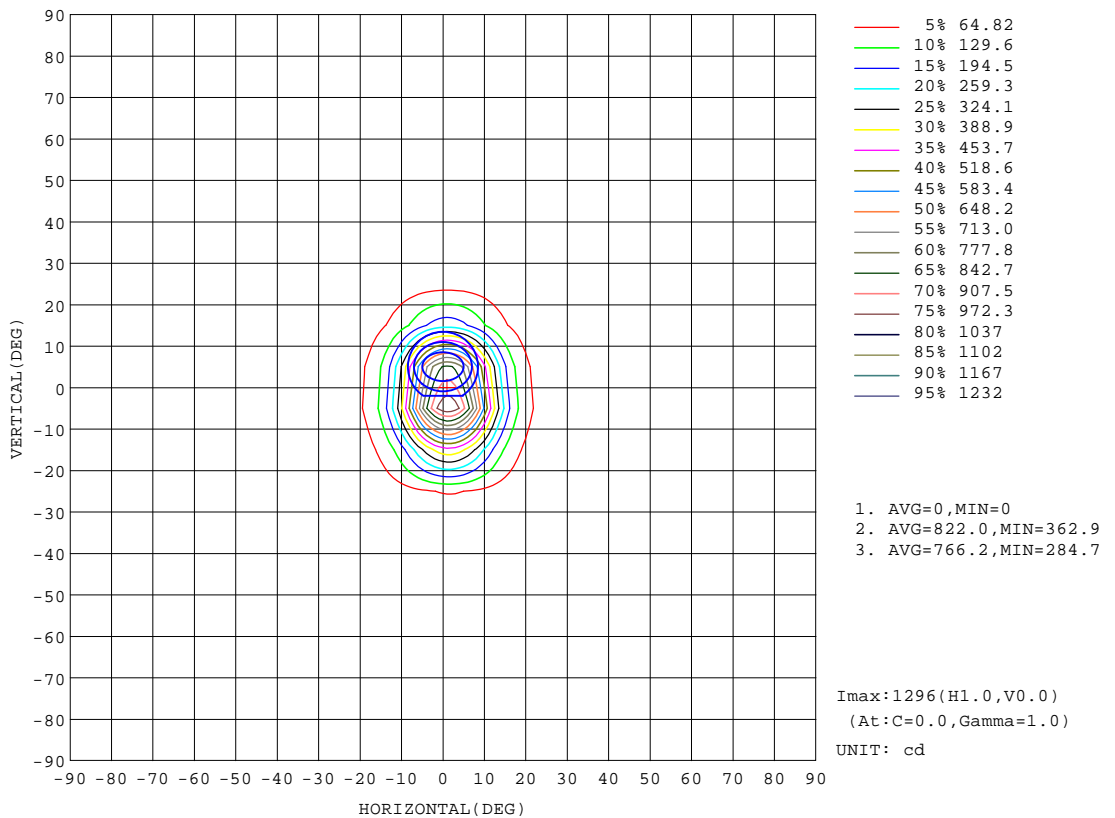


H(h) Range:-90 - 90DEG
 H(h) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:NORDECOR
 Test Date:2024-11-12

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:220.27V I:0.1004A P:10.520W PF:0.4758 Freq:50.00Hz Lamp Flux:201.276x1 lm		
NAME: 6453 15°	TYPE:	WEIGHT:320g
SPEC.:10W	DIM.: Φ9.5*7.6cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

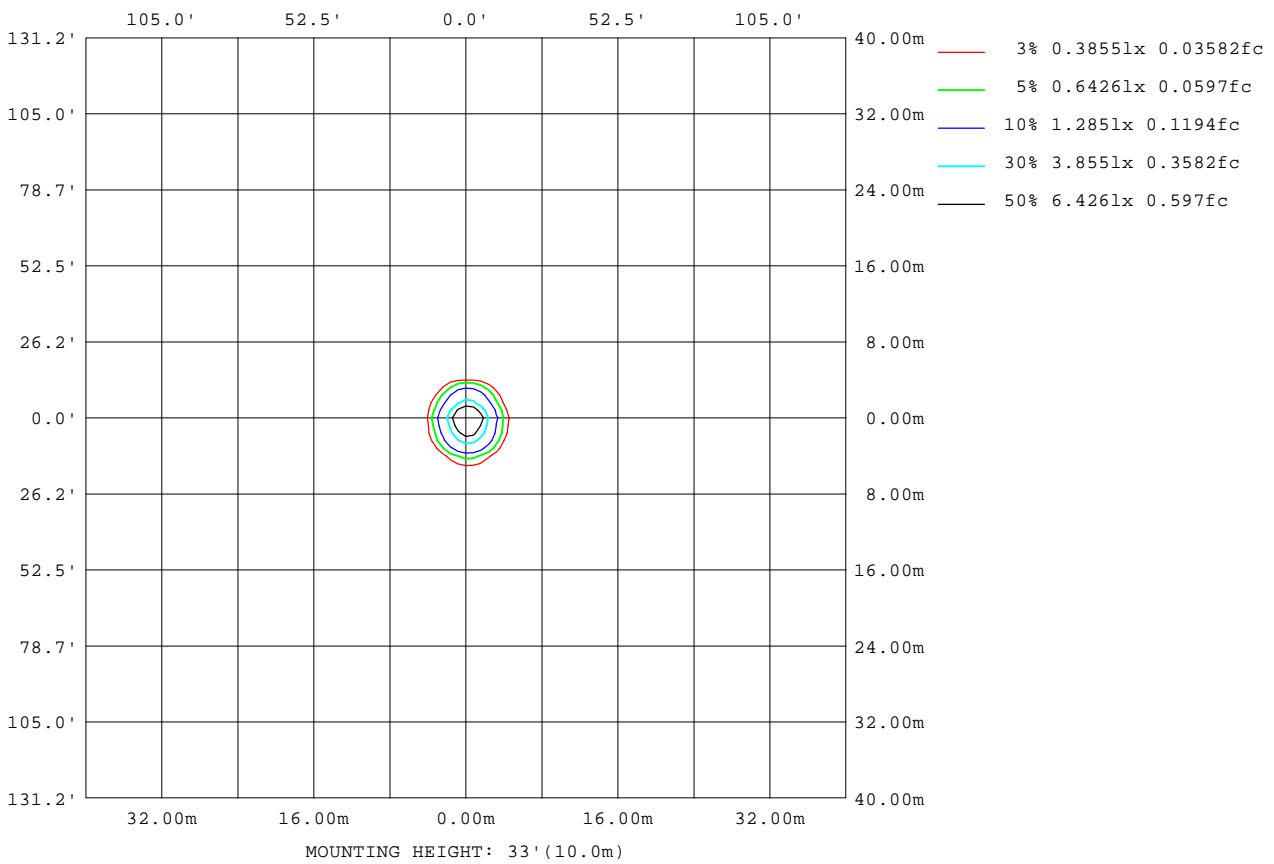

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:NORDECOR
 Test Date:2024-11-12

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

Planar Illuminance Curve

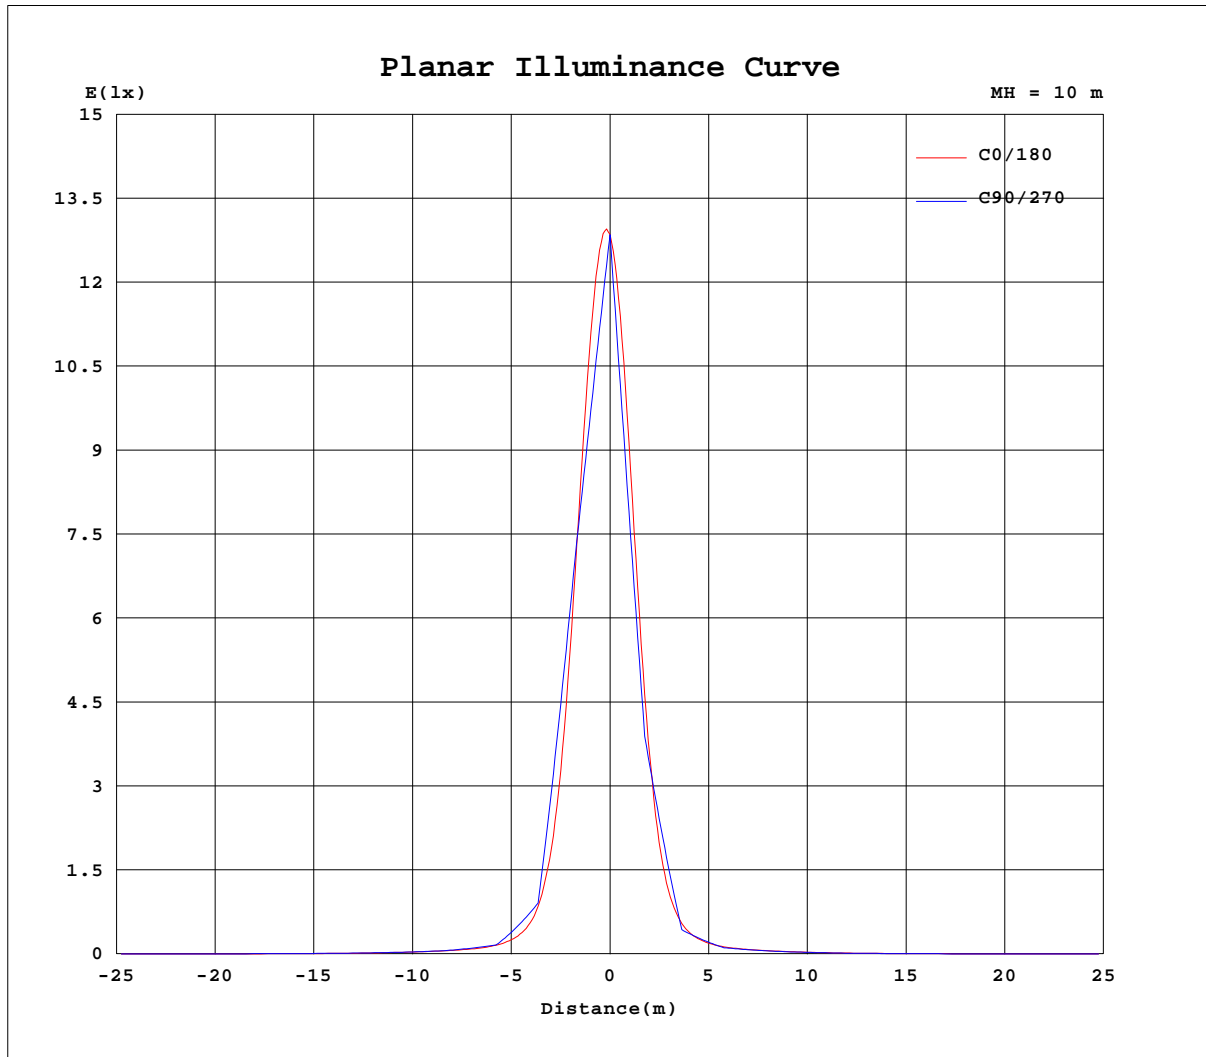


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:NORDECOR
 Test Date:2024-11-12

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.27V I:0.1004A P:10.520W PF:0.4758 Freq:50.00Hz Lamp Flux:201.276x1 lm		
NAME: 6453 15°	TYPE:	WEIGHT:320g
SPEC.:10W	DIM.: Φ9.5*7.6cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

Flux out:73.06 lm

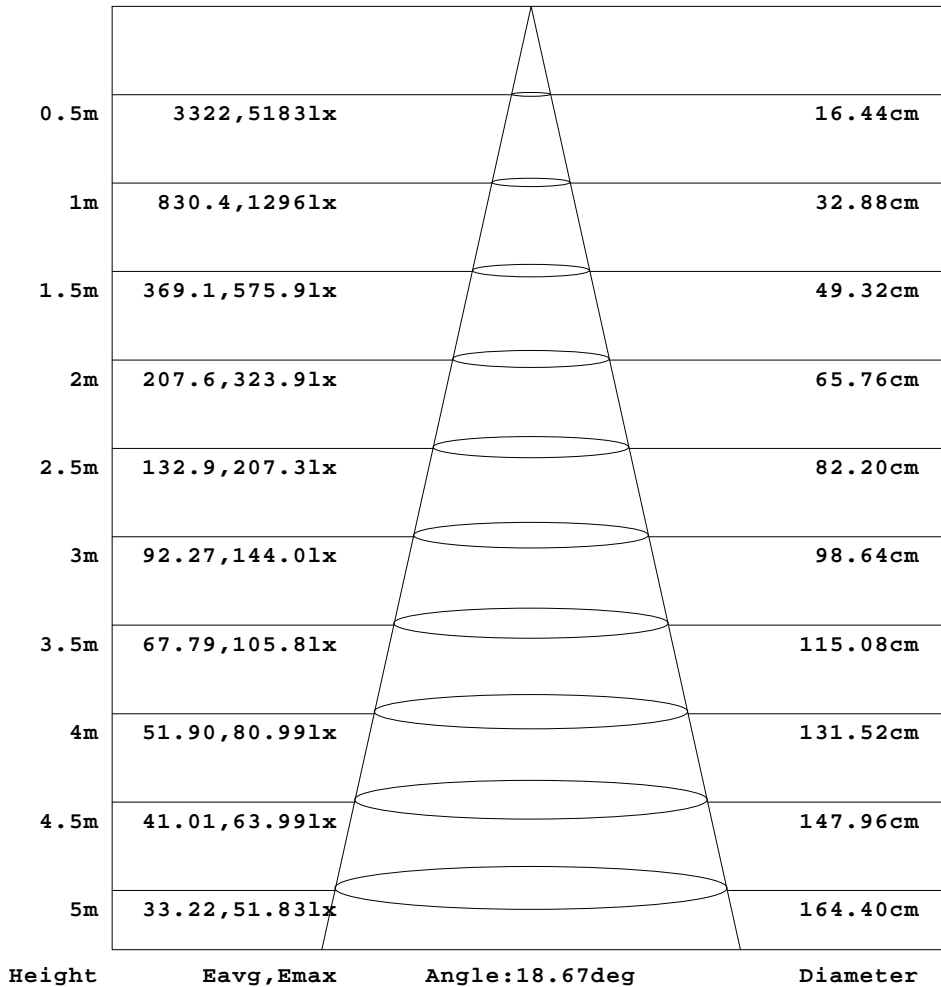

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-11-12

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.27V I:0.1004A P:10.520W PF:0.4758 Freq:50.00Hz Lamp Flux:201.276x1 lm		
NAME: 6453 15°	TYPE:	WEIGHT:320g
SPEC.:10W	DIM.: φ9.5*7.6cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

Table--1

UNIT: cd

H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.74	0.76	0.76	0.79	0.84	0.89	0.95	0.99	1.04	1.08	1.13	1.21	1.25	1.32	1.34	1.40	1.42	1.44	1.50
-75	0.76	0.79	0.83	0.88	0.95	1.03	1.11	1.19	1.29	1.40	1.47	1.61	1.69	1.81	1.88	1.99	2.09	2.13	2.17
-70	0.79	0.82	0.89	0.98	1.06	1.18	1.28	1.40	1.55	1.73	1.82	2.01	2.13	2.30	2.41	2.59	2.76	2.82	2.85
-65	0.80	0.82	0.92	1.04	1.16	1.31	1.47	1.65	1.86	2.10	2.32	2.62	2.89	3.17	3.42	3.67	3.90	4.04	4.11
-60	0.81	0.82	0.95	1.09	1.25	1.44	1.67	1.89	2.16	2.47	2.82	3.23	3.64	4.04	4.42	4.76	5.05	5.26	5.37
-55	0.79	0.82	0.96	1.13	1.33	1.55	1.83	2.13	2.50	2.93	3.42	3.94	4.48	5.01	5.55	6.07	6.52	6.86	7.03
-50	0.76	0.81	0.98	1.17	1.40	1.67	2.00	2.37	2.84	3.39	4.02	4.65	5.31	5.99	6.68	7.39	7.99	8.45	8.69
-45	0.78	0.84	1.03	1.26	1.53	1.84	2.24	2.73	3.30	3.94	4.66	5.45	6.38	7.38	8.35	9.29	10.1	10.8	11.1
-40	0.80	0.87	1.08	1.35	1.65	2.01	2.49	3.09	3.76	4.50	5.30	6.25	7.46	8.77	10.0	11.2	12.3	13.1	13.6
-35	0.81	0.90	1.13	1.43	1.80	2.24	2.85	3.58	4.37	5.25	6.31	7.56	9.01	10.7	12.5	14.4	16.5	18.3	19.4
-30	0.81	0.92	1.18	1.52	1.95	2.47	3.22	4.06	4.98	6.00	7.32	8.88	10.6	12.5	14.9	17.5	20.6	23.5	25.2
-25	0.82	0.94	1.22	1.59	2.06	2.67	3.53	4.49	5.56	6.84	8.47	10.2	12.3	15.3	20.3	28.2	40.7	56.6	67.7
-20	0.83	0.96	1.27	1.66	2.17	2.87	3.84	4.92	6.14	7.69	9.61	11.6	14.0	18.0	25.7	38.8	60.9	89.8	110
-15	0.83	0.96	1.28	1.69	2.24	3.02	4.06	5.21	6.56	8.41	10.6	12.9	16.1	22.9	38.7	78.1	172	321	426
-10	0.82	0.96	1.30	1.73	2.32	3.17	4.27	5.51	6.99	9.13	11.5	14.1	18.2	27.9	51.6	117	284	552	742
-5	0.82	0.98	1.30	1.74	2.34	3.20	4.31	5.57	7.08	9.30	11.8	14.7	19.2	30.1	58.9	147	384	764	1014
0	0.83	0.99	1.31	1.75	2.35	3.23	4.34	5.63	7.17	9.48	12.1	15.2	20.1	32.3	66.2	176	485	976	1285
5	0.83	0.98	1.29	1.72	2.31	3.17	4.25	5.48	6.95	9.13	11.7	14.5	18.7	28.5	54.1	130	330	644	846
10	0.83	0.97	1.27	1.69	2.27	3.11	4.16	5.33	6.72	8.78	11.2	13.8	17.3	24.8	42.1	82.7	174	312	407
15	0.82	0.96	1.25	1.65	2.18	2.92	3.91	4.99	6.23	7.93	10.1	12.3	15.1	20.2	31.1	55.0	105	179	230
20	0.81	0.95	1.24	1.61	2.10	2.73	3.65	4.64	5.74	7.08	8.92	10.8	12.9	15.7	20.2	27.2	36.5	46.4	52.5
25	0.80	0.93	1.19	1.53	1.97	2.52	3.31	4.16	5.12	6.26	7.70	9.40	11.2	13.4	16.4	20.8	26.4	31.8	35.0
30	0.78	0.91	1.14	1.44	1.83	2.31	2.96	3.69	4.51	5.45	6.47	7.98	9.44	11.0	12.7	14.4	16.3	17.3	17.6
35	0.77	0.87	1.08	1.35	1.69	2.09	2.61	3.22	3.93	4.75	5.60	6.74	7.88	9.43	10.8	12.1	13.4	14.1	14.4
40	0.76	0.83	1.02	1.25	1.55	1.88	2.26	2.76	3.36	4.04	4.73	5.50	6.31	7.81	8.85	9.79	10.5	10.9	11.1
45	0.75	0.81	0.98	1.19	1.43	1.72	2.05	2.46	2.93	3.52	4.10	4.74	5.39	6.39	7.13	7.79	8.31	8.63	8.78
50	0.74	0.79	0.94	1.12	1.31	1.55	1.83	2.15	2.51	2.99	3.47	3.98	4.47	4.96	5.41	5.78	6.10	6.33	6.42
55	0.76	0.79	0.92	1.07	1.24	1.44	1.66	1.93	2.21	2.56	2.92	3.31	3.69	4.06	4.41	4.69	4.93	5.10	5.18
60	0.78	0.79	0.90	1.03	1.16	1.33	1.49	1.71	1.90	2.13	2.37	2.63	2.90	3.17	3.41	3.60	3.76	3.88	3.94
65	0.79	0.79	0.87	0.98	1.08	1.21	1.34	1.49	1.65	1.81	1.98	2.17	2.35	2.52	2.69	2.82	2.93	3.01	3.05
70	0.79	0.80	0.85	0.93	1.00	1.08	1.19	1.28	1.39	1.49	1.59	1.71	1.80	1.88	1.97	2.04	2.09	2.14	2.16
75	0.80	0.81	0.83	0.88	0.93	0.98	1.05	1.12	1.19	1.25	1.31	1.39	1.45	1.51	1.57	1.61	1.65	1.68	1.70
80	0.80	0.82	0.82	0.82	0.85	0.88	0.91	0.95	0.99	1.01	1.02	1.08	1.10	1.14	1.17	1.18	1.21	1.23	1.23
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H_(h) Range:-90 - 90DEG
H_(h) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-11-12

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.27V I:0.1004A P:10.520W PF:0.4758 Freq:50.00Hz Lamp Flux:201.276x1 lm		
NAME: 6453 15°	TYPE:	WEIGHT:320g
SPEC.:10W	DIM.: φ9.5*7.6cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

Table--2

UNIT: cd

H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	1.46	1.49	1.47	1.45	1.40	1.38	1.33	1.29	1.24	1.22	1.16	1.10	1.06	1.01	0.95	0.91	0.78	0.71
-75	2.13	2.18	2.14	2.08	2.00	1.91	1.81	1.71	1.60	1.51	1.40	1.29	1.21	1.11	1.02	0.95	0.82	0.72
-70	2.80	2.88	2.81	2.71	2.59	2.44	2.29	2.12	1.96	1.80	1.65	1.49	1.35	1.21	1.10	0.99	0.85	0.74
-65	4.09	4.07	3.94	3.75	3.52	3.26	2.99	2.70	2.41	2.14	1.91	1.69	1.50	1.31	1.17	1.03	0.87	0.74
-60	5.37	5.27	5.07	4.79	4.46	4.09	3.68	3.27	2.85	2.49	2.18	1.89	1.65	1.42	1.24	1.07	0.90	0.75
-55	7.02	6.84	6.48	6.02	5.48	4.97	4.43	3.90	3.38	2.90	2.46	2.09	1.77	1.51	1.28	1.09	0.90	0.74
-50	8.68	8.41	7.89	7.25	6.50	5.85	5.18	4.53	3.91	3.31	2.74	2.28	1.90	1.60	1.32	1.10	0.91	0.72
-45	11.2	10.8	10.1	9.19	8.18	7.20	6.20	5.27	4.50	3.80	3.14	2.56	2.09	1.72	1.40	1.15	0.93	0.74
-40	13.6	13.2	12.3	11.1	9.86	8.55	7.22	6.01	5.10	4.29	3.54	2.84	2.28	1.85	1.48	1.20	0.95	0.75
-35	19.2	18.0	15.9	13.8	12.0	10.3	8.70	7.20	5.91	4.88	4.02	3.22	2.53	2.01	1.59	1.26	1.00	0.77
-30	24.8	22.9	19.5	16.5	14.1	12.1	10.2	8.40	6.73	5.47	4.49	3.61	2.79	2.17	1.70	1.32	1.04	0.79
-25	64.8	50.8	35.7	25.0	18.3	14.3	11.7	9.63	7.73	6.11	4.95	3.95	3.04	2.31	1.78	1.36	1.06	0.80
-20	105	78.8	51.8	33.5	22.5	16.5	13.2	10.9	8.74	6.75	5.42	4.30	3.29	2.45	1.86	1.41	1.09	0.81
-15	393	254	122	55.4	29.9	19.5	14.7	11.8	9.43	7.28	5.71	4.51	3.44	2.54	1.92	1.47	1.14	0.85
-10	681	430	192	77.3	37.3	22.4	16.1	12.7	10.1	7.81	6.00	4.72	3.58	2.62	1.97	1.52	1.20	0.88
-5	922	572	243	90.0	40.5	23.5	16.4	12.9	10.3	7.96	6.09	4.78	3.64	2.66	1.99	1.54	1.21	0.91
0	1162	715	293	103	43.8	24.5	16.8	13.1	10.5	8.11	6.18	4.84	3.70	2.70	2.01	1.55	1.23	0.93
5	763	470	201	77.9	37.1	22.2	15.8	12.5	10.0	7.75	5.99	4.70	3.59	2.63	1.97	1.51	1.18	0.89
10	364	226	109	53.1	30.4	19.8	14.8	11.9	9.58	7.40	5.80	4.55	3.48	2.57	1.93	1.47	1.12	0.84
15	207	134	70.7	38.6	24.3	17.2	13.4	10.9	8.78	6.79	5.42	4.29	3.29	2.44	1.86	1.41	1.08	0.81
20	50.3	41.8	32.1	24.2	18.3	14.6	12.1	9.95	7.98	6.17	5.04	4.02	3.10	2.32	1.79	1.36	1.04	0.78
25	33.8	29.1	23.7	19.0	15.3	12.7	10.6	8.75	6.93	5.54	4.55	3.63	2.82	2.16	1.68	1.30	1.01	0.75
30	17.3	16.5	15.2	13.9	12.4	10.7	9.13	7.55	5.88	4.91	4.05	3.25	2.54	2.00	1.58	1.24	0.98	0.72
35	14.1	13.6	12.7	11.7	10.5	9.15	7.58	6.40	5.19	4.36	3.60	2.90	2.30	1.85	1.48	1.18	0.94	0.72
40	11.0	10.7	10.2	9.52	8.65	7.57	6.03	5.25	4.50	3.81	3.14	2.54	2.07	1.71	1.39	1.12	0.91	0.71
45	8.73	8.50	8.11	7.61	6.96	6.20	5.19	4.56	3.93	3.33	2.78	2.30	1.90	1.59	1.32	1.08	0.89	0.70
50	6.41	6.26	6.02	5.69	5.27	4.84	4.36	3.87	3.35	2.86	2.42	2.06	1.74	1.47	1.25	1.04	0.87	0.70
55	5.17	5.07	4.89	4.65	4.34	4.01	3.64	3.25	2.86	2.50	2.16	1.87	1.61	1.39	1.20	1.03	0.87	0.72
60	3.94	3.87	3.77	3.61	3.41	3.18	2.92	2.64	2.37	2.14	1.90	1.68	1.49	1.30	1.16	1.02	0.87	0.74
65	3.05	3.01	2.95	2.84	2.71	2.56	2.39	2.21	2.01	1.85	1.67	1.51	1.37	1.23	1.11	1.00	0.86	0.76
70	2.17	2.15	2.12	2.08	2.01	1.93	1.86	1.77	1.66	1.55	1.45	1.35	1.25	1.15	1.06	0.99	0.85	0.78
75	1.69	1.69	1.68	1.65	1.62	1.57	1.52	1.47	1.40	1.33	1.27	1.21	1.14	1.07	1.01	0.96	0.84	0.79
80	1.22	1.24	1.23	1.22	1.22	1.21	1.18	1.17	1.14	1.11	1.09	1.07	1.03	0.99	0.96	0.92	0.83	0.80
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-11-12

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks: