

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		5005.8 cd per klm. 0.0 degrees vertical 2.0 degrees horizontal
Beam Spread	At 10% of Imax	41.9V x 38.8H
	At 50% of Imax	22.8V x 22.7H
	At 90% of Imax	4.6V x 10.1H
Beam Flux	Total	985.8 lumens per klm.
	To 10% of Imax	834.9 lumens per klm.
	To 50% of Imax	472.7 lumens per klm.
	To 90% of Imax	54.8 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	98.6 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.30V I:0.0666A P:6.7879W PF:0.4624 Freq:50.00Hz Lamp Flux:358.117x1 lm		
NAME: 6458	TYPE:Indoor lighting	WEIGHT:0.16kg
SPEC.:7W	DIM.: φ3.5*8.1*4.3	SERIAL No.:11
MFR.: NORDECOR	SUR.:3cm	Shielding Angle:24°

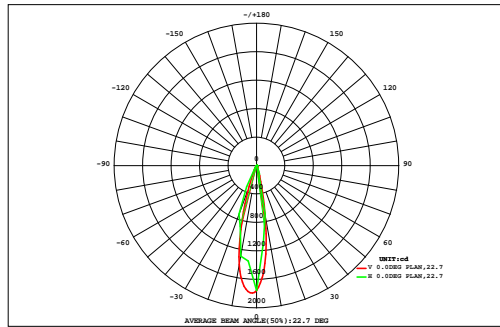

DATA OF LAMP		Eff:52.76lm/W	
MODEL		Imax(cd)	1793
NOMINAL POWER(W)	7W	AVAILABILITY(%)	86.9
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	311.3
NOMINAL FLUX(lm)	358.117	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	358.1
TEST VOLTAGE(V)	220.2	q @50%(H,V)	23,23DEG

VERTICAL( DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	90	80	70	60	50	40	30	20	10	0	10	20	30	40	50	60	70	80	90	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
40	0.00	0.00	0.00	0.00	0.00	0.04	0.10	0.17	0.22	0.24	0.22	0.17	0.11	0.05	0.01	0.00	0.00	0.00	1.33	0.00
30	0.00	0.00	0.00	0.01	0.05	0.15	0.26	0.48	0.93	1.26	1.00	0.53	0.24	0.11	0.04	0.00	0.00	0.00	5.05	0.00
20	0.00	0.00	0.01	0.02	0.10	0.23	0.41	1.19	4.95	9.56	6.13	1.52	0.40	0.16	0.07	0.01	0.00	0.00	24.8	17.6
10	0.00	0.00	0.01	0.04	0.15	0.31	0.68	3.39	17.7	32.5	18.2	3.47	0.65	0.21	0.09	0.02	0.00	0.00	77.4	70.7
0	0.00	0.00	0.01	0.04	0.16	0.33	0.84	5.17	28.8	45.7	25.8	4.65	0.69	0.23	0.10	0.02	0.00	0.00	112	107
-10	0.00	0.00	0.01	0.04	0.15	0.31	0.87	5.88	29.5	42.0	22.7	3.92	0.61	0.22	0.09	0.02	0.00	0.00	106	101
-20	0.00	0.00	0.01	0.03	0.10	0.23	0.50	2.16	7.05	6.85	2.51	0.83	0.34	0.17	0.07	0.01	0.00	0.00	20.9	15.5
-30	0.00	0.00	0.00	0.01	0.05	0.14	0.30	0.71	1.65	2.20	1.31	0.52	0.23	0.12	0.04	0.00	0.00	0.00	7.28	0.00
-40	0.00	0.00	0.00	0.00	0.01	0.07	0.14	0.20	0.22	0.24	0.22	0.18	0.13	0.07	0.01	0.00	0.00	0.00	1.50	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.02	0.06	0.13	0.20	0.22	0.20	0.14	0.08	0.02	0.00	0.00	0.00	0.00	1.07	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL( DEG)	20	30	40	50	60	70	80	90			
F t	0.00	0.00	0.05	0.19	0.79	1.84	4.16	19.5	91.3	141	78.3	15.9	3.47	1.36	0.52	0.09	0.01	0.00	358	---
F a	0.00	0.00	0.00	0.00	0.00	0.00	0.00	10.5	86.2	135	72.7	6.99	0.00	0.00	0.00	0.00	0.00	0.00	---	311


one-half-peak spread: U:7.7,D:15.4 , L:10.6,R:12.3 NEMA Beam Type: Type 3

H(h) Range:-90 - 90DEG  
H(h) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.30V I:0.0666A P:6.7879W PF:0.4624 Freq:50.00Hz Lamp Flux:358.117x1 lm		
NAME: 6458	TYPE:Indoor lighting	WEIGHT:0.16kg
SPEC.:7W	DIM.: φ3.5*8.1*4.3	SERIAL No.:11
MFR.: NORDECOR	SUR.:3cm	Shielding Angle:24°

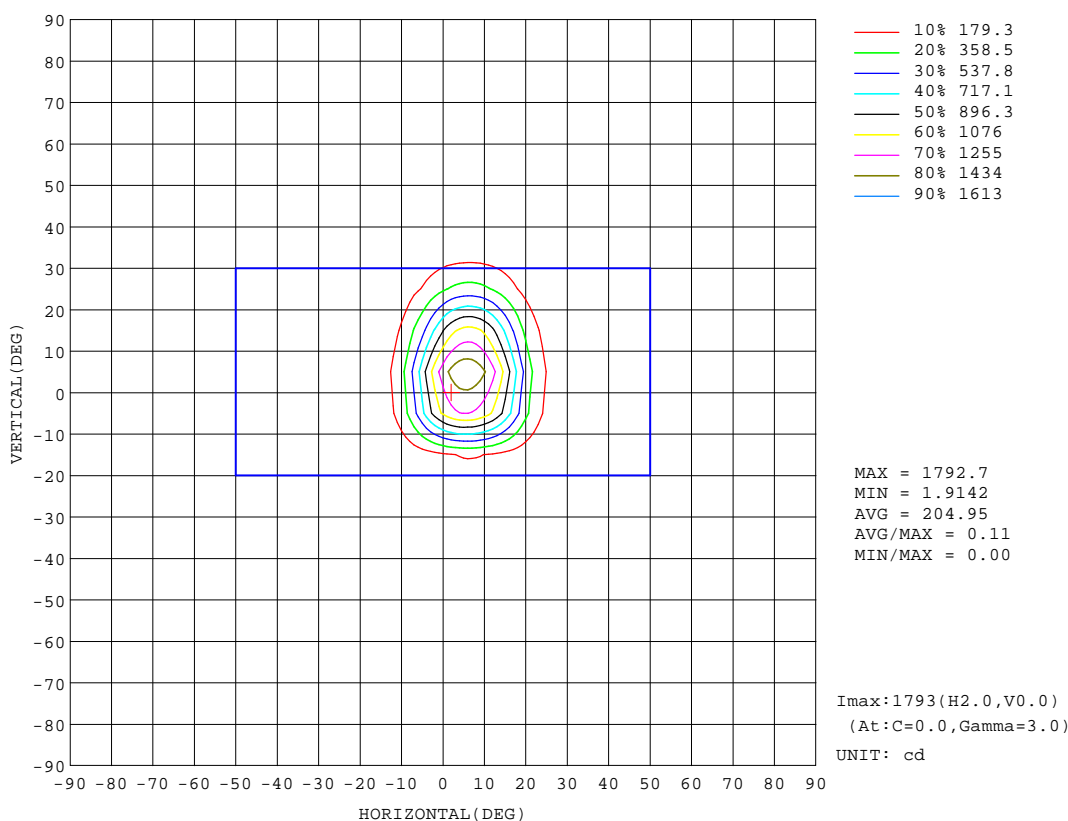


H(β) Range:-90 - 90DEG  
 H(β) Interval: 1.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:AED  
 Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:5.780m [K=1.0000]  
 Remarks:

ISOLUX DIAGRAM


Test:U:220.30V I:0.0666A P:6.7879W PF:0.4624 Freq:50.00Hz Lamp Flux:358.117x1 lm		
NAME: 6458	TYPE:Indoor lighting	WEIGHT:0.16kg
SPEC.:7W	DIM.: φ3.5*8.1*4.3	SERIAL No.:11
MFR.: NORDECOR	SUR.:3cm	Shielding Angle:24°

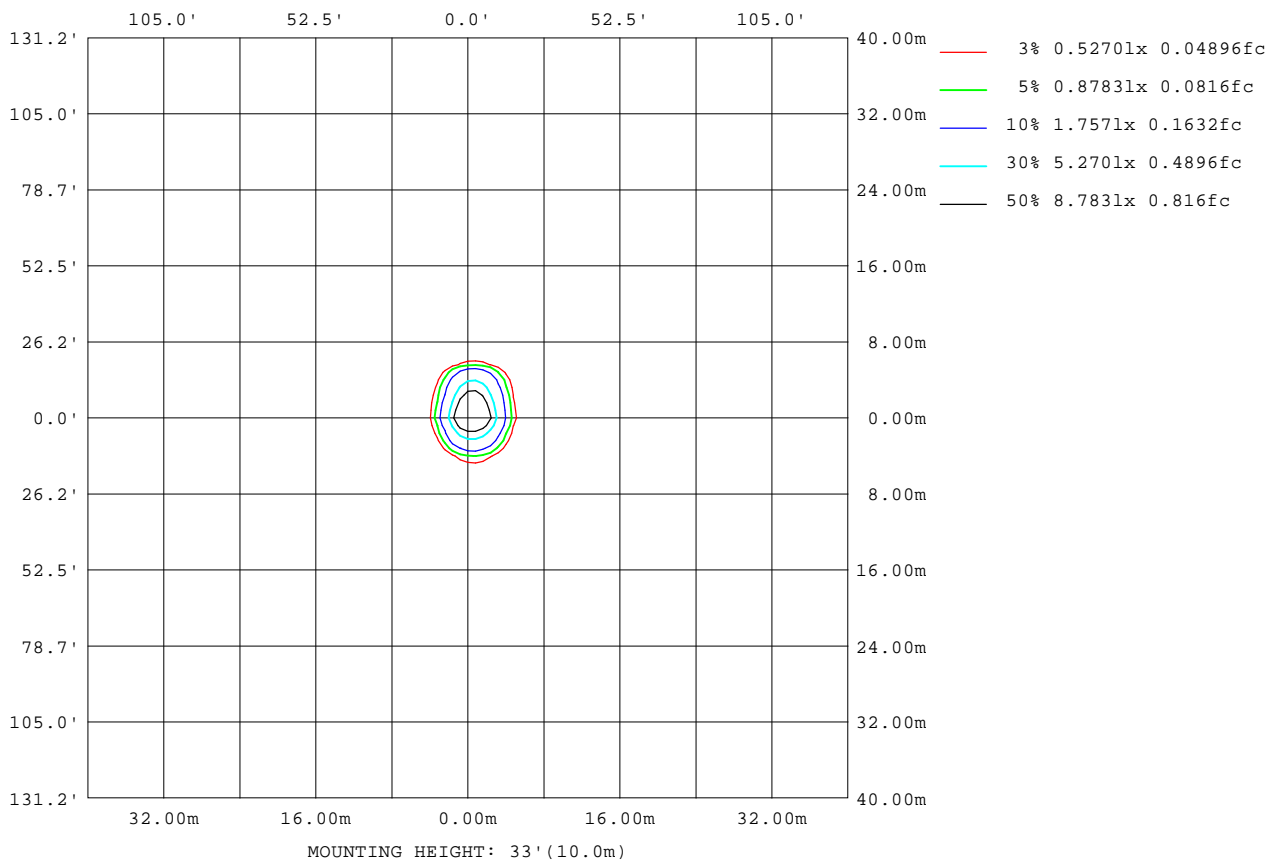

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

Planar Illuminance Curve

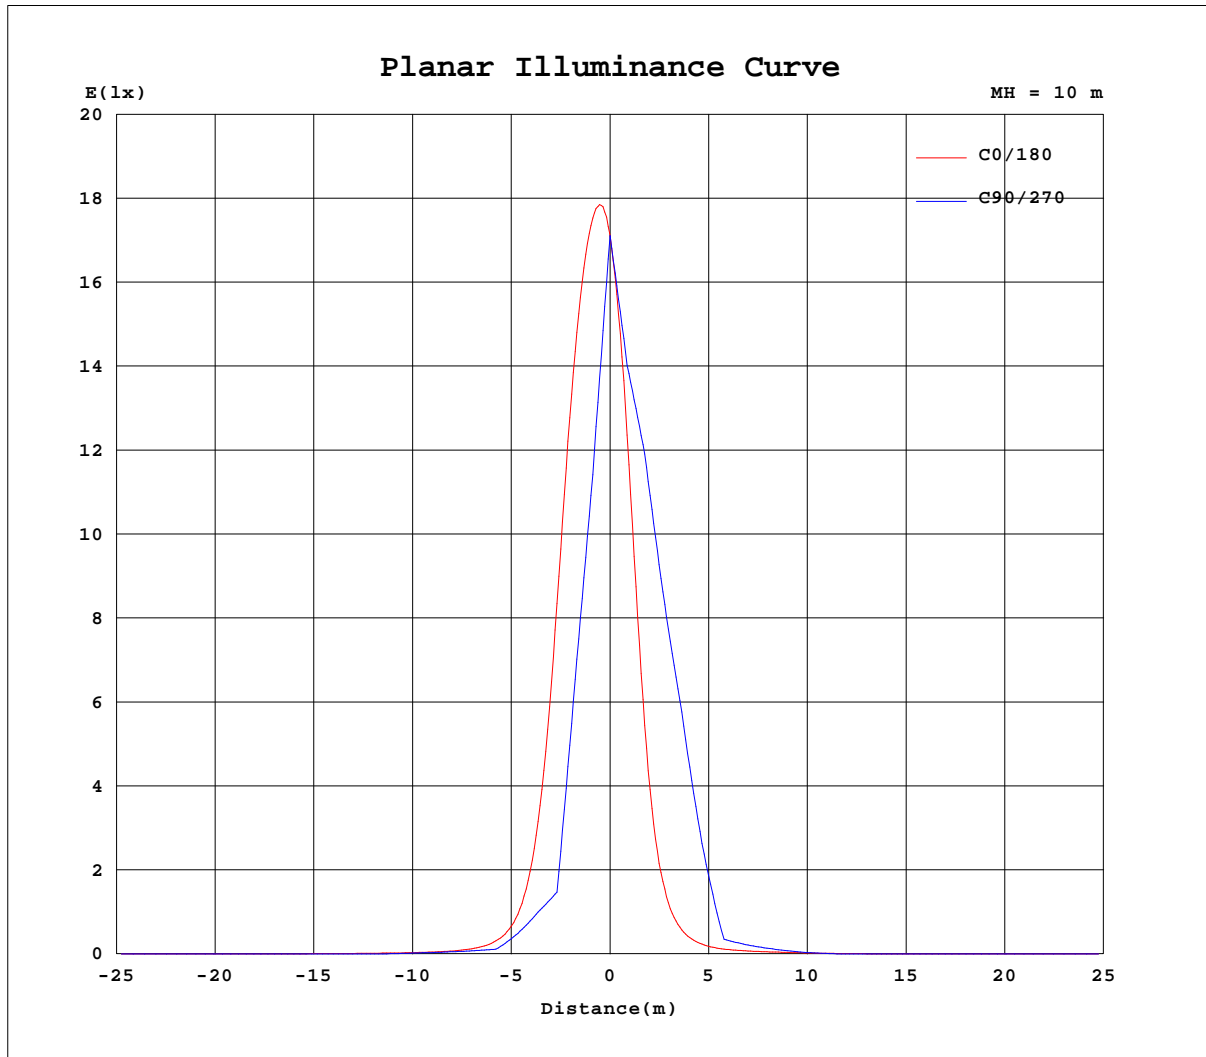


H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

AAI Figure

Test:U:220.30V I:0.0666A P:6.7879W PF:0.4624 Freq:50.00Hz Lamp Flux:358.117x1 lm		
NAME: 6458	TYPE:Indoor lighting	WEIGHT:0.16kg
SPEC.:7W	DIM.: φ3.5*8.1*4.3	SERIAL No.:11
MFR.: NORDECOR	SUR.:3cm	Shielding Angle:24°

Flux out:142.3 lm

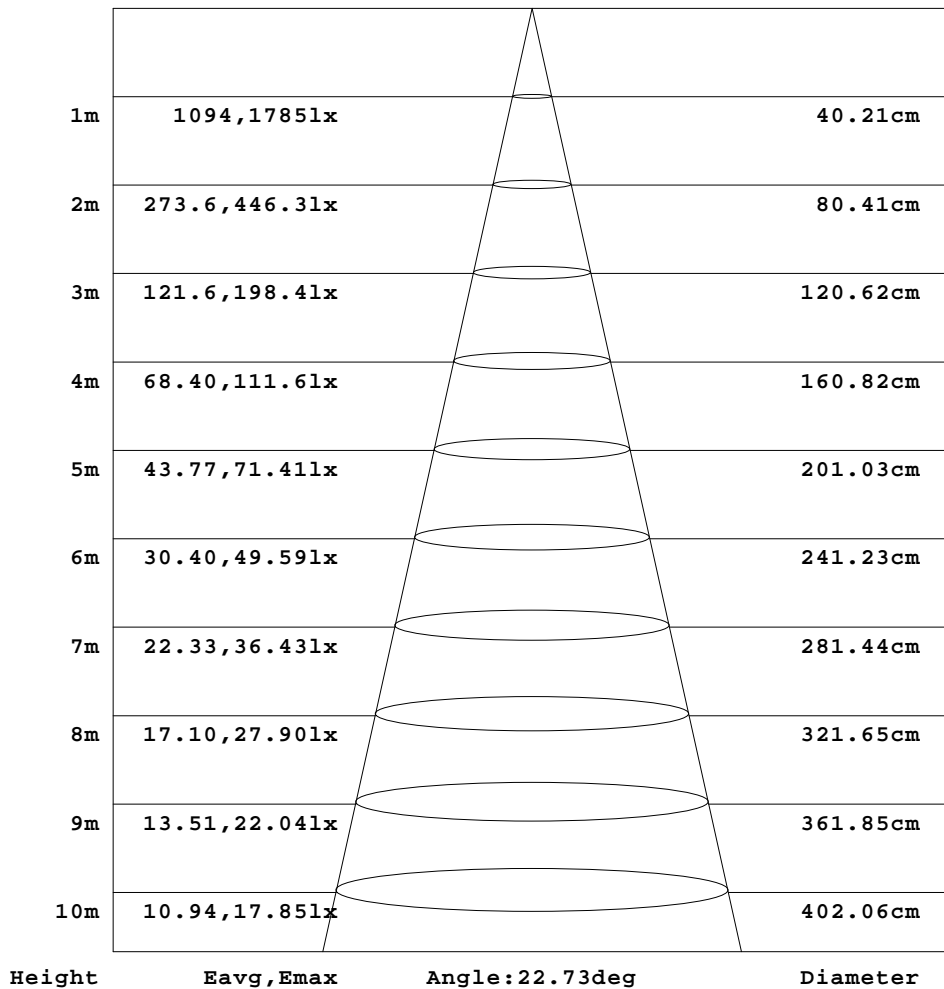

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.30V I:0.0666A P:6.7879W PF:0.4624 Freq:50.00Hz Lamp Flux:358.117x1 lm		
NAME: 6458	TYPE:Indoor lighting	WEIGHT:0.16kg
SPEC.:7W	DIM.: φ3.5*8.1*4.3	SERIAL No.:11
MFR.: NORDECOR	SUR.:3cm	Shielding Angle:24°

Table--1

UNIT: cd

H( DEG) V( DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.18	0.65	1.63	2.75	3.96	5.10	6.12	6.90
-40	0.00	0.00	0.00	0.00	0.00	0.02	0.08	0.11	0.14	0.43	0.98	1.74	2.83	4.03	5.33	6.82	8.45	9.90	10.9
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.19	0.23	0.43	1.24	2.33	3.64	4.99	6.29	7.86	9.85	12.0	13.8
-30	0.00	0.00	0.00	0.00	0.00	0.05	0.23	0.33	0.42	1.30	2.75	4.44	6.08	7.49	9.05	11.1	13.9	16.4	18.2
-25	0.00	0.00	0.00	0.00	0.02	0.13	0.34	0.54	0.88	1.75	3.35	5.11	6.87	9.09	12.4	18.5	28.5	43.7	63.0
-20	0.00	0.00	0.00	0.00	0.17	0.42	0.69	1.03	2.21	4.03	6.07	7.85	10.1	14.2	22.4	36.7	60.1	93.9	125
-15	0.00	0.00	0.00	0.00	0.07	0.38	0.73	1.05	1.95	3.98	6.35	8.51	10.4	13.9	21.2	35.8	61.1	101	154
-10	0.00	0.00	0.00	0.06	0.34	0.72	1.09	1.82	3.81	6.39	8.89	11.1	14.8	23.9	47.2	112	287	547	705
-5	0.00	0.00	0.00	0.01	0.23	0.60	1.01	1.47	3.04	5.62	8.57	11.0	14.1	21.1	40.0	94.1	267	680	1101
0	0.00	0.00	0.00	0.18	0.53	0.97	1.42	2.67	5.21	8.39	11.2	14.1	20.1	36.5	83.6	236	694	1376	1757
5	0.00	0.00	0.00	0.01	0.27	0.66	1.10	1.61	3.46	6.25	9.47	12.0	15.5	23.2	44.8	109	314	808	1346
10	0.00	0.00	0.00	0.11	0.44	0.88	1.30	2.43	4.88	7.98	10.9	13.5	18.2	30.5	65.8	170	476	946	1294
15	0.00	0.00	0.00	0.00	0.19	0.58	1.00	1.47	3.19	5.87	9.07	11.7	14.5	20.1	35.8	79.6	202	487	887
20	0.00	0.00	0.00	0.05	0.32	0.71	1.08	1.88	3.86	6.54	9.27	11.6	14.8	22.3	43.3	99.4	256	503	727
25	0.00	0.00	0.00	0.00	0.08	0.38	0.74	1.05	1.91	3.86	6.31	8.74	10.9	13.8	20.8	38.8	85.5	188	330
30	0.00	0.00	0.00	0.00	0.16	0.48	0.76	1.00	2.15	4.05	6.34	8.48	9.96	12.0	16.0	23.1	34.2	46.5	56.3
35	0.00	0.00	0.00	0.00	0.02	0.18	0.40	0.57	0.88	1.97	3.53	5.50	7.20	8.73	11.0	14.8	21.0	29.3	37.4
40	0.00	0.00	0.00	0.00	0.05	0.16	0.25	0.36	0.81	1.62	3.07	4.69	6.21	7.91	10.1	13.2	17.5	22.2	25.9
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.20	0.73	1.94	3.39	4.97	6.41	7.59	8.51	9.50	10.4
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(h) Range:-90 - 90DEG  
H(h) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.30V I:0.0666A P:6.7879W PF:0.4624 Freq:50.00Hz Lamp Flux:358.117x1 lm		
NAME: 6458	TYPE:Indoor lighting	WEIGHT:0.16kg
SPEC.:7W	DIM.: φ3.5*8.1*4.3	SERIAL No.:11
MFR.: NORDECOR	SUR.:3cm	Shielding Angle:24°

Table--2

UNIT: cd

H( DEG) V( DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	7.35	7.43	7.11	6.43	5.55	4.54	3.45	2.37	1.33	0.42	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	11.1	10.6	9.48	8.05	6.52	5.19	4.02	2.91	1.77	0.81	0.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	14.8	14.6	13.3	11.4	9.35	7.41	5.97	4.80	3.57	2.26	1.12	0.24	0.00	0.00	0.00	0.00	0.00	0.00
-30	18.5	17.3	15.0	12.3	9.67	7.81	6.47	5.26	3.79	2.26	0.85	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	75.1	71.5	54.5	36.3	22.9	14.5	10.1	7.64	5.88	4.33	2.66	1.13	0.33	0.15	0.06	0.00	0.00	0.00
-20	131	107	71.4	42.9	24.8	15.3	10.4	7.79	6.12	4.40	2.57	1.06	0.37	0.20	0.02	0.00	0.00	0.00
-15	188	178	131	81.0	46.2	25.9	15.8	10.9	8.27	6.63	4.64	2.66	0.99	0.44	0.19	0.00	0.00	0.00
-10	707	572	332	142	56.0	26.4	15.2	10.4	8.00	6.10	3.93	1.95	0.69	0.38	0.09	0.02	0.02	0.02
-5	1258	1159	832	401	148	55.1	25.3	14.7	10.2	7.92	5.83	3.54	1.56	0.64	0.33	0.07	0.05	0.05
0	1745	1411	798	309	103	41.0	20.6	13.0	9.44	7.36	4.93	2.65	0.97	0.54	0.23	0.07	0.07	0.07
5	1569	1448	1019	481	175	64.6	29.0	16.1	10.9	8.35	6.25	3.86	1.78	0.74	0.40	0.09	0.05	0.05
10	1324	1038	568	227	84.3	36.9	19.3	12.2	8.93	6.98	4.65	2.47	0.93	0.54	0.21	0.02	0.02	0.02
15	1123	1044	692	319	127	54.4	26.8	15.2	10.2	7.93	5.90	3.62	1.65	0.73	0.40	0.07	0.00	0.00
20	762	585	315	134	56.5	27.8	15.6	10.3	7.74	5.88	3.77	1.84	0.69	0.37	0.13	0.00	0.00	0.00
25	413	386	263	131	59.6	29.5	16.9	10.8	7.92	6.09	4.19	2.30	0.82	0.33	0.13	0.02	0.00	0.00
30	58.5	52.4	41.1	29.8	20.1	13.8	9.65	7.42	5.88	4.07	2.30	0.76	0.24	0.02	0.00	0.00	0.00	0.00
35	42.4	41.4	35.5	27.3	19.9	13.8	9.96	7.28	5.59	4.06	2.44	1.09	0.27	0.09	0.00	0.00	0.00	0.00
40	26.7	24.4	20.1	15.7	11.8	8.90	6.65	4.98	3.54	2.08	0.81	0.25	0.08	0.01	0.00	0.00	0.00	0.00
45	10.8	10.7	10.1	9.23	8.23	7.16	5.97	4.60	3.20	1.84	0.62	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(h) Range:-90 - 90DEG  
H(h) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2023-06-30

V(B) Range:-45 - 45DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks: