

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


| | | |
|---|----------------|---|
| Maximum Intensity (Luminaire orientation as tested.) | | 3179.2 cd per klm. 0.0 degrees vertical -2.0 degrees horizontal |
| Beam Spread | At 10% of Imax | 55.7V x 50.1H |
| | At 50% of Imax | 32.9V x 32.3H |
| | At 90% of Imax | 8.1V x 15.2H |
| Beam Flux | Total | 991.6 lumens per klm. |
| | To 10% of Imax | 876.5 lumens per klm. |
| | To 50% of Imax | 512.3 lumens per klm. |
| | To 90% of Imax | 65.8 lumens per klm. |
| | Upward LOR | 0.0 % |
| | Downward LOR | 99.2 % |
| Luminaire Efficiency(Light Output Ratio) | | 100.0 % |

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2023-06-30

V(B) Range:-45 - 45DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

| | | |
|--|----------------------|---------------------|
| Test:U:220.33V I:0.1073A P:11.403W PF:0.4823 Freq:50.00Hz Lamp Flux:729.916x1 lm | | |
| NAME: 6461 | TYPE:Indoor Lighting | WEIGHT:0.3kg |
| SPEC.:12W | DIM.: φ4.7*10*15 | SERIAL No.:12 |
| MFR.: NORDECOR | SUR.:3cm | Shielding Angle:24° |

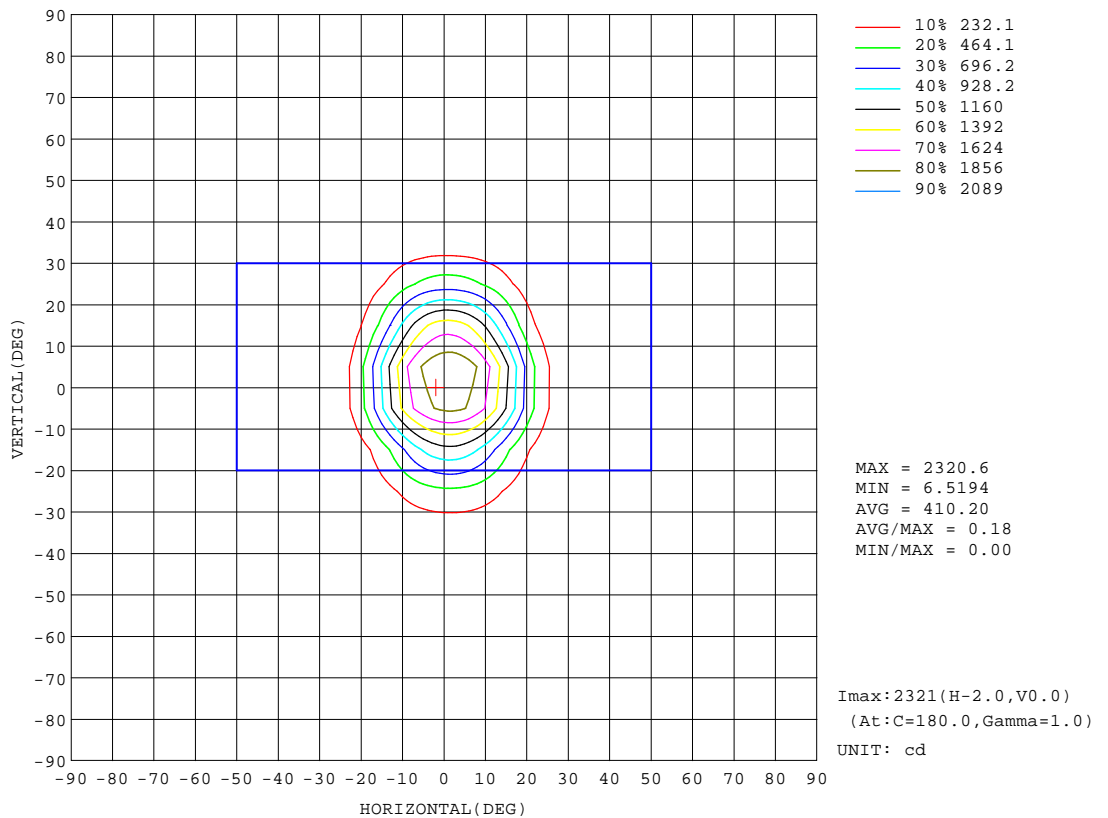


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:AED
 Test Date:2023-06-30

V(B) Range:-45 - 45DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


| | | |
|--|------------------------|---------------------|
| Test:U:220.33V I:0.1073A P:11.403W PF:0.4823 Freq:50.00Hz Lamp Flux:729.916x1 lm | | |
| NAME: 6461 | TYPE:Indoor Lighting | WEIGHT:0.3kg |
| SPEC.:12W | DIM.: $\phi 4.7*10*15$ | SERIAL No.:12 |
| MFR.: NORDECOR | SUR.:3cm | Shielding Angle:24° |

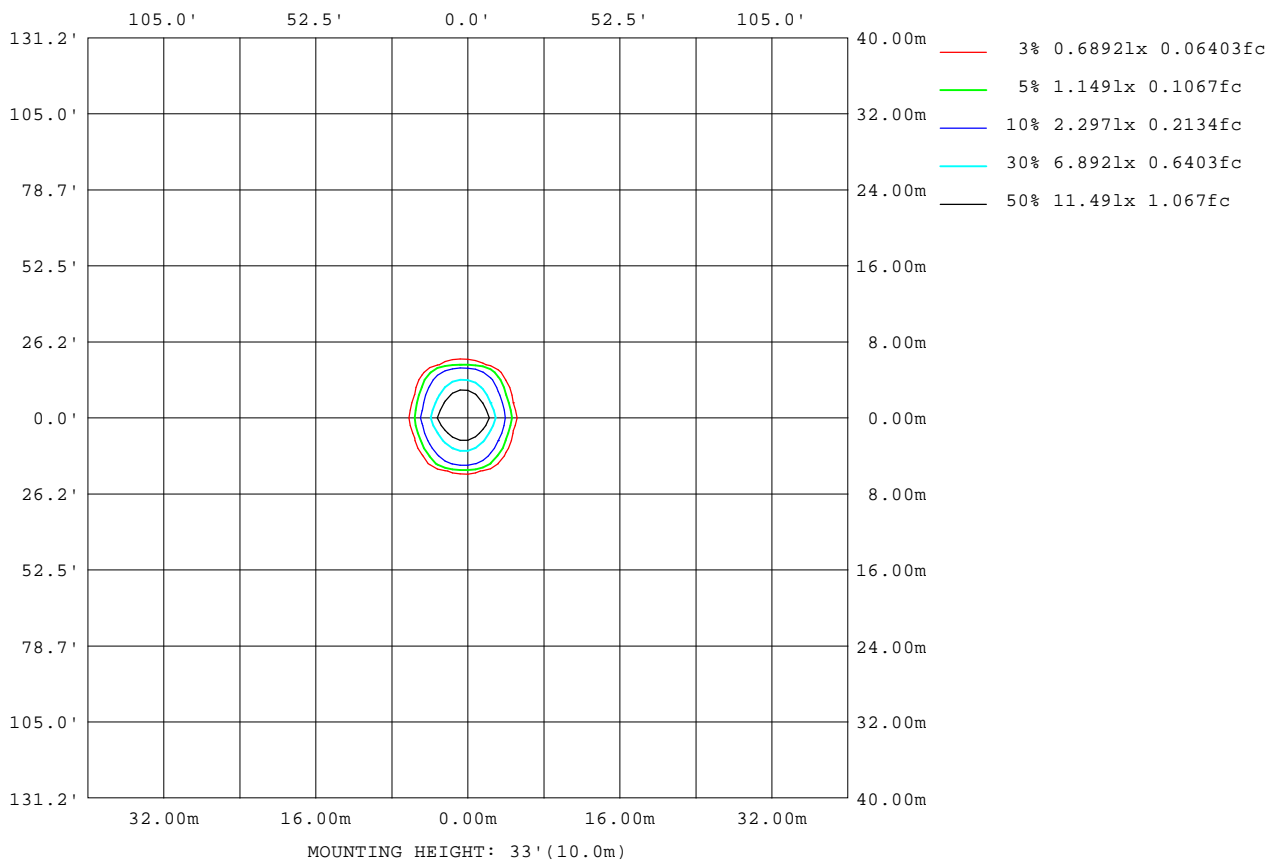

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2023-06-30

V(B) Range:-45 - 45DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

Planar Illuminance Curve

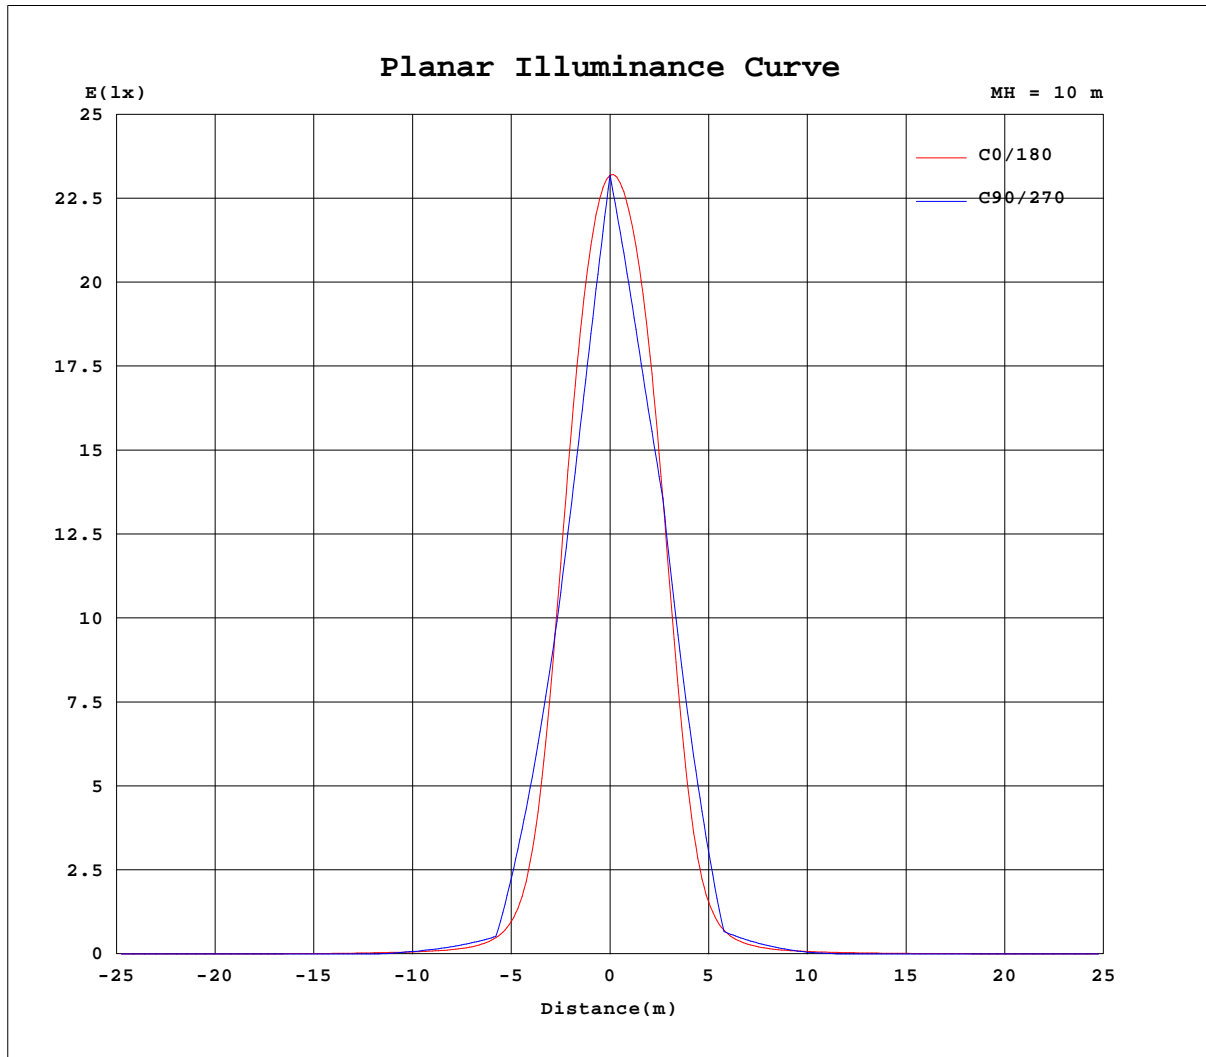


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2023-06-30

V(B) Range:-45 - 45DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

AAI Figure

| | | |
|--|----------------------|---------------------|
| Test:U:220.33V I:0.1073A P:11.403W PF:0.4823 Freq:50.00Hz Lamp Flux:729.916x1 lm | | |
| NAME: 6461 | TYPE:Indoor Lighting | WEIGHT:0.3kg |
| SPEC.:12W | DIM.: φ4.7*10*15 | SERIAL No.:12 |
| MFR.: NORDECOR | SUR.:3cm | Shielding Angle:24° |

Flux out:403.8 lm

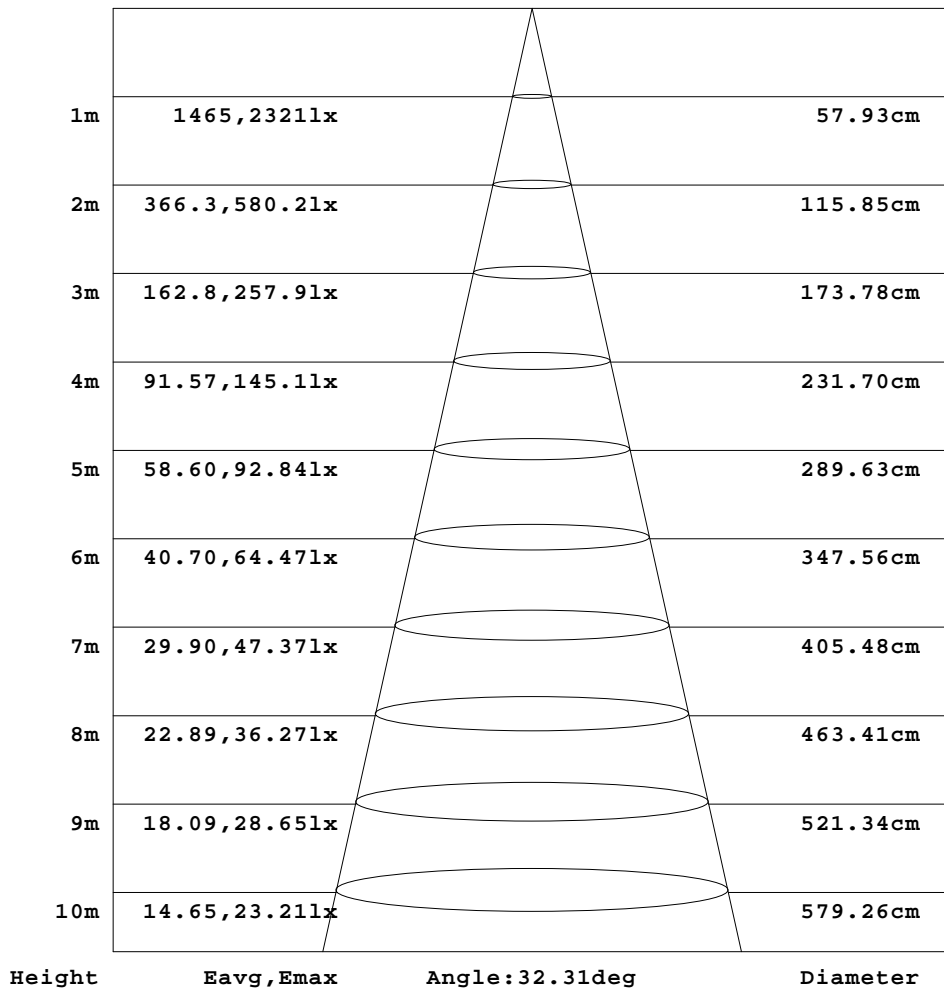

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2023-06-30

V(B) Range:-45 - 45DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

| | | |
|--|----------------------|---------------------|
| Test:U:220.33V I:0.1073A P:11.403W PF:0.4823 Freq:50.00Hz Lamp Flux:729.916x1 lm | | |
| NAME: 6461 | TYPE:Indoor Lighting | WEIGHT:0.3kg |
| SPEC.:12W | DIM.: φ4.7*10*15 | SERIAL No.:12 |
| MFR.: NORDECOR | SUR.:3cm | Shielding Angle:24° |

Table--1

UNIT: cd

| H(DEG) V(DEG) | -90 | -85 | -80 | -75 | -70 | -65 | -60 | -55 | -50 | -45 | -40 | -35 | -30 | -25 | -20 | -15 | -10 | -5 | 0 |
|--------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| -90 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| -85 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| -80 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| -75 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| -70 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| -65 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| -60 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| -55 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| -50 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| -45 | 0.27 | 0.27 | 0.33 | 0.35 | 0.44 | 0.76 | 1.09 | 1.44 | 2.29 | 4.27 | 6.52 | 8.91 | 11.3 | 13.6 | 15.8 | 17.8 | 19.6 | 20.8 | 21.5 |
| -40 | 0.42 | 0.49 | 0.55 | 0.73 | 1.07 | 1.46 | 2.34 | 3.65 | 5.81 | 8.15 | 10.7 | 13.6 | 17.0 | 21.2 | 26.4 | 32.0 | 37.2 | 40.7 | 41.2 |
| -35 | 0.49 | 0.57 | 0.68 | 0.79 | 1.13 | 1.55 | 2.03 | 3.67 | 5.80 | 8.27 | 10.8 | 13.5 | 17.1 | 21.9 | 28.6 | 37.2 | 46.7 | 55.3 | 60.6 |
| -30 | 0.70 | 0.83 | 0.98 | 1.36 | 1.85 | 2.33 | 4.25 | 7.00 | 9.74 | 12.3 | 15.2 | 19.0 | 24.6 | 32.9 | 44.3 | 57.6 | 70.4 | 79.1 | 80.5 |
| -25 | 0.69 | 0.80 | 0.96 | 1.20 | 1.77 | 2.36 | 3.54 | 6.25 | 9.26 | 12.2 | 15.4 | 20.0 | 28.4 | 44.4 | 78.0 | 151 | 263 | 365 | 417 |
| -20 | 0.83 | 1.03 | 1.30 | 1.93 | 2.63 | 4.06 | 7.05 | 10.3 | 13.4 | 17.0 | 22.5 | 33.6 | 56.0 | 105 | 222 | 420 | 626 | 743 | 740 |
| -15 | 0.87 | 0.94 | 1.18 | 1.57 | 2.37 | 3.18 | 5.60 | 9.18 | 12.7 | 16.0 | 20.4 | 28.4 | 45.4 | 81.2 | 164 | 360 | 667 | 951 | 1090 |
| -10 | 0.94 | 1.19 | 1.55 | 2.35 | 3.20 | 5.41 | 9.13 | 12.8 | 16.2 | 20.8 | 29.4 | 48.8 | 96.8 | 233 | 546 | 964 | 1305 | 1482 | 1479 |
| -5 | 0.85 | 1.03 | 1.31 | 1.78 | 2.65 | 3.62 | 6.64 | 10.6 | 14.3 | 18.0 | 23.8 | 36.0 | 64.6 | 147 | 398 | 894 | 1419 | 1758 | 1904 |
| 0 | 1.02 | 1.30 | 1.73 | 2.61 | 3.56 | 6.37 | 10.5 | 14.4 | 18.1 | 23.9 | 35.9 | 64.5 | 147 | 418 | 1018 | 1687 | 2110 | 2296 | 2297 |
| 5 | 0.79 | 1.03 | 1.31 | 1.81 | 2.68 | 3.67 | 6.81 | 10.8 | 14.4 | 18.0 | 23.8 | 36.0 | 65.1 | 151 | 419 | 951 | 1518 | 1887 | 2042 |
| 10 | 0.94 | 1.20 | 1.58 | 2.41 | 3.27 | 5.74 | 9.55 | 13.1 | 16.2 | 20.7 | 29.5 | 49.3 | 102 | 266 | 645 | 1144 | 1555 | 1758 | 1738 |
| 15 | 0.71 | 0.94 | 1.20 | 1.65 | 2.47 | 3.33 | 6.12 | 9.80 | 13.0 | 15.9 | 20.2 | 28.5 | 46.9 | 92.8 | 229 | 531 | 962 | 1337 | 1502 |
| 20 | 0.83 | 1.05 | 1.36 | 2.06 | 2.78 | 4.55 | 7.81 | 10.9 | 13.5 | 16.7 | 22.2 | 33.8 | 61.3 | 139 | 322 | 606 | 882 | 1027 | 1006 |
| 25 | 0.62 | 0.80 | 1.00 | 1.30 | 1.94 | 2.56 | 4.19 | 7.13 | 9.88 | 12.2 | 14.8 | 19.3 | 28.2 | 48.5 | 102 | 214 | 372 | 510 | 571 |
| 30 | 0.71 | 0.87 | 1.07 | 1.57 | 2.08 | 2.82 | 5.27 | 7.86 | 10.0 | 11.7 | 14.1 | 17.8 | 24.5 | 35.6 | 52.0 | 72.3 | 93.0 | 105 | 101 |
| 35 | 0.50 | 0.60 | 0.73 | 0.90 | 1.33 | 1.76 | 2.56 | 4.44 | 6.69 | 8.66 | 10.4 | 12.6 | 15.8 | 21.2 | 29.8 | 41.7 | 56.0 | 69.5 | 75.4 |
| 40 | 0.46 | 0.53 | 0.64 | 0.89 | 1.28 | 1.72 | 2.77 | 4.64 | 6.59 | 8.34 | 10.1 | 12.2 | 15.3 | 19.9 | 26.3 | 33.8 | 41.3 | 45.4 | 44.3 |
| 45 | 0.34 | 0.34 | 0.39 | 0.43 | 0.62 | 0.93 | 1.23 | 1.72 | 3.40 | 5.25 | 6.97 | 8.43 | 9.70 | 11.0 | 12.3 | 13.6 | 14.8 | 15.6 | 15.9 |
| 50 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 55 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 60 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 65 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 70 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 75 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 80 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 85 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 90 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

H(h) Range:-90 - 90DEG
H(h) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2023-06-30

V(B) Range:-45 - 45DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

| | | |
|--|----------------------|---------------------|
| Test:U:220.33V I:0.1073A P:11.403W PF:0.4823 Freq:50.00Hz Lamp Flux:729.916x1 lm | | |
| NAME: 6461 | TYPE:Indoor Lighting | WEIGHT:0.3kg |
| SPEC.:12W | DIM.: φ4.7*10*15 | SERIAL No.:12 |
| MFR.: NORDECOR | SUR.:3cm | Shielding Angle:24° |

Table--2

UNIT: cd

| H(DEG) V(DEG) | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 65 | 70 | 75 | 80 | 85 | 90 |
|--------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| -90 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| -85 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| -80 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| -75 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| -70 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| -65 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| -60 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| -55 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| -50 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| -45 | 21.6 | 20.9 | 19.4 | 17.5 | 15.1 | 12.5 | 9.80 | 7.10 | 4.48 | 2.08 | 1.02 | 0.68 | 0.30 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| -40 | 38.4 | 33.2 | 27.3 | 21.9 | 17.4 | 13.7 | 10.4 | 7.45 | 4.67 | 2.59 | 1.32 | 0.66 | 0.27 | 0.11 | 0.06 | 0.06 | 0.06 | 0.06 |
| -35 | 60.3 | 54.2 | 44.6 | 34.8 | 26.7 | 20.7 | 16.2 | 12.5 | 9.28 | 6.22 | 3.62 | 1.53 | 0.85 | 0.46 | 0.17 | 0.12 | 0.11 | 0.11 |
| -30 | 73.2 | 60.1 | 46.1 | 34.4 | 26.0 | 20.4 | 16.0 | 12.4 | 8.96 | 5.59 | 2.47 | 1.22 | 0.78 | 0.32 | 0.19 | 0.17 | 0.17 | 0.17 |
| -25 | 402 | 324 | 211 | 115 | 62.6 | 36.9 | 24.9 | 18.3 | 13.9 | 10.2 | 6.62 | 3.28 | 1.63 | 1.08 | 0.59 | 0.44 | 0.41 | 0.37 |
| -20 | 615 | 408 | 216 | 106 | 55.1 | 33.0 | 22.7 | 17.1 | 12.9 | 9.10 | 5.31 | 2.45 | 1.58 | 1.01 | 0.71 | 0.66 | 0.59 | 0.48 |
| -15 | 1046 | 831 | 518 | 259 | 123 | 61.2 | 35.9 | 24.5 | 18.4 | 14.1 | 10.0 | 5.93 | 2.63 | 1.84 | 1.24 | 0.95 | 0.88 | 0.77 |
| -10 | 1283 | 921 | 510 | 223 | 92.1 | 46.7 | 28.8 | 20.6 | 15.7 | 11.6 | 7.38 | 3.51 | 2.14 | 1.53 | 1.12 | 1.04 | 0.93 | 0.74 |
| -5 | 1863 | 1612 | 1155 | 619 | 248 | 96.8 | 47.8 | 28.9 | 20.5 | 15.7 | 11.5 | 7.16 | 3.33 | 2.17 | 1.57 | 1.26 | 1.18 | 1.02 |
| 0 | 2076 | 1599 | 929 | 384 | 137 | 61.3 | 34.2 | 22.9 | 17.4 | 13.1 | 8.68 | 4.39 | 2.46 | 1.86 | 1.43 | 1.34 | 1.18 | 0.95 |
| 5 | 1990 | 1715 | 1223 | 645 | 255 | 99.6 | 48.8 | 28.9 | 20.3 | 15.6 | 11.6 | 7.32 | 3.42 | 2.21 | 1.60 | 1.29 | 1.21 | 1.05 |
| 10 | 1500 | 1071 | 578 | 240 | 98.4 | 49.3 | 29.1 | 20.2 | 15.5 | 11.8 | 7.69 | 3.78 | 2.22 | 1.60 | 1.18 | 1.10 | 0.99 | 0.82 |
| 15 | 1424 | 1140 | 721 | 339 | 143 | 69.4 | 38.9 | 24.5 | 17.8 | 13.9 | 10.4 | 6.40 | 2.91 | 1.98 | 1.34 | 1.03 | 0.97 | 0.86 |
| 20 | 837 | 560 | 285 | 124 | 60.8 | 35.0 | 22.5 | 16.5 | 12.9 | 9.57 | 5.93 | 2.76 | 1.72 | 1.13 | 0.78 | 0.72 | 0.64 | 0.55 |
| 25 | 541 | 435 | 282 | 144 | 69.1 | 38.5 | 24.5 | 17.4 | 13.5 | 10.5 | 7.38 | 4.00 | 1.81 | 1.24 | 0.69 | 0.49 | 0.44 | 0.39 |
| 30 | 85.8 | 66.7 | 49.2 | 34.8 | 24.6 | 18.2 | 14.5 | 11.9 | 9.40 | 6.52 | 3.38 | 1.34 | 0.96 | 0.44 | 0.23 | 0.19 | 0.15 | 0.15 |
| 35 | 71.1 | 59.7 | 46.8 | 35.1 | 25.6 | 18.9 | 14.6 | 11.8 | 9.44 | 7.03 | 4.36 | 2.08 | 0.96 | 0.58 | 0.24 | 0.15 | 0.12 | 0.10 |
| 40 | 38.8 | 31.9 | 25.3 | 19.7 | 15.4 | 12.4 | 10.1 | 7.95 | 5.69 | 3.28 | 1.59 | 0.73 | 0.35 | 0.15 | 0.08 | 0.06 | 0.05 | 0.05 |
| 45 | 15.8 | 15.2 | 14.2 | 13.1 | 11.9 | 10.6 | 9.20 | 7.54 | 5.59 | 3.38 | 1.29 | 0.64 | 0.36 | 0.01 | 0.00 | 0.00 | 0.00 | 0.00 |
| 50 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 55 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 60 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 65 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 70 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 75 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 80 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 85 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |
| 90 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

H(h) Range:-90 - 90DEG
H(h) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2023-06-30

V(B) Range:-45 - 45DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks: