

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		1893.4 cd per klm. 0.0 degrees vertical -7.0 degrees horizontal
Beam Spread	At 10% of Imax	75.2V x 78.5H
	At 50% of Imax	36.9V x 38.2H
	At 90% of Imax	11.6V x 14.5H
Beam Flux	Total	998.4 lumens per klm.
	To 10% of Imax	880.6 lumens per klm.
	To 50% of Imax	403.0 lumens per klm.
	To 90% of Imax	43.5 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	99.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2023-06-30

V(B) Range:-45 - 45DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.30V I:0.1048A P:11.032W PF:0.4780 Freq:50.00Hz Lamp Flux:339.372x1 lm		
NAME: 6472	TYPE:Indoor Lighting	WEIGHT:0.23kg
SPEC.:12W	DIM.: φ8.5*7.6*6.4	SERIAL No.:14
MFR.: NORDECOR	SUR.:3.7cm	Shielding Angle:38°

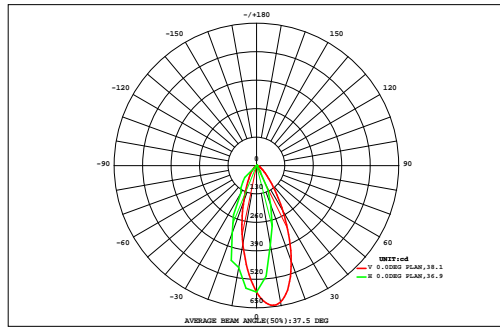

DATA OF LAMP		Eff:30.76lm/W	
MODEL		Imax(cd)	642.6
NOMINAL POWER(W)	12W	AVAILABILITY(%)	90.1
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	305.9
NOMINAL FLUX(lm)	339.372	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	339.4
TEST VOLTAGE(V)	220.2	q @50%(H,V)	38,37DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	90	80	70	60	50	40	30	20	10	0	10	20	30	40	50	60	70	80	90	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
40	0.00	0.02	0.10	0.29	0.58	0.98	1.38	1.67	1.78	1.69	1.44	1.09	0.71	0.40	0.18	0.06	0.01	0.00	12.4	10.1
30	0.00	0.04	0.18	0.48	1.01	1.81	2.78	3.59	3.86	3.49	2.70	1.81	1.06	0.54	0.23	0.07	0.01	0.00	23.7	19.0
20	0.00	0.04	0.20	0.54	1.21	2.40	4.23	6.20	7.12	6.17	4.20	2.43	1.27	0.60	0.23	0.07	0.01	0.00	36.9	33.2
10	0.00	0.04	0.20	0.58	1.43	3.32	7.00	11.6	13.9	11.4	6.84	3.41	1.54	0.65	0.24	0.06	0.01	0.00	62.2	59.1
0	0.00	0.04	0.19	0.56	1.43	3.60	8.16	14.3	17.3	14.1	8.06	3.63	1.50	0.60	0.21	0.05	0.01	0.00	73.8	70.7
-10	0.00	0.04	0.17	0.50	1.29	3.37	7.90	14.0	16.9	13.5	7.50	3.22	1.30	0.51	0.18	0.04	0.01	0.00	70.5	67.4
-20	0.00	0.03	0.13	0.36	0.84	2.01	4.40	7.44	8.69	6.82	3.84	1.77	0.79	0.34	0.12	0.02	0.00	0.00	37.6	33.8
-30	0.00	0.02	0.09	0.23	0.48	1.04	2.12	3.40	3.85	3.00	1.73	0.85	0.41	0.19	0.06	0.01	0.00	0.00	17.5	12.5
-40	0.00	0.01	0.05	0.11	0.20	0.32	0.47	0.59	0.62	0.52	0.36	0.22	0.13	0.07	0.02	0.00	0.00	0.00	3.67	0.00
-50	0.00	0.00	0.02	0.05	0.08	0.12	0.18	0.22	0.21	0.15	0.09	0.05	0.03	0.01	0.00	0.00	0.00	0.00	1.21	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL(DEG)	20	30	40	50	60	70	80	90			
F t	0.03	0.27	1.32	3.69	8.56	19.0	38.6	63.0	74.2	60.9	36.8	18.5	8.74	3.90	1.46	0.38	0.06	0.00	339	---
F a	0.00	0.00	0.00	0.00	3.26	16.8	37.4	61.9	73.3	60.1	35.3	15.3	2.52	0.00	0.00	0.00	0.00	0.00	---	306


one-half-peak spread: U:14.7,D:22.5 , L:19.3,R:19.1 NEMA Beam Type: Type 5

H(h) Range:-90 - 90DEG
H(h) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2023-06-30

V(B) Range:-45 - 45DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.30V I:0.1048A P:11.032W PF:0.4780 Freq:50.00Hz Lamp Flux:339.372x1 lm		
NAME: 6472	TYPE:Indoor Lighting	WEIGHT:0.23kg
SPEC.:12W	DIM.: φ8.5*7.6*6.4	SERIAL No.:14
MFR.: NORDECOR	SUR.:3.7cm	Shielding Angle:38°

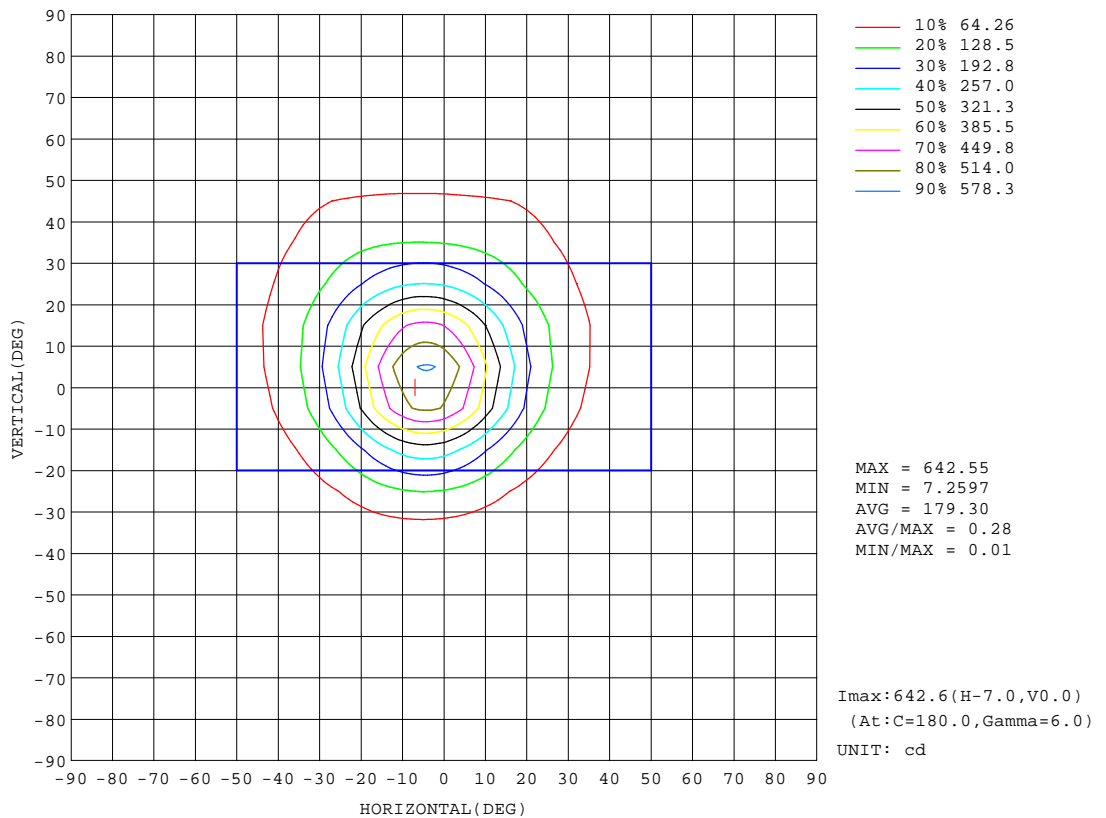


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2023-06-30

V(B) Range:-45 - 45DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.30V I:0.1048A P:11.032W PF:0.4780 Freq:50.00Hz Lamp Flux:339.372x1 lm		
NAME: 6472	TYPE:Indoor Lighting	WEIGHT:0.23kg
SPEC.:12W	DIM.: φ8.5*7.6*6.4	SERIAL No.:14
MFR.: NORDECOR	SUR.:3.7cm	Shielding Angle:38°

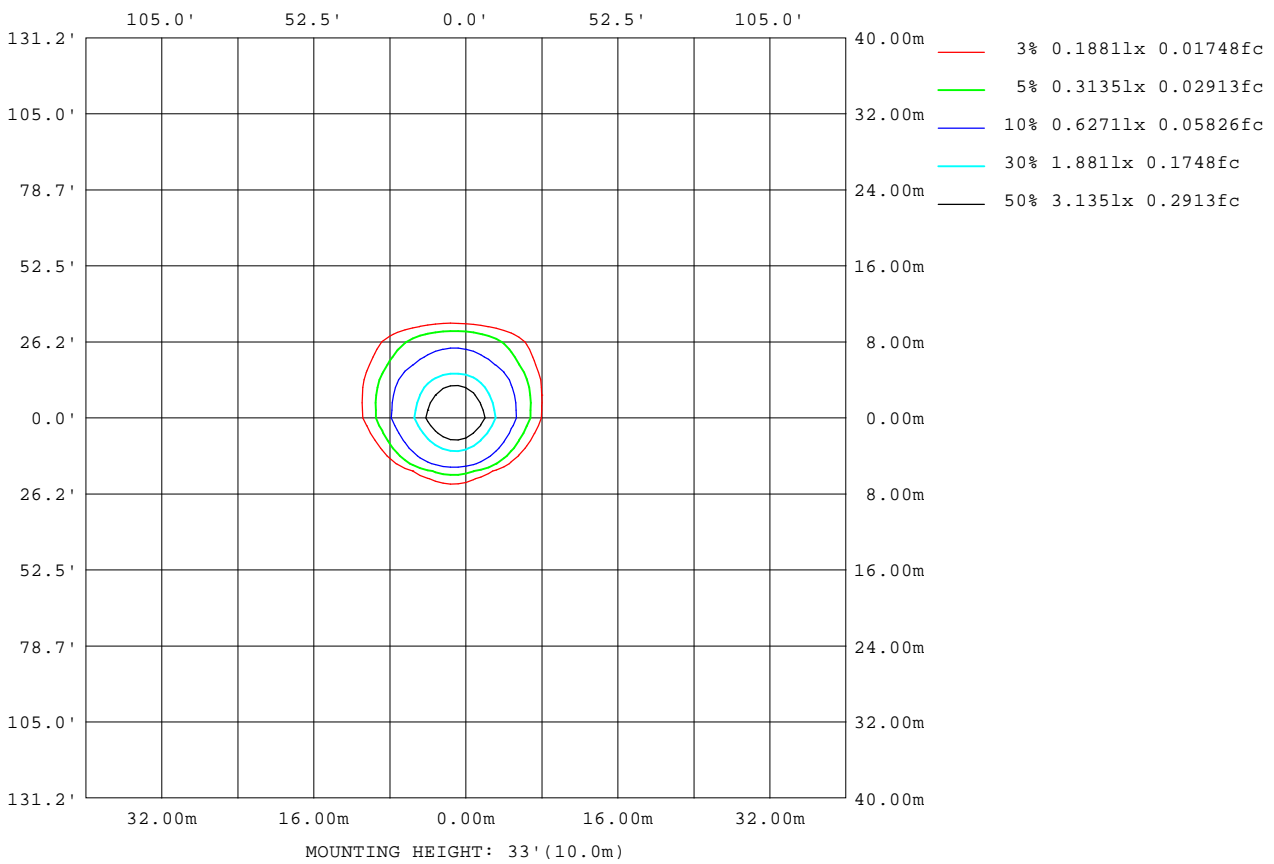

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:AED
 Test Date:2023-06-30

V(B) Range:-45 - 45DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

Planar Illuminance Curve

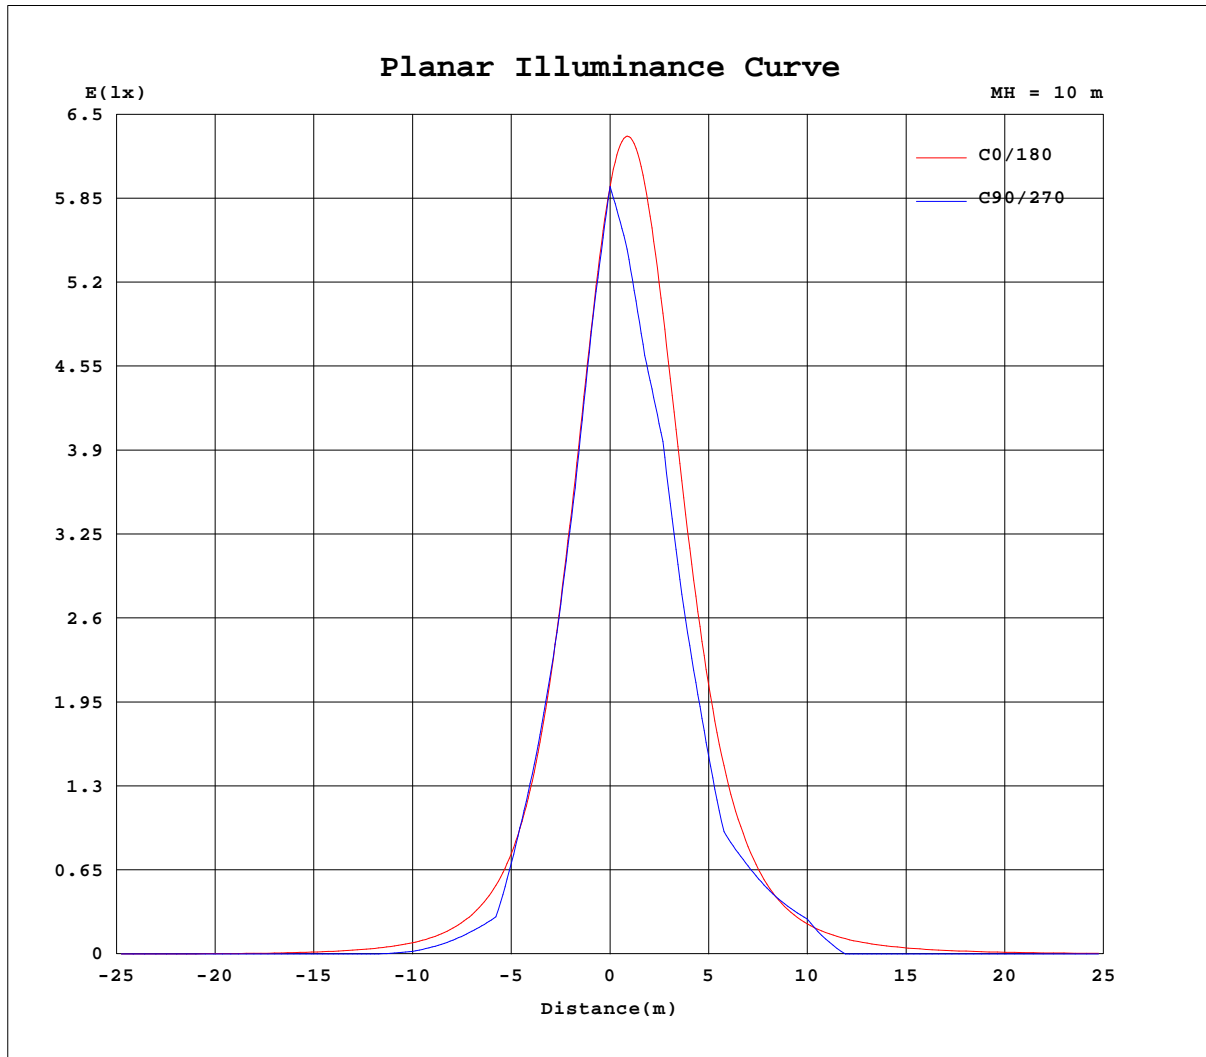


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2023-06-30

V(β) Range:-45 - 45DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.30V I:0.1048A P:11.032W PF:0.4780 Freq:50.00Hz Lamp Flux:339.372x1 lm		
NAME: 6472	TYPE:Indoor Lighting	WEIGHT:0.23kg
SPEC.:12W	DIM.: φ8.5*7.6*6.4	SERIAL No.:14
MFR.: NORDECOR	SUR.:3.7cm	Shielding Angle:38°

Flux out:128.4 lm

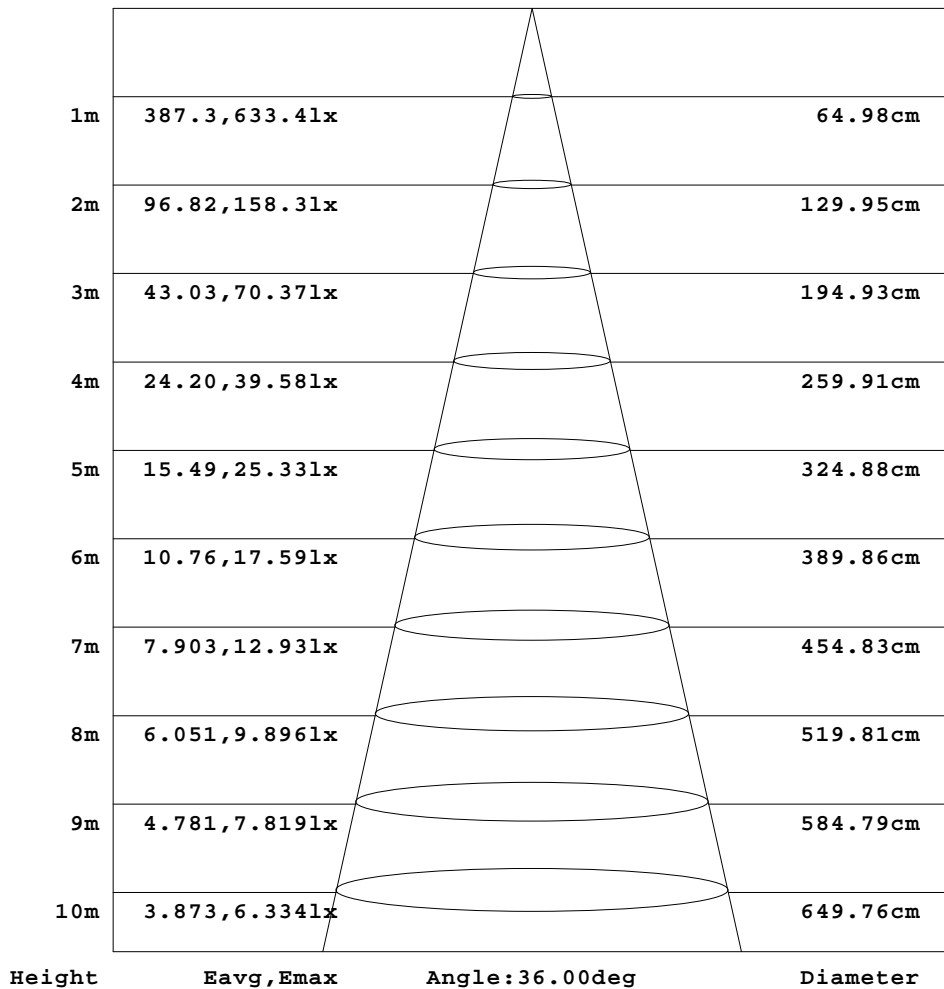

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2023-06-30

V(B) Range:-45 - 45DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.30V I:0.1048A P:11.032W PF:0.4780 Freq:50.00Hz Lamp Flux:339.372x1 lm		
NAME: 6472	TYPE:Indoor Lighting	WEIGHT:0.23kg
SPEC.:12W	DIM.: φ8.5*7.6*6.4	SERIAL No.:14
MFR.: NORDECOR	SUR.:3.7cm	Shielding Angle:38°

Table--1

UNIT: cd

H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	0.00	0.03	0.17	0.21	0.37	1.08	1.74	2.30	2.85	3.24	3.59	3.98	4.46	5.02	5.54	5.93	6.11	6.12	5.77
-40	0.00	0.26	0.39	0.70	1.67	2.74	3.79	4.90	5.83	6.88	8.29	10.1	12.4	15.0	17.5	19.4	20.2	19.8	18.1
-35	0.00	0.25	0.47	0.64	1.69	3.14	4.64	6.20	7.68	9.19	11.2	13.9	17.6	21.9	26.5	30.7	33.5	34.2	32.7
-30	0.00	0.54	0.73	1.67	3.43	5.27	7.36	9.36	11.3	13.7	17.2	21.8	27.7	34.3	40.8	45.9	48.3	47.4	43.5
-25	0.00	0.45	0.79	1.26	3.19	5.51	8.19	11.3	14.7	19.1	25.5	34.9	48.4	66.1	86.9	108	124	130	125
-20	0.00	0.79	1.15	2.97	5.69	8.84	12.7	17.3	23.0	31.5	44.2	63.0	89.3	122	159	190	209	209	190
-15	0.00	0.63	1.10	2.06	4.85	8.21	12.4	17.6	23.9	33.0	46.5	66.9	96.9	138	187	237	276	293	282
-10	0.05	1.04	1.60	4.16	7.81	12.3	17.9	25.4	35.4	50.7	74.5	111	161	227	300	365	404	405	368
-5	0.04	0.78	1.42	2.75	6.25	10.7	16.3	23.7	33.9	48.7	71.6	108	160	234	325	419	493	526	507
0	0.15	1.28	2.08	5.24	9.81	15.5	22.9	33.6	48.5	71.3	108	164	243	348	465	569	633	636	578
5	0.04	0.86	1.67	3.18	7.17	12.4	18.9	27.5	39.8	57.3	84.0	125	184	266	367	467	548	583	563
10	0.09	1.39	2.33	5.53	10.5	16.7	24.5	35.2	50.3	72.2	105	153	219	303	392	470	518	519	473
15	0.01	0.87	1.87	3.36	7.61	13.3	20.2	29.1	41.6	58.7	83.7	119	169	234	312	383	441	466	449
20	0.05	1.49	2.59	5.53	10.6	16.9	24.6	34.5	48.2	66.9	92.3	127	173	228	283	330	359	358	328
25	0.00	0.87	2.00	3.40	7.14	12.6	19.3	27.3	37.5	51.0	68.7	90.9	120	154	191	223	248	258	249
30	0.01	1.57	2.86	5.22	9.96	16.1	23.3	31.6	42.1	55.3	70.3	87.7	106	124	139	149	154	152	144
35	0.00	0.79	2.02	3.48	6.56	11.5	17.7	24.8	33.1	43.3	55.5	68.6	83.5	97.9	111	121	127	129	125
40	0.00	1.44	2.85	4.97	8.78	14.1	20.4	27.6	35.9	45.5	56.0	67.3	78.3	88.2	96.2	102	104	103	98.4
45	0.00	0.64	1.92	3.58	5.87	9.98	15.3	21.5	28.4	35.8	43.8	52.2	60.1	66.8	72.4	76.2	78.2	78.6	77.2
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(h) Range:-90 - 90DEG
H(h) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2023-06-30

V(B) Range:-45 - 45DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.30V I:0.1048A P:11.032W PF:0.4780 Freq:50.00Hz Lamp Flux:339.372x1 lm		
NAME: 6472	TYPE:Indoor Lighting	WEIGHT:0.23kg
SPEC.:12W	DIM.: φ8.5*7.6*6.4	SERIAL No.:14
MFR.: NORDECOR	SUR.:3.7cm	Shielding Angle:38°

Table--2

UNIT: cd

H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	5.19	4.46	3.69	2.94	2.27	1.70	1.24	0.77	0.45	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	15.6	12.8	10.2	7.85	6.02	4.64	3.56	2.64	1.78	1.03	0.52	0.14	0.09	0.02	0.00	0.00	0.00	0.00
-35	29.2	24.6	19.7	15.4	11.8	9.14	7.13	5.57	4.16	2.77	1.64	0.67	0.19	0.18	0.00	0.00	0.00	0.00
-30	37.4	30.4	24.0	18.5	14.2	11.1	8.76	6.79	4.87	3.09	1.55	0.42	0.26	0.05	0.00	0.00	0.00	0.00
-25	110	88.9	67.8	49.5	35.4	25.4	18.6	13.7	9.94	6.76	4.21	2.10	0.79	0.54	0.19	0.01	0.00	0.00
-20	158	122	88.8	62.5	43.7	30.9	22.1	16.0	11.1	7.26	4.23	1.89	0.90	0.54	0.14	0.00	0.00	0.00
-15	246	197	148	105	72.9	50.5	35.5	25.2	17.8	12.1	7.70	4.29	1.80	1.07	0.57	0.02	0.00	0.00
-10	304	233	167	114	76.8	52.4	36.2	25.1	17.1	11.3	6.89	3.40	1.66	1.13	0.41	0.00	0.00	0.00
-5	443	353	263	182	122	81.2	55.1	37.6	25.4	17.1	11.1	6.45	3.02	1.88	1.15	0.25	0.00	0.00
0	478	363	258	173	114	75.7	51.1	34.3	23.0	15.3	9.53	4.95	2.53	1.82	0.81	0.00	0.00	0.00
5	493	395	296	207	141	95.4	65.1	44.5	30.1	20.5	13.5	7.96	4.03	2.64	1.59	0.36	0.00	0.00
10	394	305	223	158	109	75.7	52.4	36.0	24.9	16.9	10.6	5.74	3.43	2.25	0.90	0.00	0.00	0.00
15	395	321	246	179	131	93.1	65.6	45.9	32.0	22.4	14.9	8.82	4.83	3.33	1.87	0.36	0.00	0.00
20	279	223	170	127	93.5	68.1	49.1	35.1	25.1	17.3	11.0	6.50	4.10	2.44	0.79	0.00	0.00	0.00
25	224	191	155	121	94.4	71.9	53.9	40.1	29.5	21.2	14.4	9.11	5.66	3.54	1.67	0.14	0.00	0.00
30	131	116	99.4	82.5	67.0	53.1	41.2	31.6	23.6	16.6	11.0	7.22	4.55	2.38	0.49	0.00	0.00	0.00
35	118	107	94.8	81.4	68.3	55.9	44.7	35.1	26.9	19.9	14.0	9.21	5.89	3.35	1.26	0.02	0.00	0.00
40	91.9	83.7	74.5	64.5	54.4	44.9	36.1	28.4	21.7	15.9	10.9	6.97	4.03	1.72	0.16	0.00	0.00	0.00
45	74.4	70.5	65.4	59.5	52.6	45.2	37.9	30.8	24.3	18.5	13.6	9.12	5.52	2.75	0.65	0.00	0.00	0.00
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2023-06-30

V(B) Range:-45 - 45DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks: