

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		923.6 cd per klm. 10.0 degrees vertical -1.0 degrees horizontal
Beam Spread	At 10% of Imax	91.6V x 90.1H
	At 50% of Imax	65.2V x 66.0H
	At 90% of Imax	30.4V x 30.7H
Beam Flux	Total	999.0 lumens per klm.
	To 10% of Imax	930.0 lumens per klm.
	To 50% of Imax	707.8 lumens per klm.
	To 90% of Imax	190.6 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:NORDECOR  
Test Date:2024-09-06

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.07V I:0.0340A P:3.2305W PF:0.4316 Freq:50.00Hz Lamp Flux:161.84x1 lm		
NAME: 6004	TYPE:	WEIGHT:58g
SPEC.:3W	DIM.:	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:

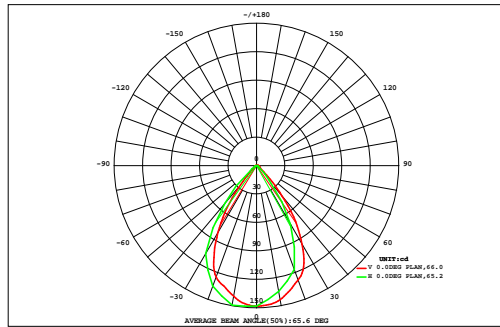

DATA OF LAMP		Eff:50.10lm/W	
MODEL		Imax(cd)	149.5
NOMINAL POWER(W)		AVAILABILITY(%)	93.4
RATED VOLTAGE(V)		Avai. FLUX(lm)	151.1
NOMINAL FLUX(lm)	161.84	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	161.8
TEST VOLTAGE(V)	0	q @50%(H,V)	66,65DEG

VERTICAL( DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a	
	90	80	70	60	50	40	30	20	10	0	10	20	30	40	50	60	70	80	90		
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
80	0.00	0.01	0.02	0.02	0.03	0.04	0.04	0.05	0.05	0.05	0.04	0.04	0.03	0.03	0.02	0.02	0.01	0.00	0.50	0.00	
70	0.00	0.01	0.01	0.02	0.03	0.04	0.06	0.07	0.07	0.06	0.06	0.05	0.04	0.03	0.02	0.01	0.01	0.00	0.60	0.00	
60	0.00	0.01	0.02	0.03	0.05	0.07	0.10	0.13	0.17	0.16	0.12	0.09	0.06	0.05	0.03	0.02	0.01	0.00	1.11	0.00	
50	0.00	0.01	0.02	0.04	0.07	0.12	0.29	0.55	0.77	0.77	0.55	0.27	0.11	0.06	0.04	0.02	0.01	0.00	3.70	2.37	
40	0.00	0.01	0.02	0.05	0.10	0.35	1.01	1.79	2.30	2.30	1.77	0.95	0.31	0.08	0.04	0.02	0.01	0.00	11.1	10.4	
30	0.00	0.01	0.03	0.06	0.19	0.86	2.11	3.18	3.71	3.69	3.12	2.00	0.77	0.15	0.05	0.03	0.01	0.00	20.0	19.5	
20	0.00	0.01	0.03	0.07	0.32	1.40	2.88	3.88	4.31	4.31	3.85	2.77	1.28	0.25	0.06	0.03	0.01	0.00	25.5	25.0	
10	0.00	0.01	0.03	0.08	0.42	1.66	3.15	4.00	4.50	4.49	3.97	3.06	1.50	0.32	0.06	0.03	0.01	0.00	27.3	26.9	
0	0.00	0.01	0.03	0.08	0.40	1.56	2.99	3.86	4.29	4.27	3.82	2.89	1.39	0.28	0.06	0.03	0.01	0.00	26.0	25.6	
-10	0.00	0.01	0.03	0.06	0.29	1.17	2.46	3.39	3.80	3.76	3.33	2.29	0.95	0.18	0.05	0.03	0.01	0.00	21.8	21.3	
-20	0.00	0.01	0.02	0.05	0.15	0.61	1.53	2.44	2.92	2.87	2.31	1.35	0.43	0.09	0.04	0.02	0.01	0.00	14.9	14.3	
-30	0.00	0.01	0.02	0.04	0.07	0.20	0.60	1.10	1.42	1.34	0.96	0.43	0.13	0.06	0.04	0.02	0.01	0.00	6.45	5.66	
-40	0.00	0.01	0.02	0.03	0.04	0.07	0.11	0.20	0.26	0.24	0.17	0.09	0.06	0.05	0.03	0.02	0.01	0.00	1.41	0.13	
-50	0.00	0.01	0.01	0.02	0.03	0.05	0.05	0.06	0.06	0.06	0.06	0.06	0.06	0.05	0.04	0.02	0.01	0.01	0.00	0.61	0.00
-60	0.00	0.01	0.01	0.02	0.02	0.03	0.04	0.05	0.05	0.06	0.05	0.05	0.04	0.03	0.02	0.01	0.01	0.00	0.50	0.00	
-70	0.00	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.04	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.35	0.00	
-80	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.14	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
F t	0.04	0.15	0.33	0.68	2.25	8.25	17.5	24.8	28.7	28.5	24.2	16.4	7.20	1.72	0.60	0.32	0.13	0.04	162	---	
F a	0.00	0.00	0.00	0.00	1.07	7.40	16.8	24.1	27.9	27.7	23.6	15.7	6.35	0.59	0.00	0.00	0.00	0.00	---	151	


one-half-peak spread: U:39.5,D:26.0 , L:34.7,R:31.6 NEMA Beam Type: Type 5

H(h) Range:-90 - 90DEG  
H(h) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:NORDECOR  
Test Date:2024-09-06

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.07V I:0.0340A P:3.2305W PF:0.4316 Freq:50.00Hz Lamp Flux:161.84x1 lm		
NAME: 6004	TYPE:	WEIGHT:58g
SPEC.:3W	DIM.:	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:

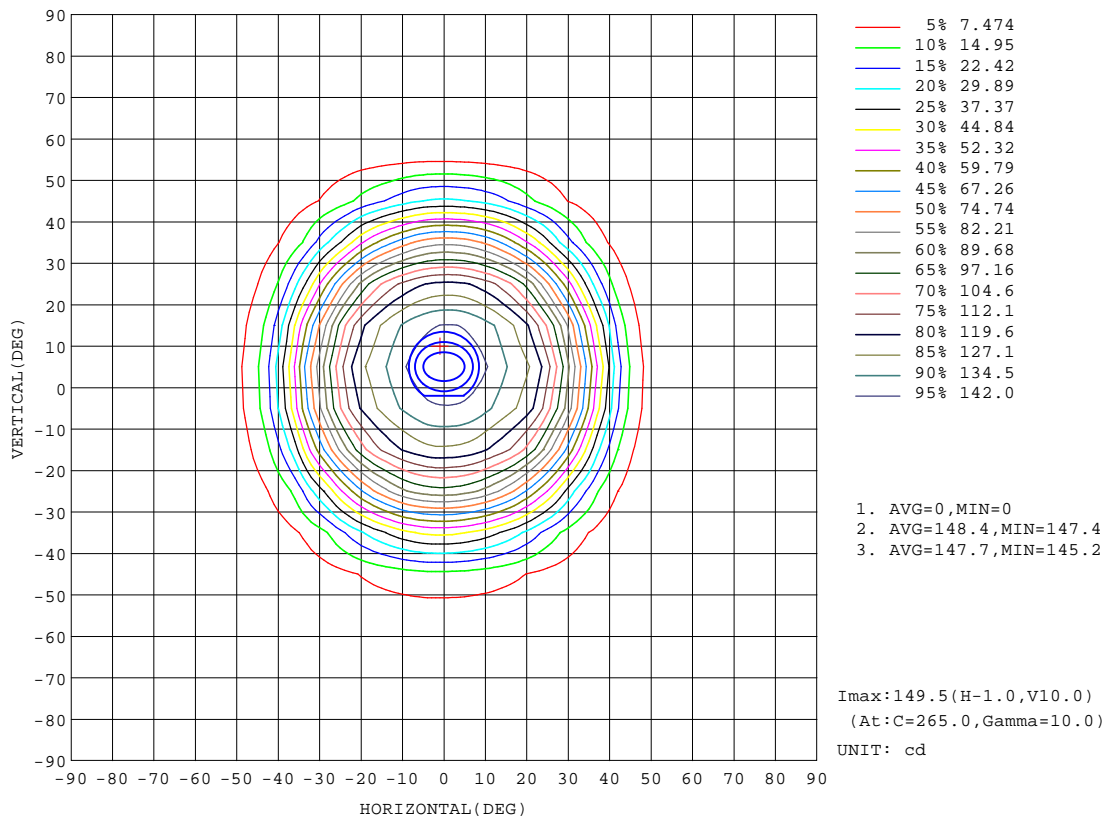


H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:NORDECOR  
Test Date:2024-09-06

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

ISOLUX DIAGRAM


Test:U:220.07V I:0.0340A P:3.2305W PF:0.4316 Freq:50.00Hz Lamp Flux:161.84x1 lm		
NAME: 6004	TYPE:	WEIGHT:58g
SPEC.:3W	DIM.:	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:

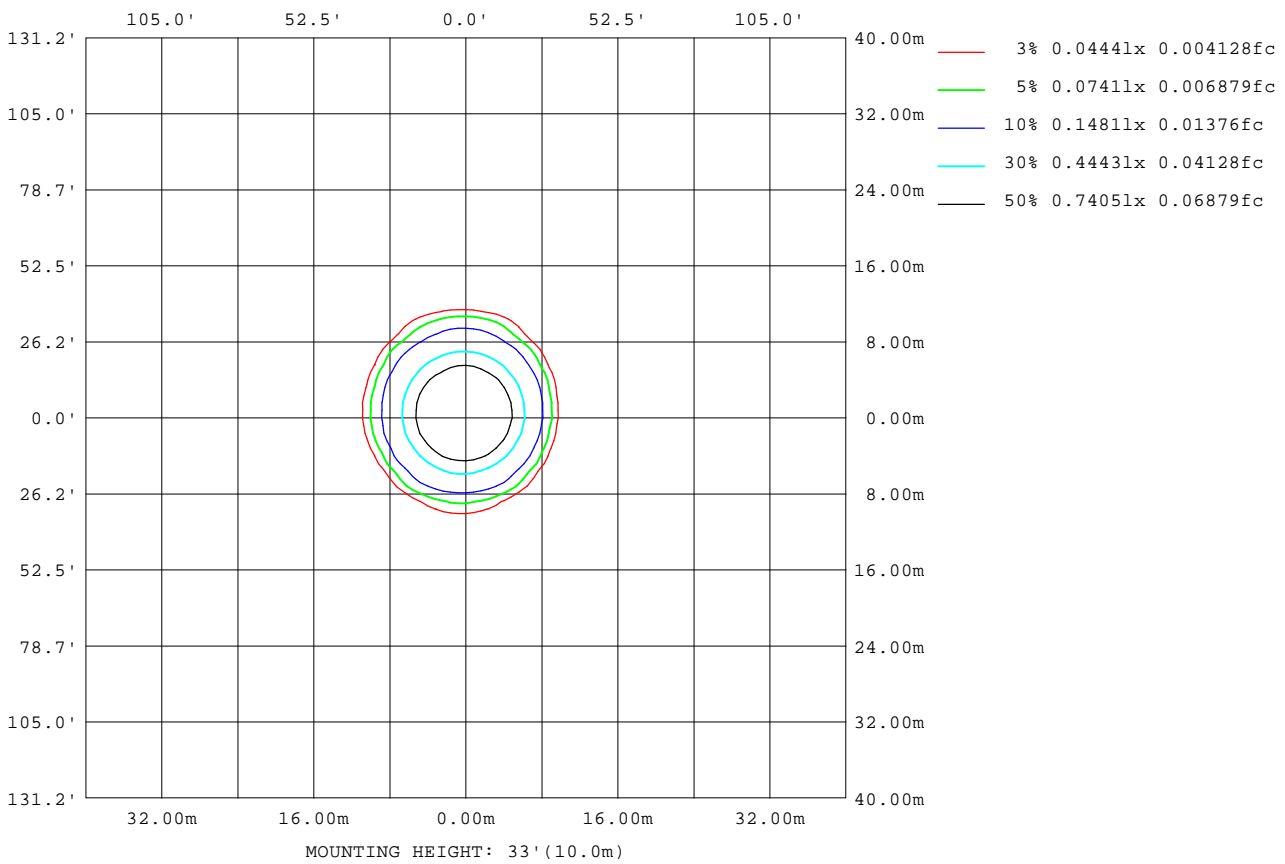

H( $\beta$ ) Range:-90 - 90DEG  
 H( $\beta$ ) Interval: 1.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:NORDECOR  
 Test Date:2024-09-06

V(B) Range:-80 - 80DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:5.780m [K=1.0000]  
 Remarks:

Planar Illuminance Curve

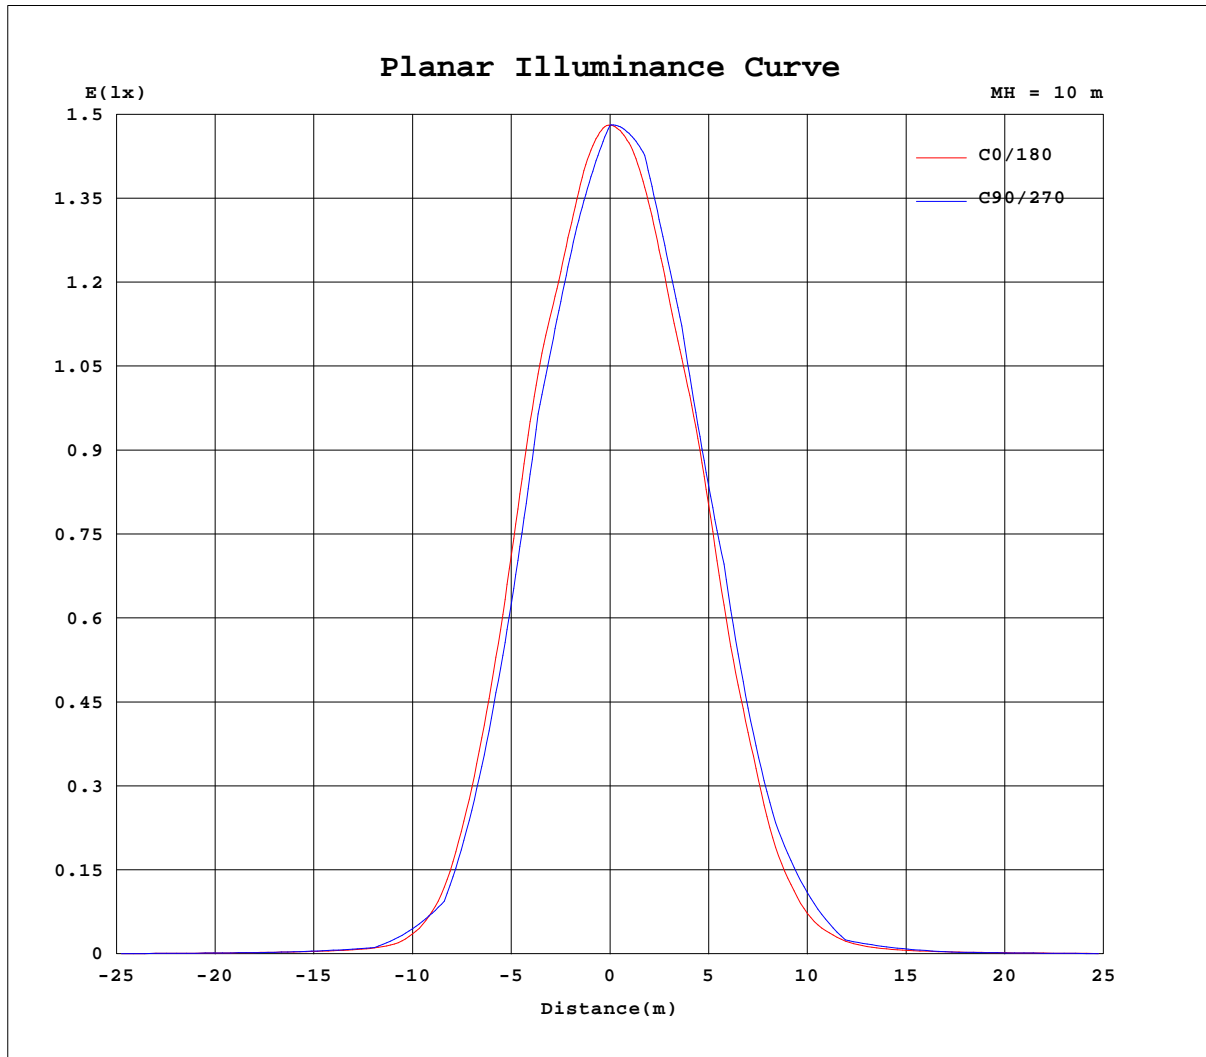


H( $\beta$ ) Range:-90 - 90DEG  
 H( $\beta$ ) Interval: 1.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:NORDECOR  
 Test Date:2024-09-06

V(B) Range:-80 - 80DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:5.780m [K=1.0000]  
 Remarks:

AAI Figure

Test:U:220.07V I:0.0340A P:3.2305W PF:0.4316 Freq:50.00Hz Lamp Flux:161.84x1 lm		
NAME: 6004	TYPE:	WEIGHT:58g
SPEC.:3W	DIM.:	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:

Flux out:115.0 lm

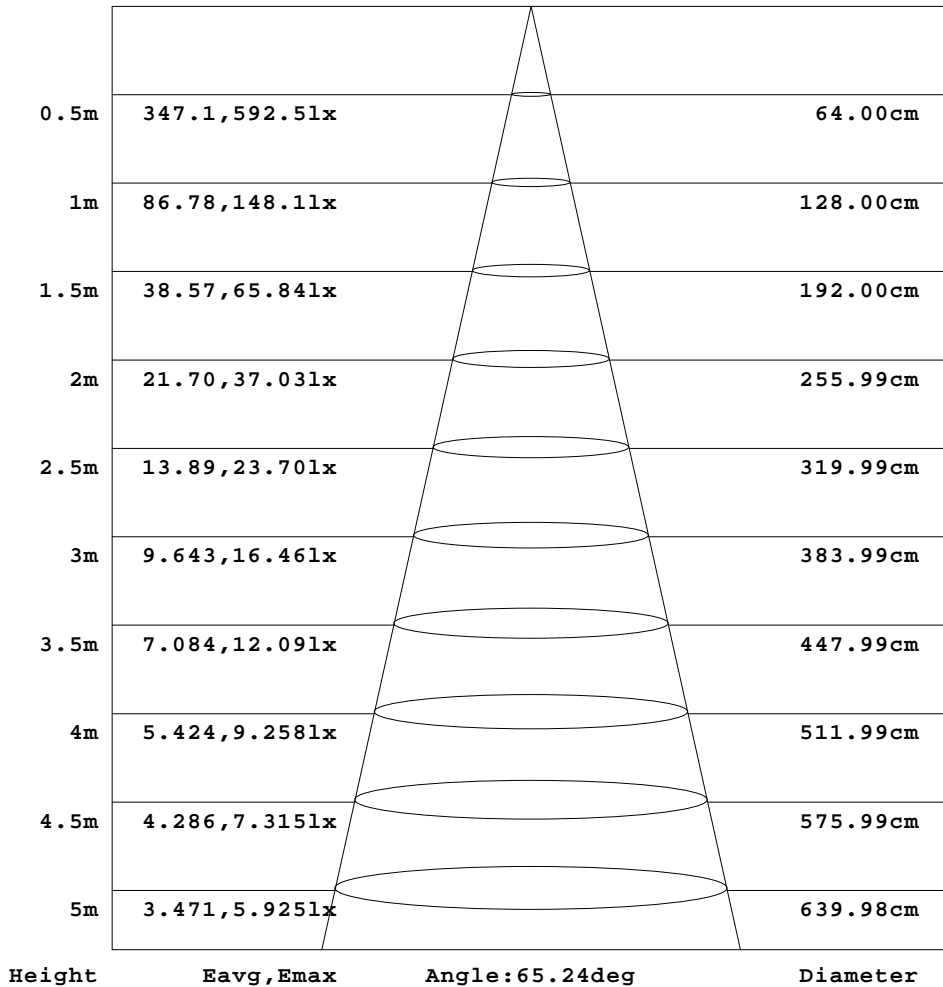

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:NORDECOR  
Test Date:2024-09-06

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.07V I:0.0340A P:3.2305W PF:0.4316 Freq:50.00Hz Lamp Flux:161.84x1 lm		
NAME: 6004	TYPE:	WEIGHT:58g
SPEC.:3W	DIM.:	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H( DEG) V( DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.82	0.86	0.87	0.88	0.90	0.90	0.90	0.90	0.91	0.92	0.92	0.92	0.92	0.92	0.91	0.91	0.91	0.90	0.91
-75	0.82	0.83	0.88	0.89	0.89	0.90	0.93	0.94	0.96	0.98	0.99	1.00	1.00	1.02	1.06	1.12	1.16	1.20	1.22
-70	0.82	0.87	0.88	0.90	0.92	0.94	0.97	0.99	1.02	1.04	1.06	1.08	1.10	1.15	1.24	1.35	1.44	1.51	1.53
-65	0.84	0.84	0.90	0.92	0.93	0.97	1.02	1.07	1.13	1.15	1.19	1.25	1.41	1.52	1.63	1.75	1.85	1.92	1.97
-60	0.83	0.89	0.92	0.95	0.96	1.03	1.10	1.18	1.25	1.28	1.32	1.56	1.80	1.97	2.13	2.22	2.33	2.38	2.41
-55	0.86	0.88	0.93	0.95	1.00	1.08	1.19	1.27	1.33	1.40	1.64	1.86	2.14	2.41	2.71	3.01	3.28	3.42	3.46
-50	0.86	0.92	0.94	0.99	1.08	1.20	1.33	1.40	1.43	1.70	2.09	2.38	2.66	3.08	3.54	4.03	4.40	4.51	4.45
-45	0.86	0.90	0.96	1.00	1.10	1.23	1.40	1.56	1.74	2.03	2.46	3.04	4.05	5.55	7.85	9.79	11.4	12.7	12.9
-40	0.88	0.95	0.98	1.06	1.22	1.40	1.61	1.80	2.30	2.69	3.18	4.40	6.57	9.76	13.8	17.0	19.6	21.3	21.1
-35	0.89	0.92	0.98	1.06	1.23	1.44	1.70	1.97	2.47	3.17	4.62	7.43	12.4	20.6	29.0	36.1	42.3	46.0	46.8
-30	0.89	0.97	1.03	1.16	1.38	1.71	1.99	2.48	3.17	4.49	7.50	13.6	23.8	38.4	50.0	60.6	68.5	72.0	71.8
-25	0.91	0.94	1.01	1.12	1.37	1.69	2.08	2.51	3.41	5.35	10.2	19.5	34.5	51.1	66.4	78.5	88.0	93.0	94.5
-20	0.91	1.00	1.09	1.28	1.57	2.02	2.42	3.17	4.75	9.27	18.6	38.0	57.3	76.2	93.3	105	113	116	116
-15	0.91	0.96	1.04	1.20	1.51	1.96	2.44	3.13	4.74	9.50	20.5	39.0	63.0	83.7	101	113	120	124	126
-10	0.92	1.01	1.11	1.32	1.71	2.31	2.91	3.99	7.21	16.5	35.1	60.6	85.3	106	120	127	131	135	135
-5	0.92	0.97	1.07	1.26	1.59	2.16	2.73	3.60	5.98	13.4	30.0	55.5	81.2	104	120	129	135	140	141
0	0.95	1.04	1.14	1.40	1.74	2.47	3.14	4.46	8.66	20.6	42.4	72.0	96.0	118	128	136	143	147	148
5	0.94	0.98	1.08	1.27	1.61	2.22	2.85	3.75	6.26	14.3	32.4	59.3	85.5	110	125	133	141	146	149
10	0.92	1.02	1.12	1.36	1.70	2.47	3.14	4.36	8.15	19.2	40.9	69.2	94.2	117	129	136	144	148	149
15	0.92	0.96	1.06	1.22	1.56	2.07	2.73	3.52	5.41	11.7	26.1	50.2	75.2	99.3	117	128	135	140	142
20	0.93	1.02	1.10	1.33	1.65	2.20	2.84	3.69	5.92	13.1	28.4	51.6	75.0	98.2	115	126	132	135	135
25	0.91	0.94	1.03	1.16	1.46	1.80	2.44	3.05	4.17	7.34	15.4	31.5	51.9	72.7	91.4	105	114	119	121
30	0.90	0.98	1.04	1.21	1.51	1.88	2.48	3.09	4.04	6.52	13.6	26.5	45.3	62.7	79.6	91.6	101	106	107
35	0.90	0.92	1.01	1.10	1.32	1.57	2.04	2.58	3.20	4.30	7.27	13.4	24.9	37.2	51.2	62.1	70.9	77.5	80.0
40	0.91	0.98	1.03	1.13	1.37	1.56	2.07	2.52	2.99	3.65	5.05	8.11	14.2	22.4	32.1	40.0	47.2	51.7	52.2
45	0.89	0.92	1.00	1.05	1.18	1.39	1.63	2.09	2.49	2.93	3.60	4.89	7.67	11.7	17.1	21.8	26.3	29.9	31.1
50	0.90	0.97	1.00	1.05	1.18	1.39	1.54	1.98	2.33	2.65	3.01	3.43	3.95	4.83	5.92	7.26	8.88	9.66	9.60
55	0.91	0.92	0.98	1.03	1.08	1.22	1.36	1.59	1.89	2.18	2.49	2.80	3.12	3.57	4.14	4.78	5.58	6.20	6.30
60	0.91	0.97	1.02	1.04	1.08	1.20	1.31	1.44	1.63	1.97	2.21	2.42	2.58	2.72	2.84	2.90	2.93	2.92	2.87
65	0.93	0.93	0.99	1.01	1.04	1.09	1.17	1.26	1.39	1.55	1.71	1.84	1.97	2.12	2.25	2.33	2.34	2.33	2.31
70	0.94	0.97	0.98	1.01	1.04	1.06	1.10	1.16	1.25	1.28	1.32	1.35	1.46	1.64	1.74	1.76	1.76	1.74	1.70
75	0.93	0.94	0.98	1.00	1.01	1.03	1.04	1.07	1.12	1.16	1.18	1.19	1.23	1.31	1.39	1.41	1.41	1.41	1.40
80	0.93	0.96	0.98	0.99	1.00	1.01	1.02	1.02	1.04	1.05	1.05	1.05	1.06	1.07	1.07	1.06	1.06	1.07	1.07
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(h) Range:-90 - 90DEG  
H(h) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:NORDECOR  
Test Date:2024-09-06

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.07V I:0.0340A P:3.2305W PF:0.4316 Freq:50.00Hz Lamp Flux:161.84x1 lm		
NAME: 6004	TYPE:	WEIGHT:58g
SPEC.:3W	DIM.:	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H( DEG) V( DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.90	0.90	0.90	0.88	0.90	0.88	0.88	0.88	0.87	0.86	0.85	0.85	0.84	0.84	0.84	0.83	0.80	0.80
-75	1.22	1.21	1.17	1.14	1.08	1.02	0.97	0.92	0.91	0.89	0.88	0.87	0.86	0.86	0.84	0.84	0.82	0.80
-70	1.53	1.51	1.43	1.35	1.23	1.12	1.00	0.97	0.94	0.92	0.90	0.88	0.88	0.86	0.84	0.83	0.81	0.80
-65	1.98	1.95	1.89	1.81	1.70	1.61	1.49	1.39	1.29	1.16	1.00	0.94	0.90	0.88	0.86	0.85	0.82	0.80
-60	2.41	2.36	2.29	2.20	2.10	1.99	1.88	1.73	1.53	1.28	1.04	0.96	0.91	0.89	0.87	0.84	0.82	0.80
-55	3.39	3.22	3.01	2.80	2.61	2.44	2.26	2.09	1.89	1.68	1.39	1.18	0.99	0.92	0.89	0.86	0.84	0.81
-50	4.25	3.93	3.55	3.24	2.97	2.72	2.49	2.30	2.08	1.86	1.57	1.22	1.00	0.92	0.88	0.86	0.83	0.84
-45	12.4	11.1	9.34	7.36	5.40	4.11	3.23	2.75	2.43	2.16	1.88	1.59	1.20	1.00	0.92	0.88	0.85	0.83
-40	19.6	17.0	13.6	9.90	6.67	4.65	3.50	2.94	2.57	2.26	1.97	1.65	1.19	0.98	0.90	0.89	0.84	0.83
-35	45.1	41.2	35.4	28.2	19.7	12.4	7.37	4.34	3.12	2.60	2.25	1.94	1.53	1.14	0.96	0.90	0.88	0.85
-30	68.0	61.2	51.8	39.9	26.5	15.5	8.22	4.50	3.20	2.66	2.28	1.94	1.49	1.09	0.96	0.90	0.87	0.84
-25	92.5	87.2	78.6	66.6	52.0	34.8	20.5	9.99	4.79	3.17	2.60	2.21	1.83	1.32	1.02	0.93	0.90	0.86
-20	114	107	96.7	82.1	64.2	41.2	22.8	10.5	4.63	3.14	2.59	2.17	1.78	1.23	0.99	0.92	0.87	0.85
-15	125	120	113	103	85.7	64.6	41.1	20.8	8.58	4.01	2.93	2.45	2.04	1.52	1.10	0.96	0.92	0.88
-10	133	128	123	112	90.7	69.4	40.9	19.4	7.37	3.67	2.85	2.38	1.98	1.38	1.04	0.95	0.90	0.86
-5	141	136	130	123	107	85.5	58.8	32.3	13.2	4.93	3.19	2.63	2.18	1.69	1.16	0.99	0.94	0.89
0	146	140	132	125	107	81.6	54.1	26.6	10.2	4.19	3.03	2.49	2.07	1.47	1.06	0.98	0.91	0.90
5	148	143	135	128	115	90.9	63.8	36.3	14.5	5.20	3.27	2.69	2.22	1.77	1.18	1.00	0.95	0.89
10	146	140	132	124	104	78.4	51.1	24.4	9.18	4.04	3.00	2.50	2.06	1.48	1.08	0.98	0.91	0.90
15	141	137	130	121	103	81.0	54.2	29.1	11.5	4.58	3.14	2.61	2.16	1.69	1.16	0.99	0.94	0.88
20	134	130	121	105	85.2	61.4	36.5	16.2	5.98	3.48	2.84	2.36	1.96	1.40	1.03	0.95	0.88	0.90
25	120	116	107	94.8	76.1	55.2	33.8	16.5	6.87	3.65	2.88	2.43	2.02	1.55	1.09	0.96	0.92	0.87
30	104	96.1	84.4	70.5	50.0	31.4	15.8	6.68	3.81	2.99	2.55	2.18	1.77	1.32	1.01	0.95	0.90	0.90
35	78.6	73.4	64.5	52.8	39.0	24.6	13.6	6.94	3.85	2.94	2.53	2.16	1.80	1.39	1.02	0.93	0.90	0.86
40	50.0	44.7	35.5	25.0	15.7	8.85	4.87	3.49	2.93	2.57	2.20	1.88	1.54	1.12	0.95	0.90	0.85	0.85
45	30.2	27.5	23.0	17.1	11.6	7.30	4.41	3.30	2.77	2.44	2.14	1.85	1.55	1.17	0.96	0.92	0.88	0.86
50	8.72	7.19	5.75	4.62	3.75	3.23	2.87	2.61	2.34	2.10	1.85	1.60	1.28	0.98	0.93	0.91	0.87	0.90
55	6.00	5.29	4.47	3.79	3.24	2.85	2.60	2.36	2.16	1.94	1.73	1.51	1.24	1.01	0.94	0.91	0.90	0.87
60	2.82	2.74	2.63	2.50	2.38	2.26	2.12	1.97	1.83	1.63	1.45	1.20	1.00	0.96	0.94	0.91	0.88	0.87
65	2.24	2.16	2.09	2.00	1.90	1.80	1.72	1.61	1.53	1.39	1.28	1.16	1.00	0.96	0.94	0.92	0.91	0.89
70	1.61	1.52	1.47	1.40	1.32	1.27	1.23	1.19	1.12	1.05	1.03	0.99	0.95	0.95	0.94	0.92	0.91	0.89
75	1.36	1.30	1.28	1.24	1.20	1.16	1.13	1.11	1.08	1.04	1.01	0.99	0.97	0.96	0.95	0.94	0.93	0.91
80	1.06	1.06	1.05	1.04	1.04	1.03	1.02	1.01	1.00	0.99	0.98	0.98	0.96	0.95	0.95	0.94	0.92	0.91
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H<sub>(h)</sub> Range:-90 - 90DEG  
H<sub>(h)</sub> Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:NORDECOR  
Test Date:2024-09-06

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks: