

Report No.:

Test Time: 2024-9-6 16:08

## Luminaire Property

Luminaire Manufacturer: NORDECOR  
 Luminaire Category: SPOTLIGHT  
 Lamp Catalog: LED  
 Number of Lamps: 1  
 Luminous Length (mm): -13  
 Luminous Height (mm):  
 Current: 0.015 A  
 Power Factor: 0.423

Luminaire Description: 6528  
 Lamp Description: TX3535  
 Lumens per Lamp: 90  
 Luminous Width (mm): -13  
 Voltage: 221.1 V  
 Power: 1.39 W


## Photometric Results

CIE Class: Direct  
 Measurement Flux: 78.58 lm  
 Downward Ratio: 78.58%  
 Horizontal Diffuse Angle(50%): H33.7  
 Vertical Diffuse Angle(50%): V33.7  
 Luminaire Efficacy Rating (LER): 49.63  
 Max. Intensity: 169.09 cd  
 S/MH(C0/C180): 0.55


Total Rated Lamp Lumens: 100.0 lm  
 Efficiency: 78.58%  
 Upward Ratio: 0.00%

C0r0 Intensity: 161.01 cd  
 Pos of Max. Intensity: H300 V3  
 S/MH(C90/C270): 0.57

Picture Of Luminaire



Luminous Intensity Distribution Curve

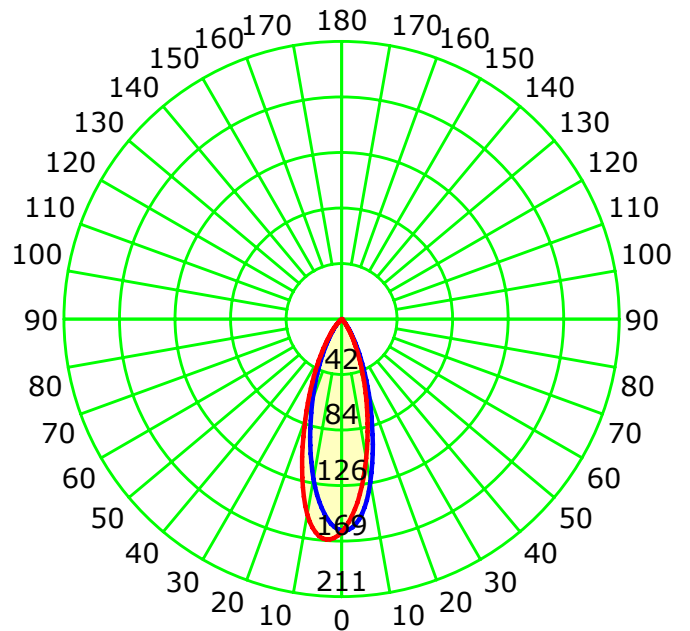

Unit: cd



Average Diffuse Angle(50%): 33.4°

— C0-C180 — C90-C270

C Plane (°):0.0-360.0: 30.0  
 Test Lab: NORDECOR  
 Test Type: TYPE C  
 Temperature: 25  
 Operator: NORDECOR

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 10.289 m [K=1.0000]  
 Humidity: 85  
 Inspector:


## Luminous Intensity Distribution Curve

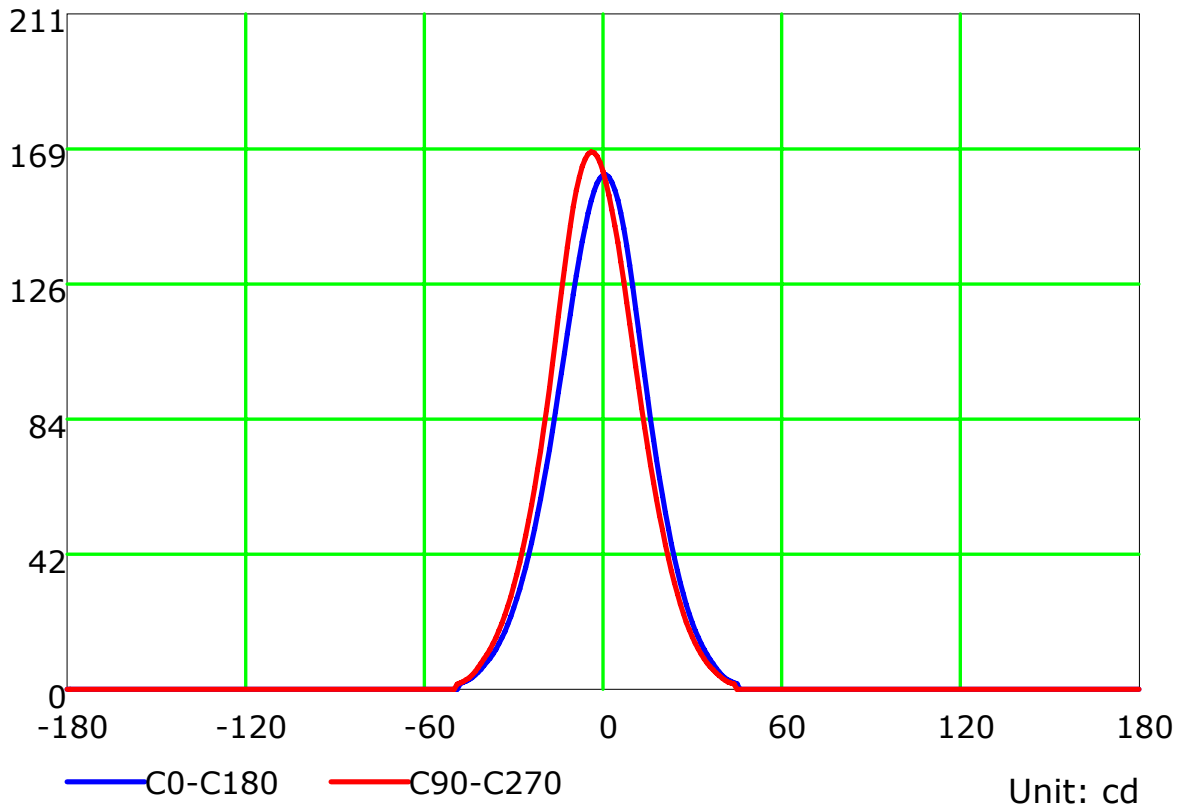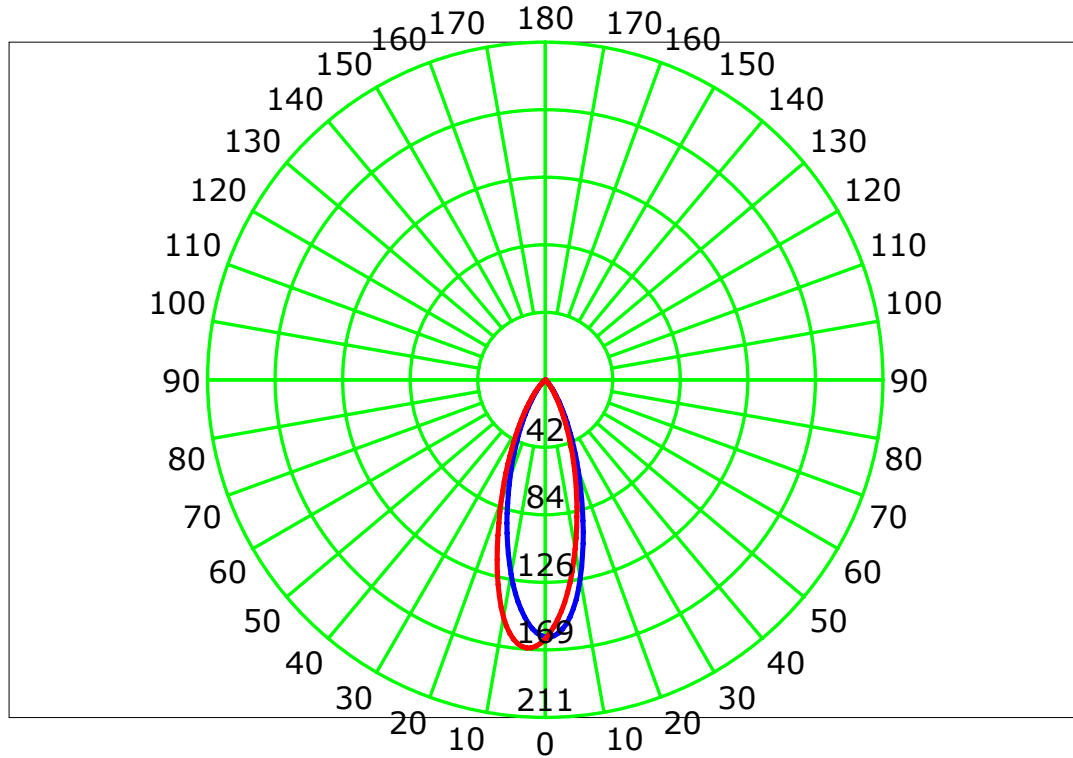

C Plane (°):0.0-360.0: 30.0  
 Test Lab: NORDECOR  
 Test Type: TYPE C  
 Temperature: 25  
 Operator: NORDECOR

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 10.289 m [K=1.0000]  
 Humidity: 85  
 Inspector:

## Luminous Intensity Distribution Curve(cd/klm)

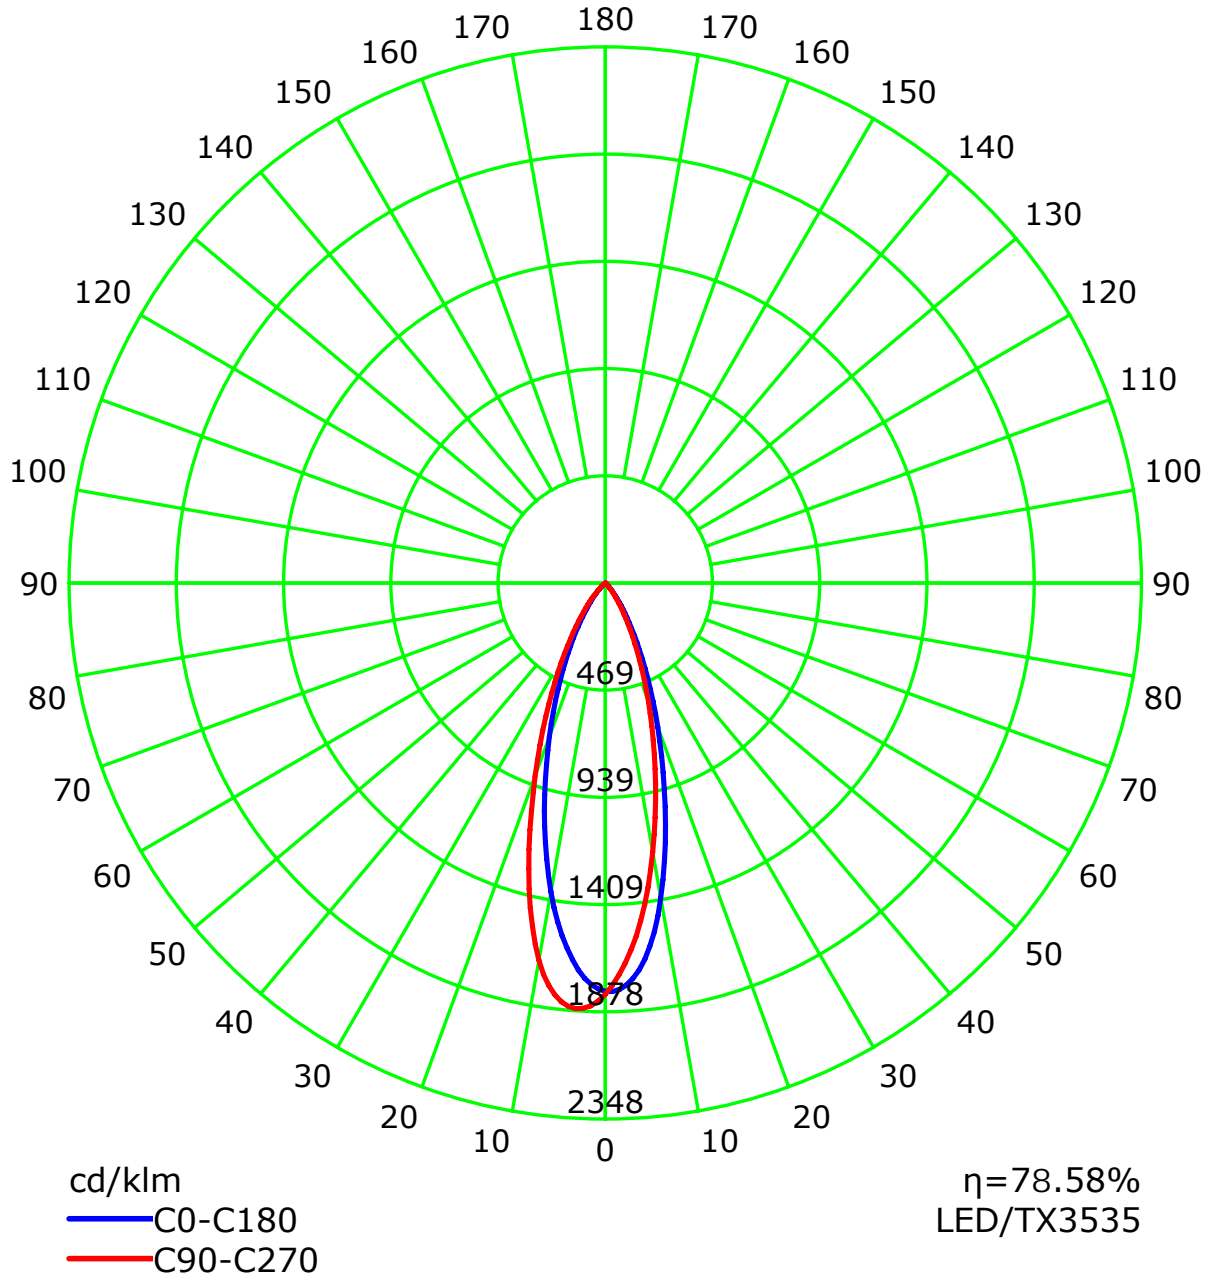


C Plane (°):0.0-360.0: 30.0  
 Test Lab: NORDECOR  
 Test Type: TYPE C  
 Temperature: 25  
 Operator: NORDECOR

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 10.289 m [K=1.0000]  
 Humidity: 85  
 Inspector:

## Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	0.910	0.910	0.910	0.910	0.890	0.890	0.890	0.890	0.850	0.850	0.850	0.810	0.810	0.810	0.780	0.780	0.780	0.77
1	0.880	0.860	0.840	0.820	0.860	0.840	0.830	0.810	0.810	0.800	0.790	0.780	0.770	0.760	0.760	0.750	0.740	0.73
2	0.840	0.810	0.780	0.760	0.820	0.790	0.770	0.750	0.770	0.750	0.730	0.750	0.730	0.720	0.730	0.710	0.700	0.69
3	0.810	0.760	0.730	0.700	0.790	0.750	0.720	0.700	0.730	0.710	0.690	0.720	0.690	0.680	0.700	0.680	0.670	0.66
4	0.770	0.720	0.690	0.660	0.760	0.710	0.680	0.660	0.700	0.670	0.650	0.680	0.660	0.640	0.670	0.650	0.630	0.62
5	0.740	0.690	0.650	0.620	0.730	0.680	0.640	0.620	0.670	0.640	0.610	0.660	0.630	0.610	0.640	0.620	0.600	0.59
6	0.710	0.650	0.620	0.590	0.700	0.650	0.610	0.590	0.640	0.610	0.580	0.630	0.600	0.580	0.620	0.590	0.570	0.56
7	0.680	0.620	0.580	0.560	0.670	0.620	0.580	0.560	0.610	0.580	0.550	0.600	0.570	0.550	0.590	0.570	0.550	0.54
8	0.660	0.600	0.560	0.530	0.650	0.590	0.560	0.530	0.580	0.550	0.530	0.580	0.550	0.530	0.570	0.540	0.520	0.51
9	0.630	0.570	0.530	0.510	0.630	0.570	0.530	0.510	0.560	0.530	0.500	0.550	0.520	0.500	0.550	0.520	0.500	0.49
10	0.610	0.550	0.510	0.480	0.600	0.540	0.510	0.480	0.540	0.510	0.480	0.530	0.500	0.480	0.530	0.500	0.480	0.47


Spacing Criteria (0-180): 0.55  
 Spacing Criteria (90-270): 0.57  
 Spacing Criteria (Diagonal): 0.59

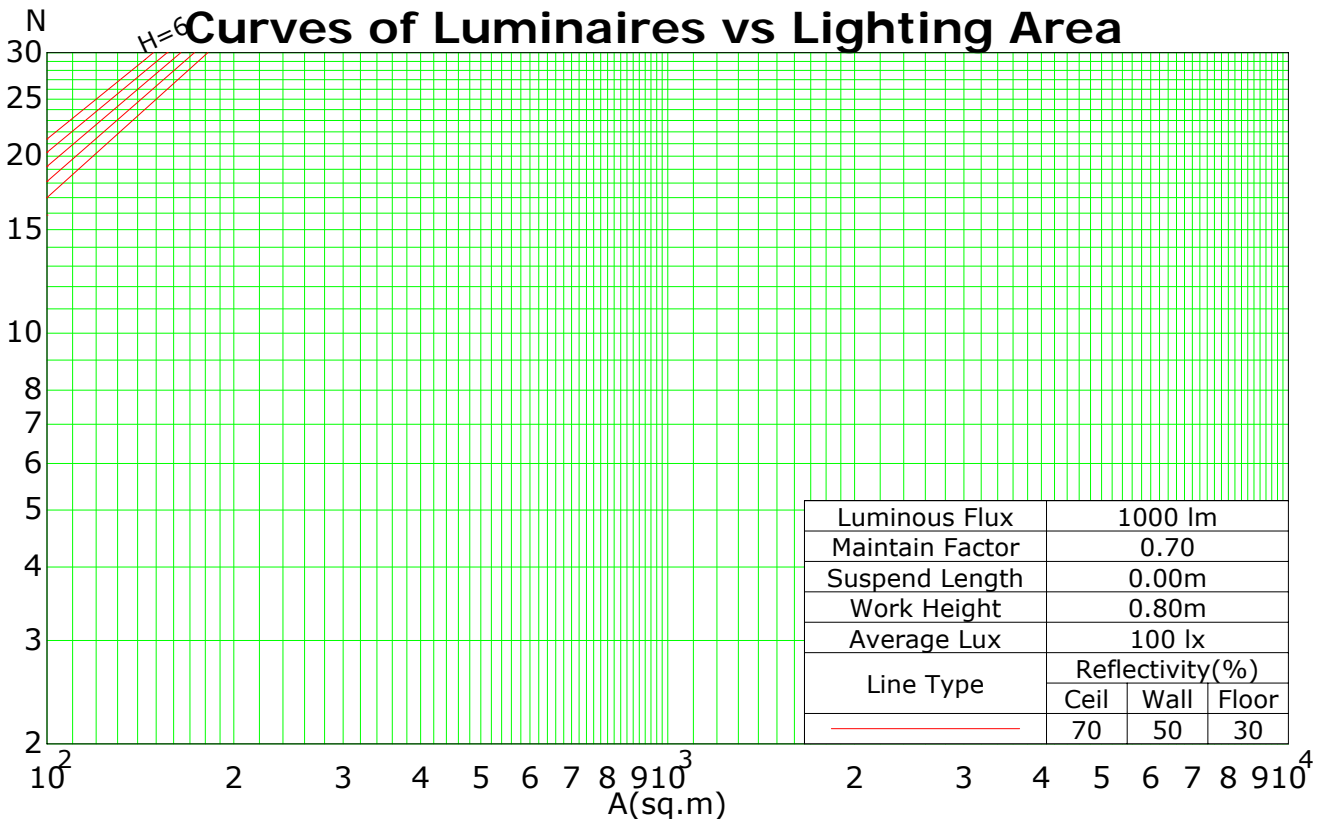

C Plane (°):0.0-360.0: 30.0  
 Test Lab: NORDECOR  
 Test Type: TYPE C  
 Temperature: 25  
 Operator: NORDECOR

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 10.289 m [K=1.0000]  
 Humidity: 85  
 Inspector:

## Isocandela (rectangle)

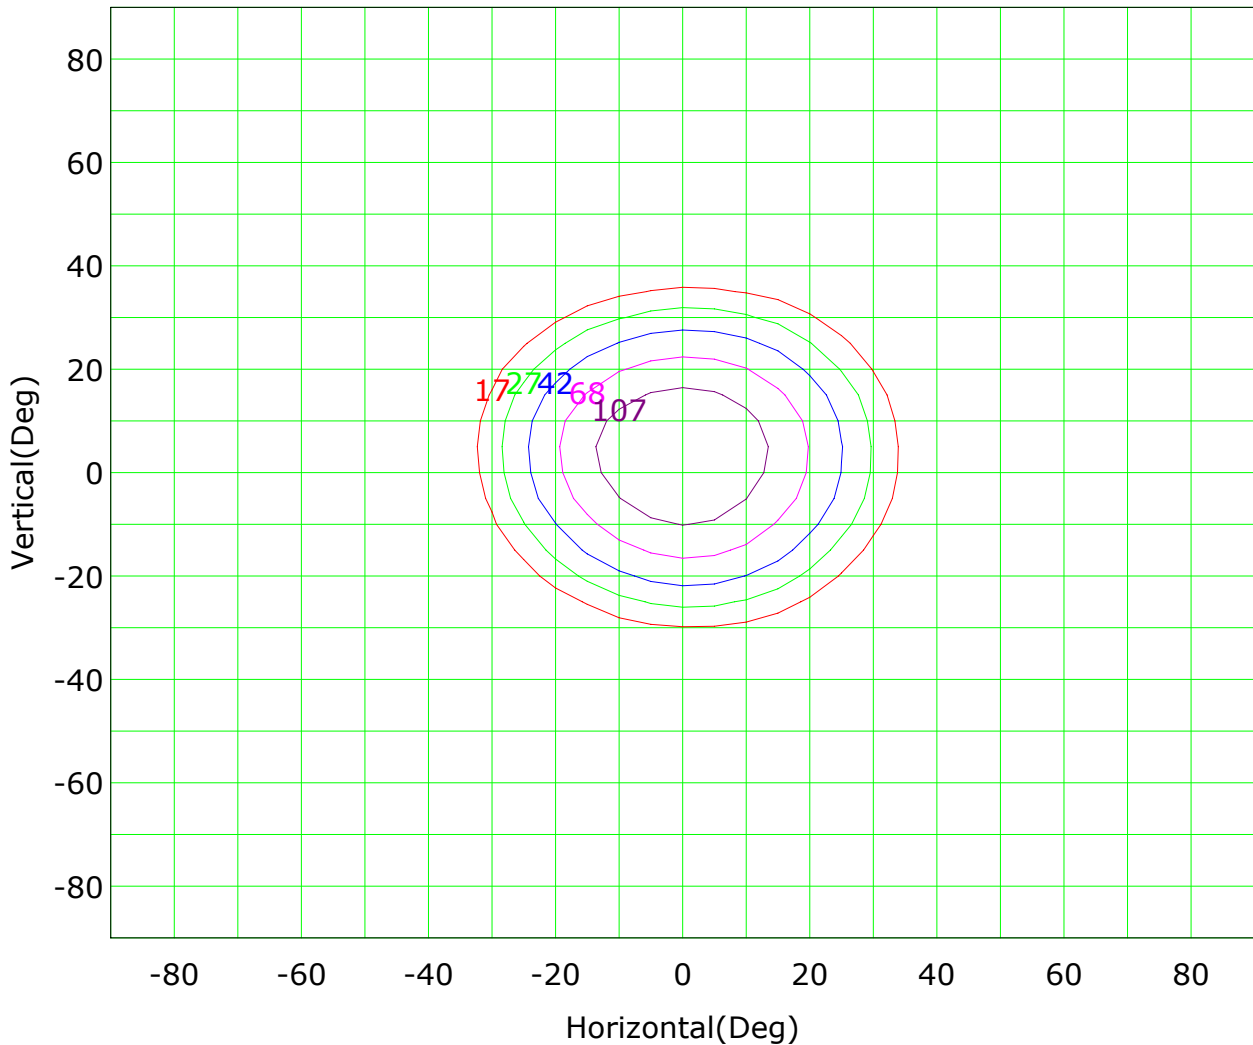


Imax (100%): 169 cd

— ( 10%):	17 cd	— ( 16%):	27 cd
— ( 25%):	42 cd	— ( 40%):	68 cd
— ( 63%):	107 cd	— (100%):	169 cd

C Plane (°):0.0-360.0: 30.0  
 Test Lab: NORDECOR  
 Test Type: TYPE C  
 Temperature: 25  
 Operator: NORDECOR

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 10.289 m [K=1.0000]  
 Humidity: 85  
 Inspector:

## Isocandela (sphere)

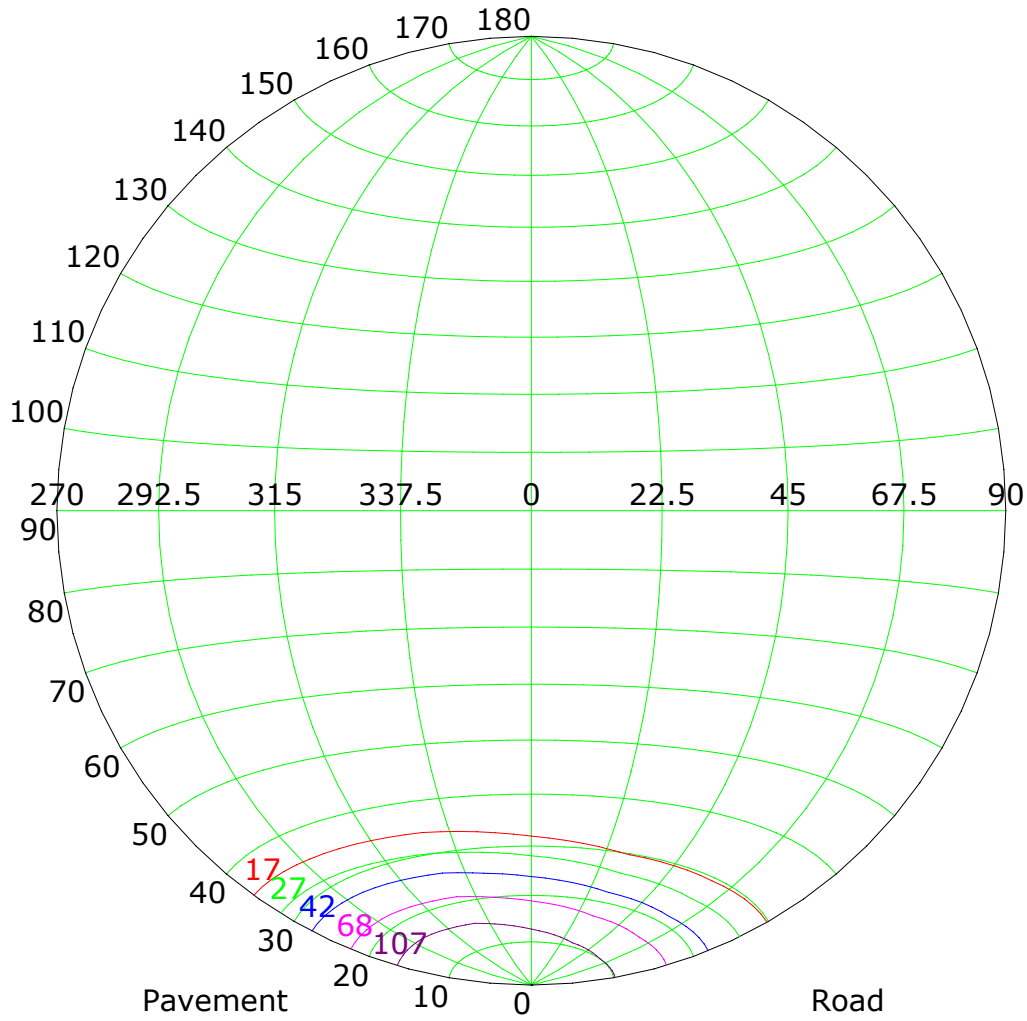


Imax (100%): 169 cd

— ( 10%):	17 cd	— ( 16%):	27 cd
— ( 25%):	42 cd	— ( 40%):	68 cd
— ( 63%):	107 cd	— (100%):	169 cd

C Plane (°):0.0-360.0: 30.0  
 Test Lab: NORDECOR  
 Test Type: TYPE C  
 Temperature: 25  
 Operator: NORDECOR

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 10.289 m [K=1.0000]  
 Humidity: 85  
 Inspector:

## IsoLux Plot

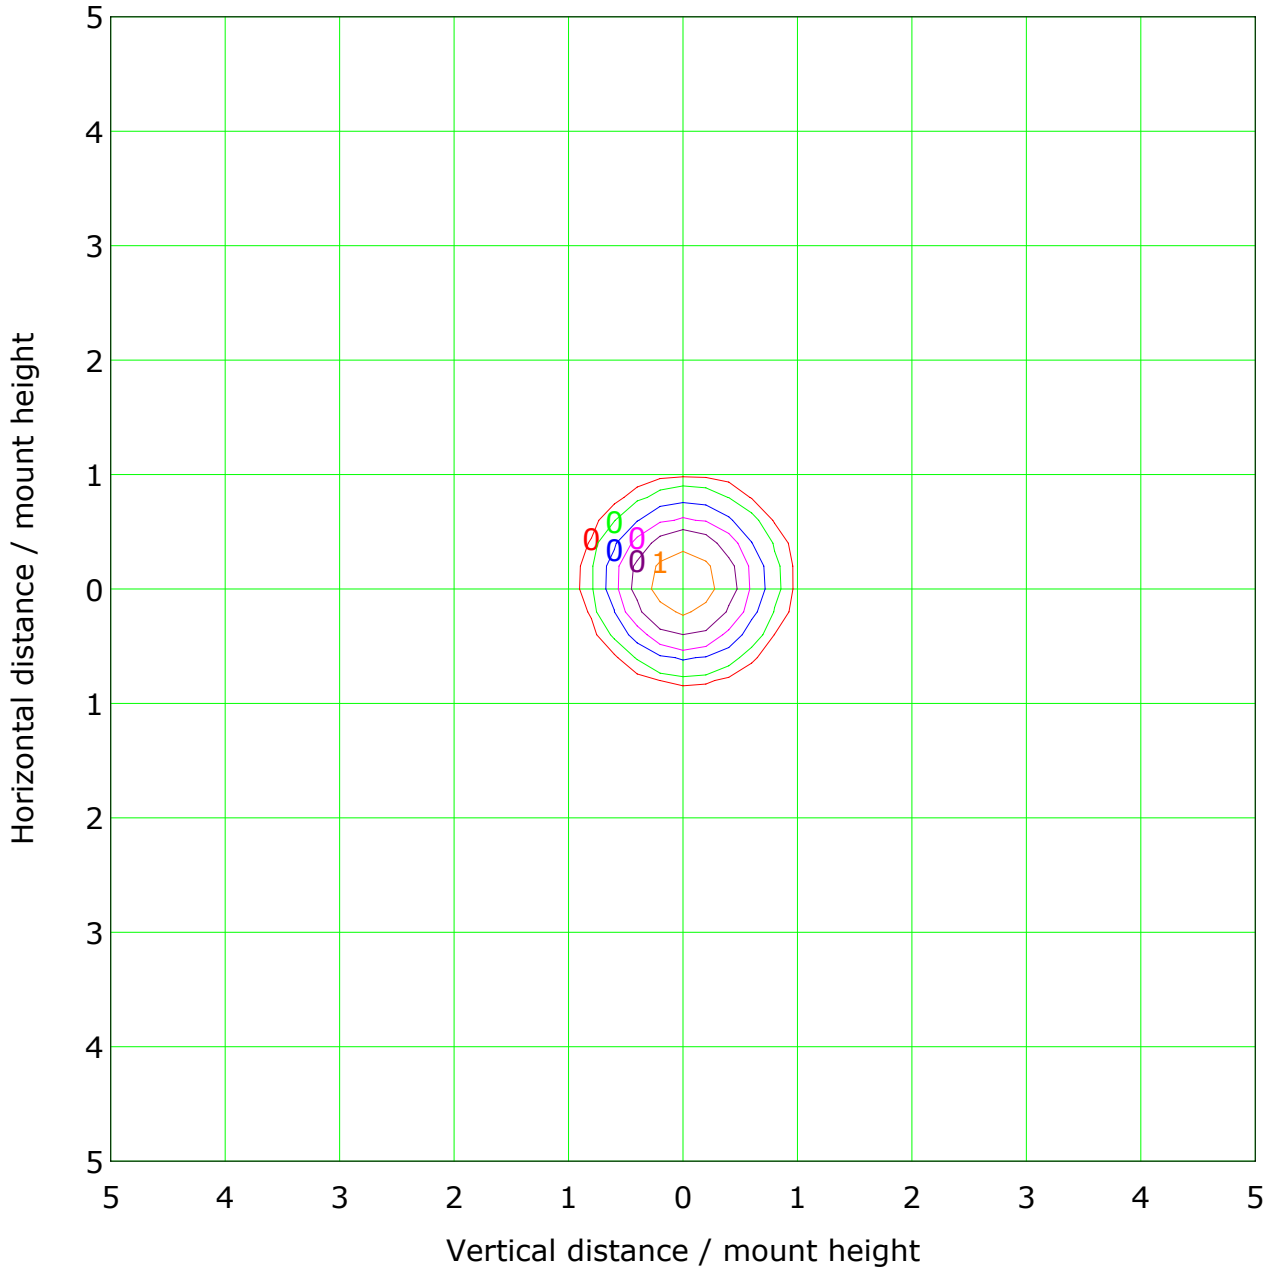

Mounting Height: 10.0m    Max Lux(100%): 1.7 lx

— ( 1%): 0.0 lx	— ( 2%): 0.0 lx
— ( 5%): 0.1 lx	— (10%): 0.2 lx
— (20%): 0.3 lx	— (50%): 0.8 lx
— (100%): 1.7 lx	



C Plane (°):0.0-360.0: 30.0  
 Test Lab: NORDECOR  
 Test Type: TYPE C  
 Temperature: 25  
 Operator: NORDECOR

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 10.289 m [K=1.0000]  
 Humidity: 85  
 Inspector:

## Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
		2000	1000	500	<=300				
1.15	A								
1.50	B								
1.85	C								
2.20	D								
2.55	E								

a b c d e f g h

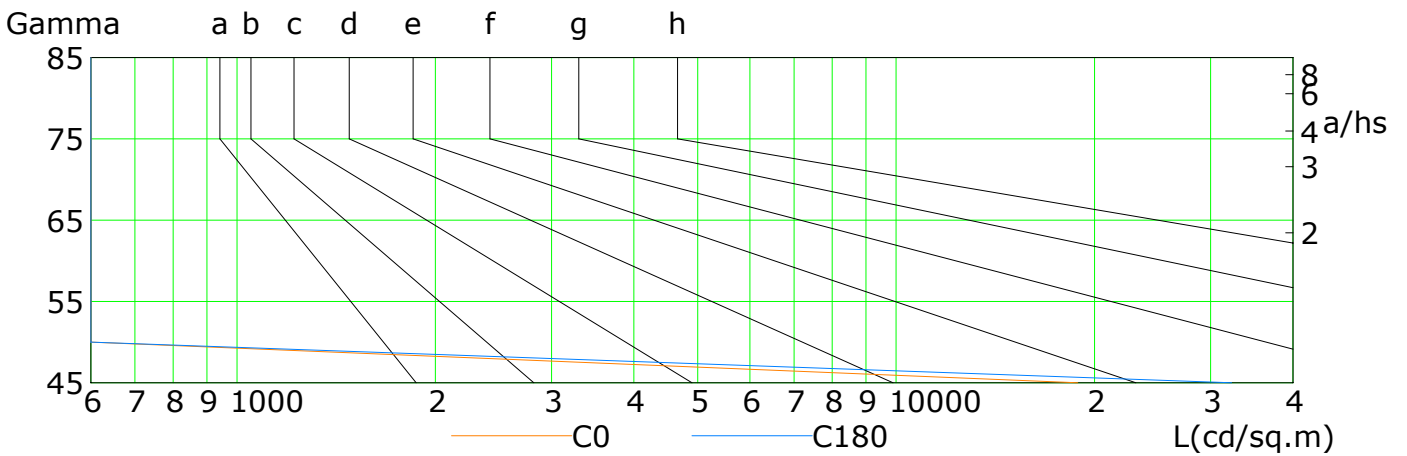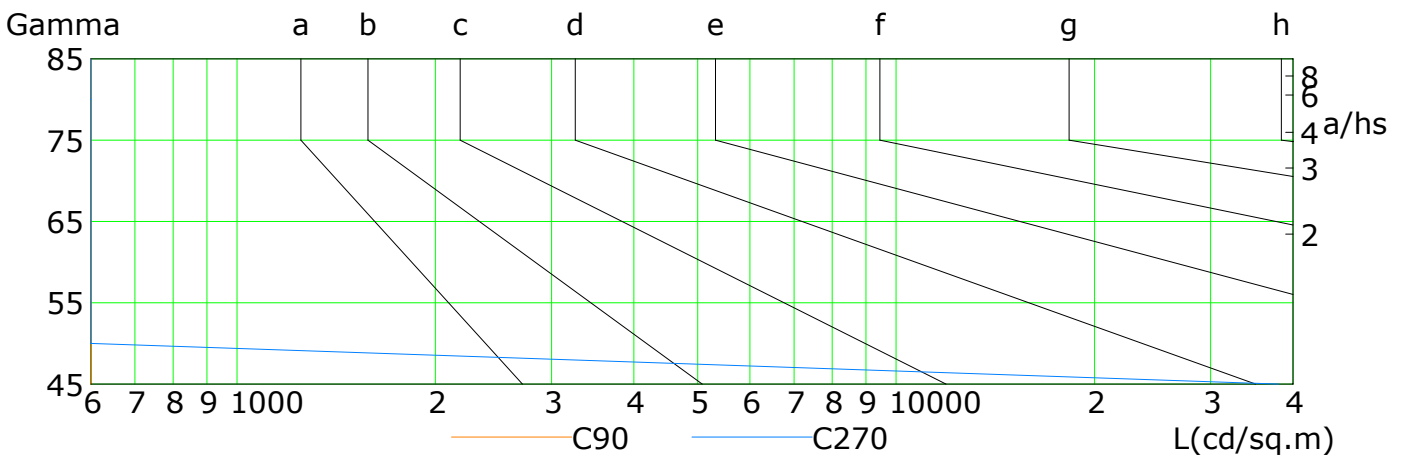


L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	18859	0	0	0	0	0	0	0	0
C90	0	0	0	0	0	0	0	0	0
C180	32284	0	0	0	0	0	0	0	0
C270	38037	0	0	0	0	0	0	0	0

C Plane (°):0.0-360.0: 30.0  
 Test Lab: NORDECOR  
 Test Type: TYPE C  
 Temperature: 25  
 Operator: NORDECOR


Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 10.289 m [K=1.0000]  
 Humidity: 85  
 Inspector:



## Illuminance at a Distance

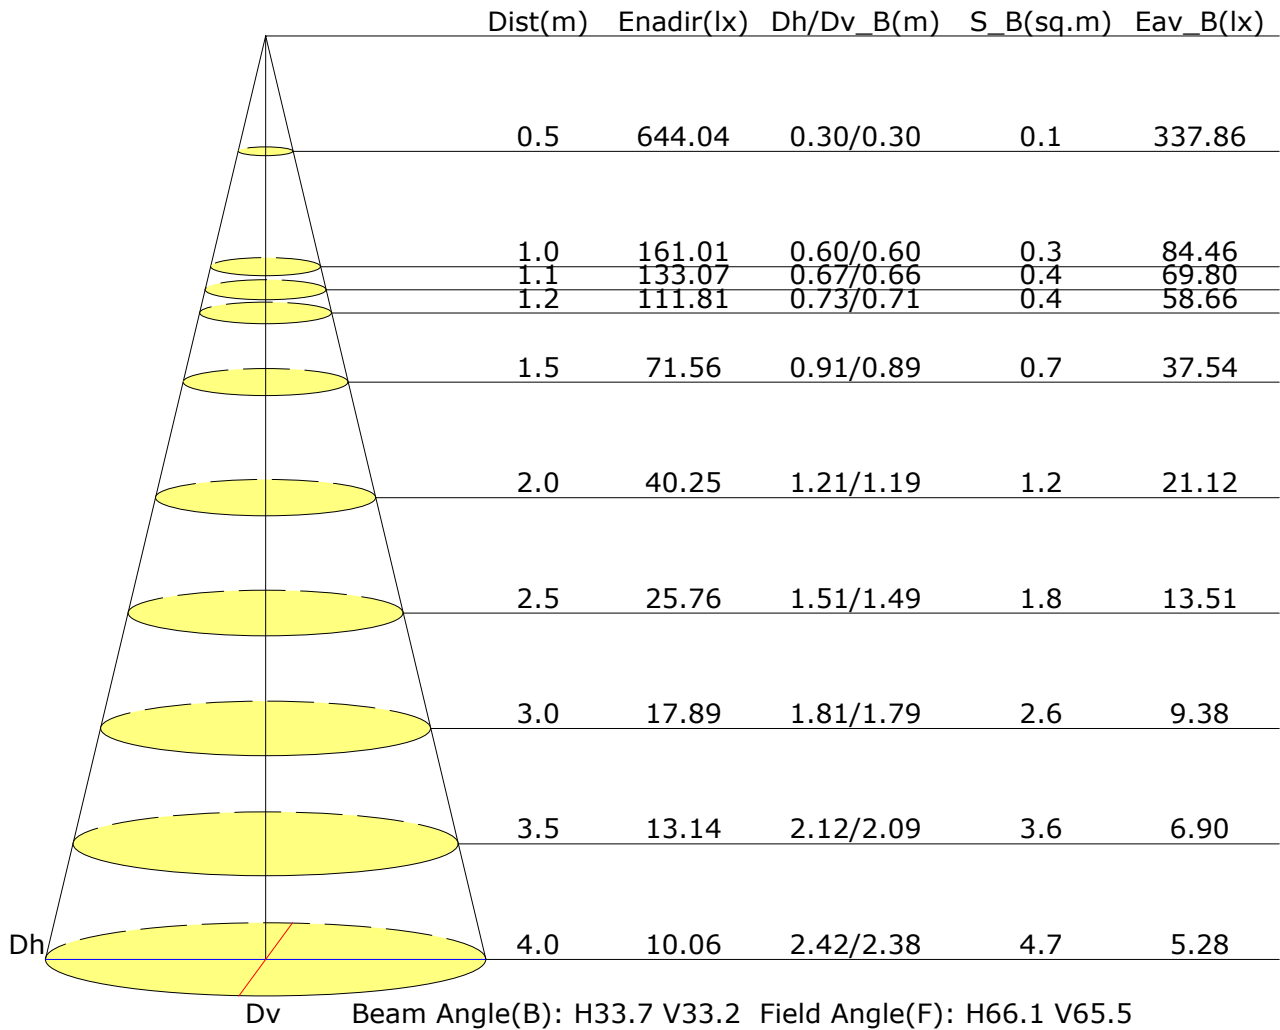

## Vertical IsoLux Plot

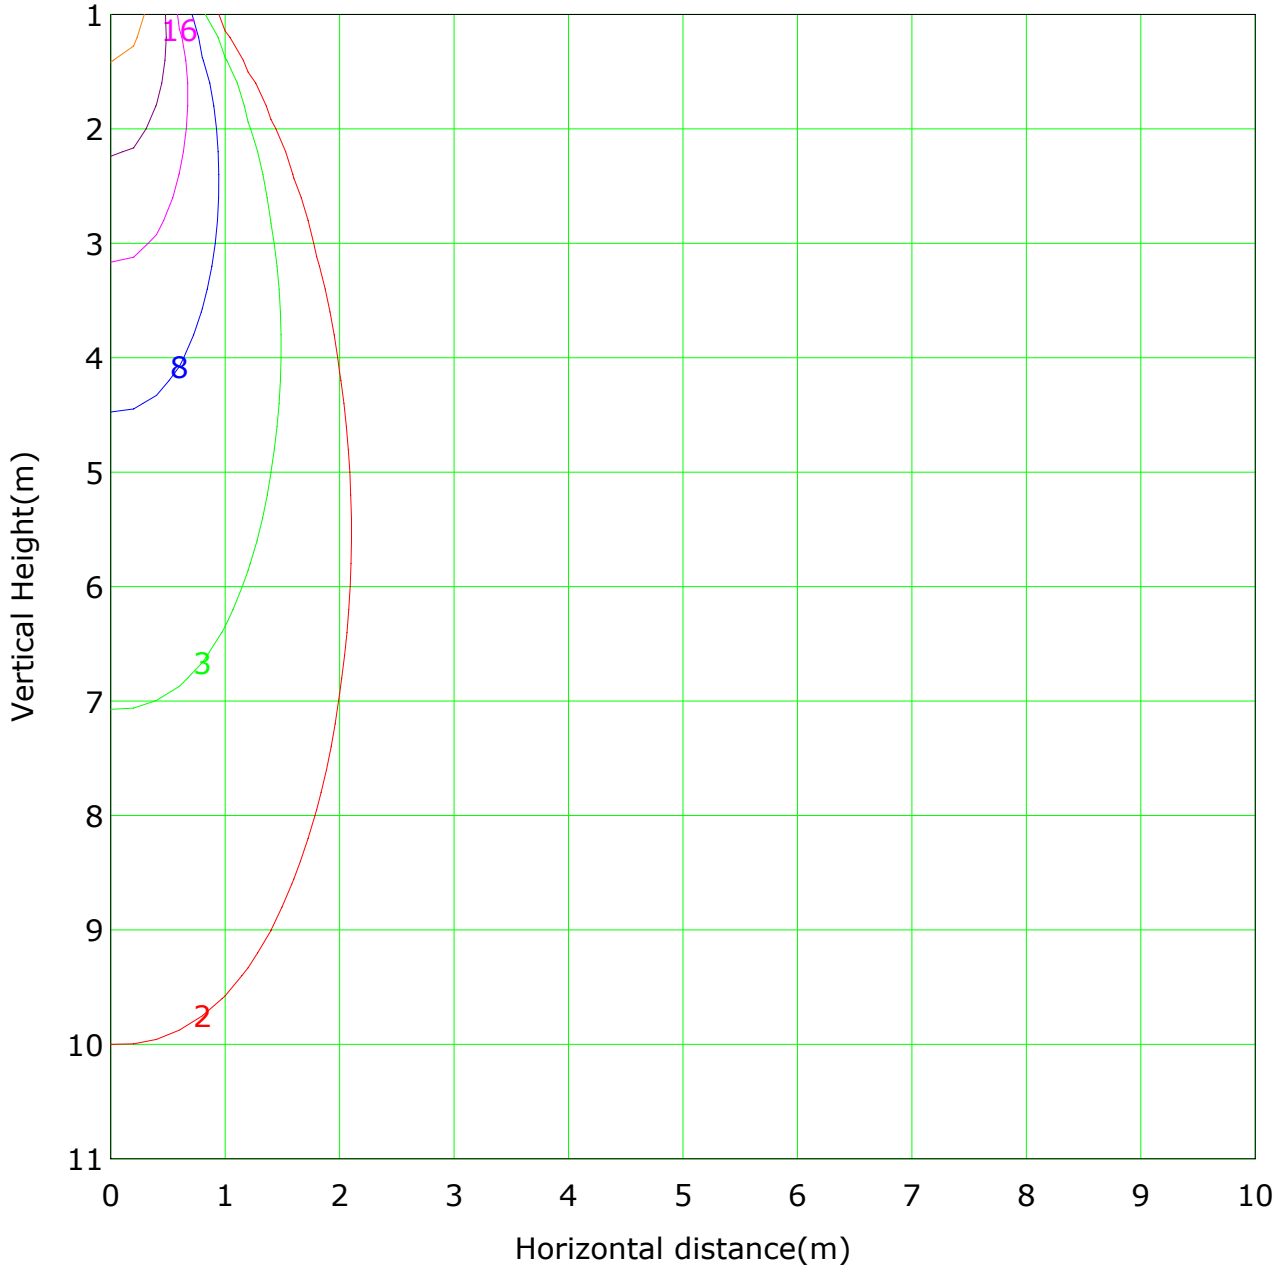


Lowest(m): 1.0m    Highest(m): 11.0m    Max Lux: 161.0 lx

- ( 1%): 1.6 lx
- ( 2%): 3.2 lx
- ( 5%): 8.1 lx
- ( 10%): 16.1 lx
- ( 20%): 32.2 lx
- ( 50%): 80.5 lx
- (100%): 161.0 lx

C Plane (°):0.0-360.0: 30.0  
 Test Lab: NORDECOR  
 Test Type: TYPE C  
 Temperature: 25  
 Operator: NORDECOR

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 10.289 m [K=1.0000]  
 Humidity: 85  
 Inspector:

## The Average Illuminance Effective Figure

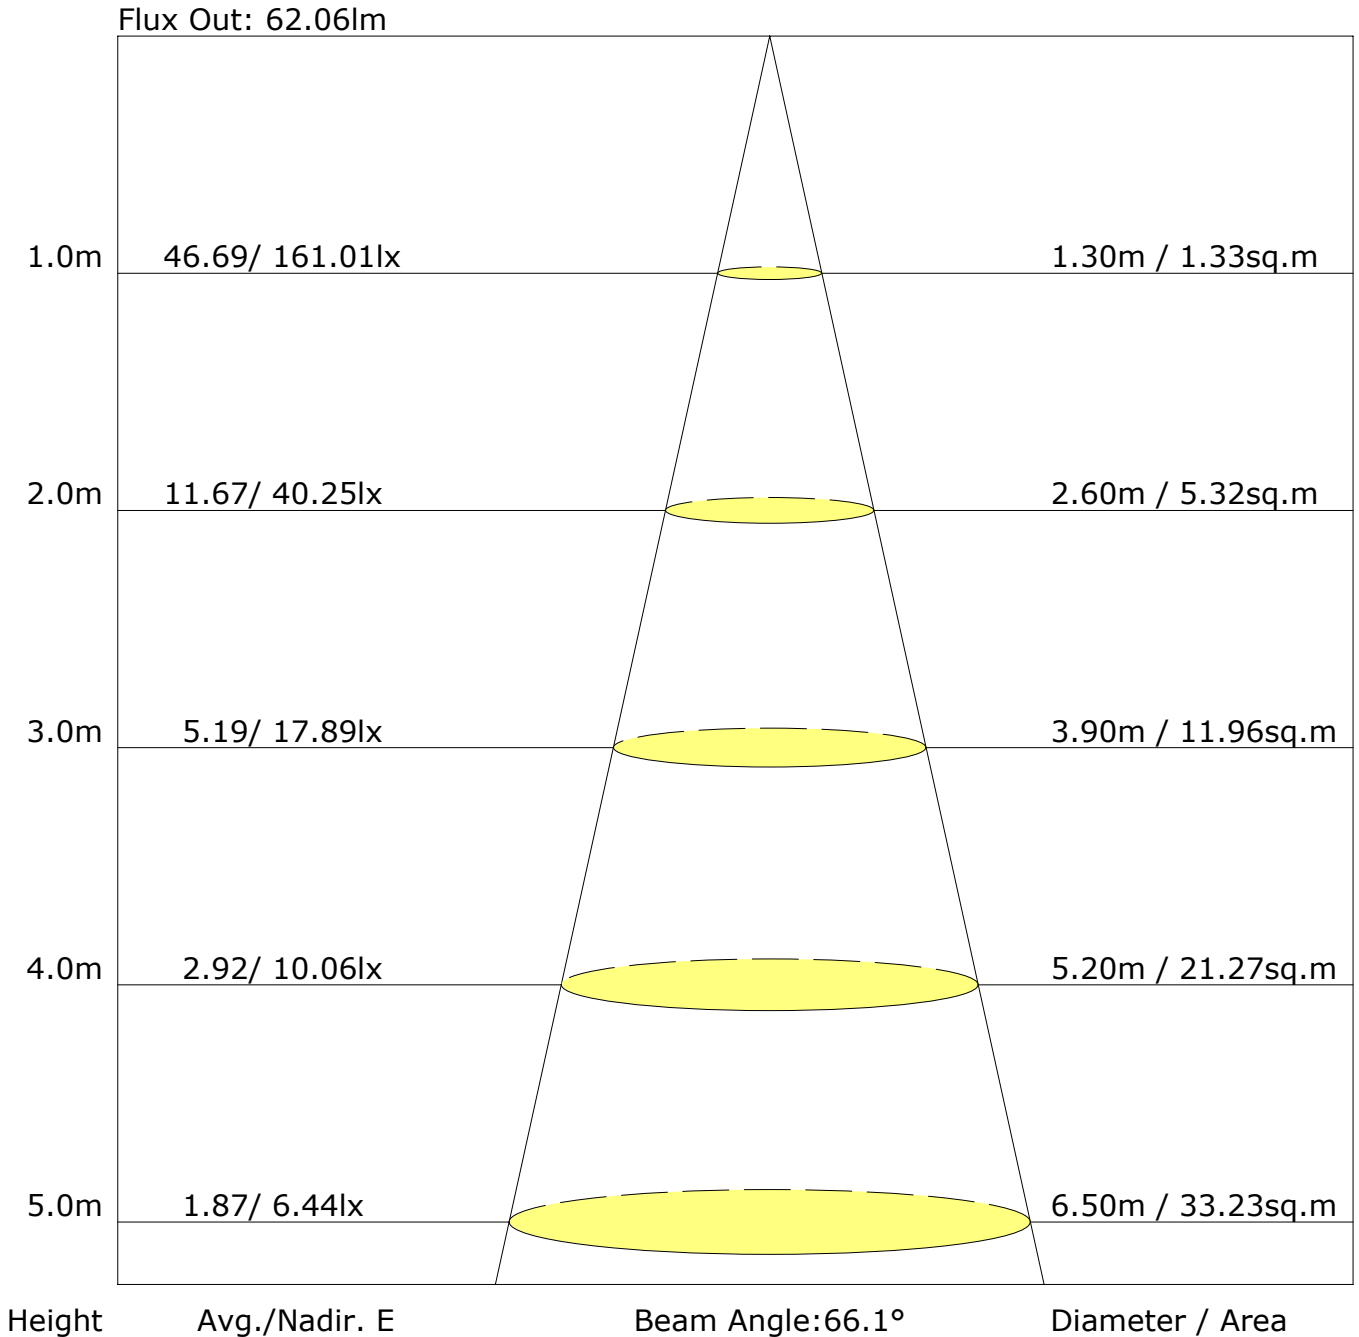

C Plane (°):0.0-360.0: 30.0  
 Test Lab: NORDECOR  
 Test Type: TYPE C  
 Temperature: 25  
 Operator: NORDECOR

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 10.289 m [K=1.0000]  
 Humidity: 85  
 Inspector:

## UGR Table

Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	17.1	17.9	17.4	18.1	18.3	18.4	19.1	18.6	19.3	19.5
3H	17.0	17.7	17.3	17.9	18.1	18.2	18.9	18.5	19.1	19.4
4H	16.9	17.5	17.2	17.8	18.1	18.2	18.8	18.5	19.0	19.3
6H	16.8	17.4	17.2	17.7	18.0	18.1	18.7	18.4	19.0	19.2
8H	16.8	17.4	17.2	17.7	18.0	18.1	18.6	18.4	18.9	19.2
12H	16.8	17.3	17.1	17.6	17.9	18.0	18.5	18.4	18.9	19.2
X=4H Y=2H	16.9	17.5	17.2	17.8	18.1	18.2	18.8	18.5	19.0	19.3
3H	16.8	17.3	17.1	17.6	17.9	18.0	18.5	18.4	18.9	19.2
4H	16.7	17.2	17.1	17.5	17.8	17.9	18.4	18.3	18.7	19.1
6H	16.6	17.0	17.0	17.4	17.8	17.8	18.3	18.3	18.6	19.0
8H	16.6	16.9	17.0	17.3	17.7	17.8	18.2	18.2	18.6	19.0
12H	16.5	16.9	16.9	17.3	17.7	17.8	18.1	18.2	18.5	18.9
X=8H Y=4H	16.6	16.9	17.0	17.3	17.7	17.8	18.2	18.2	18.6	19.0
6H	16.5	16.8	16.9	17.2	17.6	17.7	18.0	18.2	18.4	18.9
8H	16.4	16.7	16.9	17.1	17.6	17.7	17.9	18.1	18.4	18.9
12H	16.4	16.6	16.9	17.1	17.6	17.6	17.8	18.1	18.3	18.8
X=12H Y=4H	16.5	16.9	16.9	17.3	17.7	17.8	18.1	18.2	18.5	18.9
6H	16.4	16.7	16.9	17.1	17.6	17.7	17.9	18.1	18.4	18.9
8H	16.4	16.6	16.9	17.1	17.6	17.6	17.8	18.1	18.3	18.8
Variations with the observer position at spacings:										
S=1.0H	+5.5/-1.\$					+5.3/-1.\$				
S=1.5H	+8.7/-1.\$					+7.9/-1.\$				
S=2.0H	+10.7/-1.\$					+9.9/-1.\$				

Calculate in accordance with CIE Pub.117. The table is revised with 90lm ( $8\log(F/F_0) = -8.4$ ).

## Zonal Lumen

Gamma [°]	I <sub>mean</sub> [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	161.7	0.2	0.2	0.17	0.17
1.0-2.0	160.9	0.5	0.6	0.51	0.69
2.0-3.0	159.4	0.8	1.4	0.85	1.53
3.0-4.0	157.2	1.1	2.4	1.17	2.70
4.0-5.0	154.3	1.3	3.8	1.47	4.18
5.0-6.0	150.7	1.6	5.3	1.76	5.94
6.0-7.0	146.4	1.8	7.2	2.02	7.96
7.0-8.0	141.7	2.0	9.2	2.25	10.21
8.0-9.0	136.3	2.2	11.4	2.46	12.66
9.0-10.0	130.5	2.4	13.8	2.63	15.29
10.0-11.0	124.4	2.5	16.2	2.76	18.05
11.0-12.0	117.9	2.6	18.8	2.87	20.92
12.0-13.0	111.4	2.6	21.5	2.94	23.85
13.0-14.0	104.8	2.7	24.2	2.98	26.83
14.0-15.0	98.1	2.7	26.8	2.99	29.83
15.0-16.0	91.5	2.7	29.5	2.98	32.81
16.0-17.0	85.1	2.6	32.2	2.94	35.75
17.0-18.0	78.8	2.6	34.8	2.89	38.64
18.0-19.0	72.8	2.5	37.3	2.82	41.46
19.0-20.0	67.1	2.5	39.8	2.73	44.19
20.0-21.0	61.7	2.4	42.1	2.63	46.82
21.0-22.0	56.6	2.3	44.4	2.53	49.34
22.0-23.0	51.6	2.2	46.6	2.41	51.75
23.0-24.0	47.0	2.1	48.6	2.28	54.04
24.0-25.0	42.7	1.9	50.6	2.16	56.20
25.0-26.0	38.7	1.8	52.4	2.03	58.23
26.0-27.0	35.0	1.7	54.1	1.90	60.13
27.0-28.0	31.5	1.6	55.7	1.77	61.90
28.0-29.0	28.3	1.5	57.2	1.64	63.55
29.0-30.0	25.3	1.4	58.6	1.52	65.07
30.0-31.0	22.6	1.3	59.8	1.40	66.46
31.0-32.0	20.1	1.2	61.0	1.28	67.74
32.0-33.0	17.8	1.1	62.0	1.17	68.91
33.0-34.0	15.8	1.0	63.0	1.06	69.97
34.0-35.0	13.9	0.9	63.8	0.96	70.93
35.0-36.0	12.2	0.8	64.6	0.86	71.79

C Plane (°):0.0-360.0: 30.0  
 Test Lab: NORDECOR  
 Test Type: TYPE C  
 Temperature: 25  
 Operator: NORDECOR

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 10.289 m [K=1.0000]  
 Humidity: 85  
 Inspector:

## Zonal Lumen (Continue 1)

Gamma [°]	I <sub>mean</sub> [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	10.6	0.7	65.3	0.77	72.56
37.0-38.0	9.3	0.6	65.9	0.69	73.25
38.0-39.0	8.0	0.5	66.5	0.61	73.85
39.0-40.0	6.9	0.5	66.9	0.53	74.39
40.0-41.0	5.8	0.4	67.4	0.46	74.85
41.0-42.0	4.9	0.4	67.7	0.40	75.24
42.0-43.0	4.1	0.3	68.0	0.34	75.58
43.0-44.0	3.4	0.3	68.3	0.28	75.86
44.0-45.0	2.6	0.2	68.5	0.23	76.09
45.0-46.0	1.9	0.1	68.6	0.16	76.25
46.0-47.0	1.4	0.1	68.7	0.12	76.38
47.0-48.0	1.0	0.1	68.8	0.09	76.47
48.0-49.0	0.7	0.1	68.9	0.06	76.53
49.0-50.0	0.4	0.0	68.9	0.04	76.57
50.0-51.0	0.1	0.0	68.9	0.01	76.58
51.0-52.0	0.0	0.0	68.9	0.00	76.58
52.0-53.0	0.0	0.0	68.9	0.00	76.58
53.0-54.0	0.0	0.0	68.9	0.00	76.58
54.0-55.0	0.0	0.0	68.9	0.00	76.58
55.0-56.0	0.0	0.0	68.9	0.00	76.58
56.0-57.0	0.0	0.0	68.9	0.00	76.58
57.0-58.0	0.0	0.0	68.9	0.00	76.58
58.0-59.0	0.0	0.0	68.9	0.00	76.58
59.0-60.0	0.0	0.0	68.9	0.00	76.58
60.0-61.0	0.0	0.0	68.9	0.00	76.58
61.0-62.0	0.0	0.0	68.9	0.00	76.58
62.0-63.0	0.0	0.0	68.9	0.00	76.58
63.0-64.0	0.0	0.0	68.9	0.00	76.58
64.0-65.0	0.0	0.0	68.9	0.00	76.58
65.0-66.0	0.0	0.0	68.9	0.00	76.58
66.0-67.0	0.0	0.0	68.9	0.00	76.58
67.0-68.0	0.0	0.0	68.9	0.00	76.58
68.0-69.0	0.0	0.0	68.9	0.00	76.58
69.0-70.0	0.0	0.0	68.9	0.00	76.58
70.0-71.0	0.0	0.0	68.9	0.00	76.58
71.0-72.0	0.0	0.0	68.9	0.00	76.58

C Plane (°):0.0-360.0: 30.0  
 Test Lab: NORDECOR  
 Test Type: TYPE C  
 Temperature: 25  
 Operator: NORDECOR

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 10.289 m [K=1.0000]  
 Humidity: 85  
 Inspector:

## Zonal Lumen (Continue 2)

Gamma [°]	I <sub>mean</sub> [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	0.0	0.0	68.9	0.00	76.58
73.0-74.0	0.0	0.0	68.9	0.00	76.58
74.0-75.0	0.0	0.0	68.9	0.00	76.58
75.0-76.0	0.0	0.0	68.9	0.00	76.58
76.0-77.0	0.0	0.0	68.9	0.00	76.58
77.0-78.0	0.0	0.0	68.9	0.00	76.58
78.0-79.0	0.0	0.0	68.9	0.00	76.58
79.0-80.0	0.0	0.0	68.9	0.00	76.58
80.0-81.0	0.0	0.0	68.9	0.00	76.58
81.0-82.0	0.0	0.0	68.9	0.00	76.58
82.0-83.0	0.0	0.0	68.9	0.00	76.58
83.0-84.0	0.0	0.0	68.9	0.00	76.58
84.0-85.0	0.0	0.0	68.9	0.00	76.58
85.0-86.0	0.0	0.0	68.9	0.00	76.58
86.0-87.0	0.0	0.0	68.9	0.00	76.58
87.0-88.0	0.0	0.0	68.9	0.00	76.58
88.0-89.0	0.0	0.0	68.9	0.00	76.58
89.0-90.0	0.0	0.0	68.9	0.00	76.58
90.0-91.0	0.0	0.0	68.9	0.00	76.58
91.0-92.0	0.0	0.0	68.9	0.00	76.58
92.0-93.0	0.0	0.0	68.9	0.00	76.58
93.0-94.0	0.0	0.0	68.9	0.00	76.58
94.0-95.0	0.0	0.0	68.9	0.00	76.58
95.0-96.0	0.0	0.0	68.9	0.00	76.58
96.0-97.0	0.0	0.0	68.9	0.00	76.58
97.0-98.0	0.0	0.0	68.9	0.00	76.58
98.0-99.0	0.0	0.0	68.9	0.00	76.58
99.0-100.0	0.0	0.0	68.9	0.00	76.58
100.0-101.0	0.0	0.0	68.9	0.00	76.58
101.0-102.0	0.0	0.0	68.9	0.00	76.58
102.0-103.0	0.0	0.0	68.9	0.00	76.58
103.0-104.0	0.0	0.0	68.9	0.00	76.58
104.0-105.0	0.0	0.0	68.9	0.00	76.58
105.0-106.0	0.0	0.0	68.9	0.00	76.58
106.0-107.0	0.0	0.0	68.9	0.00	76.58
107.0-108.0	0.0	0.0	68.9	0.00	76.58

C Plane (°):0.0-360.0: 30.0  
 Test Lab: NORDECOR  
 Test Type: TYPE C  
 Temperature: 25  
 Operator: NORDECOR

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 10.289 m [K=1.0000]  
 Humidity: 85  
 Inspector:

## Zonal Lumen (Continue 3)

Gamma [°]	I <sub>mean</sub> [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
108.0-109.0	0.0	0.0	68.9	0.00	76.58
109.0-110.0	0.0	0.0	68.9	0.00	76.58
110.0-111.0	0.0	0.0	68.9	0.00	76.58
111.0-112.0	0.0	0.0	68.9	0.00	76.58
112.0-113.0	0.0	0.0	68.9	0.00	76.58
113.0-114.0	0.0	0.0	68.9	0.00	76.58
114.0-115.0	0.0	0.0	68.9	0.00	76.58
115.0-116.0	0.0	0.0	68.9	0.00	76.58
116.0-117.0	0.0	0.0	68.9	0.00	76.58
117.0-118.0	0.0	0.0	68.9	0.00	76.58
118.0-119.0	0.0	0.0	68.9	0.00	76.58
119.0-120.0	0.0	0.0	68.9	0.00	76.58
120.0-121.0	0.0	0.0	68.9	0.00	76.58
121.0-122.0	0.0	0.0	68.9	0.00	76.58
122.0-123.0	0.0	0.0	68.9	0.00	76.58
123.0-124.0	0.0	0.0	68.9	0.00	76.58
124.0-125.0	0.0	0.0	68.9	0.00	76.58
125.0-126.0	0.0	0.0	68.9	0.00	76.58
126.0-127.0	0.0	0.0	68.9	0.00	76.58
127.0-128.0	0.0	0.0	68.9	0.00	76.58
128.0-129.0	0.0	0.0	68.9	0.00	76.58
129.0-130.0	0.0	0.0	68.9	0.00	76.58
130.0-131.0	0.0	0.0	68.9	0.00	76.58
131.0-132.0	0.0	0.0	68.9	0.00	76.58
132.0-133.0	0.0	0.0	68.9	0.00	76.58
133.0-134.0	0.0	0.0	68.9	0.00	76.58
134.0-135.0	0.0	0.0	68.9	0.00	76.58
135.0-136.0	0.0	0.0	68.9	0.00	76.58
136.0-137.0	0.0	0.0	68.9	0.00	76.58
137.0-138.0	0.0	0.0	68.9	0.00	76.58
138.0-139.0	0.0	0.0	68.9	0.00	76.58
139.0-140.0	0.0	0.0	68.9	0.00	76.58
140.0-141.0	0.0	0.0	68.9	0.00	76.58
141.0-142.0	0.0	0.0	68.9	0.00	76.58
142.0-143.0	0.0	0.0	68.9	0.00	76.58
143.0-144.0	0.0	0.0	68.9	0.00	76.58

C Plane (°):0.0-360.0: 30.0  
 Test Lab: NORDECOR  
 Test Type: TYPE C  
 Temperature: 25  
 Operator: NORDECOR

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 10.289 m [K=1.0000]  
 Humidity: 85  
 Inspector:



## Zonal Lumen (Continue 4)

Gamma [°]	I <sub>mean</sub> [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
144.0-145.0	0.0	0.0	68.9	0.00	76.58
145.0-146.0	0.0	0.0	68.9	0.00	76.58
146.0-147.0	0.0	0.0	68.9	0.00	76.58
147.0-148.0	0.0	0.0	68.9	0.00	76.58
148.0-149.0	0.0	0.0	68.9	0.00	76.58
149.0-150.0	0.0	0.0	68.9	0.00	76.58
150.0-151.0	0.0	0.0	68.9	0.00	76.58
151.0-152.0	0.0	0.0	68.9	0.00	76.58
152.0-153.0	0.0	0.0	68.9	0.00	76.58
153.0-154.0	0.0	0.0	68.9	0.00	76.58
154.0-155.0	0.0	0.0	68.9	0.00	76.58
155.0-156.0	0.0	0.0	68.9	0.00	76.58
156.0-157.0	0.0	0.0	68.9	0.00	76.58
157.0-158.0	0.0	0.0	68.9	0.00	76.58
158.0-159.0	0.0	0.0	68.9	0.00	76.58
159.0-160.0	0.0	0.0	68.9	0.00	76.58
160.0-161.0	0.0	0.0	68.9	0.00	76.58
161.0-162.0	0.0	0.0	68.9	0.00	76.58
162.0-163.0	0.0	0.0	68.9	0.00	76.58
163.0-164.0	0.0	0.0	68.9	0.00	76.58
164.0-165.0	0.0	0.0	68.9	0.00	76.58
165.0-166.0	0.0	0.0	68.9	0.00	76.58
166.0-167.0	0.0	0.0	68.9	0.00	76.58
167.0-168.0	0.0	0.0	68.9	0.00	76.58
168.0-169.0	0.0	0.0	68.9	0.00	76.58
169.0-170.0	0.0	0.0	68.9	0.00	76.58
170.0-171.0	0.0	0.0	68.9	0.00	76.58
171.0-172.0	0.0	0.0	68.9	0.00	76.58
172.0-173.0	0.0	0.0	68.9	0.00	76.58
173.0-174.0	0.0	0.0	68.9	0.00	76.58
174.0-175.0	0.0	0.0	68.9	0.00	76.58
175.0-176.0	0.0	0.0	68.9	0.00	76.58
176.0-177.0	0.0	0.0	68.9	0.00	76.58
177.0-178.0	0.0	0.0	68.9	0.00	76.58
178.0-179.0	0.0	0.0	68.9	0.00	76.58
179.0-180.0	0.0	0.0	68.9	0.00	76.58

C Plane (°):0.0-360.0: 30.0  
 Test Lab: NORDECOR  
 Test Type: TYPE C  
 Temperature: 25  
 Operator: NORDECOR

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 10.289 m [K=1.0000]  
 Humidity: 85  
 Inspector:

## Candlepower Table

Unit: cd

G\C	C0.0	C30.0	C60.0	C90.0	C120.0	C150.0	C180.0	C210.0	C240.0	C270.0
G0.0	161.0	160.0	160.6	162.2	163.5	163.9	161.0	160.0	160.6	162.2
G1.0	161.1	158.2	157.6	158.7	159.9	160.9	160.1	161.1	163.0	164.9
G2.0	160.4	155.5	154.0	154.6	155.7	157.3	158.4	161.5	164.6	166.8
G3.0	158.8	152.2	149.8	150.1	151.0	152.9	156.1	161.1	165.5	167.9
G4.0	156.3	148.0	144.9	145.1	146.0	148.2	152.9	159.7	165.4	168.2
G5.0	153.1	143.3	139.5	139.8	140.6	142.9	149.1	157.7	164.4	167.6
G6.0	149.1	137.9	133.6	133.9	134.7	137.4	144.7	155.0	162.8	166.0
G7.0	144.3	131.9	127.2	127.7	128.8	131.7	140.1	151.6	160.3	163.6
G8.0	138.9	125.6	120.7	121.2	122.5	125.6	135.0	147.6	157.1	160.2
G9.0	132.7	118.9	113.7	114.4	116.0	119.3	129.5	143.0	153.1	156.1
G10.0	126.0	111.9	106.6	107.7	109.6	113.0	123.6	138.1	148.4	151.0
G11.0	119.2	105.0	99.8	101.1	103.3	106.8	117.5	132.6	142.8	145.1
G12.0	112.2	98.2	93.1	94.5	96.9	100.5	111.3	126.7	136.8	138.4
G13.0	105.3	91.4	86.7	88.1	90.6	94.1	105.2	120.5	130.3	131.6
G14.0	98.3	85.1	80.3	82.0	84.6	87.9	99.0	114.0	123.4	124.3
G15.0	91.3	78.7	74.3	75.8	78.4	81.8	93.0	107.4	116.5	116.7
G16.0	84.4	72.4	68.4	70.2	72.7	76.0	86.9	100.8	109.4	109.2
G17.0	78.1	66.7	62.9	64.7	67.1	70.4	80.8	94.2	102.3	101.7
G18.0	71.9	61.1	57.6	59.5	62.0	65.1	75.1	87.7	95.2	94.3
G19.0	66.1	55.9	52.7	54.4	56.9	59.9	69.8	81.5	88.7	87.4
G20.0	60.6	51.0	47.9	49.8	52.0	55.1	64.6	75.6	82.3	81.1
G21.0	55.3	46.2	43.5	45.2	47.5	50.5	59.6	69.9	76.1	74.6
G22.0	50.3	41.7	39.3	41.0	43.2	46.2	54.9	64.4	70.2	68.8
G23.0	45.5	37.5	35.4	37.0	39.1	42.0	50.3	59.2	64.5	63.2
G24.0	41.2	33.8	31.8	33.3	35.4	38.2	46.0	54.3	59.2	57.7
G25.0	37.1	30.1	28.5	29.9	31.9	34.6	41.9	49.6	54.2	52.8
G26.0	33.3	27.0	25.3	26.7	28.7	31.3	38.2	45.5	49.6	48.2
G27.0	29.9	24.1	22.5	23.8	25.7	28.1	34.7	41.3	45.3	43.8
G28.0	26.5	21.2	19.8	21.0	22.9	25.2	31.4	37.6	41.2	39.7
G29.0	23.6	18.7	17.4	18.6	20.4	22.5	28.4	34.0	37.3	35.9
G30.0	20.8	16.4	15.4	16.4	18.0	20.0	25.5	30.6	33.8	32.4
G31.0	18.4	14.4	13.4	14.4	15.9	17.7	22.8	27.5	30.3	29.0
G32.0	16.3	12.7	11.7	12.6	14.0	15.7	20.4	24.6	27.2	26.0
G33.0	14.3	11.1	10.3	11.0	12.3	13.9	18.1	22.1	24.4	23.2
G34.0	12.5	9.6	8.9	9.5	10.8	12.2	16.1	19.8	21.8	20.7
G35.0	10.8	8.3	7.6	8.2	9.4	10.7	14.2	17.5	19.4	18.4
G36.0	9.3	7.0	6.4	7.1	8.1	9.3	12.5	15.5	17.2	16.2

C Plane (°):0.0-360.0: 30.0  
 Test Lab: NORDECOR  
 Test Type: TYPE C  
 Temperature: 25  
 Operator: NORDECOR

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 10.289 m [K=1.0000]  
 Humidity: 85  
 Inspector:

## Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C30.0	C60.0	C90.0	C120.0	C150.0	C180.0	C210.0	C240.0	C270.0
G37.0	8.0	5.8	5.5	6.1	7.1	8.1	11.0	13.8	15.2	14.2
G38.0	6.7	4.8	4.6	5.2	6.0	7.0	9.7	12.2	13.5	12.5
G39.0	5.5	3.9	3.8	4.3	5.1	6.0	8.6	10.7	11.8	10.9
G40.0	4.4	3.3	3.1	3.5	4.3	5.2	7.4	9.4	10.4	9.5
G41.0	3.6	2.8	2.5	2.9	3.6	4.4	6.3	8.2	9.1	8.2
G42.0	2.9	2.3	2.2	2.3	2.9	3.7	5.3	7.2	7.8	6.8
G43.0	2.5	1.9	1.9	2.0	2.4	2.8	4.5	6.1	6.6	5.6
G44.0	2.1	1.6	1.5	1.7	2.0	2.3	3.7	5.2	5.4	4.5
G45.0	1.8	0.0	0.0	0.0	1.8	2.0	3.0	4.1	4.5	3.6
G46.0	0.0	0.0	0.0	0.0	0.0	1.8	2.6	3.3	3.5	3.0
G47.0	0.0	0.0	0.0	0.0	0.0	0.0	2.2	2.9	3.0	2.5
G48.0	0.0	0.0	0.0	0.0	0.0	0.0	1.8	2.4	2.5	2.0
G49.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.1	2.0	1.6
G50.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.8	1.6	0.0
G51.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G52.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G53.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G54.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G55.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G56.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G57.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G58.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G59.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G60.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G61.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G62.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G63.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G64.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G65.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G66.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G67.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G68.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G69.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G70.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G71.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G72.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G73.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C Plane (°):0.0-360.0: 30.0  
 Test Lab: NORDECOR  
 Test Type: TYPE C  
 Temperature: 25  
 Operator: NORDECOR

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 10.289 m [K=1.0000]  
 Humidity: 85  
 Inspector:

## Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C30.0	C60.0	C90.0	C120.0	C150.0	C180.0	C210.0	C240.0	C270.0
G74.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G75.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G76.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G77.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G78.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G79.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G80.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G81.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G82.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G83.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G84.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G85.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G86.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G87.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G88.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G89.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G90.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G91.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G92.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G93.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G94.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G95.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G96.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G97.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G98.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G99.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G100.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G101.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G102.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G103.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G104.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G105.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G106.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G107.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G108.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G109.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G110.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C Plane (°):0.0-360.0: 30.0  
 Test Lab: NORDECOR  
 Test Type: TYPE C  
 Temperature: 25  
 Operator: NORDECOR

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 10.289 m [K=1.0000]  
 Humidity: 85  
 Inspector:

## Candlepower Table (Continue 3)

Unit: cd

G/C	C0.0	C30.0	C60.0	C90.0	C120.0	C150.0	C180.0	C210.0	C240.0	C270.0
G111.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G112.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G113.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G114.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G115.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G116.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G117.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G118.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G119.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G120.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G121.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G122.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G123.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G124.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G125.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G126.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G127.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G128.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G129.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G130.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G131.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G132.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G133.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G134.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G135.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G136.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G137.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G138.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G139.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G140.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G141.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G142.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G143.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G144.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G145.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G146.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G147.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C Plane (°):0.0-360.0: 30.0  
 Test Lab: NORDECOR  
 Test Type: TYPE C  
 Temperature: 25  
 Operator: NORDECOR

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 10.289 m [K=1.0000]  
 Humidity: 85  
 Inspector:

## Candlepower Table (Continue 4)

Unit: cd

G\C	C0.0	C30.0	C60.0	C90.0	C120.0	C150.0	C180.0	C210.0	C240.0	C270.0
G148.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G149.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G150.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G151.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G152.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G153.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G154.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G155.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G156.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G157.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G158.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G159.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G160.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G161.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G162.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G163.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G164.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G165.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G166.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G167.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G168.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G169.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G170.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G171.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G172.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G173.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G174.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G175.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G176.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G177.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G178.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G179.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
G180.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C Plane (°):0.0-360.0: 30.0  
 Test Lab: NORDECOR  
 Test Type: TYPE C  
 Temperature: 25  
 Operator: NORDECOR

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 10.289 m [K=1.0000]  
 Humidity: 85  
 Inspector:

## Candlepower Table (Continue 5)

Unit: cd

G\C	C300.0	C330.0	C360.0							
G0.0	163.5	163.9	161.0							
G1.0	166.1	166.0	161.1							
G2.0	168.0	167.1	160.4							
G3.0	169.1	167.4	158.8							
G4.0	169.1	166.8	156.3							
G5.0	168.2	165.4	153.1							
G6.0	166.4	162.8	149.1							
G7.0	163.7	159.5	144.3							
G8.0	160.1	155.2	138.9							
G9.0	155.6	150.1	132.7							
G10.0	150.3	144.2	126.0							
G11.0	143.8	137.6	119.2							
G12.0	137.0	130.7	112.2							
G13.0	129.9	123.6	105.3							
G14.0	122.6	116.2	98.3							
G15.0	114.9	108.7	91.3							
G16.0	107.2	101.4	84.4							
G17.0	99.7	94.1	78.1							
G18.0	92.4	86.9	71.9							
G19.0	85.3	80.2	66.1							
G20.0	78.7	73.9	60.6							
G21.0	72.3	67.9	55.3							
G22.0	66.5	62.1	50.3							
G23.0	60.8	56.5	45.5							
G24.0	55.3	51.3	41.2							
G25.0	50.5	46.6	37.1							
G26.0	45.7	42.2	33.3							
G27.0	41.5	38.1	29.9							
G28.0	37.3	34.3	26.5							
G29.0	33.6	30.7	23.6							
G30.0	30.0	27.2	20.8							
G31.0	26.8	24.3	18.4							
G32.0	23.9	21.5	16.3							
G33.0	21.4	19.0	14.3							
G34.0	18.8	16.9	12.5							
G35.0	16.7	14.8	10.8							
G36.0	14.7	13.0	9.3							

C Plane (°):0.0-360.0: 30.0  
 Test Lab: NORDECOR  
 Test Type: TYPE C  
 Temperature: 25  
 Operator: NORDECOR

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 10.289 m [K=1.0000]  
 Humidity: 85  
 Inspector:

## Candlepower Table (Continue 6)

Unit: cd

G\C	C300.0	C330.0	C360.0							
G37.0	12.9	11.3	8.0							
G38.0	11.3	9.8	6.7							
G39.0	9.8	8.2	5.5							
G40.0	8.3	6.9	4.4							
G41.0	6.9	5.6	3.6							
G42.0	5.7	4.6	2.9							
G43.0	4.5	3.7	2.5							
G44.0	3.8	3.1	2.1							
G45.0	3.2	2.5	1.8							
G46.0	2.6	2.1	0.0							
G47.0	2.1	1.7	0.0							
G48.0	1.7	0.0	0.0							
G49.0	0.0	0.0	0.0							
G50.0	0.0	0.0	0.0							
G51.0	0.0	0.0	0.0							
G52.0	0.0	0.0	0.0							
G53.0	0.0	0.0	0.0							
G54.0	0.0	0.0	0.0							
G55.0	0.0	0.0	0.0							
G56.0	0.0	0.0	0.0							
G57.0	0.0	0.0	0.0							
G58.0	0.0	0.0	0.0							
G59.0	0.0	0.0	0.0							
G60.0	0.0	0.0	0.0							
G61.0	0.0	0.0	0.0							
G62.0	0.0	0.0	0.0							
G63.0	0.0	0.0	0.0							
G64.0	0.0	0.0	0.0							
G65.0	0.0	0.0	0.0							
G66.0	0.0	0.0	0.0							
G67.0	0.0	0.0	0.0							
G68.0	0.0	0.0	0.0							
G69.0	0.0	0.0	0.0							
G70.0	0.0	0.0	0.0							
G71.0	0.0	0.0	0.0							
G72.0	0.0	0.0	0.0							
G73.0	0.0	0.0	0.0							

C Plane (°):0.0-360.0: 30.0  
 Test Lab: NORDECOR  
 Test Type: TYPE C  
 Temperature: 25  
 Operator: NORDECOR

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 10.289 m [K=1.0000]  
 Humidity: 85  
 Inspector:



## Candlepower Table (Continue 7)

Unit: cd

G\C	C300.0	C330.0	C360.0							
G74.0	0.0	0.0	0.0							
G75.0	0.0	0.0	0.0							
G76.0	0.0	0.0	0.0							
G77.0	0.0	0.0	0.0							
G78.0	0.0	0.0	0.0							
G79.0	0.0	0.0	0.0							
G80.0	0.0	0.0	0.0							
G81.0	0.0	0.0	0.0							
G82.0	0.0	0.0	0.0							
G83.0	0.0	0.0	0.0							
G84.0	0.0	0.0	0.0							
G85.0	0.0	0.0	0.0							
G86.0	0.0	0.0	0.0							
G87.0	0.0	0.0	0.0							
G88.0	0.0	0.0	0.0							
G89.0	0.0	0.0	0.0							
G90.0	0.0	0.0	0.0							
G91.0	0.0	0.0	0.0							
G92.0	0.0	0.0	0.0							
G93.0	0.0	0.0	0.0							
G94.0	0.0	0.0	0.0							
G95.0	0.0	0.0	0.0							
G96.0	0.0	0.0	0.0							
G97.0	0.0	0.0	0.0							
G98.0	0.0	0.0	0.0							
G99.0	0.0	0.0	0.0							
G100.0	0.0	0.0	0.0							
G101.0	0.0	0.0	0.0							
G102.0	0.0	0.0	0.0							
G103.0	0.0	0.0	0.0							
G104.0	0.0	0.0	0.0							
G105.0	0.0	0.0	0.0							
G106.0	0.0	0.0	0.0							
G107.0	0.0	0.0	0.0							
G108.0	0.0	0.0	0.0							
G109.0	0.0	0.0	0.0							
G110.0	0.0	0.0	0.0							

C Plane (°):0.0-360.0: 30.0  
 Test Lab: NORDECOR  
 Test Type: TYPE C  
 Temperature: 25  
 Operator: NORDECOR

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 10.289 m [K=1.0000]  
 Humidity: 85  
 Inspector:

## Candlepower Table (Continue 8)

Unit: cd

G\C	C300.0	C330.0	C360.0							
G111.0	0.0	0.0	0.0							
G112.0	0.0	0.0	0.0							
G113.0	0.0	0.0	0.0							
G114.0	0.0	0.0	0.0							
G115.0	0.0	0.0	0.0							
G116.0	0.0	0.0	0.0							
G117.0	0.0	0.0	0.0							
G118.0	0.0	0.0	0.0							
G119.0	0.0	0.0	0.0							
G120.0	0.0	0.0	0.0							
G121.0	0.0	0.0	0.0							
G122.0	0.0	0.0	0.0							
G123.0	0.0	0.0	0.0							
G124.0	0.0	0.0	0.0							
G125.0	0.0	0.0	0.0							
G126.0	0.0	0.0	0.0							
G127.0	0.0	0.0	0.0							
G128.0	0.0	0.0	0.0							
G129.0	0.0	0.0	0.0							
G130.0	0.0	0.0	0.0							
G131.0	0.0	0.0	0.0							
G132.0	0.0	0.0	0.0							
G133.0	0.0	0.0	0.0							
G134.0	0.0	0.0	0.0							
G135.0	0.0	0.0	0.0							
G136.0	0.0	0.0	0.0							
G137.0	0.0	0.0	0.0							
G138.0	0.0	0.0	0.0							
G139.0	0.0	0.0	0.0							
G140.0	0.0	0.0	0.0							
G141.0	0.0	0.0	0.0							
G142.0	0.0	0.0	0.0							
G143.0	0.0	0.0	0.0							
G144.0	0.0	0.0	0.0							
G145.0	0.0	0.0	0.0							
G146.0	0.0	0.0	0.0							
G147.0	0.0	0.0	0.0							

C Plane (°):0.0-360.0: 30.0  
 Test Lab: NORDECOR  
 Test Type: TYPE C  
 Temperature: 25  
 Operator: NORDECOR

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 10.289 m [K=1.0000]  
 Humidity: 85  
 Inspector:

## Candlepower Table (Continue 9)

Unit: cd

G\C	C300.0	C330.0	C360.0							
G148.0	0.0	0.0	0.0							
G149.0	0.0	0.0	0.0							
G150.0	0.0	0.0	0.0							
G151.0	0.0	0.0	0.0							
G152.0	0.0	0.0	0.0							
G153.0	0.0	0.0	0.0							
G154.0	0.0	0.0	0.0							
G155.0	0.0	0.0	0.0							
G156.0	0.0	0.0	0.0							
G157.0	0.0	0.0	0.0							
G158.0	0.0	0.0	0.0							
G159.0	0.0	0.0	0.0							
G160.0	0.0	0.0	0.0							
G161.0	0.0	0.0	0.0							
G162.0	0.0	0.0	0.0							
G163.0	0.0	0.0	0.0							
G164.0	0.0	0.0	0.0							
G165.0	0.0	0.0	0.0							
G166.0	0.0	0.0	0.0							
G167.0	0.0	0.0	0.0							
G168.0	0.0	0.0	0.0							
G169.0	0.0	0.0	0.0							
G170.0	0.0	0.0	0.0							
G171.0	0.0	0.0	0.0							
G172.0	0.0	0.0	0.0							
G173.0	0.0	0.0	0.0							
G174.0	0.0	0.0	0.0							
G175.0	0.0	0.0	0.0							
G176.0	0.0	0.0	0.0							
G177.0	0.0	0.0	0.0							
G178.0	0.0	0.0	0.0							
G179.0	0.0	0.0	0.0							
G180.0	0.0	0.0	0.0							

C Plane (°):0.0-360.0: 30.0  
 Test Lab: NORDECOR  
 Test Type: TYPE C  
 Temperature: 25  
 Operator: NORDECOR

Gamma Plane (°):0.0-180.0:1.0  
 Test Device: GPM-1800B  
 Distance: 10.289 m [K=1.0000]  
 Humidity: 85  
 Inspector:

## LED Average Luminance Report

Avg.L	cd/m <sup>2</sup>
L 0-180(65) av	0.00
L 0-180(75) av	0.00
L 0-180(85) av	0.00
L 90-270(65) av	0.00
L 90-270(75) av	0.00
L 90-270(85) av	0.00
L 45(65) av	0.00
L 45(75) av	0.00
L 45(85) av	0.00

Standard: GB/T 29293-2012