

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		4007.3 cd per klm. 0.0 degrees vertical 7.0 degrees horizontal
Beam Spread	At 10% of Imax	49.1V x 46.0H
	At 50% of Imax	27.7V x 27.1H
	At 90% of Imax	14.1V x 11.6H
Beam Flux	Total	994.2 lumens per klm.
	To 10% of Imax	879.7 lumens per klm.
	To 50% of Imax	516.1 lumens per klm.
	To 90% of Imax	91.6 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	99.4 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-07-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.12V I:0.0453A P:4.5772W PF:0.4592 Freq:50.00Hz Lamp Flux:222.268x1 lm		
NAME: 6586	TYPE:	WEIGHT:0.3KG
SPEC.:3+3W	DIM.: 8.4*4.5cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

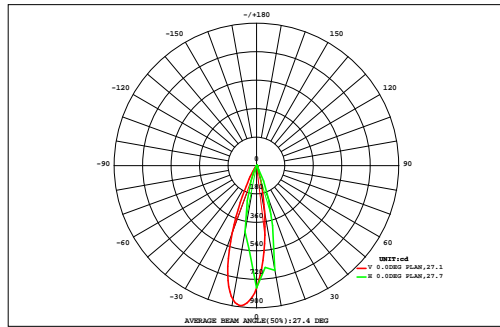

DATA OF LAMP		Eff:48.56lm/W	
MODEL		Imax(cd)	890.7
NOMINAL POWER(W)		AVAILABILITY(%)	89.8
RATED VOLTAGE(V)		Avai. FLUX(lm)	199.5
NOMINAL FLUX(lm)	222.268	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	222.3
TEST VOLTAGE(V)	0	q @50%(H,V)	27,28DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM															UNIT:lm		F t	F a	
	90	80	70	60	50	40	30	20	10	0	10	20	30	40	50	60	70			80
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.01	0.01	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.00	0.32	0.00	
70	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.26	0.00	
60	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.00	0.27	0.00	
50	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.03	0.02	0.02	0.01	0.01	0.00	0.30	0.00	
40	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.04	0.10	0.17	0.17	0.09	0.03	0.02	0.01	0.01	0.00	0.73	0.00	
30	0.00	0.01	0.01	0.01	0.02	0.03	0.05	0.20	0.77	1.60	1.45	0.56	0.12	0.03	0.01	0.01	0.01	4.87	1.34	
20	0.00	0.01	0.01	0.02	0.02	0.04	0.15	0.92	4.07	8.01	6.88	2.55	0.42	0.05	0.02	0.01	0.01	23.2	19.9	
10	0.00	0.01	0.01	0.02	0.03	0.06	0.33	2.41	11.1	20.0	16.8	6.11	0.87	0.09	0.02	0.01	0.01	57.9	55.5	
0	0.00	0.01	0.01	0.02	0.03	0.07	0.42	3.27	15.0	25.9	21.6	7.50	1.00	0.11	0.02	0.01	0.01	75.0	72.7	
-10	0.00	0.01	0.01	0.02	0.03	0.06	0.31	2.08	9.38	16.8	13.4	4.20	0.58	0.08	0.02	0.01	0.01	46.9	44.4	
-20	0.00	0.01	0.01	0.02	0.02	0.04	0.12	0.53	1.77	3.66	2.66	0.87	0.19	0.04	0.02	0.01	0.01	9.97	5.72	
-30	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.10	0.18	0.27	0.26	0.15	0.05	0.02	0.01	0.01	0.00	1.17	0.00	
-40	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.04	0.06	0.06	0.04	0.02	0.02	0.01	0.01	0.00	0.38	0.00	
-50	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.30	0.00	
-60	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.30	0.00	
-70	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.26	0.00	
-80	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.11	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
F t	0.03	0.09	0.15	0.23	0.31	0.49	1.63	9.76	42.6	76.7	63.5	22.2	3.45	0.57	0.24	0.16	0.09	0.03	222	---
F a	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.49	39.5	74.5	60.9	18.7	0.42	0.00	0.00	0.00	0.00	0.00	---	200


one-half-peak spread: U:16.6,D:11.3 , L:14.0,NEMA. Beam Type: Type 3 x 4 (H x V)

H(h) Range:-90 - 90DEG
 H(h) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:NORDECOR
 Test Date:2024-07-17

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.12V I:0.0453A P:4.5772W PF:0.4592 Freq:50.00Hz Lamp Flux:222.268x1 lm		
NAME: 6586	TYPE:	WEIGHT:0.3KG
SPEC.:3+3W	DIM.: 8.4*4.5cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

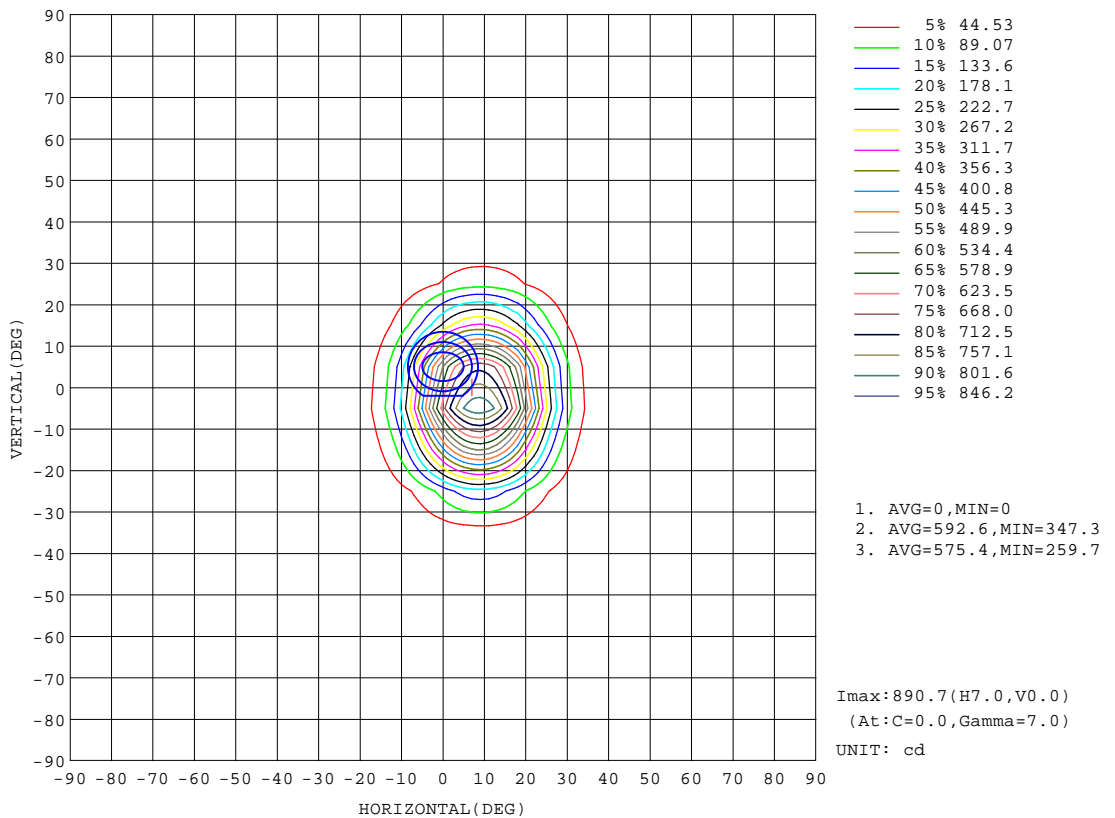


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:NORDECOR
 Test Date:2024-07-17

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:220.12V I:0.0453A P:4.5772W PF:0.4592 Freq:50.00Hz Lamp Flux:222.268x1 lm		
NAME: 6586	TYPE:	WEIGHT:0.3KG
SPEC.:3+3W	DIM.: 8.4*4.5cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

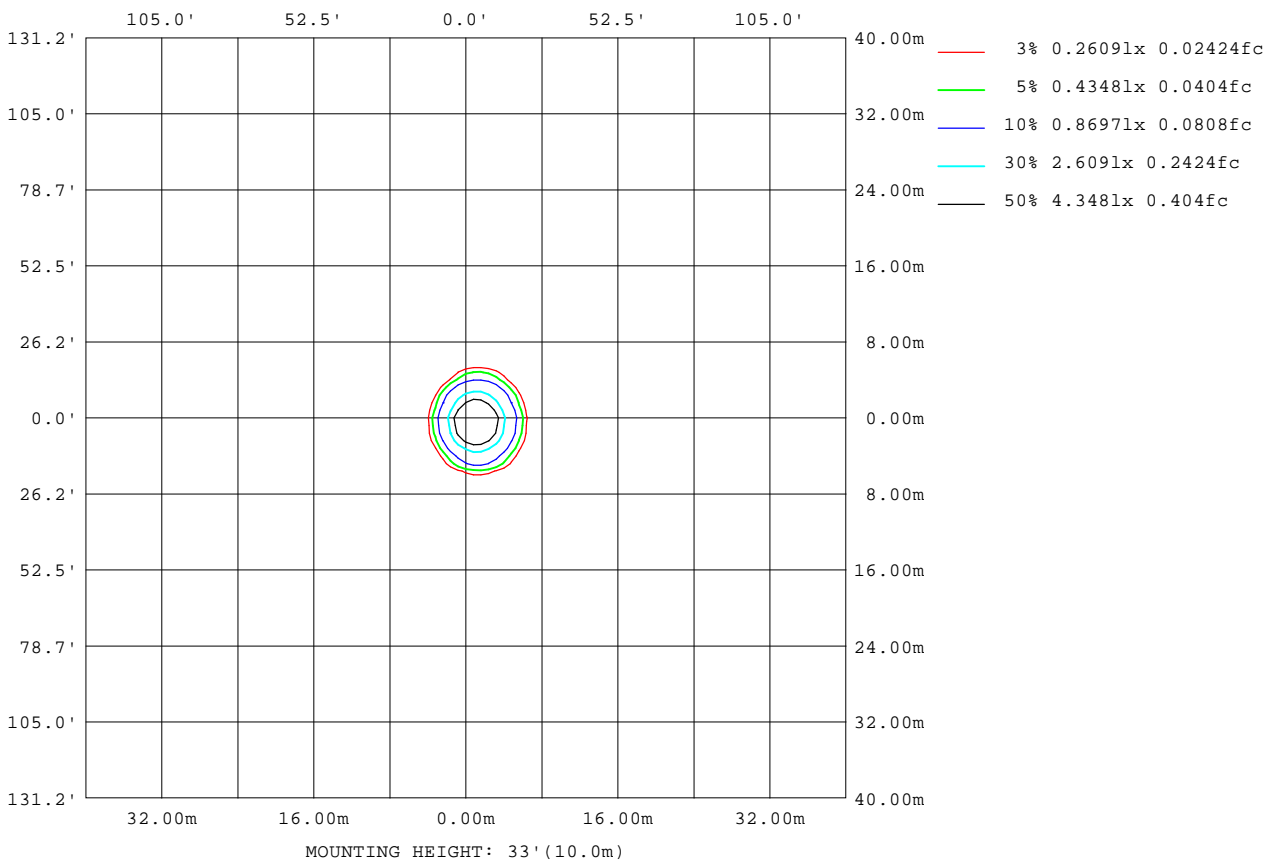

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:NORDECOR
 Test Date:2024-07-17

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

Planar Illuminance Curve

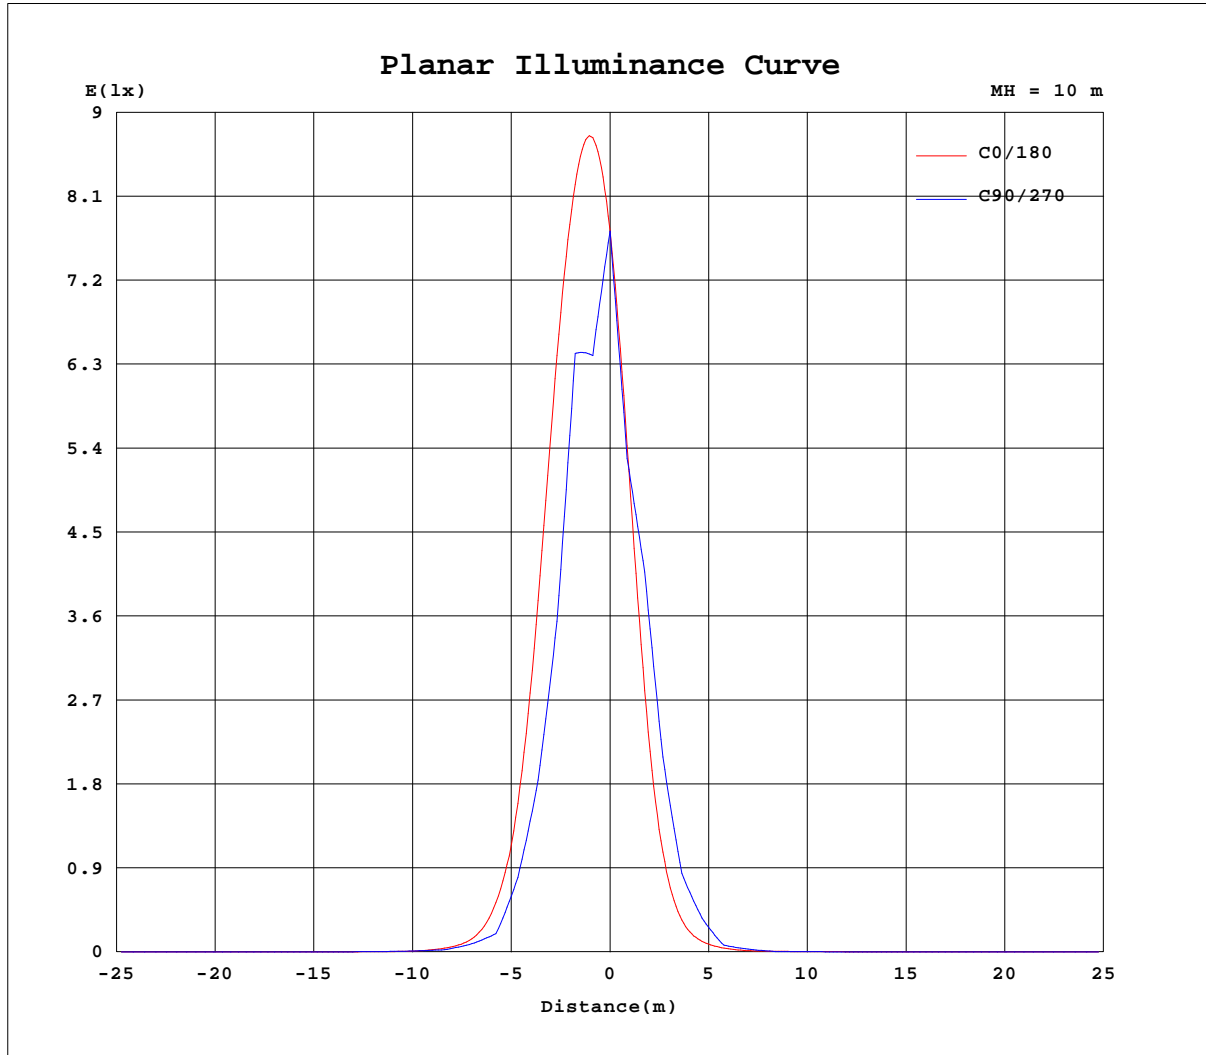


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:NORDECOR
 Test Date:2024-07-17

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.12V I:0.0453A P:4.5772W PF:0.4592 Freq:50.00Hz Lamp Flux:222.268x1 lm		
NAME: 6586	TYPE:	WEIGHT:0.3KG
SPEC.:3+3W	DIM.: 8.4*4.5cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

Flux out:99.12 lm

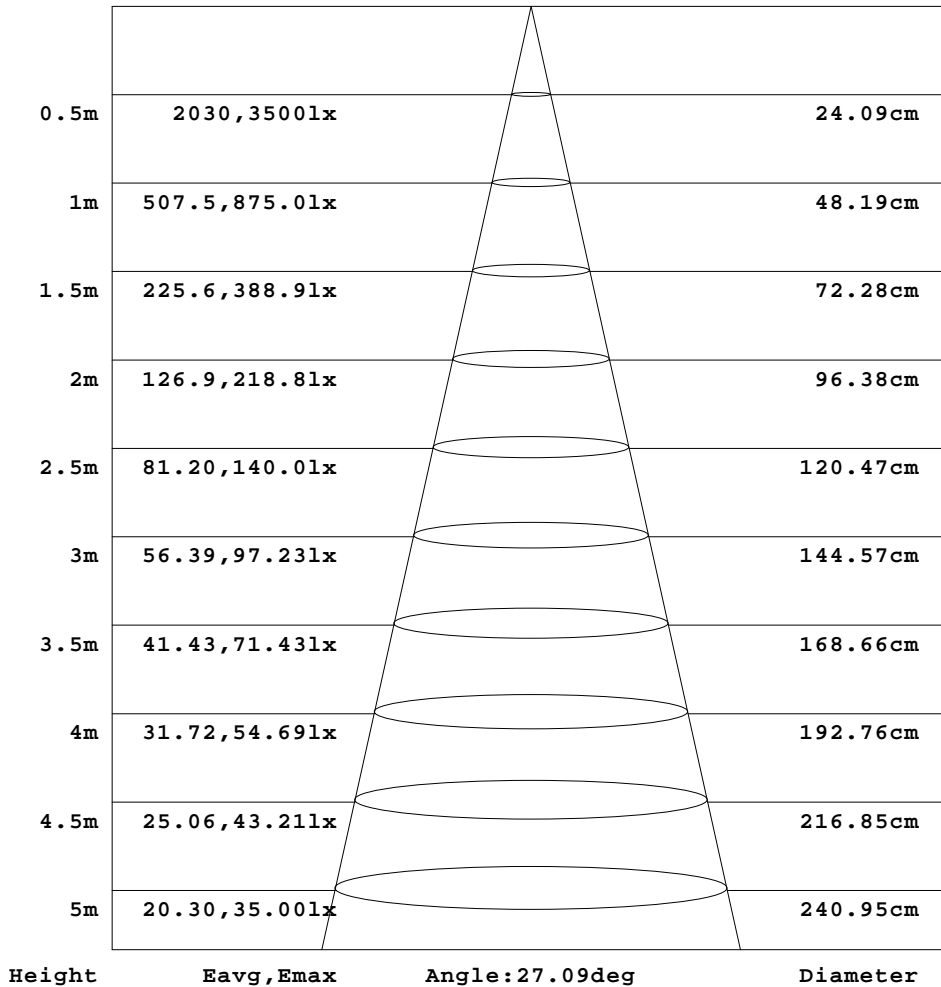

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(b) Range:-90 - 90DEG
H(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-07-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.12V I:0.0453A P:4.5772W PF:0.4592 Freq:50.00Hz Lamp Flux:222.268x1 lm		
NAME: 6586	TYPE:	WEIGHT:0.3KG
SPEC.:3+3W	DIM.: 8.4*4.5cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

Table--1

UNIT: cd

H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.56	0.58	0.60	0.60	0.60	0.60	0.60	0.62	0.62	0.62	0.63	0.63	0.64	0.64	0.65	0.66	0.67	0.68	0.70
-75	0.60	0.60	0.62	0.62	0.62	0.63	0.62	0.64	0.65	0.65	0.66	0.67	0.67	0.70	0.72	0.73	0.76	0.78	0.81
-70	0.61	0.63	0.63	0.65	0.65	0.65	0.65	0.67	0.68	0.70	0.70	0.73	0.73	0.76	0.79	0.83	0.85	0.89	0.92
-65	0.61	0.63	0.64	0.64	0.64	0.65	0.66	0.67	0.68	0.69	0.68	0.70	0.71	0.77	0.80	0.86	0.92	0.98	1.00
-60	0.63	0.63	0.64	0.64	0.65	0.66	0.66	0.68	0.68	0.70	0.67	0.72	0.77	0.81	0.86	0.95	1.03	1.11	1.18
-55	0.61	0.63	0.61	0.61	0.64	0.64	0.65	0.66	0.67	0.68	0.67	0.69	0.72	0.80	0.86	0.96	1.08	1.21	1.32
-50	0.61	0.62	0.58	0.64	0.63	0.63	0.64	0.66	0.66	0.67	0.69	0.71	0.77	0.83	0.93	1.08	1.24	1.43	1.61
-45	0.62	0.63	0.60	0.61	0.65	0.65	0.67	0.67	0.68	0.69	0.70	0.72	0.76	0.84	1.00	1.23	1.70	2.46	3.32
-40	0.63	0.64	0.65	0.66	0.67	0.68	0.68	0.70	0.70	0.71	0.72	0.75	0.82	0.97	1.24	1.72	2.67	4.20	5.60
-35	0.64	0.64	0.66	0.67	0.69	0.70	0.73	0.75	0.77	0.79	0.80	0.86	0.98	1.24	2.13	3.99	7.05	11.4	16.3
-30	0.65	0.67	0.68	0.70	0.74	0.75	0.80	0.81	0.85	0.87	0.93	1.03	1.31	2.07	4.33	8.43	14.6	22.5	30.6
-25	0.65	0.67	0.68	0.71	0.74	0.77	0.82	0.87	0.92	0.99	1.08	1.27	1.72	3.37	7.16	15.3	31.9	62.4	108
-20	0.67	0.67	0.71	0.74	0.77	0.83	0.89	0.96	1.06	1.16	1.36	1.74	3.04	7.05	15.2	33.0	70.1	135	222
-15	0.66	0.68	0.70	0.73	0.78	0.82	0.90	0.97	1.07	1.21	1.43	1.88	3.29	7.60	17.4	43.8	110	236	393
-10	0.66	0.68	0.72	0.75	0.80	0.86	0.94	1.06	1.19	1.42	1.76	2.63	6.13	14.0	34.8	94.9	235	464	672
-5	0.67	0.68	0.70	0.74	0.79	0.84	0.93	1.02	1.15	1.35	1.66	2.26	4.44	10.6	25.5	71.2	188	405	647
0	0.67	0.69	0.74	0.76	0.80	0.89	0.96	1.09	1.23	1.50	1.90	2.79	6.62	15.6	41.7	119	293	549	773
5	0.66	0.67	0.70	0.73	0.78	0.83	0.92	1.00	1.12	1.29	1.57	2.07	3.71	9.13	22.2	61.4	161	337	535
10	0.66	0.67	0.69	0.73	0.78	0.84	0.92	1.00	1.11	1.30	1.55	2.06	4.07	10.2	24.3	66.0	153	289	426
15	0.66	0.66	0.69	0.72	0.76	0.80	0.87	0.92	1.00	1.09	1.25	1.51	2.17	4.69	11.2	28.3	70.0	141	232
20	0.67	0.67	0.70	0.74	0.75	0.81	0.86	0.90	0.94	1.01	1.13	1.30	1.66	2.95	7.93	16.9	34.4	65.5	102
25	0.66	0.66	0.67	0.69	0.72	0.75	0.78	0.81	0.84	0.88	0.93	1.02	1.20	1.61	3.43	7.18	14.6	29.1	49.0
30	0.63	0.65	0.66	0.68	0.71	0.72	0.73	0.76	0.76	0.77	0.80	0.86	0.96	1.15	1.46	2.19	4.53	8.00	11.3
35	0.64	0.64	0.65	0.66	0.67	0.69	0.70	0.71	0.72	0.72	0.73	0.76	0.81	0.91	1.10	1.38	2.21	3.93	5.74
40	0.63	0.63	0.64	0.64	0.66	0.66	0.67	0.67	0.68	0.69	0.68	0.70	0.74	0.82	0.93	1.02	1.17	1.32	1.45
45	0.64	0.63	0.64	0.65	0.65	0.65	0.66	0.66	0.68	0.68	0.69	0.68	0.71	0.76	0.82	0.90	0.99	1.09	1.18
50	0.64	0.64	0.64	0.64	0.64	0.63	0.65	0.66	0.67	0.67	0.68	0.71	0.71	0.75	0.79	0.83	0.88	0.93	0.98
55	0.63	0.64	0.64	0.66	0.65	0.65	0.66	0.67	0.68	0.68	0.70	0.70	0.70	0.73	0.75	0.81	0.82	0.87	0.89
60	0.65	0.65	0.65	0.66	0.66	0.66	0.67	0.68	0.69	0.71	0.71	0.69	0.70	0.74	0.76	0.76	0.78	0.84	0.85
65	0.61	0.66	0.66	0.67	0.68	0.67	0.68	0.69	0.69	0.70	0.72	0.73	0.72	0.73	0.75	0.79	0.78	0.79	0.79
70	0.66	0.68	0.67	0.68	0.68	0.68	0.69	0.71	0.71	0.72	0.74	0.74	0.75	0.76	0.76	0.78	0.75	0.75	0.76
75	0.63	0.67	0.68	0.68	0.68	0.67	0.69	0.69	0.70	0.70	0.72	0.72	0.72	0.73	0.74	0.74	0.76	0.74	0.74
80	0.68	0.67	0.68	0.69	0.67	0.68	0.70	0.68	0.69	0.70	0.70	0.70	0.71	0.71	0.71	0.73	0.72	0.74	0.73
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-07-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.12V I:0.0453A P:4.5772W PF:0.4592 Freq:50.00Hz Lamp Flux:222.268x1 lm		
NAME: 6586	TYPE:	WEIGHT:0.3KG
SPEC.:3+3W	DIM.: 8.4*4.5cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

Table--2

UNIT: cd

H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.71	0.71	0.74	0.73	0.73	0.72	0.74	0.71	0.71	0.70	0.67	0.66	0.65	0.64	0.63	0.62	0.60	0.58
-75	0.82	0.84	0.86	0.86	0.86	0.84	0.83	0.81	0.78	0.76	0.73	0.70	0.69	0.67	0.65	0.63	0.62	0.60
-70	0.96	0.98	0.99	1.00	0.96	0.96	0.92	0.88	0.84	0.81	0.76	0.73	0.70	0.68	0.66	0.64	0.62	0.62
-65	1.08	1.11	1.14	1.08	1.08	1.02	1.00	0.92	0.87	0.82	0.77	0.71	0.69	0.66	0.64	0.63	0.62	0.61
-60	1.23	1.27	1.20	1.24	1.16	1.06	1.01	0.93	0.85	0.78	0.74	0.70	0.66	0.64	0.62	0.60	0.60	0.60
-55	1.46	1.52	1.54	1.43	1.33	1.19	1.08	0.94	0.85	0.76	0.70	0.65	0.63	0.61	0.60	0.60	0.60	0.59
-50	1.75	1.80	1.76	1.61	1.41	1.22	1.04	0.88	0.76	0.68	0.63	0.61	0.59	0.58	0.58	0.58	0.58	0.60
-45	3.96	4.18	3.98	3.38	2.56	1.81	1.32	1.03	0.83	0.71	0.64	0.61	0.59	0.56	0.57	0.59	0.58	0.58
-40	6.47	6.51	5.83	4.53	2.99	1.96	1.34	0.99	0.79	0.67	0.61	0.59	0.59	0.54	0.55	0.59	0.59	0.57
-35	20.3	21.7	19.6	15.0	9.92	5.98	3.33	1.69	1.08	0.83	0.72	0.67	0.64	0.61	0.63	0.64	0.63	0.62
-30	36.1	35.9	30.0	21.2	13.3	7.57	3.71	1.74	1.13	0.86	0.77	0.71	0.70	0.68	0.67	0.66	0.66	0.66
-25	150	161	135	87.7	48.1	22.9	10.2	4.46	1.90	1.16	0.93	0.82	0.76	0.74	0.73	0.71	0.70	0.68
-20	282	273	203	119	59.3	25.4	10.9	4.67	1.86	1.20	0.98	0.87	0.82	0.78	0.75	0.72	0.71	0.72
-15	508	533	458	312	162	66.7	24.1	9.25	3.50	1.60	1.18	1.01	0.90	0.84	0.79	0.77	0.76	0.73
-10	778	755	606	382	171	63.9	21.2	8.16	2.83	1.57	1.22	1.03	0.92	0.86	0.82	0.79	0.79	0.79
-5	802	833	733	518	272	111	37.1	12.8	4.74	1.88	1.33	1.12	0.97	0.88	0.83	0.80	0.79	0.78
0	883	862	709	454	214	81.6	25.7	9.37	3.08	1.64	1.23	1.05	0.94	0.86	0.82	0.79	0.79	0.79
5	669	696	610	433	233	97.2	32.8	11.5	3.93	1.74	1.27	1.08	0.94	0.86	0.82	0.79	0.78	0.76
10	503	487	385	245	121	46.3	16.3	6.05	2.05	1.37	1.12	0.98	0.87	0.84	0.79	0.78	0.76	0.76
15	301	317	272	190	104	45.2	16.6	6.05	2.15	1.32	1.04	0.91	0.83	0.78	0.76	0.73	0.72	0.70
20	125	124	98.5	61.8	31.3	14.5	6.05	1.97	1.24	0.98	0.86	0.78	0.74	0.74	0.71	0.70	0.68	0.66
25	65.7	70.9	61.8	43.1	23.9	11.3	5.17	2.03	1.16	0.93	0.79	0.72	0.69	0.68	0.68	0.67	0.66	0.65
30	13.5	13.6	11.6	8.21	4.53	2.02	1.33	1.05	0.86	0.74	0.66	0.63	0.63	0.63	0.63	0.62	0.63	0.63
35	7.18	7.70	7.08	5.54	3.63	1.91	1.25	1.01	0.83	0.72	0.64	0.62	0.61	0.61	0.61	0.62	0.61	0.60
40	1.54	1.56	1.49	1.38	1.23	1.07	0.93	0.82	0.71	0.63	0.61	0.58	0.59	0.58	0.57	0.57	0.59	0.57
45	1.26	1.30	1.28	1.22	1.12	1.02	0.90	0.81	0.73	0.66	0.63	0.61	0.60	0.59	0.59	0.59	0.59	0.59
50	1.03	1.03	1.04	0.99	0.93	0.86	0.78	0.74	0.70	0.67	0.64	0.62	0.61	0.60	0.60	0.59	0.59	0.58
55	0.92	0.94	0.96	0.93	0.88	0.85	0.80	0.78	0.74	0.70	0.67	0.66	0.65	0.63	0.62	0.62	0.61	0.61
60	0.86	0.86	0.84	0.84	0.80	0.80	0.78	0.78	0.76	0.75	0.72	0.70	0.68	0.67	0.65	0.64	0.63	0.66
65	0.80	0.82	0.83	0.83	0.78	0.80	0.78	0.79	0.77	0.74	0.71	0.70	0.69	0.70	0.69	0.68	0.67	0.66
70	0.76	0.80	0.80	0.81	0.79	0.79	0.80	0.76	0.78	0.72	0.71	0.70	0.75	0.73	0.72	0.70	0.70	0.67
75	0.75	0.76	0.77	0.79	0.75	0.78	0.77	0.77	0.77	0.76	0.73	0.73	0.72	0.73	0.73	0.72	0.72	0.70
80	0.75	0.75	0.74	0.76	0.76	0.77	0.75	0.76	0.76	0.76	0.75	0.72	0.75	0.73	0.75	0.72	0.74	0.74
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-07-17

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks: