

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		6923.3 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	36.6V x 36.3H
	At 50% of Imax	19.2V x 20.4H
	At 90% of Imax	4.7V x 8.0H
Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	839.1 lumens per klm.
	To 50% of Imax	422.3 lumens per klm.
	To 90% of Imax	38.8 lumens per klm.
Upward LOR		0.0 %
Downward LOR		100.0 %
Luminaire Efficiency(Light Output Ratio)		102.1 %

H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: AED
Test Date: 2024-03-26

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 5.780m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.19V I:0.0224A P:2.3592W PF:0.4789 Freq:50.00Hz Lamp Flux:91.8884x1 lm		
NAME: 6428	TYPE:	WEIGHT:110g
SPEC.:2W	DIM.: 4.6*4.6*5.2cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

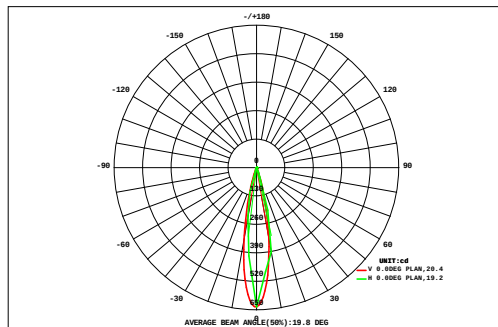

DATA OF LAMP		Eff:39.75lm/W	
MODEL		Imax(cd)	636.2
NOMINAL POWER(W)		AVAILABILITY(%)	88.9
RATED VOLTAGE(V)		Avai. FLUX(lm)	81.70
NOMINAL FLUX(lm)	91.8884	LOR(%)	102.1
LAMPS INSIDE	1	TOTAL FLUX(lm)	93.78
TEST VOLTAGE(V)	0	q @50%(H,V)	20,19DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm			F t	F a
	90	80	70	60	50	40	30	20	10	0	-10	-20	-30	-40	-50	-60	-70	-80	-90		
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.36		
	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.29		
	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.30		
	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.29		
	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.05	0.05	0.04	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.35		
	0.00	0.01	0.01	0.01	0.02	0.02	0.04	0.09	0.21	0.27	0.15	0.06	0.03	0.02	0.01	0.01	0.01	0.00	0.96		
	0.00	0.01	0.01	0.02	0.02	0.03	0.09	0.53	2.14	2.82	1.20	0.19	0.05	0.02	0.01	0.01	0.01	0.00	7.16		
	0.00	0.01	0.01	0.02	0.02	0.05	0.19	2.07	8.65	11.2	4.31	0.48	0.07	0.03	0.02	0.01	0.01	0.00	27.1		
	0.00	0.01	0.01	0.02	0.03	0.05	0.26	3.22	13.0	15.9	5.53	0.55	0.08	0.03	0.02	0.01	0.01	0.00	38.7		
	0.00	0.01	0.01	0.02	0.02	0.04	0.16	1.51	5.41	5.90	1.87	0.25	0.06	0.02	0.02	0.01	0.01	0.00	15.3		
	0.00	0.01	0.01	0.02	0.02	0.03	0.06	0.12	0.21	0.33	0.20	0.08	0.03	0.02	0.01	0.01	0.01	0.00	1.16		
	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.05	0.05	0.06	0.05	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.40		
	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.04	0.04	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.31		
	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.00		
	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.00		
	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.03	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.28		
	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.13		
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL (DEG) 20 30 40 50 60 70 80 90																					
F t	0.03	0.11	0.18	0.25	0.32	0.44	1.05	7.84	30.0	36.7	13.6	1.87	0.53	0.31	0.24	0.17	0.10	0.03	94	---	
F a	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.80	28.6	35.4	11.7	0.19	0.00	0.00	0.00	0.00	0.00	0.00	---	82	

one-half-peak spread: U:12.3,D:7.1 , L:10.1,R:10.4


NEMA Beam Type: Type 3

H_b Range: -90 - 90DEG
H_b Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2024-03-26

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.19V I:0.0224A P:2.3592W PF:0.4789 Freq:50.00Hz Lamp Flux:91.8884x1 lm		
NAME: 6428	TYPE:	WEIGHT:110g
SPEC.:2W	DIM.: 4.6*4.6*5.2cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

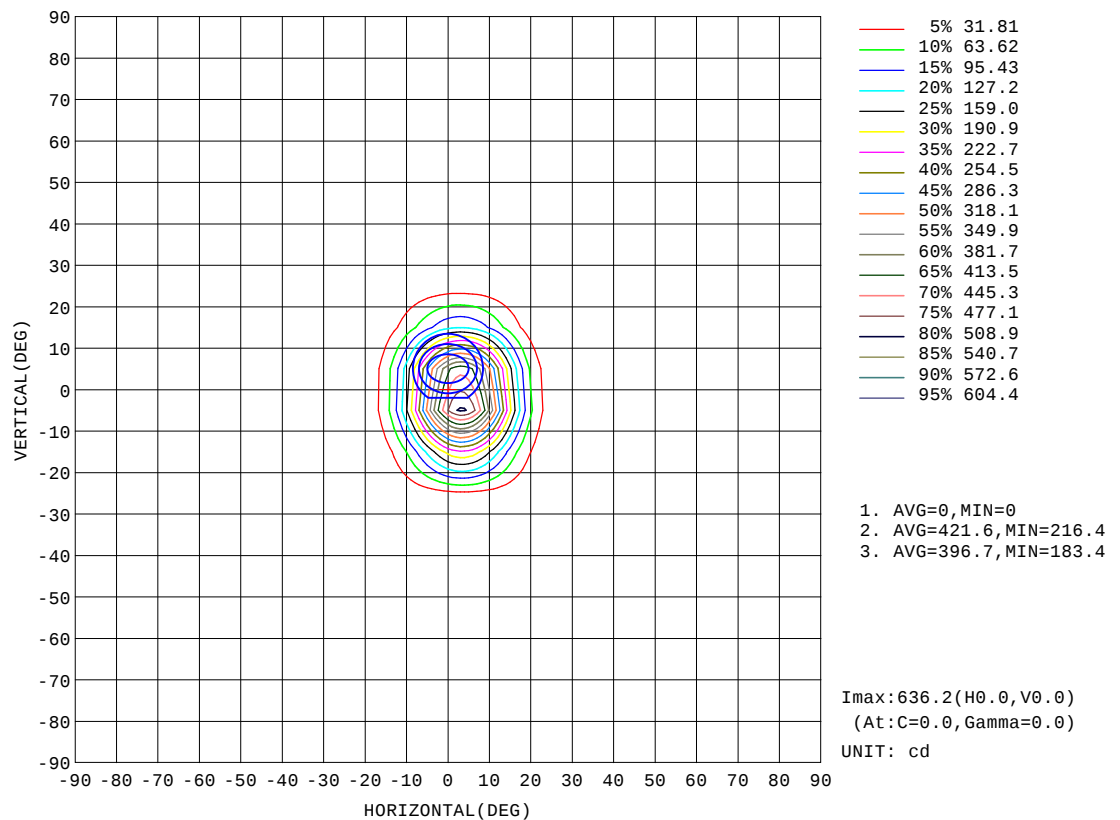


H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: AED
Test Date: 2024-03-26

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 5.780m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.19V I:0.0224A P:2.3592W PF:0.4789 Freq:50.00Hz Lamp Flux:91.8884x1 lm		
NAME: 6428	TYPE:	WEIGHT:110g
SPEC.:2W	DIM.: 4.6*4.6*5.2cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

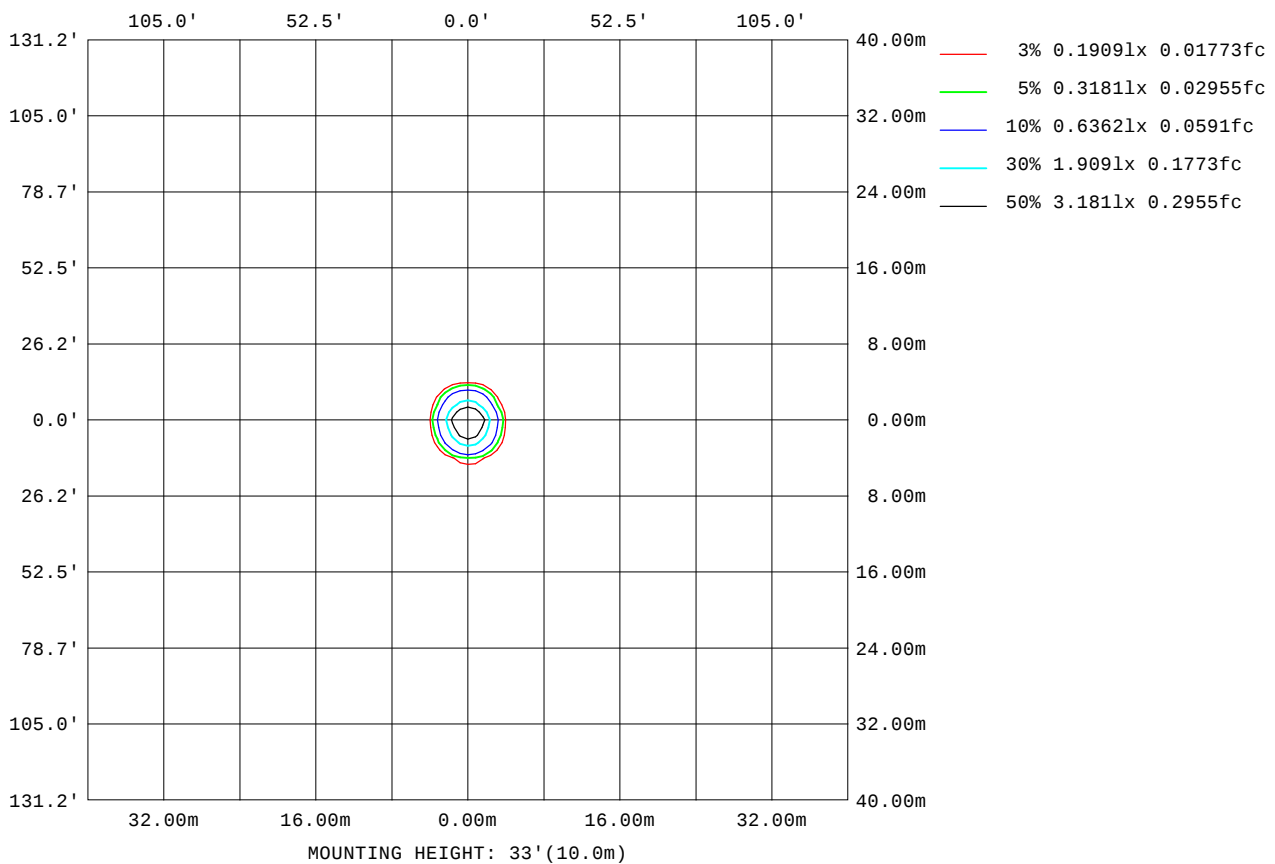

H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: AED
Test Date: 2024-03-26

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 5.780m [K=1.0000]
Remarks:

Planar Illuminance Curve

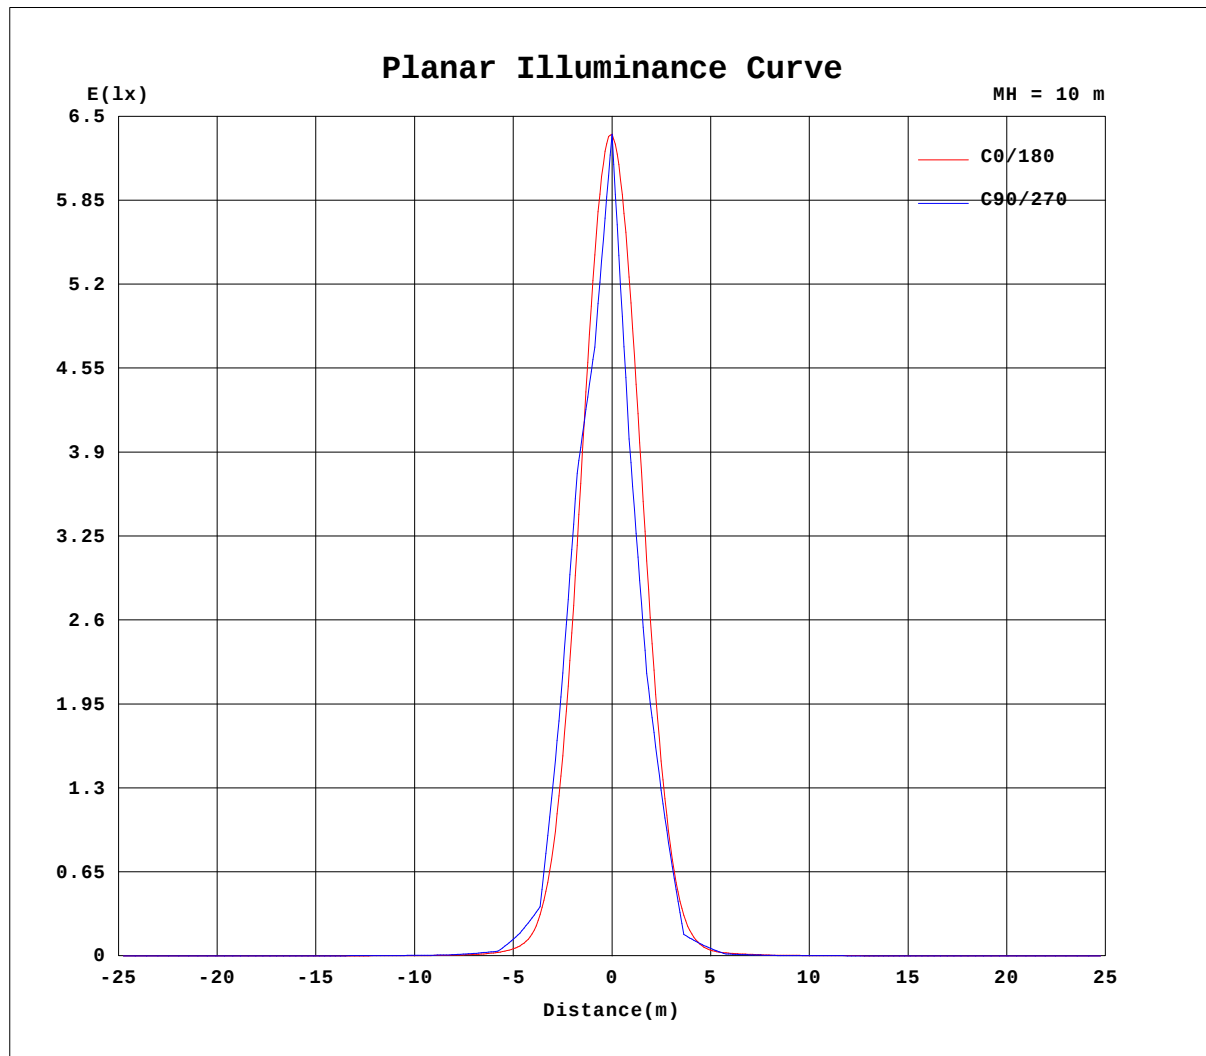


H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: AED
Test Date: 2024-03-26

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 5.780m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.19V I:0.0224A P:2.3592W PF:0.4789 Freq:50.00Hz Lamp Flux:91.8884x1 lm		
NAME: 6428	TYPE:	WEIGHT:110g
SPEC.:2W	DIM.: 4.6*4.6*5.2cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

Flux out:39.49 lm

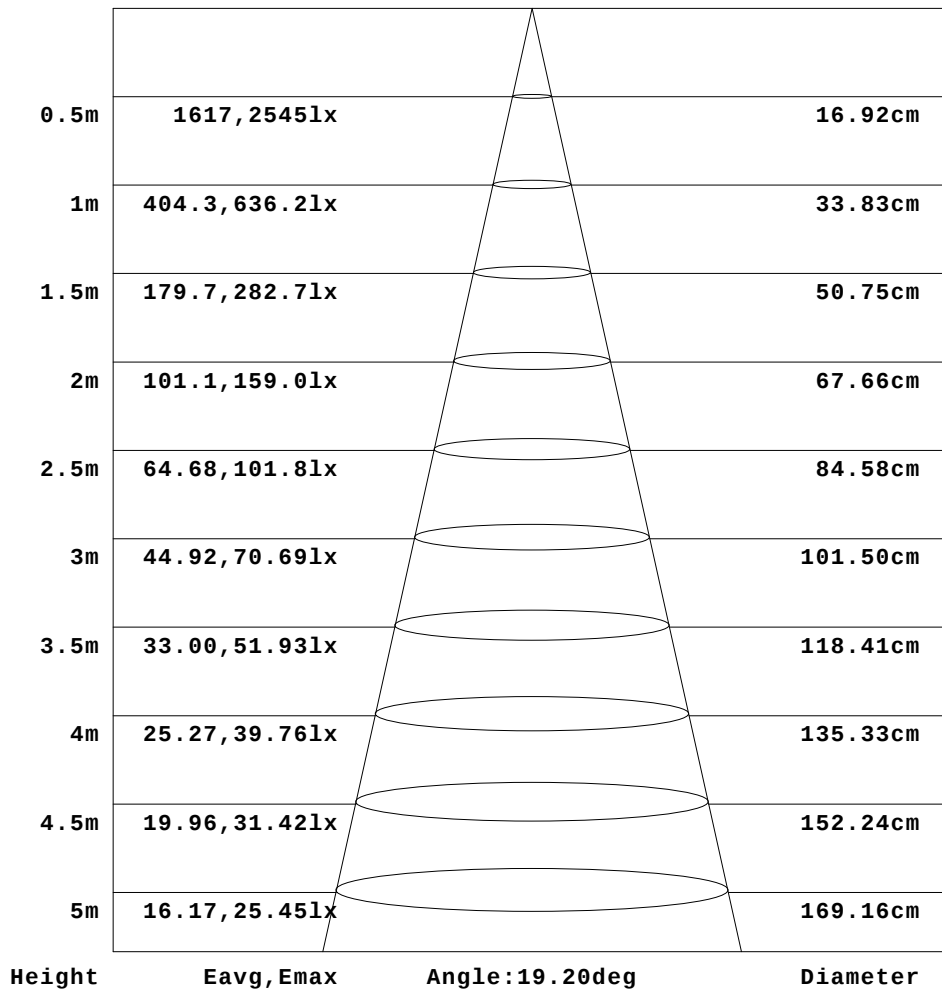

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2024-03-26

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.19V I:0.0224A P:2.3592W PF:0.4789 Freq:50.00Hz Lamp Flux:91.8884x1 lm		
NAME: 6428	TYPE:	WEIGHT:110g
SPEC.:2W	DIM.: 4.6*4.6*5.2cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.74	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.76	0.76	0.76	0.76	0.76	0.77	0.77	0.78	0.77	0.78	0.78
-75	0.76	0.76	0.76	0.77	0.77	0.76	0.76	0.77	0.78	0.77	0.78	0.78	0.79	0.80	0.80	0.81	0.82	0.82	0.83
-70	0.76	0.76	0.77	0.78	0.78	0.78	0.78	0.79	0.80	0.80	0.81	0.81	0.82	0.83	0.85	0.86	0.86	0.88	0.87
-65	0.79	0.78	0.78	0.78	0.78	0.78	0.79	0.79	0.80	0.80	0.82	0.83	0.85	0.86	0.88	0.90	0.92	0.93	0.95
-60	0.78	0.78	0.78	0.79	0.78	0.78	0.80	0.80	0.81	0.82	0.84	0.86	0.89	0.91	0.95	0.97	1.01	1.02	1.03
-55	0.77	0.77	0.77	0.77	0.77	0.77	0.77	0.78	0.79	0.80	0.81	0.83	0.85	0.89	0.93	0.98	1.03	1.09	1.14
-50	0.76	0.75	0.76	0.77	0.76	0.76	0.77	0.77	0.78	0.79	0.80	0.83	0.86	0.91	0.98	1.05	1.14	1.23	1.27
-45	0.77	0.76	0.76	0.77	0.77	0.76	0.76	0.77	0.77	0.78	0.78	0.79	0.82	0.87	0.96	1.07	1.20	1.43	1.57
-40	0.77	0.77	0.77	0.78	0.78	0.77	0.78	0.77	0.76	0.76	0.76	0.79	0.84	0.92	1.07	1.23	1.53	1.83	1.94
-35	0.77	0.77	0.78	0.78	0.79	0.79	0.80	0.81	0.80	0.79	0.79	0.82	0.87	1.02	1.39	1.77	2.40	3.17	3.75
-30	0.78	0.79	0.80	0.82	0.81	0.82	0.84	0.84	0.83	0.82	0.85	0.90	1.04	1.58	2.14	3.01	4.18	5.30	5.94
-25	0.78	0.79	0.80	0.81	0.82	0.83	0.86	0.87	0.89	0.89	0.93	1.01	1.28	1.80	2.94	4.92	9.43	16.5	23.9
-20	0.80	0.81	0.82	0.83	0.85	0.87	0.91	0.93	0.94	1.00	1.09	1.30	2.09	3.25	5.71	11.6	22.7	37.2	46.2
-15	0.79	0.80	0.81	0.83	0.84	0.87	0.90	0.93	0.97	1.04	1.13	1.35	2.07	3.33	7.24	22.4	64.4	134	202
-10	0.79	0.81	0.82	0.83	0.86	0.89	0.95	0.99	1.05	1.17	1.37	2.16	3.40	6.55	22.3	76.3	186	319	391
-5	0.79	0.80	0.81	0.84	0.86	0.89	0.92	0.97	1.02	1.13	1.28	1.64	2.68	4.59	13.3	51.7	156	324	477
0	0.80	0.81	0.83	0.86	0.88	0.92	0.96	1.01	1.10	1.24	1.50	2.41	3.87	9.27	38.0	135	320	532	636
5	0.79	0.79	0.81	0.83	0.85	0.88	0.92	0.96	1.01	1.10	1.23	1.55	2.53	4.29	12.5	48.6	142	283	405
10	0.79	0.80	0.81	0.84	0.86	0.89	0.93	0.96	1.02	1.11	1.26	1.83	2.88	5.64	18.9	58.8	127	198	229
15	0.77	0.79	0.80	0.82	0.84	0.86	0.89	0.92	0.94	0.98	1.04	1.18	1.68	2.75	5.76	17.8	46.4	85.7	119
20	0.78	0.79	0.80	0.82	0.84	0.86	0.89	0.90	0.90	0.93	0.97	1.08	1.57	2.33	3.73	6.76	12.2	18.1	20.3
25	0.76	0.78	0.79	0.80	0.81	0.82	0.83	0.86	0.85	0.85	0.86	0.89	0.99	1.40	1.92	3.11	5.31	8.46	11.0
30	0.77	0.78	0.78	0.80	0.80	0.80	0.82	0.81	0.80	0.78	0.78	0.80	0.88	1.00	1.43	1.82	2.13	2.40	2.51
35	0.76	0.76	0.77	0.77	0.78	0.78	0.78	0.79	0.78	0.78	0.77	0.77	0.79	0.86	0.96	1.25	1.46	1.63	1.76
40	0.75	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.75	0.75	0.76	0.78	0.82	0.88	0.93	1.00	1.04	1.04
45	0.76	0.76	0.76	0.76	0.76	0.75	0.76	0.76	0.76	0.77	0.78	0.80	0.81	0.84	0.79	0.90	0.94	0.97	0.99
50	0.75	0.76	0.75	0.76	0.75	0.75	0.77	0.77	0.78	0.78	0.83	0.84	0.86	0.87	0.89	0.89	0.92	0.93	0.93
55	0.76	0.78	0.78	0.79	0.79	0.78	0.79	0.80	0.80	0.81	0.83	0.85	0.86	0.87	0.81	0.89	0.90	0.91	0.91
60	0.80	0.81	0.81	0.81	0.80	0.82	0.82	0.82	0.84	0.84	0.86	0.86	0.87	0.88	0.89	0.89	0.88	0.89	0.90
65	0.79	0.80	0.81	0.82	0.82	0.81	0.82	0.84	0.83	0.83	0.83	0.84	0.85	0.85	0.86	0.86	0.87	0.87	0.87
70	0.80	0.80	0.81	0.81	0.81	0.80	0.81	0.81	0.82	0.83	0.82	0.84	0.83	0.84	0.84	0.86	0.86	0.85	0.86
75	0.82	0.81	0.81	0.81	0.81	0.80	0.81	0.83	0.82	0.82	0.82	0.83	0.83	0.83	0.83	0.84	0.84	0.84	0.84
80	0.80	0.81	0.82	0.82	0.82	0.81	0.82	0.83	0.82	0.82	0.82	0.83	0.83	0.83	0.82	0.82	0.83	0.83	0.83
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: AED
Test Date: 2024-03-26

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 5.780m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.19V I:0.0224A P:2.3592W PF:0.4789 Freq:50.00Hz Lamp Flux:91.8884x1 lm		
NAME: 6428	TYPE:	WEIGHT:110g
SPEC.:2W	DIM.: 4.6*4.6*5.2cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.79	0.78	0.78	0.78	0.77	0.77	0.77	0.76	0.76	0.76	0.74	0.75	0.75	0.74	0.75	0.75	0.74	0.74
-75	0.84	0.83	0.82	0.82	0.81	0.80	0.79	0.79	0.79	0.78	0.77	0.77	0.77	0.77	0.77	0.77	0.76	0.76
-70	0.87	0.88	0.87	0.85	0.84	0.82	0.82	0.81	0.80	0.79	0.79	0.78	0.78	0.79	0.79	0.78	0.77	0.77
-65	0.96	0.95	0.93	0.91	0.89	0.87	0.85	0.83	0.81	0.80	0.80	0.79	0.79	0.78	0.78	0.78	0.78	0.78
-60	1.02	1.00	0.97	0.95	0.90	0.87	0.85	0.83	0.82	0.80	0.79	0.79	0.78	0.79	0.78	0.78	0.78	0.81
-55	1.15	1.11	1.05	0.99	0.94	0.88	0.84	0.82	0.79	0.77	0.77	0.76	0.76	0.75	0.76	0.76	0.76	0.76
-50	1.24	1.14	1.05	0.97	0.90	0.84	0.80	0.77	0.74	0.75	0.74	0.74	0.73	0.74	0.74	0.74	0.74	0.73
-45	1.61	1.53	1.37	1.14	1.01	0.89	0.82	0.77	0.75	0.73	0.74	0.73	0.74	0.74	0.74	0.75	0.75	0.75
-40	1.91	1.74	1.42	1.14	0.97	0.84	0.78	0.75	0.72	0.73	0.73	0.73	0.75	0.74	0.74	0.75	0.75	0.74
-35	3.96	3.66	3.00	2.23	1.65	1.27	0.95	0.82	0.77	0.74	0.75	0.75	0.76	0.76	0.76	0.76	0.76	0.75
-30	5.76	4.87	3.66	2.56	1.84	1.32	0.93	0.82	0.78	0.76	0.77	0.78	0.78	0.78	0.77	0.77	0.77	0.75
-25	25.9	20.5	12.3	7.10	4.10	2.47	1.51	1.09	0.88	0.81	0.81	0.80	0.80	0.79	0.78	0.78	0.78	0.77
-20	41.1	26.0	13.9	7.79	4.18	2.34	1.56	1.03	0.89	0.86	0.84	0.83	0.81	0.80	0.80	0.79	0.78	0.76
-15	214	160	85.0	31.9	10.4	4.71	2.45	1.56	1.07	0.93	0.89	0.86	0.85	0.83	0.82	0.81	0.81	0.80
-10	334	203	83.2	23.9	8.59	3.94	2.11	1.40	1.06	0.96	0.91	0.88	0.86	0.84	0.84	0.83	0.84	0.83
-5	504	378	197	69.2	18.2	6.71	3.16	1.86	1.21	1.01	0.94	0.89	0.88	0.85	0.84	0.84	0.84	0.84
0	549	333	138	38.6	10.6	4.51	2.27	1.50	1.09	0.97	0.91	0.88	0.86	0.84	0.83	0.84	0.86	0.86
5	424	319	167	58.4	16.1	5.95	2.85	1.73	1.16	0.98	0.93	0.88	0.87	0.84	0.83	0.83	0.83	0.83
10	196	121	50.1	15.9	6.13	2.99	1.80	1.21	0.99	0.92	0.88	0.86	0.85	0.82	0.81	0.81	0.81	0.82
15	121	92.0	49.4	18.4	6.91	3.30	1.90	1.29	0.98	0.89	0.86	0.84	0.83	0.82	0.80	0.80	0.79	0.79
20	17.4	11.7	6.87	4.05	2.43	1.64	1.17	0.92	0.84	0.82	0.82	0.81	0.81	0.80	0.79	0.78	0.77	0.77
25	11.1	8.77	5.76	3.54	2.34	1.52	1.16	0.90	0.82	0.78	0.78	0.78	0.78	0.78	0.77	0.77	0.76	0.77
30	2.38	2.10	1.79	1.50	1.19	0.92	0.82	0.75	0.74	0.74	0.74	0.75	0.75	0.75	0.75	0.76	0.75	0.68
35	1.76	1.65	1.48	1.29	1.12	0.91	0.82	0.76	0.75	0.73	0.73	0.74	0.73	0.74	0.74	0.74	0.74	0.75
40	1.04	1.02	0.95	0.88	0.82	0.77	0.75	0.73	0.71	0.72	0.72	0.73	0.72	0.72	0.73	0.74	0.73	0.68
45	0.99	0.97	0.95	0.90	0.86	0.82	0.80	0.77	0.77	0.76	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.76
50	0.92	0.92	0.90	0.88	0.86	0.84	0.82	0.81	0.78	0.79	0.78	0.77	0.77	0.78	0.78	0.77	0.77	0.76
55	0.91	0.90	0.90	0.88	0.87	0.85	0.84	0.82	0.82	0.81	0.80	0.80	0.79	0.79	0.78	0.78	0.79	0.78
60	0.90	0.88	0.87	0.87	0.87	0.84	0.85	0.84	0.83	0.82	0.81	0.80	0.81	0.79	0.80	0.79	0.80	0.79
65	0.88	0.87	0.87	0.87	0.86	0.85	0.85	0.84	0.82	0.83	0.82	0.82	0.81	0.81	0.80	0.80	0.80	0.79
70	0.85	0.86	0.86	0.85	0.84	0.84	0.84	0.84	0.84	0.83	0.81	0.82	0.82	0.81	0.81	0.81	0.80	0.81
75	0.85	0.85	0.84	0.84	0.84	0.84	0.84	0.83	0.82	0.83	0.83	0.82	0.81	0.82	0.81	0.81	0.81	0.80
80	0.83	0.82	0.84	0.84	0.83	0.82	0.84	0.84	0.83	0.82	0.82	0.82	0.83	0.82	0.82	0.81	0.81	0.80
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: AED
Test Date: 2024-03-26

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 5.780m [K=1.0000]
Remarks: