

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2909.0 cd per klm. 0.0 degrees vertical -2.0 degrees horizontal
Beam Spread	At 10% of Imax	64.9V x 64.6H
	At 50% of Imax	26.2V x 25.4H
	At 90% of Imax	7.6V x 12.4H
Beam Flux	Total	998.4 lumens per klm.
	To 10% of Imax	843.9 lumens per klm.
	To 50% of Imax	321.6 lumens per klm.
	To 90% of Imax	44.4 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	99.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2024-04-11

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.30V I:0.0498A P:4.7440W PF:0.4324 Freq:50.00Hz Lamp Flux:218.053x1 lm		
NAME: 6622	TYPE:	WEIGHT:220g
SPEC.:5W	DIM.: $\phi$ 6.5*7cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

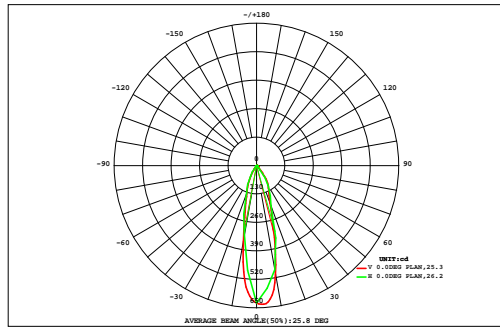

DATA OF LAMP		Eff:45.96lm/W	
MODEL		Imax(cd)	634.3
NOMINAL POWER(W)		AVAILABILITY(%)	85.7
RATED VOLTAGE(V)		Avai. FLUX(lm)	186.8
NOMINAL FLUX(lm)	218.053	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	218.1
TEST VOLTAGE(V)	0	q @50%(H,V)	25,26DEG

VERTICAL( DEG)	AREA FLUX DIAGRAM															UNIT:lm		F t	F a	
	90	80	70	60	50	40	30	20	10	0	10	20	30	40	50	60	70			80
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.01	0.02	0.03	0.03	0.04	0.05	0.05	0.05	0.05	0.04	0.04	0.03	0.02	0.02	0.01	0.00	0.55	0.00	
70	0.00	0.01	0.02	0.03	0.04	0.05	0.06	0.06	0.07	0.06	0.06	0.05	0.04	0.03	0.02	0.01	0.01	0.00	0.62	0.00
60	0.00	0.01	0.02	0.03	0.05	0.07	0.09	0.11	0.11	0.11	0.10	0.07	0.05	0.04	0.03	0.02	0.01	0.00	0.92	0.00
50	0.00	0.01	0.02	0.04	0.07	0.11	0.14	0.18	0.20	0.19	0.16	0.11	0.08	0.05	0.03	0.02	0.01	0.00	1.43	0.00
40	0.00	0.01	0.03	0.05	0.10	0.16	0.33	0.65	0.84	0.76	0.45	0.19	0.12	0.07	0.04	0.02	0.01	0.00	3.82	0.00
30	0.00	0.01	0.03	0.07	0.14	0.32	1.20	2.26	2.83	2.58	1.61	0.59	0.16	0.09	0.05	0.02	0.01	0.00	12.0	7.97
20	0.00	0.02	0.04	0.09	0.17	0.91	2.68	4.21	6.00	5.90	3.64	1.58	0.30	0.11	0.06	0.02	0.01	0.00	25.7	23.4
10	0.00	0.02	0.04	0.11	0.24	1.57	3.44	6.42	12.7	12.3	5.88	2.49	0.54	0.11	0.07	0.03	0.01	0.00	46.0	44.0
0	0.00	0.02	0.05	0.11	0.29	1.73	3.62	8.36	17.4	16.3	6.83	2.72	0.62	0.12	0.07	0.03	0.01	0.00	58.3	56.4
-10	0.00	0.02	0.04	0.11	0.24	1.40	3.20	6.02	10.2	9.18	4.75	2.18	0.42	0.11	0.06	0.03	0.01	0.00	38.0	36.0
-20	0.00	0.02	0.04	0.09	0.17	0.72	2.16	3.33	3.85	3.56	2.67	1.13	0.18	0.10	0.05	0.02	0.01	0.00	18.1	15.3
-30	0.00	0.01	0.03	0.07	0.13	0.23	0.83	1.70	2.03	1.77	0.99	0.26	0.11	0.08	0.04	0.02	0.01	0.00	8.32	3.67
-40	0.00	0.01	0.03	0.05	0.09	0.13	0.12	0.24	0.34	0.27	0.14	0.10	0.10	0.05	0.03	0.02	0.01	0.00	1.76	0.00
-50	0.00	0.01	0.02	0.04	0.06	0.10	0.14	0.13	0.11	0.11	0.13	0.10	0.06	0.04	0.03	0.02	0.01	0.00	1.12	0.00
-60	0.00	0.01	0.02	0.03	0.05	0.06	0.07	0.08	0.09	0.08	0.07	0.06	0.04	0.03	0.02	0.02	0.01	0.00	0.75	0.00
-70	0.00	0.01	0.02	0.02	0.03	0.04	0.05	0.05	0.05	0.05	0.05	0.04	0.03	0.03	0.02	0.01	0.01	0.00	0.52	0.00
-80	0.00	0.01	0.02	0.02	0.03	0.04	0.05	0.05	0.05	0.05	0.05	0.04	0.03	0.03	0.02	0.01	0.01	0.00	0.19	0.00
-90	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.19	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL( DEG)	20	30	40	50	60	70	80	90			
F t	0.05	0.21	0.48	0.99	1.92	7.66	18.2	33.9	56.8	53.4	27.6	11.7	2.92	1.10	0.63	0.32	0.15	0.04	218	---
F a	0.00	0.00	0.00	0.00	0.00	3.51	15.1	31.4	54.2	50.0	24.9	7.67	0.07	0.00	0.00	0.00	0.00	0.00	---	187


one-half-peak spread: U:15.9,D:10.5 , L:12.6,R:12.9 NEMA Beam Type: Type 4

H(h) Range:-90 - 90DEG  
 H(h) Interval: 1.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:AED  
 Test Date:2024-04-11

V(B) Range:-80 - 80DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:5.780m [K=1.0000]  
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.30V I:0.0498A P:4.7440W PF:0.4324 Freq:50.00Hz Lamp Flux:218.053x1 lm		
NAME: 6622	TYPE:	WEIGHT:220g
SPEC.:5W	DIM.: $\phi$ 6.5*7cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

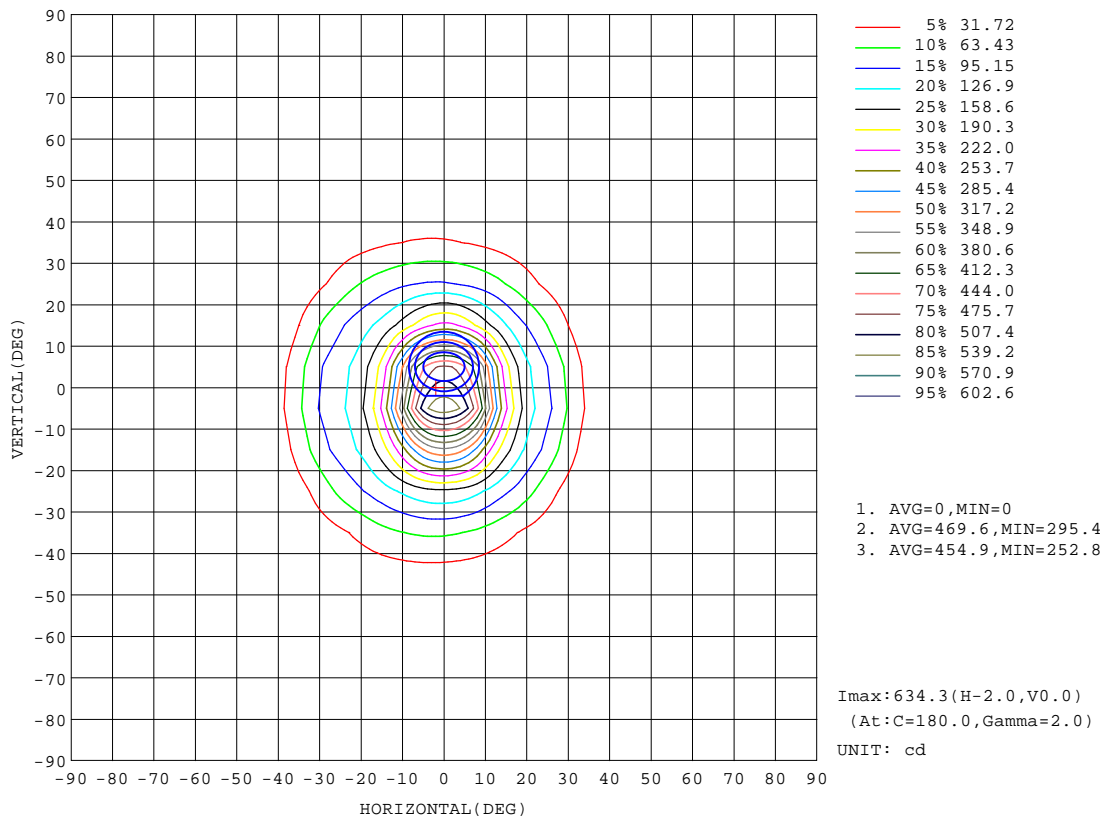


H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2024-04-11

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

ISOLUX DIAGRAM


Test:U:220.30V I:0.0498A P:4.7440W PF:0.4324 Freq:50.00Hz Lamp Flux:218.053x1 lm		
NAME: 6622	TYPE:	WEIGHT:220g
SPEC.:5W	DIM.: $\phi$ 6.5*7cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

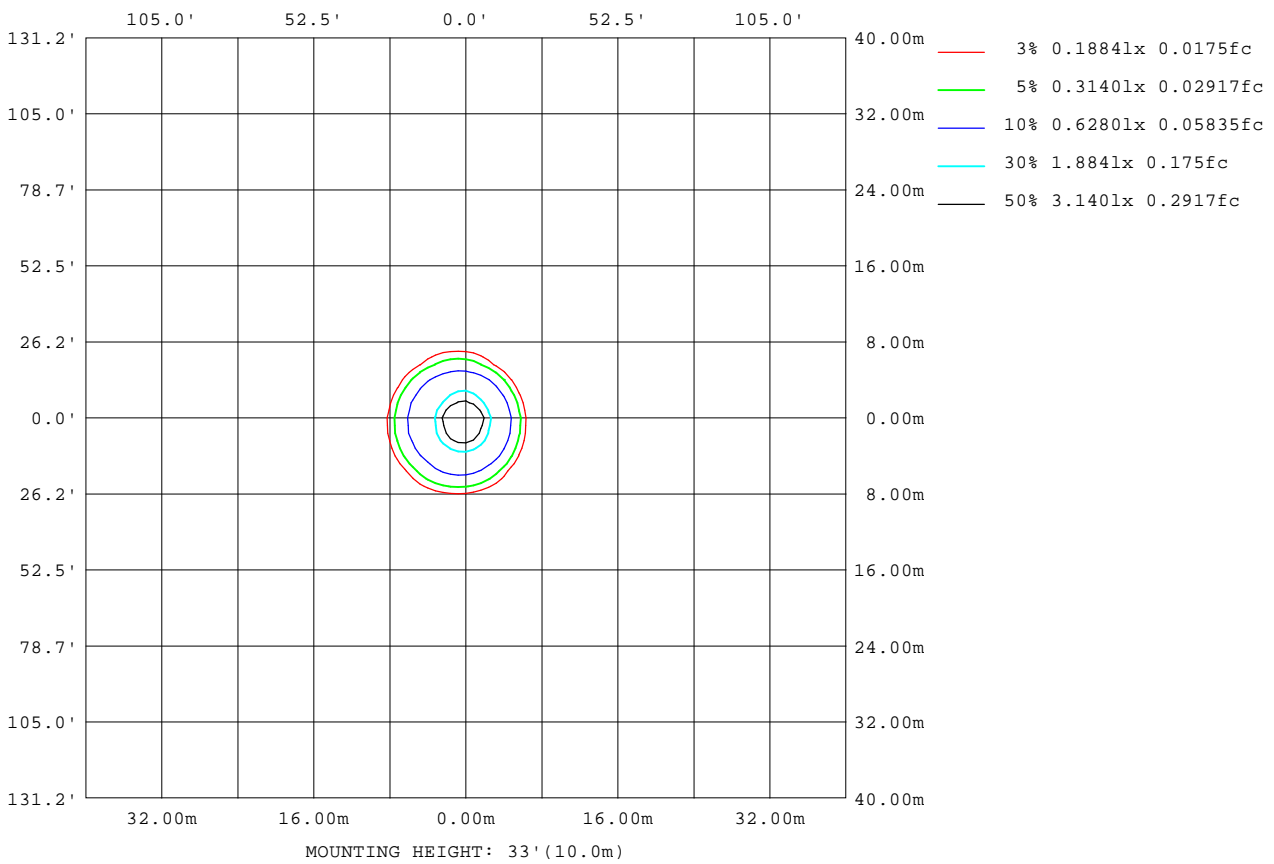

H( $\beta$ ) Range:-90 - 90DEG  
 H( $\beta$ ) Interval: 1.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:AED  
 Test Date:2024-04-11

V(B) Range:-80 - 80DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:5.780m [K=1.0000]  
 Remarks:

Planar Illuminance Curve

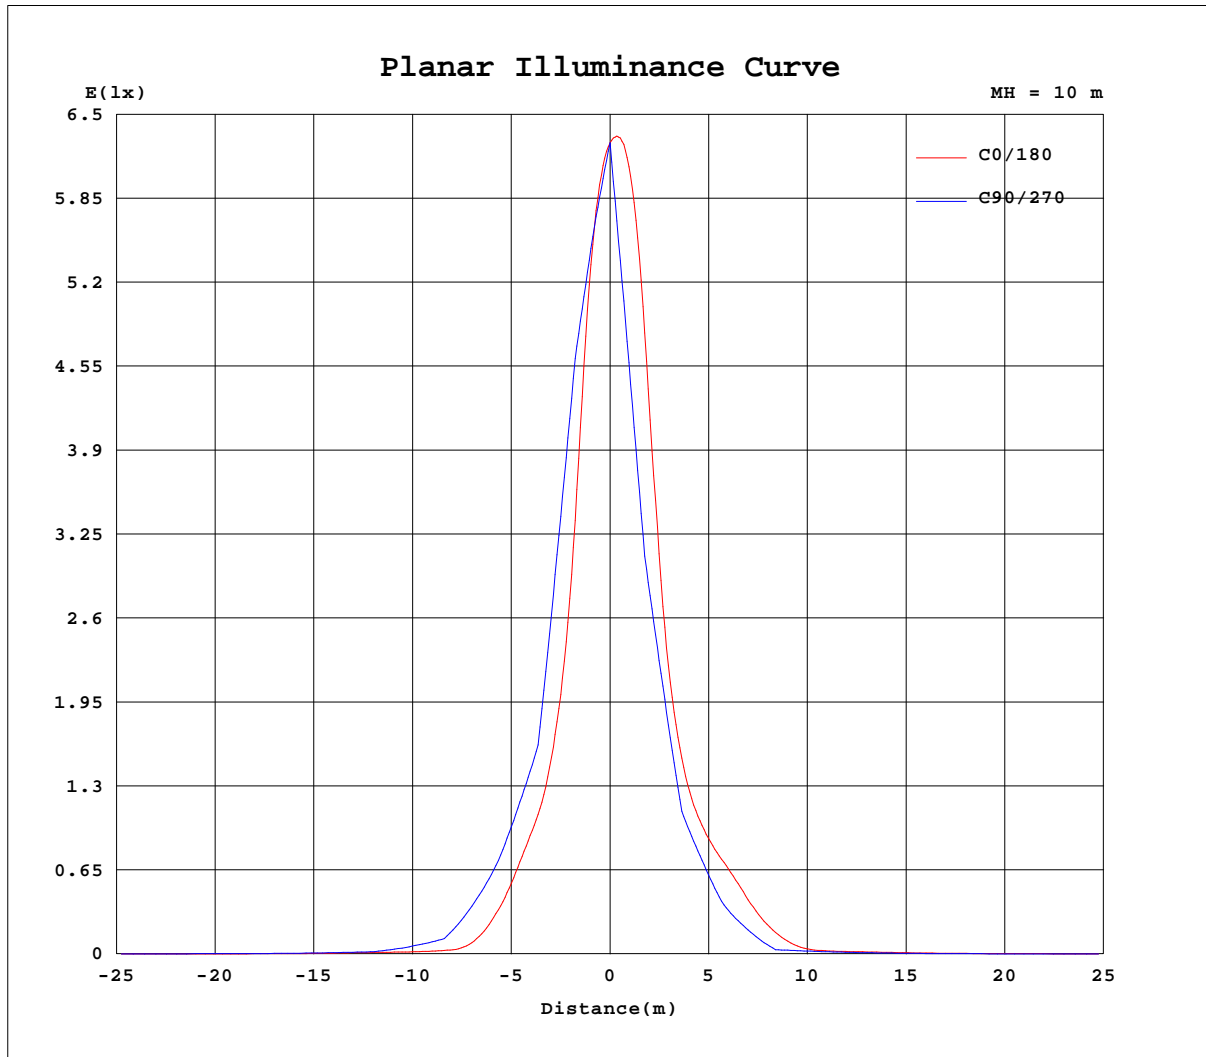


H( $\beta$ ) Range:-90 - 90DEG  
 H( $\beta$ ) Interval: 1.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:AED  
 Test Date:2024-04-11

V(B) Range:-80 - 80DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:5.780m [K=1.0000]  
 Remarks:

AAI Figure

Test:U:220.30V I:0.0498A P:4.7440W PF:0.4324 Freq:50.00Hz Lamp Flux:218.053x1 lm		
NAME: 6622	TYPE:	WEIGHT:220g
SPEC.:5W	DIM.: $\phi$ 6.5*7cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

Flux out:70.07 lm

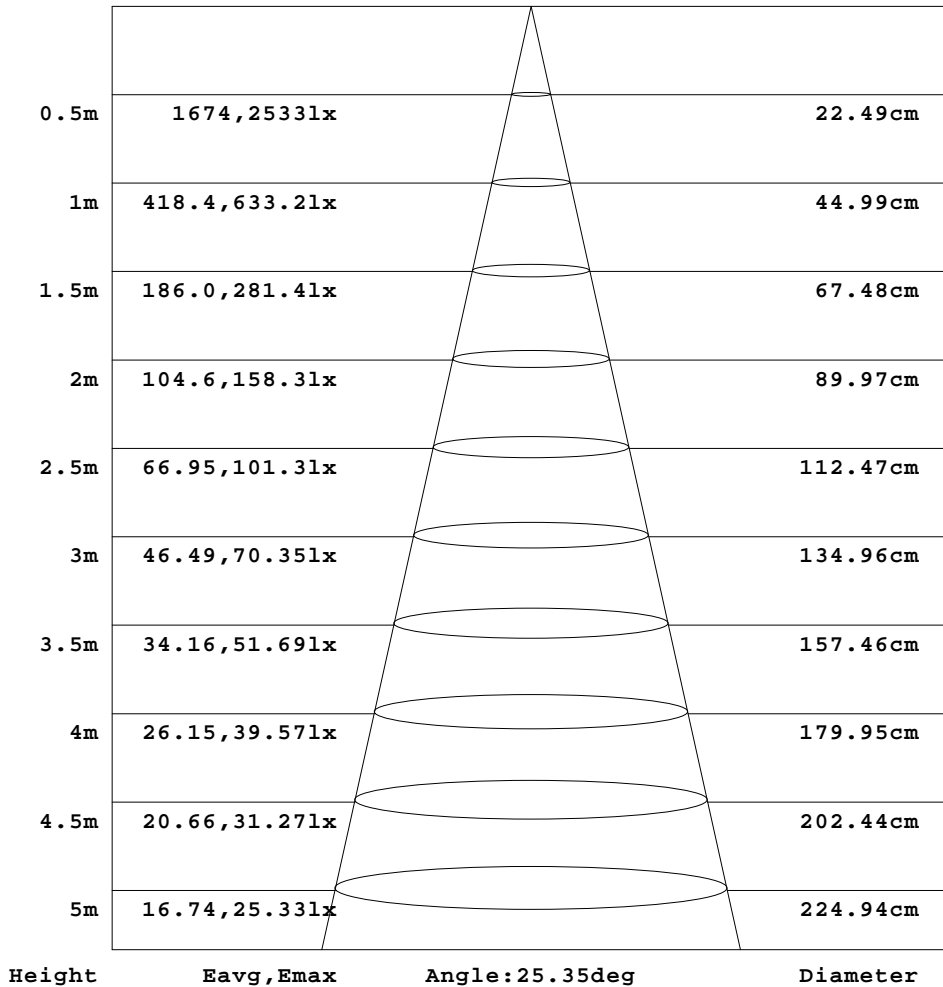

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H( $\beta$ ) Range:-90 - 90DEG  
 H( $\beta$ ) Interval: 1.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:AED  
 Test Date:2024-04-11

V(B) Range:-80 - 80DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:5.780m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.30V I:0.0498A P:4.7440W PF:0.4324 Freq:50.00Hz Lamp Flux:218.053x1 lm		
NAME: 6622	TYPE:	WEIGHT:220g
SPEC.:5W	DIM.: $\phi$ 6.5*7cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

Table--1

UNIT: cd

H( DEG) V( DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.88	0.90	0.95	0.98	1.03	1.08	1.14	1.20	1.25	1.29	1.32	1.35	1.38	1.40	1.41	1.40	1.40	1.37	1.37
-75	0.91	0.91	0.99	1.05	1.12	1.21	1.29	1.37	1.45	1.53	1.60	1.66	1.73	1.80	1.81	1.85	1.85	1.83	1.81
-70	0.91	0.96	1.04	1.16	1.28	1.40	1.51	1.62	1.72	1.83	1.92	2.00	2.11	2.21	2.26	2.28	2.29	2.28	2.22
-65	0.92	0.94	1.06	1.19	1.34	1.48	1.62	1.78	1.97	2.14	2.30	2.48	2.66	2.83	2.96	3.06	3.12	3.11	3.06
-60	0.93	1.00	1.15	1.33	1.49	1.67	1.85	2.08	2.37	2.58	2.81	3.09	3.33	3.56	3.72	3.88	3.94	3.93	3.80
-55	0.94	0.94	1.13	1.32	1.52	1.71	1.97	2.24	2.57	2.90	3.26	3.75	4.33	4.88	5.29	5.51	5.59	5.60	5.52
-50	0.92	1.04	1.24	1.47	1.68	1.93	2.30	2.62	3.04	3.50	4.10	4.92	5.87	6.65	7.08	7.21	7.23	7.20	7.11
-45	0.98	0.93	1.22	1.46	1.71	2.00	2.38	2.81	3.29	4.09	5.09	5.70	6.13	7.16	9.48	13.0	16.2	17.8	17.6
-40	0.92	1.13	1.37	1.64	1.93	2.38	2.79	3.31	4.07	5.38	6.71	6.91	6.93	9.00	14.7	21.6	26.9	28.7	26.8
-35	1.00	0.96	1.33	1.62	1.93	2.40	2.90	3.50	4.55	6.01	6.68	8.29	15.5	26.7	40.0	53.2	62.7	67.4	67.5
-30	0.98	1.20	1.50	1.83	2.27	2.80	3.45	4.42	6.17	7.12	7.47	13.9	32.0	54.1	76.3	93.6	103	107	105
-25	0.99	1.02	1.43	1.76	2.18	2.78	3.45	4.43	6.23	7.27	8.85	21.1	44.4	71.0	92.4	112	131	147	152
-20	1.00	1.26	1.60	1.98	2.58	3.24	4.05	5.86	7.38	7.79	17.1	44.5	78.4	106	124	147	173	193	195
-15	0.99	1.03	1.49	1.87	2.41	3.08	3.89	5.41	7.42	7.89	16.3	44.3	79.9	108	133	175	243	316	343
-10	1.02	1.29	1.66	2.09	2.79	3.57	4.63	6.78	7.75	10.6	34.1	72.0	106	129	170	252	376	474	483
-5	0.98	1.04	1.52	1.91	2.52	3.23	4.11	5.88	7.71	8.57	23.1	58.0	97.1	121	153	227	370	520	562
0	1.02	1.29	1.68	2.10	2.81	3.59	4.71	6.80	7.62	11.3	37.2	76.4	109	134	183	298	503	624	628
5	1.02	1.01	1.47	1.87	2.48	3.17	4.02	5.70	7.52	8.27	20.1	52.8	91.0	116	145	203	318	440	480
10	0.93	1.23	1.62	2.03	2.68	3.42	4.43	6.38	7.57	8.86	26.3	60.2	96.1	118	143	184	245	307	323
15	1.02	0.99	1.42	1.79	2.29	2.93	3.68	4.94	6.76	7.43	11.9	31.7	63.0	90.8	114	138	171	209	230
20	1.00	1.22	1.55	1.90	2.44	3.01	3.74	4.97	6.73	7.00	9.53	26.9	54.3	82.7	103	116	128	135	133
25	0.98	0.99	1.37	1.68	2.04	2.56	3.14	3.90	5.18	6.38	7.27	12.4	26.1	45.2	64.6	78.6	89.6	96.7	97.6
30	0.95	1.16	1.43	1.72	2.08	2.55	3.07	3.69	4.82	6.26	6.60	7.46	11.9	24.8	38.3	50.4	58.4	61.0	58.4
35	0.95	0.95	1.27	1.52	1.79	2.15	2.59	3.05	3.67	4.66	5.53	6.23	7.76	12.7	19.8	26.6	31.7	34.2	33.9
40	0.92	1.07	1.30	1.52	1.76	2.12	2.45	2.82	3.26	3.88	4.84	5.83	6.39	6.49	7.04	7.54	7.72	7.79	7.71
45	0.92	0.93	1.17	1.38	1.57	1.79	2.11	2.43	2.75	3.12	3.68	4.35	4.99	5.30	5.58	6.05	6.44	6.66	6.62
50	0.91	1.02	1.20	1.36	1.56	1.75	2.00	2.28	2.52	2.76	3.01	3.34	3.74	4.23	4.67	5.10	5.36	5.49	5.45
55	0.93	0.91	1.08	1.26	1.41	1.55	1.74	1.94	2.12	2.34	2.56	2.74	2.98	3.26	3.52	3.75	3.97	4.05	4.03
60	0.94	0.97	1.11	1.23	1.40	1.47	1.63	1.77	1.90	2.13	2.21	2.34	2.43	2.52	2.59	2.63	2.65	2.62	2.60
65	0.92	0.93	1.03	1.15	1.25	1.35	1.47	1.55	1.65	1.78	1.90	1.96	2.03	2.10	2.16	2.18	2.20	2.20	2.18
70	0.96	0.96	1.04	1.13	1.20	1.30	1.38	1.45	1.50	1.56	1.61	1.64	1.70	1.72	1.74	1.77	1.76	1.76	1.74
75	0.94	0.97	1.02	1.06	1.10	1.16	1.21	1.27	1.32	1.35	1.39	1.43	1.45	1.47	1.49	1.49	1.50	1.49	1.50
80	0.97	0.98	1.00	1.03	1.04	1.07	1.11	1.12	1.16	1.19	1.20	1.20	1.23	1.21	1.23	1.24	1.23	1.23	1.23
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(h) Range:-90 - 90DEG  
H(h) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2024-04-11

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.30V I:0.0498A P:4.7440W PF:0.4324 Freq:50.00Hz Lamp Flux:218.053x1 lm		
NAME: 6622	TYPE:	WEIGHT:220g
SPEC.:5W	DIM.: $\phi$ 6.5*7cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

Table--2

UNIT: cd

H( DEG) V( DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	1.35	1.32	1.30	1.25	1.23	1.19	1.15	1.11	1.08	1.06	1.02	0.98	0.96	0.92	0.91	0.90	0.88	0.86
-75	1.77	1.72	1.67	1.60	1.51	1.44	1.37	1.30	1.23	1.20	1.14	1.08	1.03	1.00	0.96	0.93	0.89	0.87
-70	2.15	2.08	2.01	1.88	1.75	1.63	1.54	1.45	1.37	1.28	1.23	1.16	1.09	1.03	0.97	0.95	0.88	0.86
-65	2.96	2.82	2.64	2.45	2.25	2.07	1.89	1.73	1.60	1.47	1.36	1.26	1.17	1.10	1.04	0.98	0.92	0.89
-60	3.66	3.42	3.17	2.87	2.60	2.34	2.09	1.92	1.75	1.55	1.42	1.31	1.22	1.12	1.04	0.97	0.91	0.91
-55	5.35	5.16	4.79	4.31	3.74	3.18	2.67	2.30	2.03	1.78	1.59	1.42	1.29	1.18	1.09	1.01	0.93	0.89
-50	6.96	6.63	6.18	5.43	4.54	3.61	2.89	2.47	2.10	1.84	1.64	1.42	1.30	1.17	1.06	0.98	0.89	0.87
-45	15.5	12.1	8.47	6.30	5.27	4.68	4.13	3.43	2.70	2.19	1.88	1.62	1.42	1.28	1.16	1.03	0.95	0.88
-40	21.7	14.4	8.83	6.43	5.53	5.36	4.73	3.78	2.77	2.26	1.90	1.66	1.41	1.28	1.13	0.99	0.89	0.91
-35	62.6	52.4	39.0	25.8	14.0	6.81	5.25	4.56	3.90	2.96	2.29	1.90	1.63	1.40	1.24	1.09	1.00	0.90
-30	96.7	79.9	58.5	35.5	14.9	6.23	4.95	4.84	4.27	3.00	2.33	1.92	1.63	1.40	1.25	1.09	0.95	0.91
-25	144	124	99.1	73.8	44.9	21.1	7.98	5.25	4.76	4.06	2.94	2.24	1.85	1.53	1.33	1.18	1.04	0.94
-20	178	148	120	89.3	53.6	23.2	7.03	5.00	4.89	4.30	2.81	2.19	1.80	1.52	1.31	1.14	0.95	0.94
-15	317	242	169	121	83.9	46.1	16.9	6.20	4.97	4.81	3.71	2.54	2.01	1.65	1.42	1.23	1.07	0.96
-10	405	270	176	123	83.0	42.3	13.2	5.99	4.93	4.77	3.33	2.41	1.91	1.60	1.37	1.19	0.99	0.97
-5	522	384	227	145	104	61.0	25.0	7.17	5.17	4.96	4.17	2.71	2.10	1.72	1.45	1.26	1.09	0.98
0	556	351	200	130	90.4	48.2	16.0	6.38	5.03	4.85	3.58	2.47	1.95	1.59	1.37	1.19	1.01	0.99
5	447	333	203	135	95.4	54.9	21.5	7.04	5.14	4.94	4.13	2.66	2.06	1.70	1.43	1.25	1.09	0.98
10	267	195	139	106	67.9	32.5	9.59	5.78	4.85	4.65	3.16	2.31	1.88	1.56	1.34	1.16	0.98	0.96
15	211	169	128	94.3	62.6	31.9	11.5	5.81	4.85	4.69	3.52	2.39	1.92	1.59	1.37	1.19	1.05	0.94
20	123	108	85.8	58.2	31.2	11.3	6.11	4.89	4.64	4.06	2.58	2.03	1.72	1.43	1.26	1.10	0.93	0.91
25	90.9	79.3	62.8	43.1	24.8	11.9	5.84	4.89	4.49	3.81	2.65	2.05	1.73	1.45	1.29	1.12	0.99	0.90
30	50.4	38.3	24.3	12.1	6.72	5.39	4.68	4.53	3.98	2.62	2.09	1.77	1.51	1.33	1.19	1.03	0.91	0.90
35	30.9	25.2	18.0	11.0	6.55	5.49	4.68	4.16	3.45	2.64	2.03	1.74	1.51	1.32	1.19	1.05	0.94	0.88
40	7.46	6.74	5.77	5.33	5.15	4.82	4.24	3.28	2.36	1.97	1.73	1.53	1.35	1.20	1.08	0.98	0.87	0.90
45	6.40	6.02	5.44	4.76	4.31	3.91	3.47	2.91	2.26	1.92	1.68	1.50	1.33	1.21	1.10	0.99	0.88	0.84
50	5.18	4.81	4.33	3.78	3.20	2.66	2.32	2.08	1.83	1.68	1.47	1.34	1.24	1.12	1.02	0.89	0.83	0.83
55	3.93	3.72	3.46	3.15	2.79	2.42	2.16	1.94	1.75	1.59	1.46	1.33	1.23	1.14	1.04	0.97	0.88	0.85
60	2.52	2.43	2.32	2.18	2.05	1.93	1.81	1.67	1.52	1.41	1.32	1.24	1.16	1.07	1.00	0.95	0.88	0.92
65	2.14	2.08	2.00	1.92	1.83	1.75	1.64	1.55	1.45	1.36	1.28	1.20	1.14	1.07	1.01	0.97	0.92	0.90
70	1.71	1.68	1.62	1.58	1.52	1.47	1.40	1.35	1.28	1.22	1.18	1.12	1.06	1.02	0.98	0.95	0.92	0.91
75	1.48	1.45	1.42	1.39	1.35	1.31	1.27	1.21	1.18	1.17	1.11	1.06	1.04	0.99	0.97	0.94	0.92	0.90
80	1.22	1.20	1.18	1.18	1.15	1.13	1.06	1.06	1.05	1.06	1.00	0.98	0.96	0.95	0.95	0.93	0.96	1.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2024-04-11

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks: