

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		1885.5 cd per klm. 0.0 degrees vertical -2.0 degrees horizontal
Beam Spread	At 10% of Imax	73.8V x 72.1H
	At 50% of Imax	38.0V x 34.1H
	At 90% of Imax	9.9V x 12.8H
Beam Flux	Total	999.6 lumens per klm.
	To 10% of Imax	805.4 lumens per klm.
	To 50% of Imax	397.9 lumens per klm.
	To 90% of Imax	42.5 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2024-04-11

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.17V I:0.0989A P:10.039W PF:0.4611 Freq:50.00Hz Lamp Flux:213.584x1 lm		
NAME: 6623	TYPE:	WEIGHT:370g
SPEC.:10W	DIM.: $\phi 10 \times 7 \text{cm}$	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

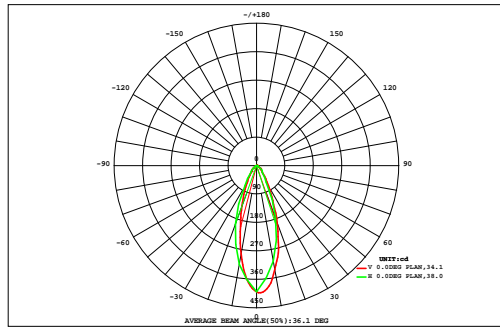

DATA OF LAMP		Eff:21.27lm/W	
MODEL		Imax(cd)	402.7
NOMINAL POWER(W)		AVAILABILITY(%)	80.4
RATED VOLTAGE(V)		Avai. FLUX(lm)	171.7
NOMINAL FLUX(lm)	213.584	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	213.6
TEST VOLTAGE(V)	0	q @50%(H,V)	34,38DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	90	80	70	60	50	40	30	20	10	0	10	20	30	40	50	60	70	80	90	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.01	0.02	0.03	0.04	0.05	0.05	0.06	0.06	0.06	0.05	0.04	0.04	0.03	0.02	0.01	0.00	0.64	0.00	
70	0.00	0.01	0.02	0.03	0.04	0.06	0.08	0.09	0.10	0.10	0.09	0.07	0.05	0.04	0.03	0.02	0.01	0.00	0.85	0.00
60	0.00	0.01	0.02	0.04	0.06	0.11	0.16	0.26	0.31	0.26	0.26	0.20	0.11	0.06	0.03	0.02	0.01	0.00	1.93	0.00
50	0.00	0.01	0.02	0.05	0.11	0.22	0.39	0.61	0.69	0.60	0.66	0.49	0.26	0.11	0.04	0.02	0.01	0.00	4.31	0.00
40	0.00	0.01	0.03	0.07	0.21	0.42	0.76	1.13	1.37	1.41	1.23	0.77	0.47	0.24	0.07	0.03	0.01	0.00	8.23	3.25
30	0.00	0.01	0.04	0.11	0.34	0.64	1.32	2.64	3.63	3.67	2.52	1.24	0.66	0.38	0.11	0.03	0.01	0.00	17.3	14.3
20	0.00	0.01	0.04	0.15	0.39	0.92	2.32	5.30	7.45	7.28	4.47	2.12	0.94	0.43	0.16	0.04	0.01	0.00	32.0	29.7
10	0.00	0.01	0.04	0.19	0.46	1.16	3.20	7.31	10.5	10.1	6.07	2.77	1.09	0.47	0.19	0.04	0.01	0.00	43.6	41.6
0	0.00	0.01	0.04	0.19	0.47	1.18	3.03	6.89	10.8	10.3	6.09	2.68	1.05	0.47	0.19	0.04	0.01	0.00	43.5	41.4
-10	0.00	0.01	0.04	0.17	0.43	0.96	2.14	4.71	7.27	6.78	4.18	2.01	0.86	0.44	0.16	0.03	0.01	0.00	30.2	27.8
-20	0.00	0.01	0.03	0.13	0.36	0.63	1.29	2.21	3.33	3.24	2.14	1.19	0.62	0.39	0.11	0.03	0.01	0.00	15.7	12.6
-30	0.00	0.01	0.03	0.08	0.25	0.48	0.81	0.89	1.01	1.05	0.90	0.69	0.50	0.25	0.05	0.03	0.01	0.00	7.03	1.07
-40	0.00	0.01	0.02	0.05	0.11	0.31	0.53	0.53	0.66	0.65	0.57	0.49	0.31	0.09	0.04	0.02	0.01	0.00	4.40	0.00
-50	0.00	0.01	0.02	0.04	0.06	0.10	0.22	0.37	0.44	0.43	0.37	0.21	0.08	0.05	0.03	0.02	0.01	0.00	2.45	0.00
-60	0.00	0.01	0.02	0.03	0.04	0.05	0.05	0.06	0.06	0.07	0.06	0.05	0.05	0.04	0.03	0.02	0.01	0.00	0.63	0.00
-70	0.00	0.01	0.01	0.02	0.03	0.04	0.04	0.04	0.05	0.04	0.04	0.04	0.03	0.03	0.02	0.01	0.01	0.00	0.48	0.00
-80	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.18	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
F t	0.05	0.19	0.46	1.38	3.41	7.33	16.4	33.1	47.7	46.1	29.7	15.1	7.13	3.53	1.30	0.42	0.18	0.05	214	---
F a	0.00	0.00	0.00	0.00	0.00	2.68	12.6	29.6	44.2	42.8	26.3	11.2	2.21	0.00	0.00	0.00	0.00	0.00	---	172


one-half-peak spread: U:18.3,D:20.0 , L:17.5,R:17.0 NEMA Beam Type: Type 5

H(h) Range:-90 - 90DEG
 H(h) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:AED
 Test Date:2024-04-11

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.17V I:0.0989A P:10.039W PF:0.4611 Freq:50.00Hz Lamp Flux:213.584x1 lm		
NAME: 6623	TYPE:	WEIGHT:370g
SPEC.:10W	DIM.: $\phi 10*7$ cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

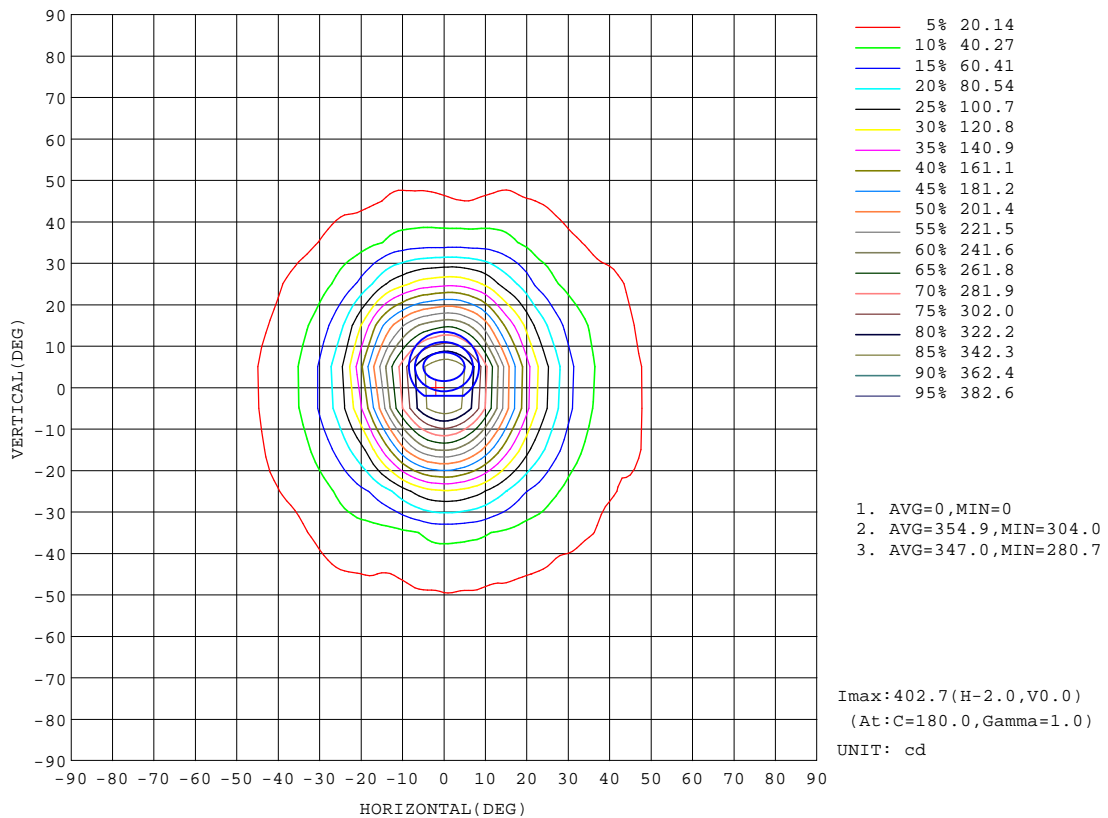


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2024-04-11

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.17V I:0.0989A P:10.039W PF:0.4611 Freq:50.00Hz Lamp Flux:213.584x1 lm		
NAME: 6623	TYPE:	WEIGHT:370g
SPEC.:10W	DIM.: $\phi 10 \times 7 \text{cm}$	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

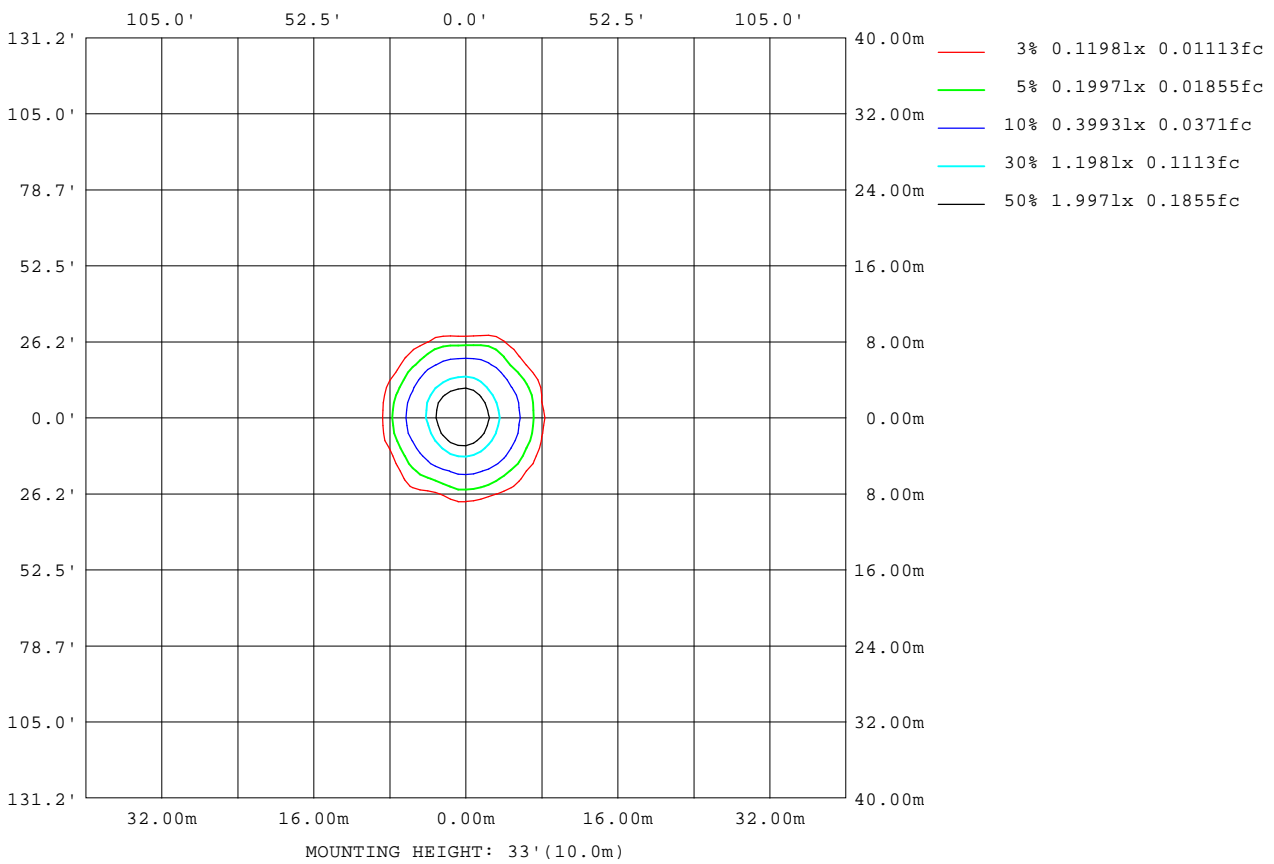

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:AED
 Test Date:2024-04-11

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

Planar Illuminance Curve

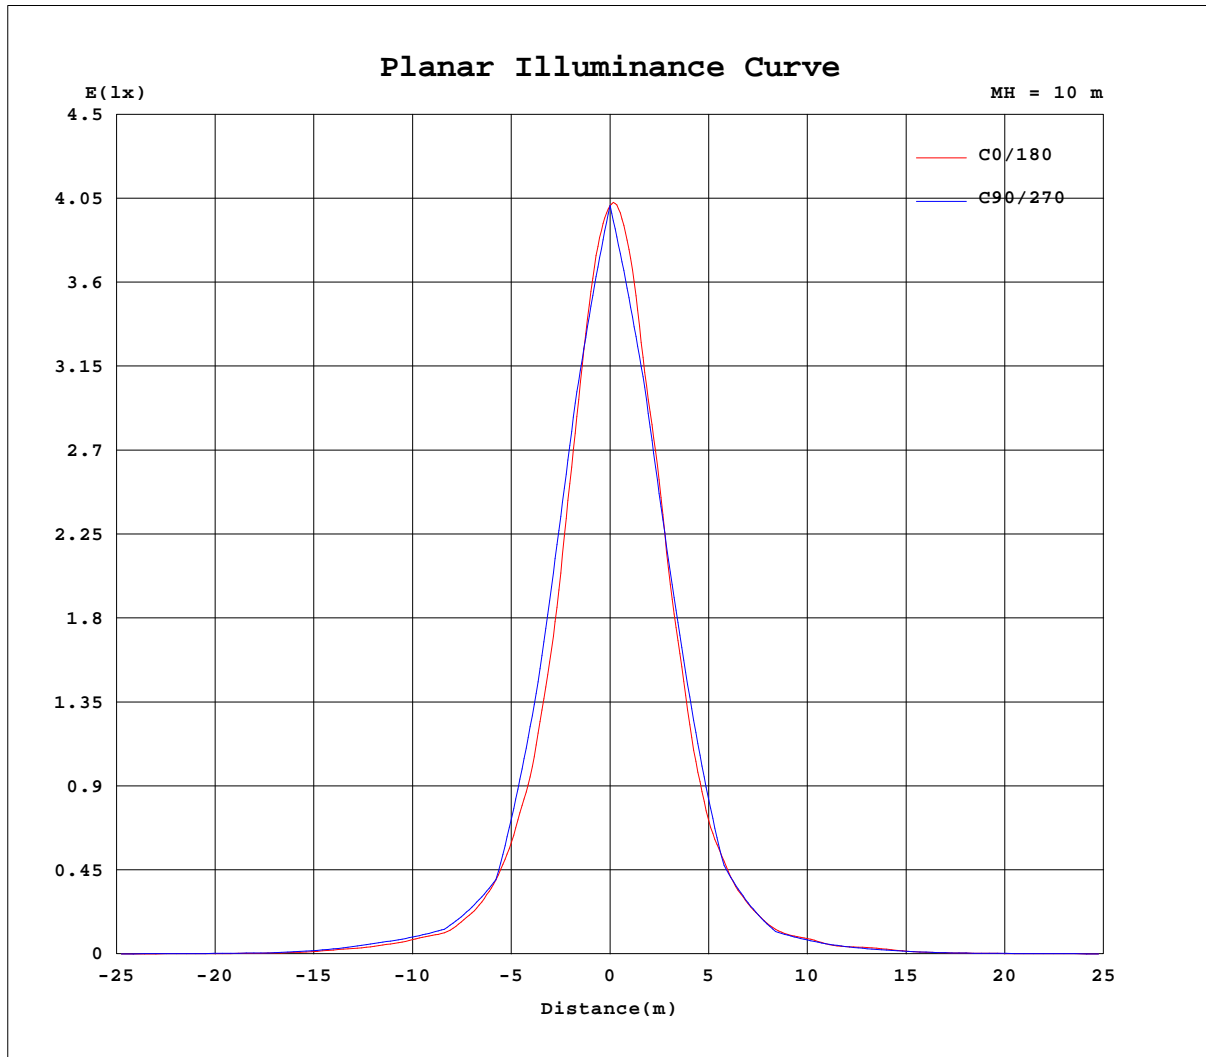


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:AED
 Test Date:2024-04-11

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.17V I:0.0989A P:10.039W PF:0.4611 Freq:50.00Hz Lamp Flux:213.584x1 lm		
NAME: 6623	TYPE:	WEIGHT:370g
SPEC.:10W	DIM.: $\phi 10 \times 7$ cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

Flux out:82.06 lm

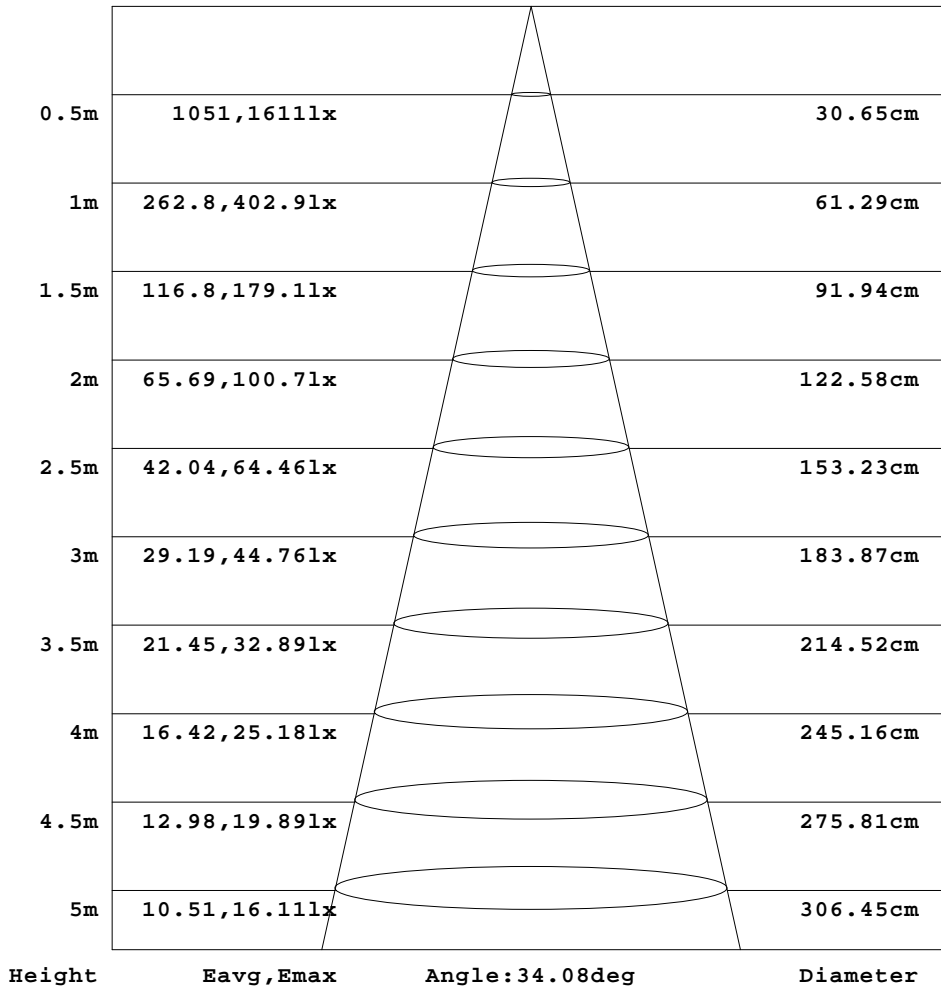

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2024-04-11

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.17V I:0.0989A P:10.039W PF:0.4611 Freq:50.00Hz Lamp Flux:213.584x1 lm		
NAME: 6623	TYPE:	WEIGHT:370g
SPEC.:10W	DIM.: ϕ 10*7cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

Table--1

UNIT: cd

H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.89	0.94	0.99	1.00	1.01	1.03	1.06	1.07	1.11	1.14	1.16	1.19	1.21	1.23	1.24	1.26	1.27	1.28	1.28
-75	0.90	0.93	1.00	1.03	1.07	1.09	1.15	1.21	1.27	1.33	1.40	1.46	1.53	1.59	1.63	1.68	1.70	1.72	1.72
-70	0.90	0.98	1.04	1.09	1.14	1.20	1.28	1.37	1.48	1.59	1.68	1.80	1.90	1.98	2.05	2.11	2.15	2.17	2.16
-65	0.91	0.95	1.04	1.11	1.18	1.26	1.39	1.52	1.69	1.86	2.07	2.30	2.53	2.75	2.94	3.12	3.34	3.41	3.58
-60	0.92	1.01	1.09	1.18	1.28	1.41	1.58	1.79	2.04	2.32	2.63	2.98	3.35	3.66	3.97	4.27	4.60	4.71	5.24
-55	0.93	0.96	1.08	1.19	1.31	1.46	1.69	1.96	2.30	2.74	3.27	4.05	6.03	7.71	9.86	10.8	12.1	13.3	13.2
-50	0.93	1.03	1.15	1.28	1.45	1.67	1.98	2.38	2.90	3.56	4.40	6.58	10.3	13.1	17.5	18.2	21.3	20.9	21.7
-45	0.96	1.00	1.15	1.29	1.47	1.72	2.08	2.59	3.33	4.45	7.21	10.4	15.1	18.9	20.1	19.8	21.5	24.4	25.7
-40	0.97	1.09	1.25	1.42	1.67	2.03	2.55	3.33	4.54	7.12	12.2	17.7	23.8	25.9	23.7	21.8	24.5	28.7	29.5
-35	0.98	1.03	1.21	1.40	1.66	2.03	2.62	3.59	6.05	10.4	13.5	18.2	23.7	30.2	32.5	33.3	36.5	41.9	45.7
-30	0.98	1.12	1.31	1.56	1.90	2.45	3.39	5.19	10.8	16.3	18.3	22.2	29.0	37.3	41.9	45.9	52.2	60.5	61.5
-25	0.97	1.06	1.26	1.51	1.86	2.38	3.31	5.34	11.3	16.0	19.8	23.1	32.0	44.4	56.7	71.3	92.2	112	119
-20	0.99	1.19	1.40	1.70	2.16	2.94	4.33	9.01	15.7	18.1	24.9	29.2	44.7	60.7	80.3	112	150	172	175
-15	0.99	1.10	1.31	1.61	2.04	2.73	4.02	7.73	14.4	17.4	24.8	31.6	48.6	68.6	94.8	141	195	232	244
-10	1.01	1.21	1.45	1.81	2.38	3.40	5.62	12.0	15.1	23.4	28.7	45.8	67.2	96.8	141	212	276	307	308
-5	1.03	1.14	1.36	1.68	2.17	2.98	4.46	8.94	14.9	19.3	26.5	40.3	63.0	91.8	140	210	282	336	357
0	1.04	1.25	1.50	1.89	2.50	3.56	5.44	13.2	15.2	24.1	31.1	51.4	80.2	123	192	270	333	390	399
5	1.03	1.15	1.38	1.71	2.21	3.04	4.48	8.87	15.2	20.0	25.6	40.9	63.0	96.4	158	228	292	340	361
10	1.02	1.23	1.48	1.87	2.46	3.47	5.23	11.4	15.0	22.6	29.5	46.2	71.4	114	181	243	291	313	317
15	1.01	1.12	1.35	1.65	2.12	2.86	4.09	7.32	13.1	16.9	22.7	34.4	49.6	76.0	121	177	219	246	258
20	1.01	1.21	1.44	1.77	2.28	3.08	4.38	7.96	14.3	16.2	24.4	32.4	46.8	69.8	104	149	175	190	198
25	0.98	1.08	1.28	1.55	1.95	2.53	3.43	5.02	9.58	14.0	18.9	24.8	32.4	46.9	66.3	94.3	115	129	135
30	0.98	1.15	1.33	1.61	2.01	2.60	3.49	5.33	9.55	15.0	18.2	20.9	28.8	36.8	48.6	60.9	69.3	73.4	73.3
35	0.98	1.05	1.23	1.44	1.74	2.17	2.79	3.71	6.00	10.0	12.8	16.0	20.6	28.0	32.4	39.9	47.5	49.9	50.0
40	0.98	1.13	1.27	1.49	1.77	2.17	2.71	3.51	4.76	7.85	9.05	14.3	18.1	22.7	22.3	27.0	28.2	27.1	27.0
45	0.97	1.03	1.18	1.33	1.55	1.84	2.23	2.77	3.52	5.09	6.34	8.94	11.7	15.1	16.3	20.1	23.2	22.9	21.6
50	0.97	1.09	1.19	1.35	1.54	1.81	2.14	2.58	3.14	3.89	4.87	6.11	7.95	8.44	12.6	17.2	17.8	18.0	14.7
55	0.97	1.02	1.14	1.25	1.39	1.56	1.81	2.12	2.49	2.98	3.58	4.31	5.45	5.97	7.47	9.95	11.4	11.6	10.7
60	0.99	1.09	1.15	1.26	1.37	1.52	1.71	1.94	2.20	2.51	2.84	3.25	3.66	4.00	4.34	4.67	4.93	5.03	4.94
65	0.99	1.02	1.12	1.19	1.27	1.36	1.50	1.66	1.83	2.02	2.25	2.49	2.75	2.97	3.18	3.38	3.55	3.65	3.64
70	1.00	1.07	1.13	1.18	1.23	1.31	1.39	1.50	1.61	1.72	1.82	1.93	2.02	2.11	2.19	2.24	2.27	2.29	2.27
75	1.00	1.01	1.10	1.13	1.16	1.20	1.26	1.33	1.40	1.47	1.54	1.61	1.67	1.72	1.77	1.81	1.84	1.85	1.84
80	1.00	1.05	1.09	1.12	1.13	1.16	1.18	1.21	1.25	1.27	1.30	1.33	1.35	1.38	1.40	1.40	1.41	1.42	1.41
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(h) Range:-90 - 90DEG
H(h) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2024-04-11

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.17V I:0.0989A P:10.039W PF:0.4611 Freq:50.00Hz Lamp Flux:213.584x1 lm		
NAME: 6623	TYPE:	WEIGHT:370g
SPEC.:10W	DIM.: $\phi 10 \times 7 \text{cm}$	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

Table--2

UNIT: cd

H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	1.27	1.27	1.25	1.25	1.21	1.19	1.18	1.15	1.12	1.10	1.06	1.06	1.03	1.01	0.98	0.97	0.89	0.88
-75	1.71	1.69	1.65	1.61	1.56	1.51	1.45	1.39	1.32	1.27	1.21	1.16	1.11	1.07	1.02	1.00	0.94	0.88
-70	2.13	2.09	2.02	1.95	1.86	1.78	1.69	1.58	1.50	1.40	1.32	1.23	1.16	1.10	1.05	1.01	0.91	0.90
-65	3.64	3.41	3.18	2.89	2.68	2.48	2.26	2.06	1.86	1.70	1.54	1.41	1.29	1.19	1.10	1.05	0.96	0.89
-60	4.98	4.49	4.12	3.65	3.33	3.01	2.68	2.38	2.11	1.87	1.66	1.48	1.34	1.22	1.12	1.04	0.92	0.91
-55	13.1	12.5	12.1	10.7	8.29	6.05	4.46	3.39	2.79	2.34	1.99	1.71	1.51	1.34	1.20	1.09	0.99	0.89
-50	21.4	19.5	18.7	16.7	10.5	8.00	5.32	3.85	3.11	2.50	2.10	1.75	1.54	1.33	1.18	1.06	0.92	0.82
-45	24.8	23.4	22.3	20.5	18.2	15.7	12.3	8.56	5.39	3.31	2.61	2.11	1.78	1.51	1.30	1.14	1.02	0.90
-40	27.9	25.7	24.5	22.8	21.9	21.4	17.6	9.89	5.62	3.49	2.69	2.16	1.78	1.50	1.28	1.12	0.95	0.91
-35	44.6	41.7	37.2	31.9	28.7	24.6	21.2	16.3	12.1	7.09	3.49	2.62	2.08	1.70	1.42	1.21	1.06	0.92
-30	59.7	53.6	45.8	38.0	31.3	25.4	21.2	19.2	14.4	6.59	3.46	2.61	2.05	1.66	1.38	1.18	0.98	0.94
-25	114	100	80.5	60.7	46.9	34.6	27.0	21.4	19.1	13.6	6.09	3.25	2.41	1.89	1.53	1.28	1.10	0.94
-20	159	132	98.1	73.0	53.0	36.6	26.5	20.7	20.4	14.0	5.51	3.14	2.31	1.80	1.46	1.22	1.01	0.94
-15	230	195	149	107	76.2	51.9	35.9	25.0	21.7	17.4	9.72	4.15	2.73	2.06	1.65	1.35	1.14	0.96
-10	276	222	164	114	78.0	53.0	35.0	22.6	21.3	16.3	7.59	3.65	2.54	1.94	1.57	1.30	1.07	0.98
-5	337	281	209	147	100	66.0	43.5	28.0	22.9	17.7	11.9	5.01	2.98	2.19	1.71	1.40	1.17	0.98
0	360	284	199	136	92.2	58.6	38.6	25.0	21.2	15.3	9.53	4.02	2.66	1.99	1.59	1.31	1.07	0.98
5	343	288	212	149	102	67.6	45.6	27.5	23.3	17.6	11.9	5.16	3.03	2.20	1.72	1.41	1.19	0.99
10	289	231	169	120	83.8	55.5	37.4	24.5	20.5	16.2	7.55	3.86	2.60	1.98	1.58	1.32	1.09	1.01
15	247	211	157	115	80.0	54.3	39.5	25.9	21.4	15.2	9.48	4.54	2.82	2.09	1.66	1.37	1.16	0.98
20	183	146	111	77.8	53.7	39.7	28.3	24.7	16.9	10.9	5.95	3.32	2.34	1.81	1.48	1.23	1.02	0.96
25	132	117	91.5	69.4	48.4	35.4	26.9	23.1	18.1	11.7	6.27	3.54	2.45	1.89	1.54	1.29	1.10	0.94
30	71.5	67.3	54.8	39.5	29.7	24.6	19.8	18.7	14.0	7.51	3.77	2.63	2.04	1.65	1.38	1.18	0.98	0.93
35	50.2	49.8	45.5	36.3	28.6	22.7	18.6	16.2	12.3	7.37	3.90	2.64	2.06	1.68	1.41	1.20	1.06	0.91
40	28.0	30.2	28.8	24.6	22.7	17.6	15.3	10.5	6.64	3.48	2.64	2.13	1.75	1.47	1.26	1.11	0.94	0.92
45	20.2	21.8	23.5	20.8	18.5	14.8	11.7	7.93	5.70	3.43	2.56	2.10	1.76	1.50	1.30	1.15	1.03	0.92
50	12.9	15.1	16.5	15.8	11.0	9.67	5.41	3.51	2.88	2.43	2.06	1.78	1.55	1.37	1.21	1.10	0.97	0.92
55	8.88	9.48	10.7	9.74	8.21	6.79	4.84	3.16	2.64	2.27	1.97	1.74	1.53	1.37	1.23	1.12	1.03	0.92
60	4.99	4.88	4.16	3.62	3.26	2.91	2.59	2.32	2.07	1.86	1.67	1.52	1.37	1.25	1.16	1.08	0.92	0.88
65	3.54	3.65	3.26	2.91	2.68	2.46	2.24	2.05	1.88	1.72	1.57	1.45	1.34	1.23	1.15	1.09	1.01	0.93
70	2.22	2.17	2.08	2.00	1.92	1.83	1.74	1.63	1.55	1.45	1.37	1.28	1.21	1.15	1.08	1.05	0.96	0.91
75	1.83	1.79	1.75	1.69	1.65	1.59	1.53	1.47	1.40	1.35	1.29	1.23	1.18	1.13	1.08	1.04	1.00	0.96
80	1.39	1.38	1.37	1.34	1.33	1.31	1.28	1.26	1.23	1.19	1.17	1.15	1.11	1.10	1.03	1.01	0.97	0.97
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2024-04-11

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks: