

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		1726.5 cd per klm. -15.0 degrees vertical -8.0 degrees horizontal
Beam Spread	At 10% of Imax	95.1V x 96.3H
	At 50% of Imax	31.5V x 30.1H
	At 90% of Imax	5.0V x 9.3H
Beam Flux	Total	999.2 lumens per klm.
	To 10% of Imax	819.3 lumens per klm.
	To 50% of Imax	293.7 lumens per klm.
	To 90% of Imax	33.5 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H_(b) Range:-90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2025-02-26

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.15V I:0.1021A P:10.545W PF:0.4691 Freq:50.00Hz Lamp Flux:298.952x1 lm		
NAME: 6623	TYPE:	WEIGHT:
SPEC.:10W	DIM.:	SERIAL No.:
MFR.: NORDECOR	SUR.:	Shielding Angle:

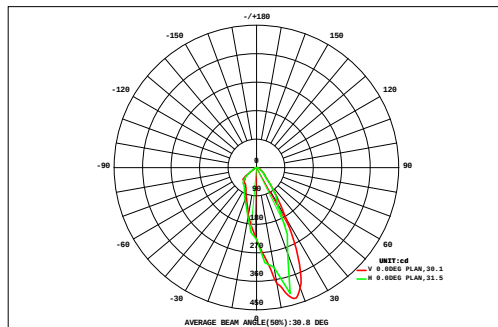

DATA OF LAMP		Eff:28.35lm/W	
MODEL		Imax(cd)	516.1
NOMINAL POWER(W)		AVAILABILITY(%)	82.3
RATED VOLTAGE(V)		Avai. FLUX(lm)	246.0
NOMINAL FLUX(lm)	298.952	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	299.0
TEST VOLTAGE(V)	0	q @50%(H,V)	30,31DEG

		AREA FLUX DIAGRAM																UNIT:lm				F t	F a
		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
VERTICAL (DEG)	90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
	80	0.00	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.07	0.07	0.05	0.04	0.03	0.02	0.01	0.01	0.00	0.68	0.00		
	70	0.00	0.02	0.04	0.07	0.11	0.14	0.18	0.21	0.23	0.23	0.21	0.17	0.14	0.10	0.05	0.03	0.01	0.00	1.93	0.00		
	60	0.00	0.02	0.05	0.10	0.17	0.26	0.34	0.47	0.63	0.73	0.82	0.77	0.43	0.16	0.08	0.04	0.01	0.00	5.10	0.49		
	50	0.00	0.02	0.07	0.14	0.25	0.45	0.67	1.07	1.60	2.02	2.44	2.35	1.08	0.23	0.12	0.06	0.02	0.00	12.6	8.17		
	40	0.01	0.03	0.09	0.19	0.41	0.65	0.98	1.47	1.97	2.28	2.40	2.23	1.85	0.94	0.17	0.07	0.02	0.00	15.8	11.7		
	30	0.01	0.04	0.10	0.26	0.55	0.93	1.62	2.32	2.66	2.74	2.53	2.26	2.30	1.40	0.28	0.08	0.02	0.00	20.1	17.3		
	20	0.01	0.04	0.12	0.33	0.66	1.42	2.93	4.09	3.99	3.64	3.06	2.41	1.88	1.55	0.49	0.09	0.03	0.00	26.7	24.6		
	10	0.01	0.04	0.13	0.38	0.80	2.16	6.09	9.47	7.52	5.23	3.52	2.36	1.72	1.34	0.53	0.10	0.03	0.00	41.4	39.5		
	0	0.01	0.05	0.14	0.40	0.90	2.63	8.11	13.1	10.9	6.84	3.81	2.29	1.54	1.12	0.52	0.10	0.03	0.00	52.4	50.2		
	-10	0.01	0.05	0.14	0.38	0.90	2.36	7.29	13.5	14.4	8.44	3.84	2.14	1.36	0.91	0.40	0.09	0.03	0.00	56.2	53.1		
	-20	0.01	0.04	0.13	0.32	0.74	1.69	4.15	7.18	7.77	4.86	2.69	1.60	1.11	0.67	0.25	0.08	0.02	0.00	33.3	29.2		
	-30	0.01	0.04	0.11	0.26	0.56	1.04	1.62	2.39	2.89	2.34	1.70	1.14	0.82	0.44	0.15	0.07	0.02	0.00	15.6	10.1		
	-40	0.00	0.03	0.09	0.19	0.36	0.63	0.95	1.17	1.16	1.03	0.92	0.78	0.45	0.23	0.12	0.06	0.02	0.00	8.19	1.61		
	-50	0.00	0.02	0.07	0.14	0.25	0.39	0.55	0.66	0.68	0.63	0.54	0.43	0.27	0.16	0.09	0.04	0.01	0.00	4.96	0.00		
	-60	0.00	0.02	0.05	0.10	0.15	0.21	0.26	0.30	0.31	0.29	0.24	0.18	0.14	0.10	0.06	0.03	0.01	0.00	2.45	0.00		
	-70	0.00	0.01	0.03	0.06	0.09	0.12	0.15	0.17	0.17	0.15	0.13	0.10	0.08	0.05	0.03	0.02	0.01	0.00	1.39	0.00		
	-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
		-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)	20	30	40	50	60	70	80	90					
F t	0.08	0.48	1.40	3.37	6.94	15.1	36.0	57.6	56.9	41.5	28.9	21.3	15.2	9.44	3.39	0.98	0.30	0.06	299	---			
F a	0.00	0.00	0.00	0.00	0.42	9.46	31.0	53.3	53.5	38.4	25.9	17.6	10.7	5.26	0.60	0.00	0.00	0.00	---	246			

one-half-peak spread: U:11.4,D:20.4 , L:11.9,R:18.6


NEMA Beam Type: Type 5

H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: NORDECOR
Test Date: 2025-02-26

V(B) Range: -75 - 75DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 5.780m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.15V I:0.1021A P:10.545W PF:0.4691 Freq:50.00Hz Lamp Flux:298.952x1 lm		
NAME: 6623	TYPE:	WEIGHT:
SPEC.:10W	DIM.:	SERIAL No.:
MFR.: NORDECOR	SUR.:	Shielding Angle:

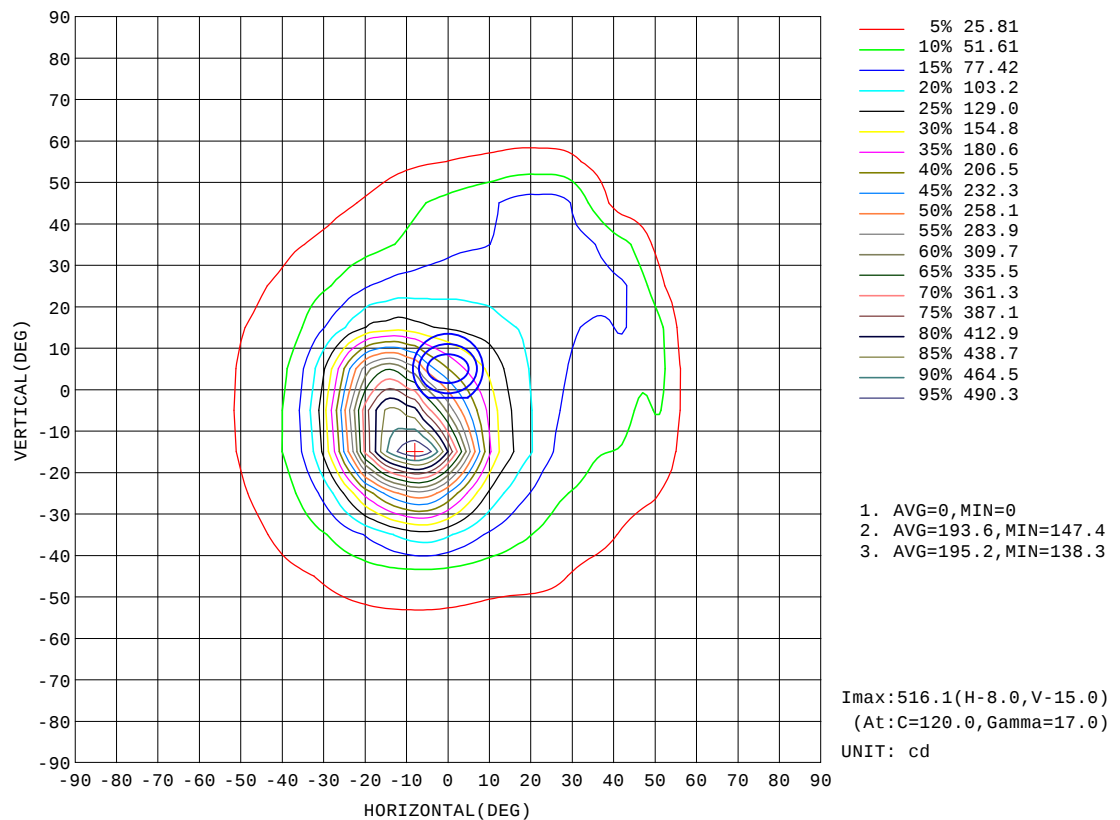


H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2025-02-26

V(B) Range: -75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.15V I:0.1021A P:10.545W PF:0.4691 Freq:50.00Hz Lamp Flux:298.952x1 lm		
NAME: 6623	TYPE:	WEIGHT:
SPEC.:10W	DIM.:	SERIAL No.:
MFR.: NORDECOR	SUR.:	Shielding Angle:

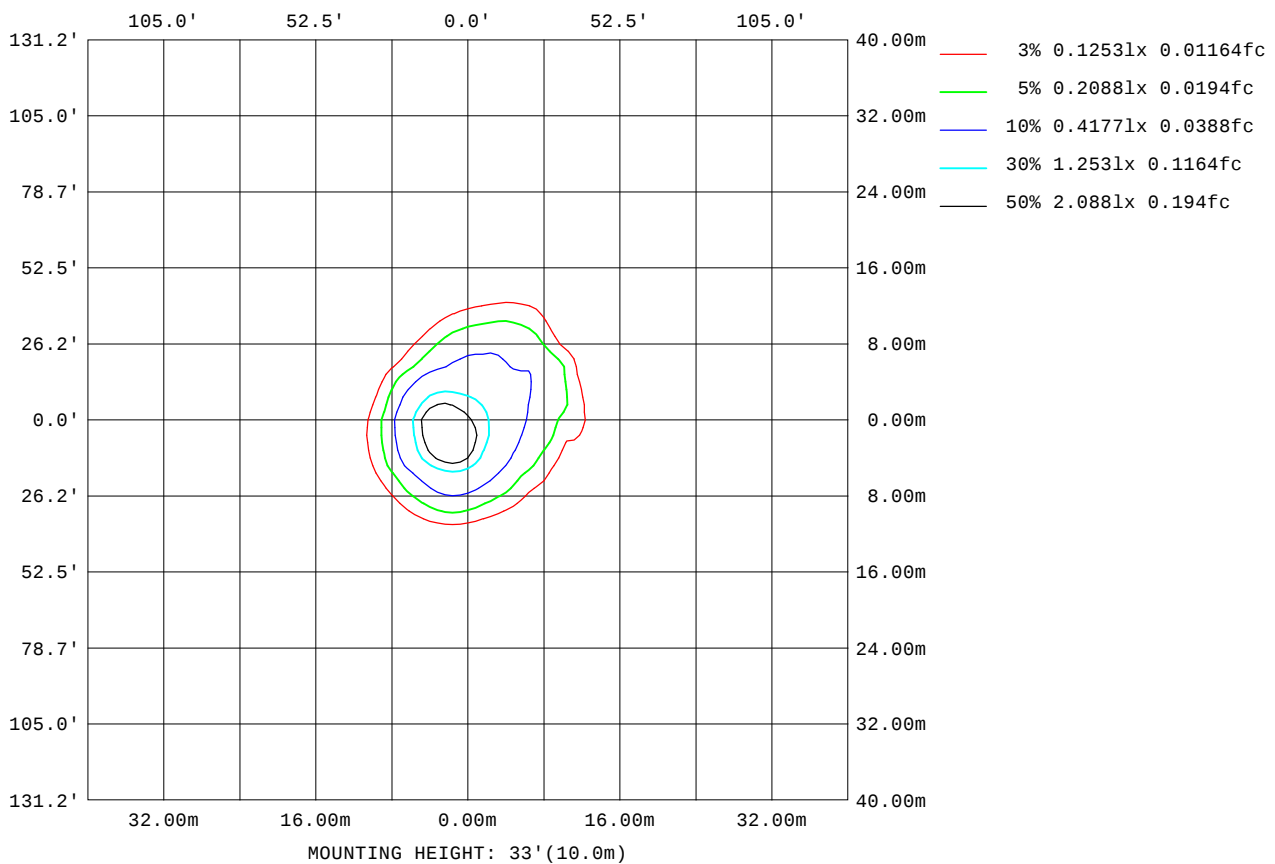

H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: NORDECOR
Test Date: 2025-02-26

V(B) Range: -75 - 75DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 5.780m [K=1.0000]
Remarks:

Planar Illuminance Curve

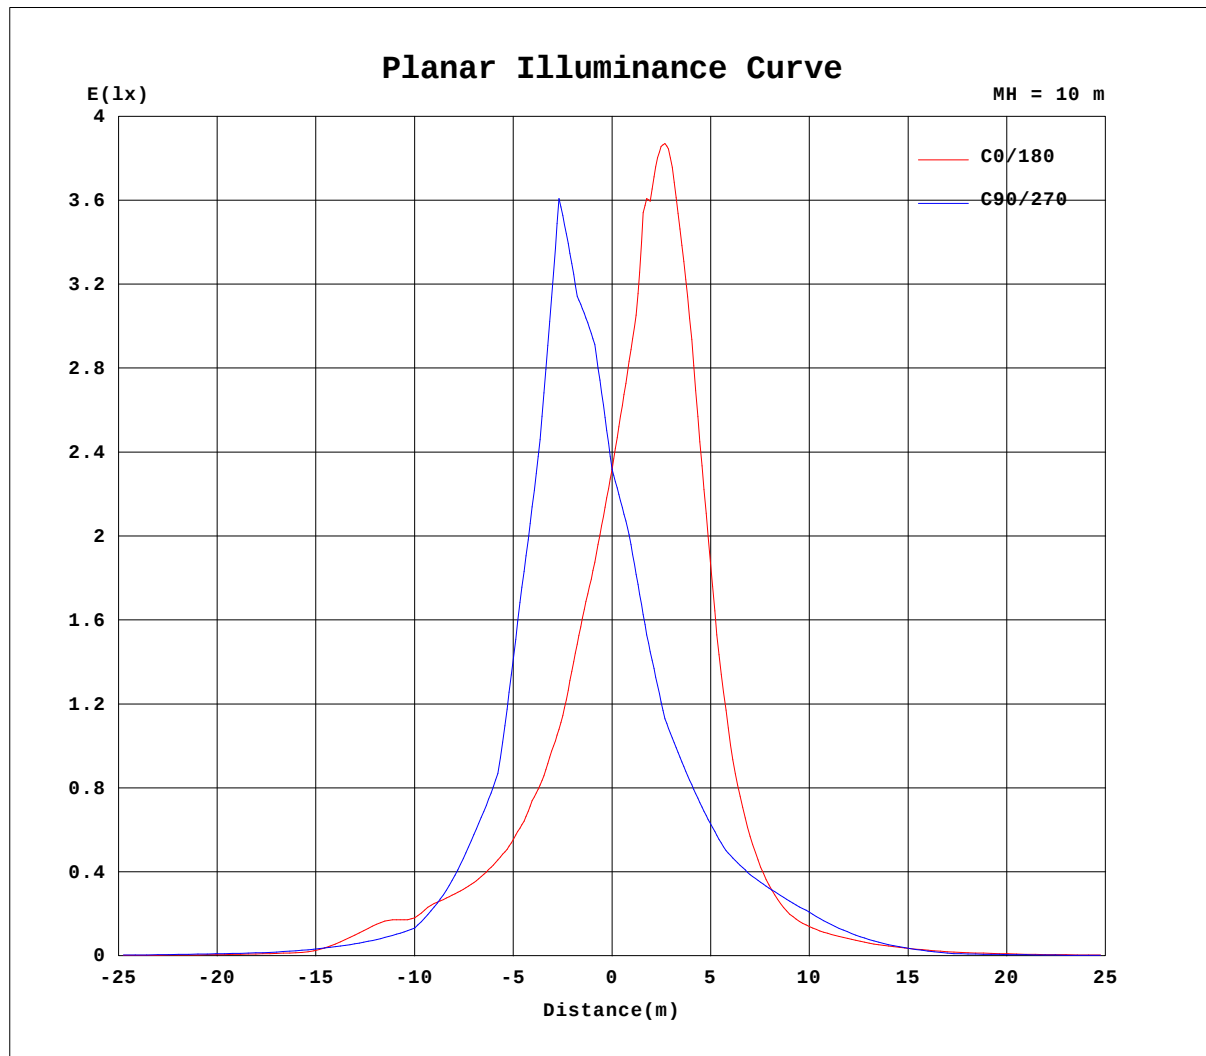


H_b Range: -90 - 90DEG
H_b Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: NORDECOR
Test Date: 2025-02-26

V(B) Range: -75 - 75DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 5.780m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.15V I:0.1021A P:10.545W PF:0.4691 Freq:50.00Hz Lamp Flux:298.952x1 lm		
NAME: 6623	TYPE:	WEIGHT:
SPEC.:10W	DIM.:	SERIAL No.:
MFR.: NORDECOR	SUR.:	Shielding Angle:

Flux out:43.54 lm

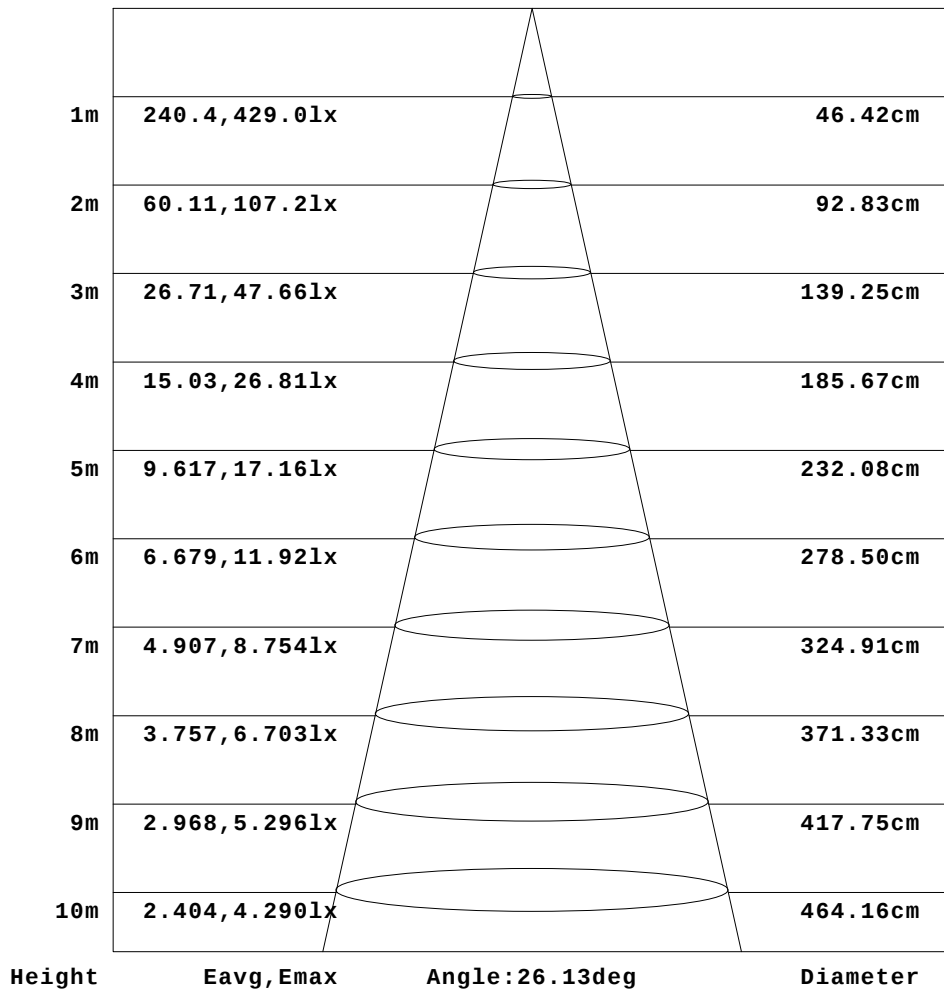

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: NORDECOR
Test Date: 2025-02-26

V(B) Range: -75 - 75DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 5.780m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.15V I:0.1021A P:10.545W PF:0.4691 Freq:50.00Hz Lamp Flux:298.952x1 lm		
NAME: 6623	TYPE:	WEIGHT:
SPEC.:10W	DIM.:	SERIAL No.:
MFR.: NORDECOR	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	1.02	1.07	1.53	1.74	1.99	2.32	2.70	3.14	3.55	3.96	4.31	4.70	5.07	5.36	5.65	5.73	5.72	5.60	5.36
-70	1.03	1.28	1.76	2.14	2.60	3.23	3.88	4.53	5.15	5.73	6.31	6.94	7.57	8.07	8.44	8.63	8.67	8.49	8.18
-65	1.01	1.09	1.74	2.21	2.83	3.59	4.52	5.41	6.24	7.06	7.84	8.68	9.59	10.4	11.0	11.4	11.6	11.6	11.3
-60	1.04	1.40	2.06	2.76	3.58	4.78	5.86	6.99	8.01	9.00	10.0	11.1	12.3	13.2	13.9	14.4	14.6	14.4	14.0
-55	1.02	1.13	2.00	2.74	3.79	4.95	6.35	7.71	9.13	10.8	12.9	15.0	17.2	19.4	21.1	22.3	22.8	22.8	22.2
-50	1.06	1.56	2.46	3.48	4.82	6.32	7.90	9.58	11.5	14.1	17.6	20.5	24.1	27.1	29.4	30.7	31.0	30.8	29.6
-45	1.05	1.17	2.28	3.33	4.88	6.40	8.18	10.0	12.2	15.1	19.6	23.6	28.0	32.5	36.0	38.4	39.1	39.2	38.0
-40	1.09	1.77	2.91	4.31	6.12	7.97	10.2	12.9	16.6	21.6	28.1	34.3	42.4	52.0	61.6	71.4	77.8	77.2	68.8
-35	1.10	1.25	2.66	4.08	6.03	8.03	10.3	13.4	18.0	23.5	31.6	39.6	49.7	63.7	79.0	96.0	112	118	107
-30	1.14	2.04	3.40	5.24	7.48	9.75	12.7	17.0	23.3	31.4	41.5	52.5	67.4	87.9	111	137	155	154	132
-25	1.11	1.34	2.96	4.67	6.87	9.27	12.2	16.8	23.2	31.4	42.3	58.4	85.6	131	190	237	268	273	232
-20	1.15	2.22	3.68	5.72	8.10	10.8	14.7	21.0	29.4	39.5	53.4	82.8	135	217	305	368	396	367	288
-15	1.09	1.44	3.17	5.10	7.42	10.1	13.7	20.3	27.9	38.9	51.8	79.9	136	236	368	460	507	502	412
-10	1.17	2.32	3.83	5.98	8.41	11.3	15.9	23.3	32.4	42.7	60.8	102	176	291	403	465	468	410	320
-5	1.15	1.44	3.20	5.11	7.42	10.0	13.7	21.0	28.8	37.6	51.4	85.4	146	253	374	441	428	371	302
0	1.18	2.35	3.85	6.01	8.39	11.3	16.2	24.2	32.4	41.0	63.7	110	191	310	404	426	373	281	227
5	1.16	1.44	3.12	4.94	7.16	9.52	13.0	20.0	27.7	34.4	46.0	76.2	126	208	294	333	306	248	207
10	1.15	2.25	3.61	5.60	7.77	10.2	14.2	21.9	28.6	34.8	48.0	77.9	121	179	225	236	215	179	158
15	1.12	1.43	2.94	4.59	6.64	8.66	11.5	17.4	24.7	29.5	35.5	52.3	76.3	101	128	138	140	132	126
20	1.12	2.11	3.31	5.06	7.02	8.99	12.0	18.2	24.2	29.0	35.8	51.7	69.1	90.2	107	114	113	110	109
25	1.08	1.35	2.65	4.01	5.86	7.65	9.68	13.4	19.9	24.5	28.8	37.2	47.6	60.3	74.7	82.7	87.9	90.4	92.4
30	1.07	1.93	2.94	4.39	6.15	7.72	9.61	13.1	19.3	23.6	27.0	31.1	35.3	43.3	50.3	57.8	64.9	72.3	77.8
35	1.05	1.29	2.36	3.43	4.97	6.54	8.04	10.1	14.6	18.3	22.0	25.6	28.9	34.3	41.3	48.5	55.8	63.9	70.0
40	1.06	1.78	2.56	3.59	5.03	6.48	7.86	9.77	12.8	15.9	19.8	22.7	26.1	31.0	37.0	45.0	53.3	60.6	67.0
45	1.03	1.23	2.09	2.85	3.97	5.33	6.55	7.57	8.87	10.9	15.3	17.4	20.3	23.4	27.9	35.0	44.1	52.0	58.7
50	1.06	1.64	2.23	2.93	3.94	5.09	6.11	7.12	8.39	10.2	13.1	14.8	16.9	19.4	23.0	28.8	34.8	39.7	44.3
55	1.06	1.21	1.88	2.41	3.11	3.93	4.86	5.77	6.74	7.86	9.59	10.6	11.9	13.2	14.9	17.6	20.9	23.7	26.0
60	1.07	1.51	1.93	2.39	2.88	3.56	4.35	5.19	6.00	6.49	6.88	7.40	7.78	8.25	8.54	9.03	9.38	9.62	9.66
65	1.08	1.19	1.70	2.02	2.38	2.81	3.38	4.00	4.59	5.08	5.38	5.72	6.07	6.40	6.66	6.98	7.28	7.47	7.53
70	1.09	1.42	1.71	1.94	2.20	2.53	2.90	3.28	3.63	3.88	4.07	4.34	4.57	4.81	4.99	5.22	5.34	5.43	5.42
75	1.11	1.17	1.55	1.67	1.79	1.95	2.10	2.26	2.40	2.53	2.63	2.75	2.91	3.04	3.17	3.29	3.32	3.37	3.30
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H_(b) Range: -90 - 90DEGH_(b) Interval: 1.0DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:NORDECOR

Test Date:2025-02-26

V(B) Range: -75 - 75DEG

V(B) Interval: 5.0DEG

Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.411

Humidity:65.0%

Test Distance:5.780m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.15V I:0.1021A P:10.545W PF:0.4691 Freq:50.00Hz Lamp Flux:298.952x1 lm																	
NAME: 6623									TYPE:						WEIGHT:		
SPEC.:10W									DIM.:						SERIAL No.:		
MFR.: NORDECOR									SUR.:						Shielding Angle:		

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	5.15	4.92	4.57	4.28	3.90	3.52	3.16	2.84	2.54	2.27	2.02	1.79	1.59	1.44	1.36	1.31	1.09	0.97
-70	7.79	7.29	6.76	6.19	5.61	5.04	4.57	4.12	3.64	3.17	2.65	2.18	1.83	1.59	1.42	1.32	1.00	0.97
-65	10.8	10.1	9.36	8.58	7.79	7.02	6.33	5.78	5.13	4.45	3.69	2.94	2.31	1.91	1.61	1.41	1.13	0.98
-60	13.2	12.3	11.3	10.3	9.35	8.38	7.64	6.92	6.08	5.17	4.11	3.13	2.45	1.97	1.59	1.40	1.02	1.00
-55	21.1	19.7	18.6	17.8	16.5	14.0	11.3	9.81	7.92	6.69	5.53	4.46	3.35	2.51	1.91	1.53	1.17	0.99
-50	27.8	26.1	25.2	24.4	21.8	17.4	13.7	11.1	8.72	7.29	6.09	4.86	3.55	2.49	1.87	1.47	1.01	0.98
-45	36.1	33.7	32.3	31.9	29.9	24.4	18.2	14.9	10.9	9.01	7.52	6.35	4.72	3.26	2.26	1.68	1.21	0.98
-40	59.0	51.0	44.7	40.0	34.1	29.0	24.2	18.5	15.3	10.6	7.83	6.32	4.70	3.12	2.14	1.56	1.02	0.96
-35	89.9	73.8	61.8	52.1	43.3	37.3	34.3	27.2	21.2	16.6	9.51	7.56	5.96	4.14	2.64	1.84	1.28	0.97
-30	107	87.0	69.8	57.3	46.1	43.3	39.3	29.3	25.7	15.0	9.35	7.48	5.89	3.86	2.41	1.65	1.05	0.94
-25	176	125	96.2	76.5	59.8	50.6	46.2	39.3	31.0	27.5	15.6	8.71	6.89	4.99	3.07	1.99	1.35	0.98
-20	201	135	103	81.0	63.2	54.0	48.0	43.3	32.0	31.4	12.6	8.30	6.56	4.46	2.68	1.76	1.06	1.02
-15	293	187	136	105	79.5	64.3	53.7	51.4	40.4	41.6	25.9	9.79	7.51	5.80	3.54	2.12	1.44	1.01
-10	227	157	119	94.2	74.7	62.8	56.0	54.0	40.7	44.8	16.7	8.84	6.95	4.92	2.83	1.83	1.08	1.05
-5	232	173	131	104	84.1	70.2	61.5	58.4	51.7	52.7	33.5	10.2	7.68	6.11	3.66	2.16	1.47	1.02
0	186	152	118	96.8	80.7	69.7	63.4	61.4	51.6	55.1	21.7	9.11	7.06	5.24	2.87	1.86	1.10	1.02
5	175	149	121	101	86.7	75.3	68.3	67.1	63.4	60.2	34.2	10.1	7.63	6.05	3.58	2.13	1.47	1.02
10	141	124	108	95.2	83.0	74.8	70.4	73.4	66.7	52.7	16.6	8.74	6.84	4.85	2.69	1.80	1.09	1.02
15	120	115	105	95.8	87.2	79.6	74.1	77.4	75.5	63.9	28.0	9.62	7.35	5.63	3.31	2.04	1.44	1.01
20	105	100	95.2	88.7	82.7	83.3	80.1	80.2	66.3	39.6	12.4	8.12	6.44	4.30	2.48	1.72	1.09	1.02
25	92.8	91.4	88.7	83.9	80.3	85.1	88.5	83.5	69.0	40.2	16.0	8.41	6.75	4.88	2.82	1.90	1.41	1.01
30	78.9	80.8	80.2	77.3	79.8	95.1	92.4	81.7	50.6	15.8	8.94	7.26	5.84	3.59	2.23	1.63	1.11	1.00
35	74.6	77.2	81.5	81.5	80.8	83.7	79.0	64.4	47.3	21.8	9.04	7.26	5.79	3.93	2.40	1.75	1.36	1.00
40	72.0	78.1	84.2	84.7	84.0	74.0	54.5	35.8	23.2	10.5	7.50	6.19	4.38	2.78	1.96	1.51	1.08	0.99
45	65.8	73.1	83.3	88.5	88.6	75.4	45.6	20.0	10.4	8.48	7.23	6.19	4.47	2.80	2.02	1.58	1.30	0.98
50	48.9	54.2	60.5	61.7	60.1	44.7	26.0	10.7	8.33	6.78	5.67	4.63	3.13	2.18	1.73	1.44	1.07	0.98
55	28.3	30.6	33.8	35.3	34.9	30.2	19.9	11.1	7.59	6.27	4.99	4.01	3.00	2.20	1.75	1.48	1.27	0.99
60	9.49	9.27	8.98	8.47	7.82	7.38	6.88	6.53	5.92	4.58	3.44	2.59	2.10	1.77	1.52	1.40	1.08	0.96
65	7.49	7.27	7.06	6.75	6.22	5.84	5.46	5.14	4.79	4.08	3.17	2.49	2.02	1.76	1.55	1.42	1.25	1.00
70	5.33	5.13	4.93	4.62	4.29	4.01	3.76	3.57	3.28	2.74	2.28	1.93	1.71	1.56	1.45	1.39	1.05	1.00
75	3.29	3.13	2.93	2.81	2.57	2.40	2.25	2.14	2.00	1.89	1.74	1.63	1.54	1.47	1.42	1.38	1.23	1.01
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H_(b) Range: -90 - 90DEGH_(b) Interval: 1.0DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:NORDECOR

Test Date:2025-02-26

V(B) Range: -75 - 75DEG

V(B) Interval: 5.0DEG

Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.411

Humidity:65.0%

Test Distance:5.780m [K=1.0000]

Remarks: