

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2781.9 cd per klm. 0.0 degrees vertical -1.0 degrees horizontal
Beam Spread	At 10% of Imax	60.3V x 59.7H
	At 50% of Imax	30.1V x 28.7H
	At 90% of Imax	8.0V x 11.1H
Beam Flux	Total	998.4 lumens per klm.
	To 10% of Imax	817.6 lumens per klm.
	To 50% of Imax	390.2 lumens per klm.
	To 90% of Imax	42.1 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	99.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2024-04-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.15V I:0.0256A P:2.4092W PF:0.4272 Freq:50.00Hz Lamp Flux:51.3995x1 lm		
NAME: 6616	TYPE:	WEIGHT:
SPEC.:3W	DIM.: ϕ 5.2*8cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

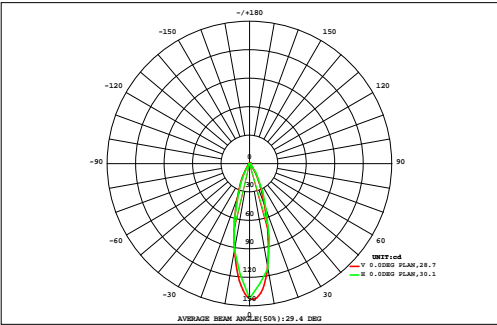

DATA OF LAMP		Eff:21.34lm/W	
MODEL		Imax(cd)	143.0
NOMINAL POWER(W)		AVAILABILITY(%)	82.5
RATED VOLTAGE(V)		Avai. FLUX(lm)	42.42
NOMINAL FLUX(lm)	51.3995	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	51.40
TEST VOLTAGE(V)	0	q @50%(H,V)	29,30DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM															UNIT:lm		F t	F a	
	90	80	70	60	50	40	30	20	10	0	10	20	30	40	50	60	70			80
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.37	0.00	
70	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.31	0.00
60	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.00	0.32	0.00
50	0.00	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.00	0.35	0.00
40	0.00	0.01	0.01	0.02	0.02	0.03	0.04	0.08	0.13	0.14	0.10	0.05	0.03	0.02	0.02	0.01	0.01	0.00	0.71	0.00
30	0.00	0.01	0.01	0.02	0.02	0.04	0.12	0.32	0.55	0.59	0.40	0.17	0.06	0.02	0.02	0.01	0.01	0.00	2.37	1.24
20	0.00	0.01	0.01	0.02	0.03	0.08	0.35	0.89	1.57	1.69	1.05	0.44	0.12	0.03	0.02	0.01	0.01	0.00	6.30	5.67
10	0.00	0.01	0.01	0.02	0.03	0.15	0.59	1.63	3.14	3.27	1.83	0.70	0.20	0.04	0.02	0.01	0.01	0.00	11.7	11.1
0	0.00	0.01	0.01	0.02	0.03	0.18	0.68	1.96	3.74	3.75	2.05	0.77	0.21	0.04	0.02	0.01	0.01	0.00	13.5	12.9
-10	0.00	0.01	0.01	0.02	0.03	0.14	0.53	1.38	2.39	2.34	1.37	0.56	0.16	0.03	0.02	0.01	0.01	0.00	9.01	8.42
-20	0.00	0.01	0.01	0.02	0.03	0.08	0.27	0.60	0.88	0.86	0.58	0.28	0.08	0.03	0.02	0.01	0.01	0.00	3.76	2.96
-30	0.00	0.01	0.01	0.02	0.02	0.03	0.10	0.20	0.26	0.25	0.18	0.09	0.03	0.02	0.02	0.01	0.01	0.00	1.27	0.08
-40	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.06	0.06	0.04	0.03	0.02	0.02	0.02	0.01	0.01	0.00	0.42	0.00
-50	0.00	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.02	0.02	0.02	0.03	0.02	0.02	0.02	0.01	0.01	0.00	0.31	0.00
-60	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.31	0.00
-70	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.30	0.00
-80	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.14	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
F t	0.03	0.11	0.18	0.27	0.38	0.91	2.90	7.31	13.0	13.2	7.81	3.28	1.08	0.41	0.27	0.18	0.11	0.03	51	---
F a	0.00	0.00	0.00	0.00	0.00	0.09	1.90	6.46	12.1	12.4	7.10	2.26	0.12	0.00	0.00	0.00	0.00	0.00	---	42


one-half-peak spread: U:16.6,D:13.8 , L:14.7,R:14.3 NEMA Beam Type: Type 4

H(h) Range:-90 - 90DEG
H(h) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2024-04-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.15V I:0.0256A P:2.4092W PF:0.4272 Freq:50.00Hz Lamp Flux:51.3995x1 lm		
NAME: 6616	TYPE:	WEIGHT:
SPEC.:3W	DIM.: ϕ 5.2*8cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

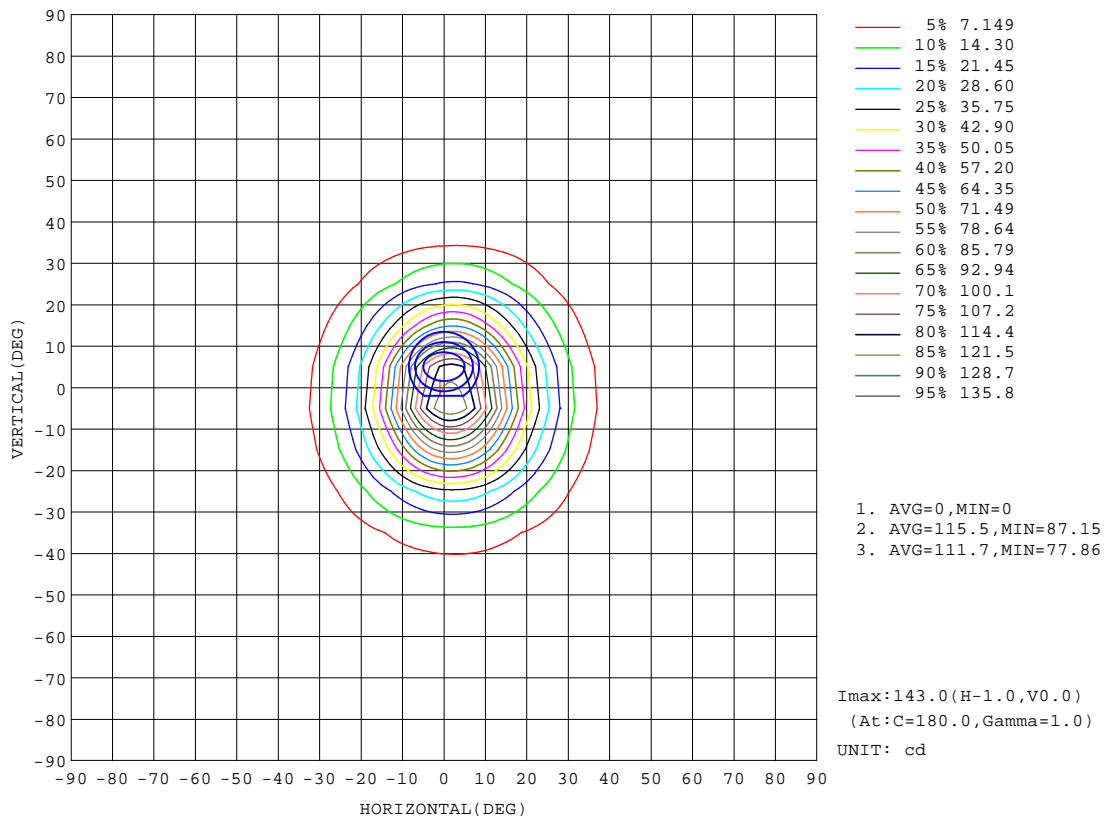


H(h) Range:-90 - 90DEG
 H(h) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:AED
 Test Date:2024-04-20

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:220.15V I:0.0256A P:2.4092W PF:0.4272 Freq:50.00Hz Lamp Flux:51.3995x1 lm		
NAME: 6616	TYPE:	WEIGHT:
SPEC.:3W	DIM.: ϕ 5.2*8cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

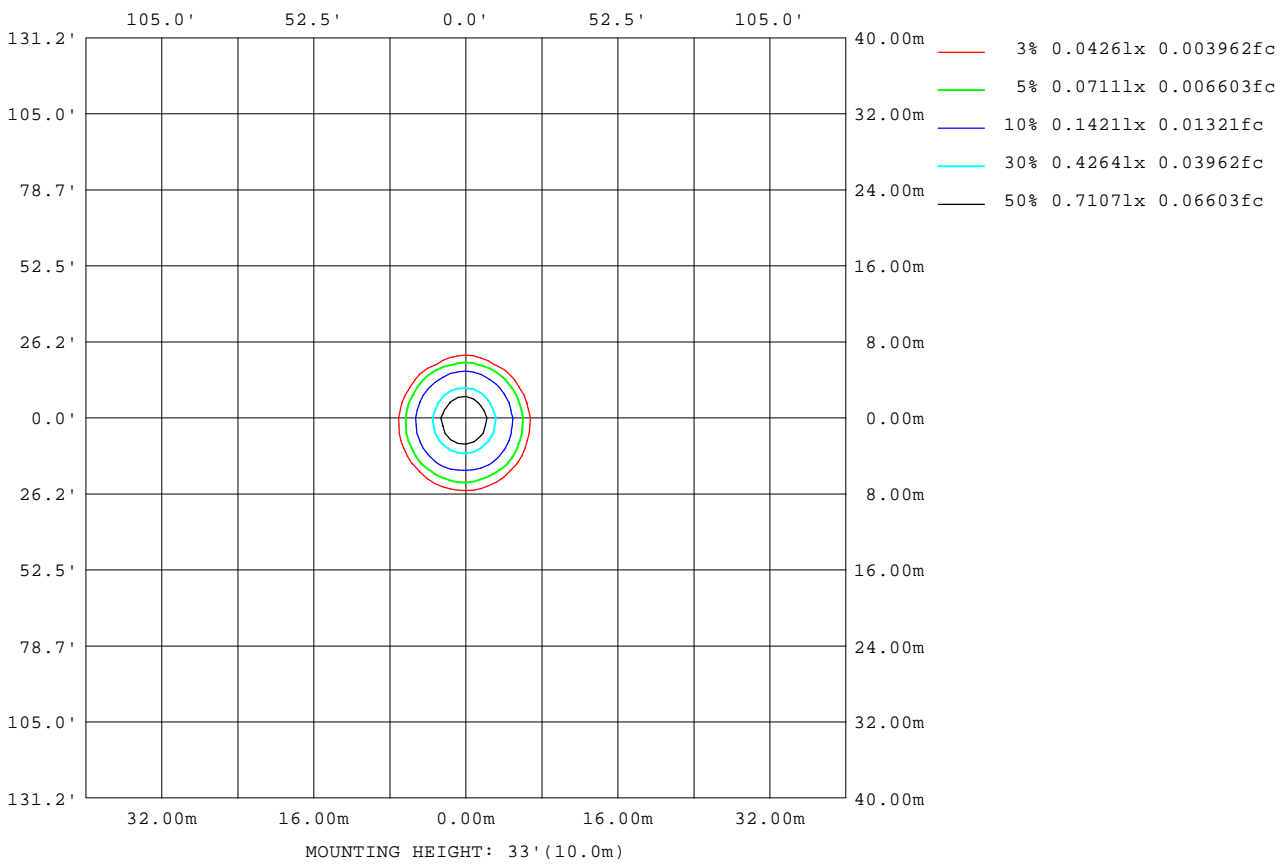

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:AED
 Test Date:2024-04-20

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

Planar Illuminance Curve

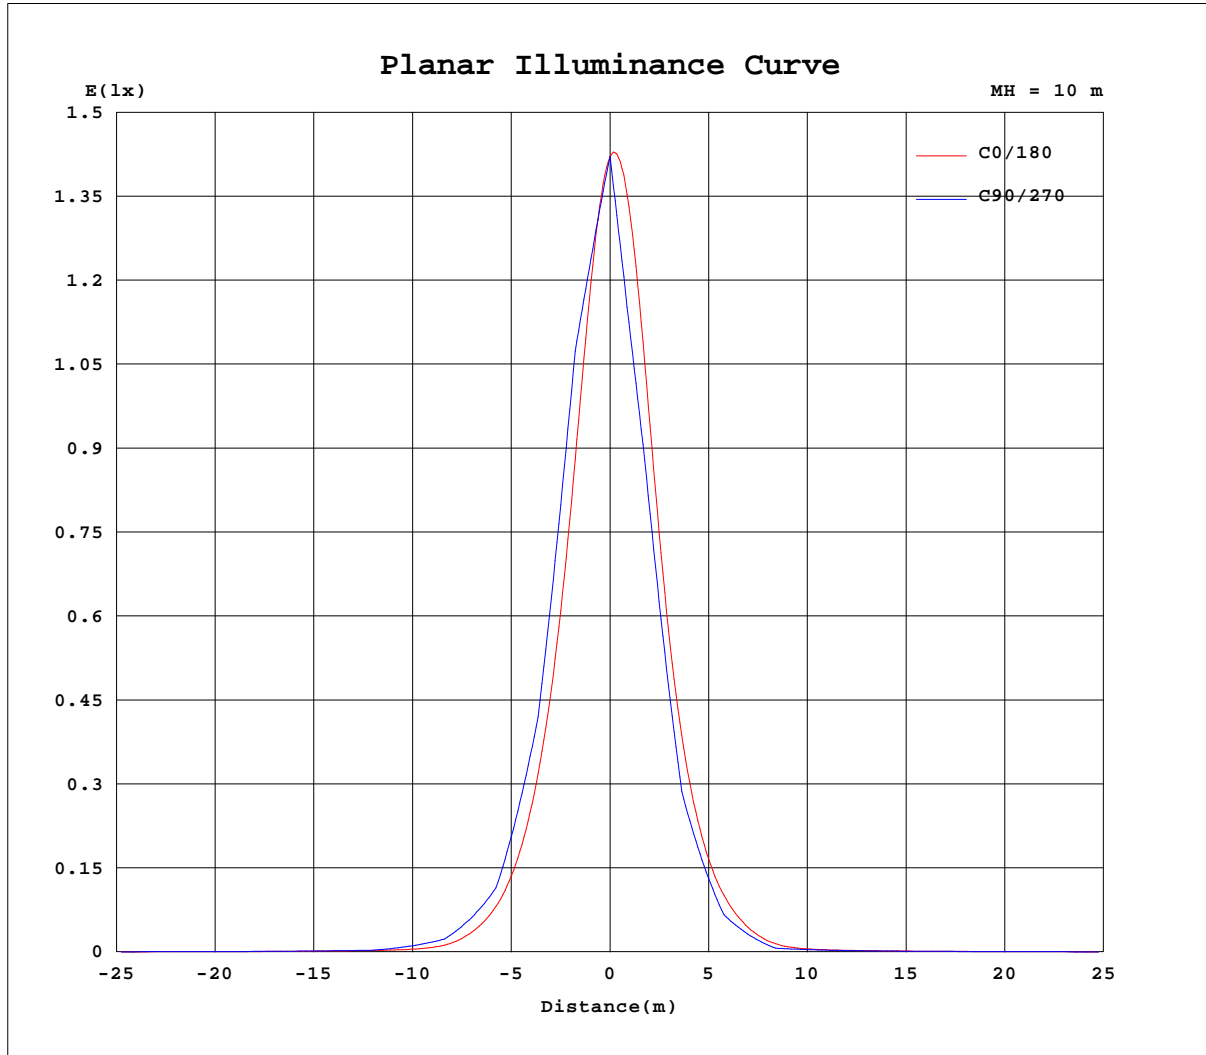


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2024-04-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.15V I:0.0256A P:2.4092W PF:0.4272 Freq:50.00Hz Lamp Flux:51.3995x1 lm		
NAME: 6616	TYPE:	WEIGHT:
SPEC.:3W	DIM.: ϕ 5.2*8cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

Flux out:19.77 lm

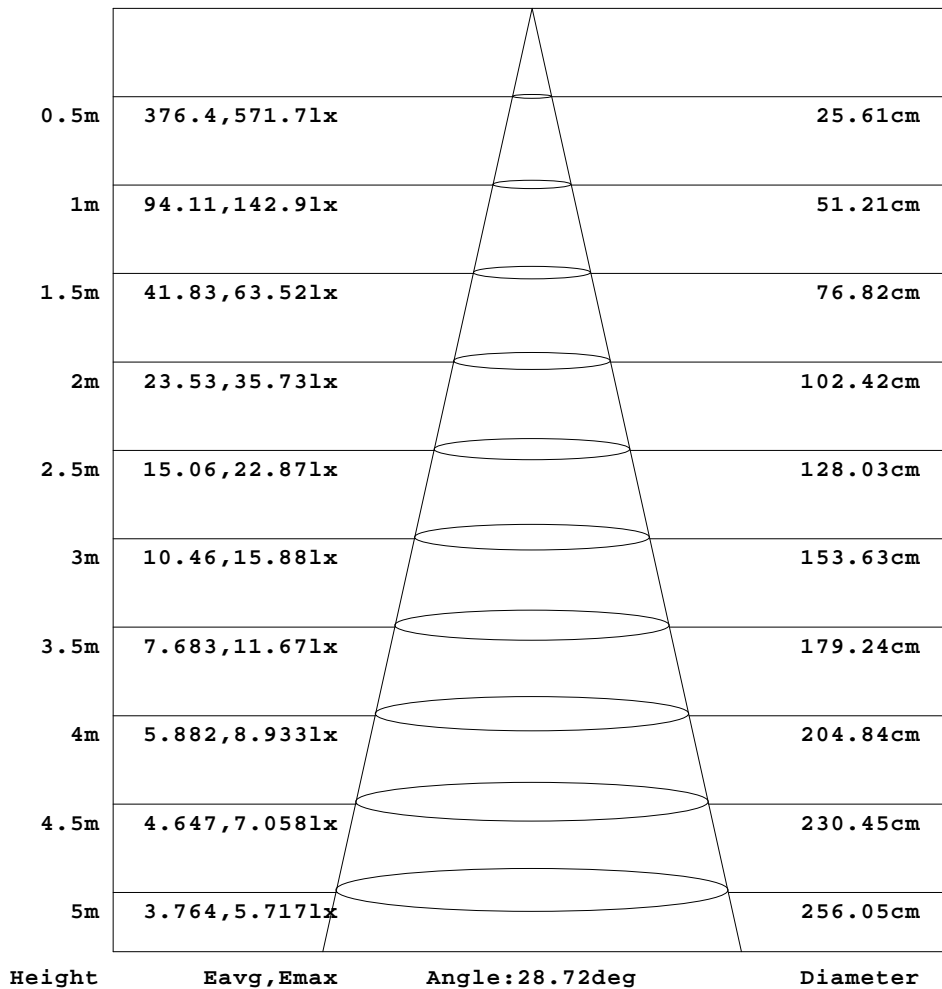

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2024-04-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.15V I:0.0256A P:2.4092W PF:0.4272 Freq:50.00Hz Lamp Flux:51.3995x1 lm		
NAME: 6616	TYPE:	WEIGHT:
SPEC.:3W	DIM.: ϕ 5.2*8cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

Table--1

UNIT: cd

H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.69	0.72	0.74	0.75	0.75	0.75	0.78	0.76	0.77	0.76	0.81	0.82	0.83	0.83	0.83	0.84	0.84	0.85	0.86
-75	0.77	0.74	0.75	0.76	0.77	0.77	0.79	0.81	0.79	0.80	0.83	0.85	0.86	0.86	0.87	0.88	0.88	0.88	0.89
-70	0.74	0.76	0.76	0.78	0.78	0.80	0.82	0.82	0.85	0.85	0.86	0.88	0.89	0.90	0.92	0.92	0.93	0.93	0.93
-65	0.69	0.74	0.75	0.75	0.77	0.79	0.82	0.84	0.86	0.86	0.89	0.90	0.91	0.93	0.95	0.96	0.97	0.97	0.99
-60	0.74	0.74	0.75	0.74	0.77	0.81	0.84	0.87	0.88	0.90	0.91	0.94	0.95	0.97	0.99	1.01	1.02	1.04	1.05
-55	0.68	0.74	0.75	0.76	0.78	0.80	0.85	0.87	0.89	0.90	0.92	0.95	0.97	1.02	1.05	1.09	1.13	1.16	1.18
-50	0.76	0.78	0.79	0.81	0.82	0.84	0.88	0.89	0.92	0.93	0.96	1.00	1.04	1.09	1.16	1.22	1.27	1.32	1.33
-45	0.75	0.76	0.78	0.80	0.82	0.84	0.87	0.89	0.92	0.93	0.97	1.02	1.10	1.24	1.48	1.87	2.42	2.91	3.20
-40	0.76	0.77	0.79	0.82	0.84	0.87	0.88	0.92	0.94	0.98	1.04	1.13	1.30	1.64	2.24	3.18	4.19	4.91	5.17
-35	0.70	0.74	0.77	0.78	0.83	0.86	0.88	0.91	0.94	0.98	1.08	1.24	1.70	2.89	4.73	6.84	8.87	10.4	11.3
-30	0.75	0.75	0.77	0.80	0.86	0.88	0.90	0.95	1.00	1.08	1.27	1.79	3.31	6.28	9.72	13.1	15.5	17.2	17.6
-25	0.68	0.74	0.78	0.79	0.85	0.89	0.91	0.95	1.00	1.09	1.31	2.00	4.04	7.77	12.8	18.7	25.0	30.7	33.9
-20	0.76	0.79	0.81	0.85	0.88	0.92	0.95	1.00	1.09	1.31	1.98	4.25	8.85	15.1	22.8	31.8	41.7	48.8	50.6
-15	0.72	0.76	0.80	0.83	0.84	0.88	0.92	0.98	1.05	1.22	1.70	3.54	7.87	14.6	24.3	37.5	54.5	71.7	81.2
-10	0.76	0.79	0.82	0.82	0.86	0.88	0.98	1.04	1.16	1.58	3.15	7.40	14.4	24.8	40.7	62.8	89.0	109	112
-5	0.75	0.78	0.81	0.85	0.86	0.90	0.95	1.01	1.09	1.30	1.99	4.65	10.3	18.9	32.4	52.7	81.1	111	127
0	0.80	0.82	0.85	0.89	0.93	0.96	1.02	1.09	1.23	1.64	3.33	8.01	15.6	27.6	46.6	75.2	110	137	142
5	0.78	0.79	0.82	0.85	0.89	0.92	0.96	1.01	1.09	1.26	1.84	4.08	9.29	17.4	29.7	48.1	73.9	101	116
10	0.77	0.80	0.82	0.85	0.90	0.93	0.97	1.02	1.11	1.37	2.38	5.64	12.0	20.6	33.2	50.8	70.9	87.5	92.1
15	0.78	0.77	0.79	0.81	0.87	0.90	0.93	0.97	1.03	1.12	1.42	2.50	5.50	11.0	18.7	28.9	41.7	54.6	62.6
20	0.74	0.76	0.78	0.81	0.90	0.92	0.94	0.97	1.04	1.14	1.41	2.36	5.06	10.0	15.9	22.0	28.5	33.2	34.5
25	0.77	0.77	0.79	0.80	0.86	0.89	0.90	0.93	0.97	1.02	1.11	1.38	2.23	4.29	7.65	11.5	15.8	19.8	22.1
30	0.78	0.79	0.81	0.83	0.86	0.88	0.89	0.91	0.95	0.98	1.05	1.20	1.55	2.40	4.03	6.10	8.23	9.70	10.3
35	0.78	0.76	0.79	0.81	0.84	0.85	0.87	0.89	0.91	0.94	0.96	1.01	1.13	1.41	2.04	3.02	4.17	5.22	5.78
40	0.76	0.76	0.81	0.82	0.85	0.88	0.84	0.88	0.89	0.92	0.92	0.96	1.00	1.13	1.20	1.31	1.42	1.51	1.54
45	0.84	0.78	0.79	0.81	0.82	0.82	0.85	0.87	0.88	0.89	0.90	0.91	0.94	1.00	1.03	1.07	1.19	1.25	1.28
50	0.76	0.79	0.79	0.82	0.84	0.84	0.84	0.89	0.86	0.91	0.90	0.92	0.95	0.94	0.94	1.02	1.03	1.02	1.04
55	0.75	0.78	0.78	0.80	0.80	0.81	0.84	0.84	0.86	0.86	0.87	0.90	0.92	0.95	0.92	0.92	0.97	0.98	0.98
60	0.79	0.78	0.80	0.80	0.78	0.82	0.82	0.87	0.84	0.85	0.90	0.90	0.92	0.92	0.93	0.93	0.94	0.93	0.94
65	0.72	0.78	0.78	0.81	0.81	0.82	0.83	0.83	0.85	0.85	0.85	0.89	0.90	0.90	0.90	0.91	0.90	0.90	0.91
70	0.80	0.80	0.81	0.81	0.82	0.82	0.83	0.84	0.85	0.86	0.87	0.88	0.87	0.88	0.89	0.88	0.88	0.88	0.89
75	0.81	0.81	0.82	0.82	0.83	0.83	0.83	0.84	0.84	0.85	0.85	0.86	0.87	0.86	0.86	0.87	0.85	0.86	0.87
80	0.83	0.82	0.82	0.84	0.83	0.83	0.84	0.83	0.84	0.83	0.84	0.84	0.84	0.85	0.84	0.85	0.85	0.84	0.85
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(h) Range:-90 - 90DEG
H(h) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2024-04-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.15V I:0.0256A P:2.4092W PF:0.4272 Freq:50.00Hz Lamp Flux:51.3995x1 lm		
NAME: 6616	TYPE:	WEIGHT:
SPEC.:3W	DIM.: ϕ 5.2*8cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

Table--2

UNIT: cd

H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.85	0.85	0.85	0.85	0.84	0.84	0.83	0.83	0.83	0.81	0.82	0.76	0.76	0.77	0.78	0.76	0.73	0.65
-75	0.89	0.89	0.89	0.89	0.88	0.87	0.86	0.86	0.85	0.84	0.83	0.83	0.79	0.79	0.78	0.79	0.77	0.74
-70	0.94	0.92	0.92	0.90	0.90	0.90	0.87	0.87	0.86	0.85	0.83	0.83	0.82	0.80	0.80	0.78	0.76	0.75
-65	0.98	0.98	0.97	0.96	0.94	0.92	0.92	0.89	0.89	0.87	0.85	0.85	0.83	0.82	0.80	0.79	0.77	0.75
-60	1.03	1.03	1.00	0.98	0.96	0.95	0.92	0.90	0.88	0.88	0.86	0.84	0.82	0.82	0.80	0.78	0.76	0.72
-55	1.18	1.16	1.13	1.09	1.04	1.00	0.98	0.95	0.93	0.90	0.87	0.86	0.85	0.83	0.81	0.79	0.77	0.75
-50	1.30	1.25	1.18	1.13	1.06	1.03	0.99	0.96	0.92	0.88	0.87	0.86	0.84	0.82	0.80	0.78	0.76	0.77
-45	3.24	2.98	2.48	1.91	1.49	1.24	1.10	1.02	0.97	0.93	0.90	0.88	0.86	0.84	0.82	0.80	0.78	0.76
-40	4.93	4.14	3.07	2.14	1.57	1.25	1.10	1.02	0.96	0.92	0.90	0.88	0.86	0.84	0.81	0.79	0.76	0.76
-35	11.3	10.3	8.52	6.69	4.60	2.85	1.67	1.22	1.03	0.95	0.91	0.89	0.84	0.83	0.82	0.80	0.78	0.76
-30	16.6	14.4	11.7	8.70	5.42	2.80	1.56	1.17	1.03	0.93	0.89	0.92	0.83	0.80	0.81	0.78	0.75	0.75
-25	33.6	29.9	23.9	17.8	12.2	7.42	3.92	1.95	1.26	1.03	0.94	0.91	0.85	0.84	0.82	0.80	0.78	0.76
-20	46.8	38.5	28.6	19.8	13.0	7.38	3.50	1.72	1.19	1.02	0.93	0.91	0.87	0.84	0.82	0.79	0.75	0.72
-15	79.4	67.5	50.5	34.5	22.5	13.4	7.26	3.33	1.67	1.18	1.02	0.95	0.91	0.88	0.86	0.83	0.79	0.77
-10	99.5	76.6	52.4	33.7	20.3	11.4	5.80	2.47	1.42	1.11	1.00	0.95	0.92	0.88	0.85	0.83	0.78	0.77
-5	123	102	72.6	47.6	29.7	17.1	9.31	4.41	1.97	1.26	1.06	0.98	0.93	0.90	0.87	0.84	0.81	0.78
0	124	92.0	61.2	38.4	22.6	12.6	6.46	2.75	1.47	1.12	0.99	0.94	0.91	0.88	0.85	0.82	0.78	0.78
5	113	93.1	66.3	43.7	27.0	15.7	8.58	3.96	1.84	1.22	1.04	0.97	0.93	0.90	0.87	0.84	0.81	0.78
10	81.3	62.0	42.9	27.6	16.7	9.53	4.60	2.05	1.30	1.08	0.98	0.93	0.90	0.87	0.85	0.82	0.79	0.79
15	61.7	52.1	38.9	26.8	17.2	10.2	5.36	2.50	1.42	1.10	0.99	0.94	0.91	0.88	0.85	0.83	0.80	0.77
20	32.1	26.5	19.9	13.9	8.64	4.54	2.18	1.36	1.08	0.97	0.93	0.90	0.88	0.85	0.83	0.79	0.76	0.76
25	22.1	19.6	15.5	11.2	7.37	4.36	2.36	1.43	1.11	0.99	0.93	0.91	0.89	0.86	0.83	0.82	0.79	0.77
30	9.66	7.86	5.84	3.77	2.24	1.51	1.19	1.04	0.98	0.92	0.90	0.88	0.86	0.85	0.83	0.81	0.77	0.78
35	5.87	5.24	4.23	3.13	2.12	1.47	1.19	1.04	0.97	0.93	0.90	0.89	0.87	0.85	0.83	0.81	0.79	0.77
40	1.49	1.41	1.31	1.19	1.10	1.03	0.98	0.96	0.91	0.90	0.89	0.87	0.85	0.83	0.81	0.79	0.77	0.78
45	1.28	1.24	1.19	1.13	1.07	1.01	0.98	0.95	0.93	0.90	0.89	0.88	0.86	0.84	0.82	0.81	0.79	0.78
50	1.02	1.02	1.00	0.98	0.96	0.94	0.93	0.92	0.91	0.89	0.88	0.87	0.85	0.84	0.82	0.81	0.79	0.77
55	0.98	0.97	0.97	0.96	0.95	0.93	0.92	0.91	0.91	0.89	0.87	0.87	0.85	0.83	0.82	0.81	0.78	0.77
60	0.93	0.93	0.92	0.92	0.92	0.91	0.89	0.89	0.88	0.86	0.85	0.84	0.83	0.81	0.81	0.80	0.74	0.78
65	0.91	0.92	0.90	0.90	0.90	0.89	0.88	0.88	0.88	0.87	0.86	0.85	0.84	0.83	0.82	0.81	0.79	0.78
70	0.90	0.88	0.88	0.89	0.88	0.87	0.87	0.87	0.86	0.86	0.85	0.84	0.83	0.82	0.82	0.82	0.79	0.78
75	0.87	0.87	0.86	0.87	0.87	0.86	0.85	0.85	0.85	0.84	0.85	0.83	0.83	0.83	0.82	0.82	0.81	0.81
80	0.85	0.85	0.84	0.85	0.84	0.85	0.83	0.84	0.84	0.83	0.83	0.83	0.82	0.82	0.82	0.81	0.80	0.80
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(h) Range:-90 - 90DEG
H(h) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2024-04-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks: