

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2781.9 cd per klm. 0.0 degrees vertical -1.0 degrees horizontal
Beam Spread	At 10% of Imax	60.3V x 59.7H
	At 50% of Imax	30.1V x 28.7H
	At 90% of Imax	8.0V x 11.1H
Beam Flux	Total	998.4 lumens per klm.
	To 10% of Imax	817.6 lumens per klm.
	To 50% of Imax	390.2 lumens per klm.
	To 90% of Imax	42.1 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	99.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2024-04-20

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.15V I:0.0256A P:2.4092W PF:0.4272 Freq:50.00Hz Lamp Flux:51.3995x1 lm		
NAME: 6617	TYPE:	WEIGHT:
SPEC.:3W	DIM.: $\phi$ 5.2*8cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

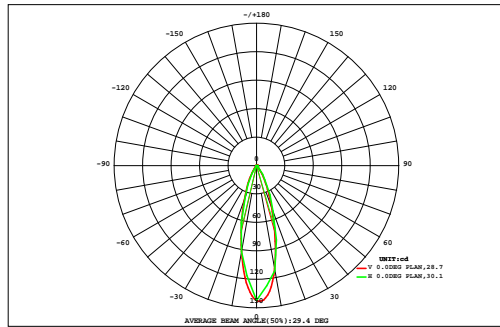

DATA OF LAMP		Eff:21.34lm/W	
MODEL		Imax(cd)	143.0
NOMINAL POWER(W)		AVAILABILITY(%)	82.5
RATED VOLTAGE(V)		Avai. FLUX(lm)	42.42
NOMINAL FLUX(lm)	51.3995	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	51.40
TEST VOLTAGE(V)	0	q @50%(H,V)	29,30DEG

VERTICAL( DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	90	80	70	60	50	40	30	20	10	0	10	20	30	40	50	60	70	80	90	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.37	0.00	
70	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.31	0.00
60	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.00	0.32	0.00
50	0.00	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.04	0.04	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.00	0.35	0.00
40	0.00	0.01	0.01	0.02	0.02	0.03	0.04	0.08	0.13	0.14	0.10	0.05	0.03	0.02	0.02	0.01	0.01	0.00	0.71	0.00
30	0.00	0.01	0.01	0.02	0.02	0.04	0.12	0.32	0.55	0.59	0.40	0.17	0.06	0.02	0.02	0.01	0.01	0.00	2.37	1.24
20	0.00	0.01	0.01	0.02	0.03	0.08	0.35	0.89	1.57	1.69	1.05	0.44	0.12	0.03	0.02	0.01	0.01	0.00	6.30	5.67
10	0.00	0.01	0.01	0.02	0.03	0.15	0.59	1.63	3.14	3.27	1.83	0.70	0.20	0.04	0.02	0.01	0.01	0.00	11.7	11.1
0	0.00	0.01	0.01	0.02	0.03	0.18	0.68	1.96	3.74	3.75	2.05	0.77	0.21	0.04	0.02	0.01	0.01	0.00	13.5	12.9
-10	0.00	0.01	0.01	0.02	0.03	0.14	0.53	1.38	2.39	2.34	1.37	0.56	0.16	0.03	0.02	0.01	0.01	0.00	9.01	8.42
-20	0.00	0.01	0.01	0.02	0.03	0.08	0.27	0.60	0.88	0.86	0.58	0.28	0.08	0.03	0.02	0.01	0.01	0.00	3.76	2.96
-30	0.00	0.01	0.01	0.02	0.02	0.03	0.10	0.20	0.26	0.25	0.18	0.09	0.03	0.02	0.02	0.01	0.01	0.00	1.27	0.08
-40	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.06	0.06	0.04	0.03	0.02	0.02	0.02	0.01	0.01	0.00	0.42	0.00
-50	0.00	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.02	0.02	0.02	0.03	0.02	0.02	0.02	0.01	0.01	0.00	0.31	0.00
-60	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.31	0.00
-70	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.30	0.00
-80	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.14	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL( DEG)	20	30	40	50	60	70	80	90			
F t	0.03	0.11	0.18	0.27	0.38	0.91	2.90	7.31	13.0	13.2	7.81	3.28	1.08	0.41	0.27	0.18	0.11	0.03	51	---
F a	0.00	0.00	0.00	0.00	0.00	0.09	1.90	6.46	12.1	12.4	7.10	2.26	0.12	0.00	0.00	0.00	0.00	0.00	---	42


one-half-peak spread: U:16.6,D:13.8 , L:14.7,R:14.3 NEMA Beam Type: Type 4

H(h) Range:-90 - 90DEG  
H(h) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2024-04-20

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.15V I:0.0256A P:2.4092W PF:0.4272 Freq:50.00Hz Lamp Flux:51.3995x1 lm		
NAME: 6617	TYPE:	WEIGHT:
SPEC.:3W	DIM.: $\phi 5.2 \times 8\text{cm}$	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

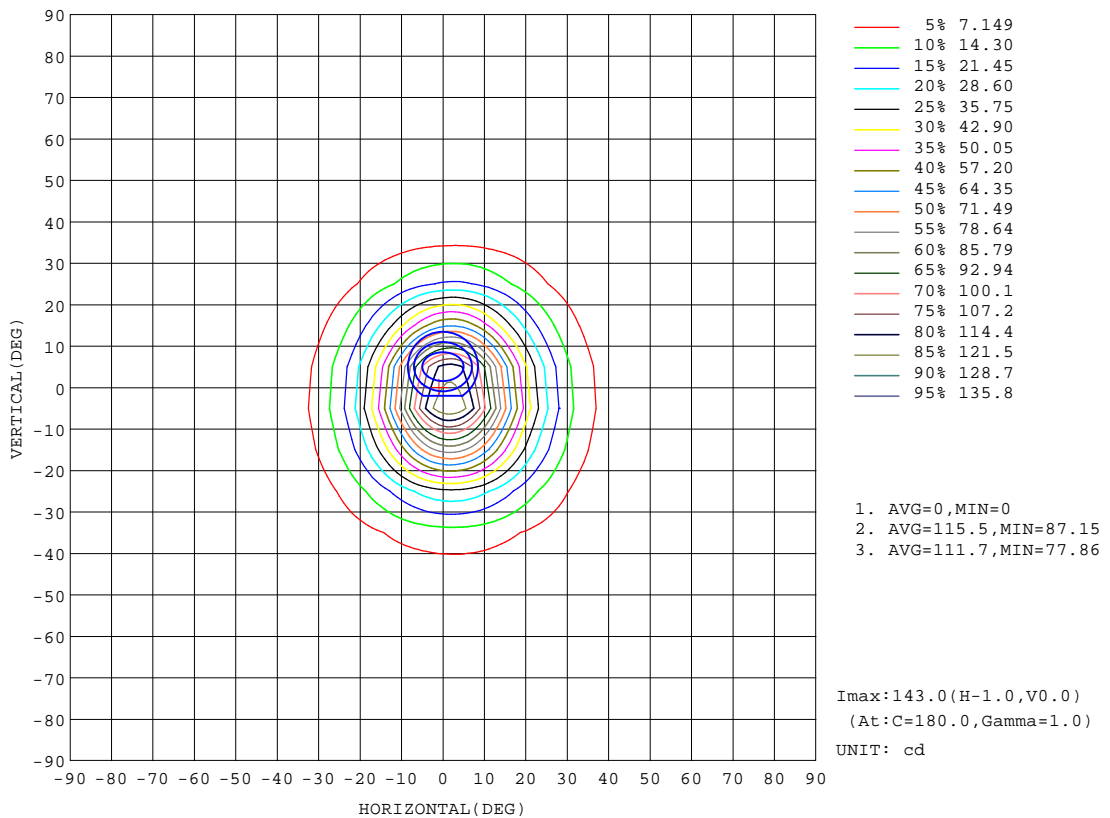


H(h) Range:-90 - 90DEG  
 H(h) Interval: 1.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:AED  
 Test Date:2024-04-20

V(B) Range:-80 - 80DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:5.780m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**


Test:U:220.15V I:0.0256A P:2.4092W PF:0.4272 Freq:50.00Hz Lamp Flux:51.3995x1 lm		
NAME: 6617	TYPE:	WEIGHT:
SPEC.:3W	DIM.: $\phi$ 5.2*8cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

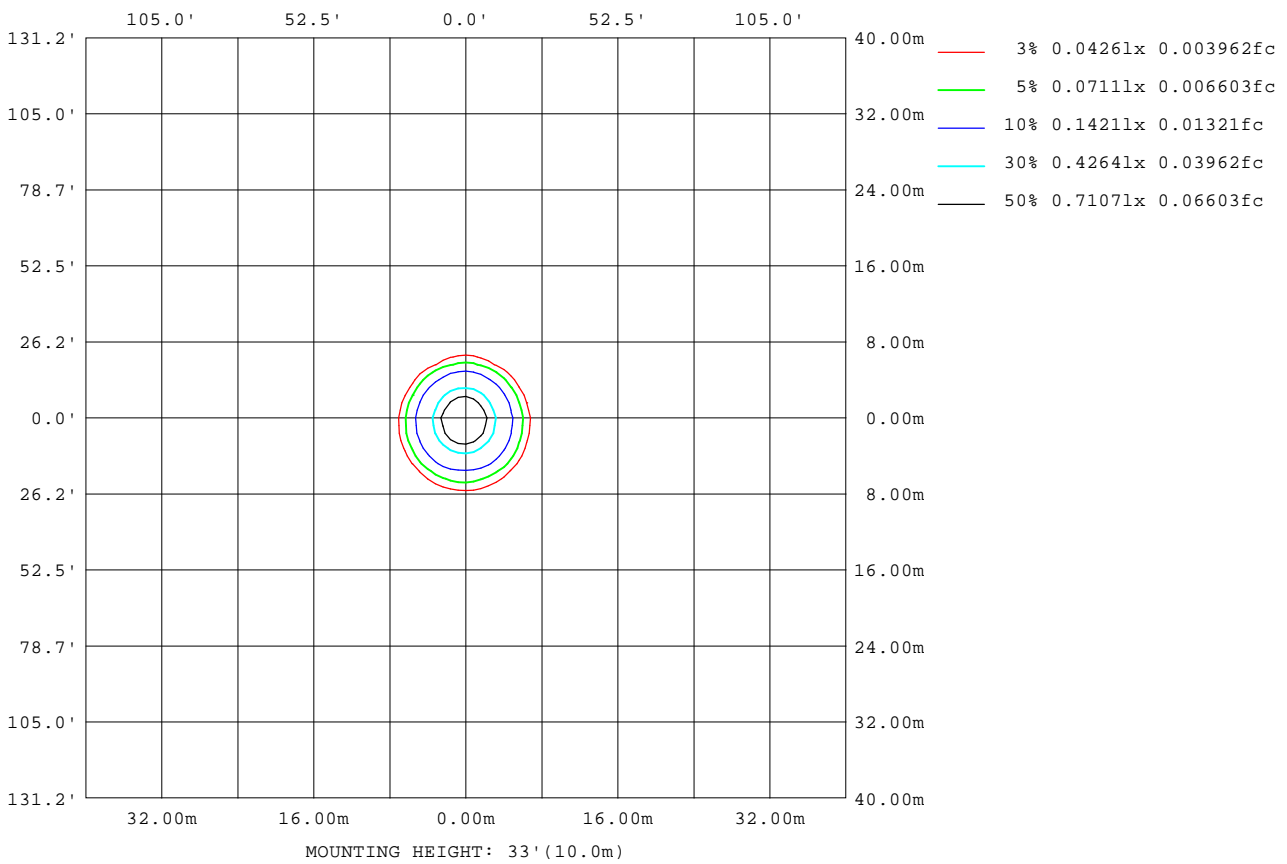

H( $\beta$ ) Range:-90 - 90DEG  
 H( $\beta$ ) Interval: 1.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:AED  
 Test Date:2024-04-20

V(B) Range:-80 - 80DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:5.780m [K=1.0000]  
 Remarks:

Planar Illuminance Curve

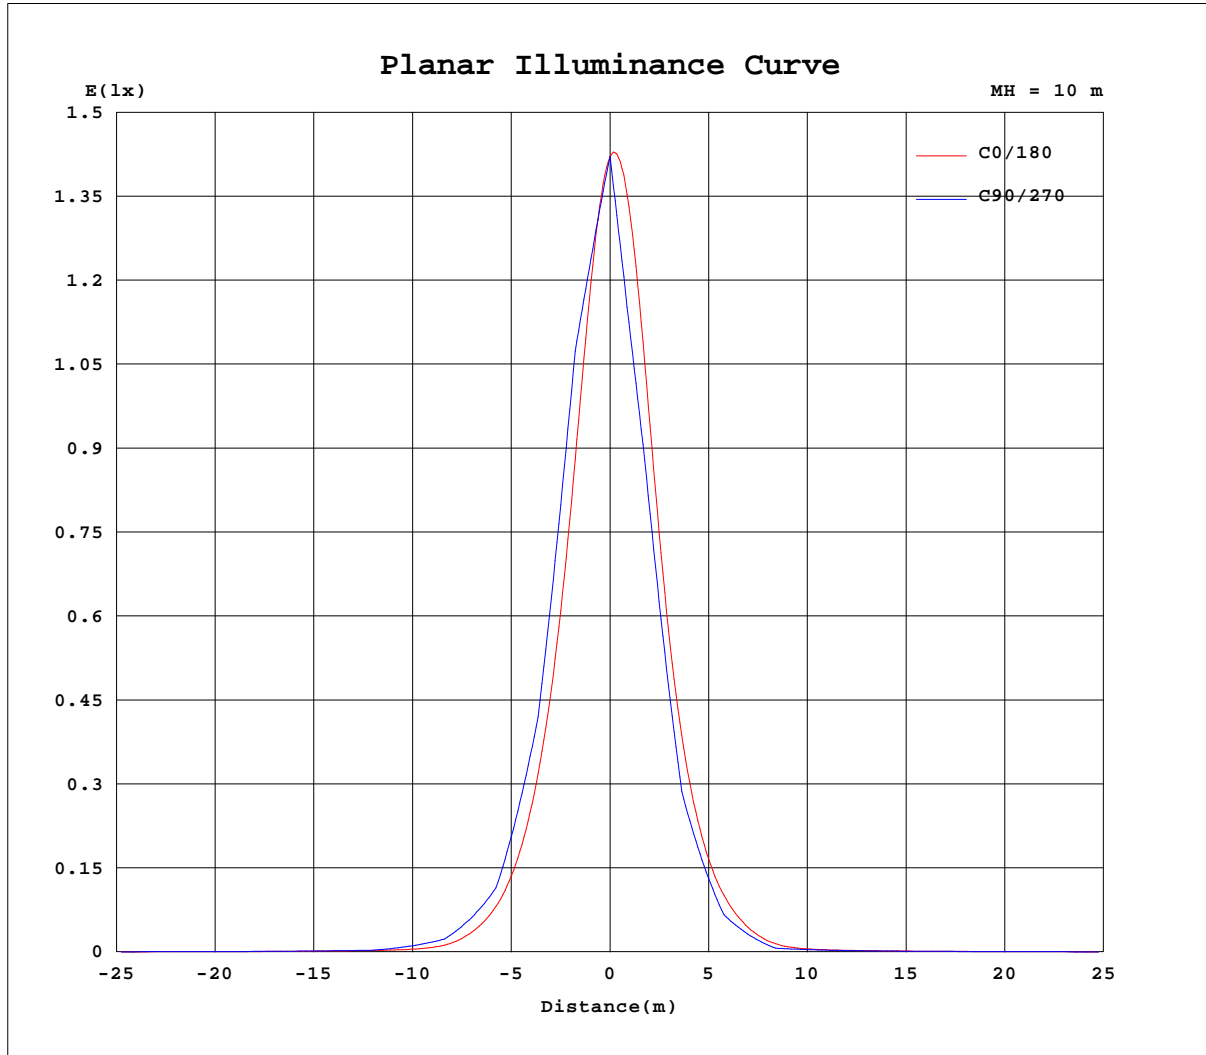


H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2024-04-20

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

AAI Figure

Test:U:220.15V I:0.0256A P:2.4092W PF:0.4272 Freq:50.00Hz Lamp Flux:51.3995x1 lm		
NAME: 6617	TYPE:	WEIGHT:
SPEC.:3W	DIM.: $\phi$ 5.2*8cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

Flux out:19.77 lm

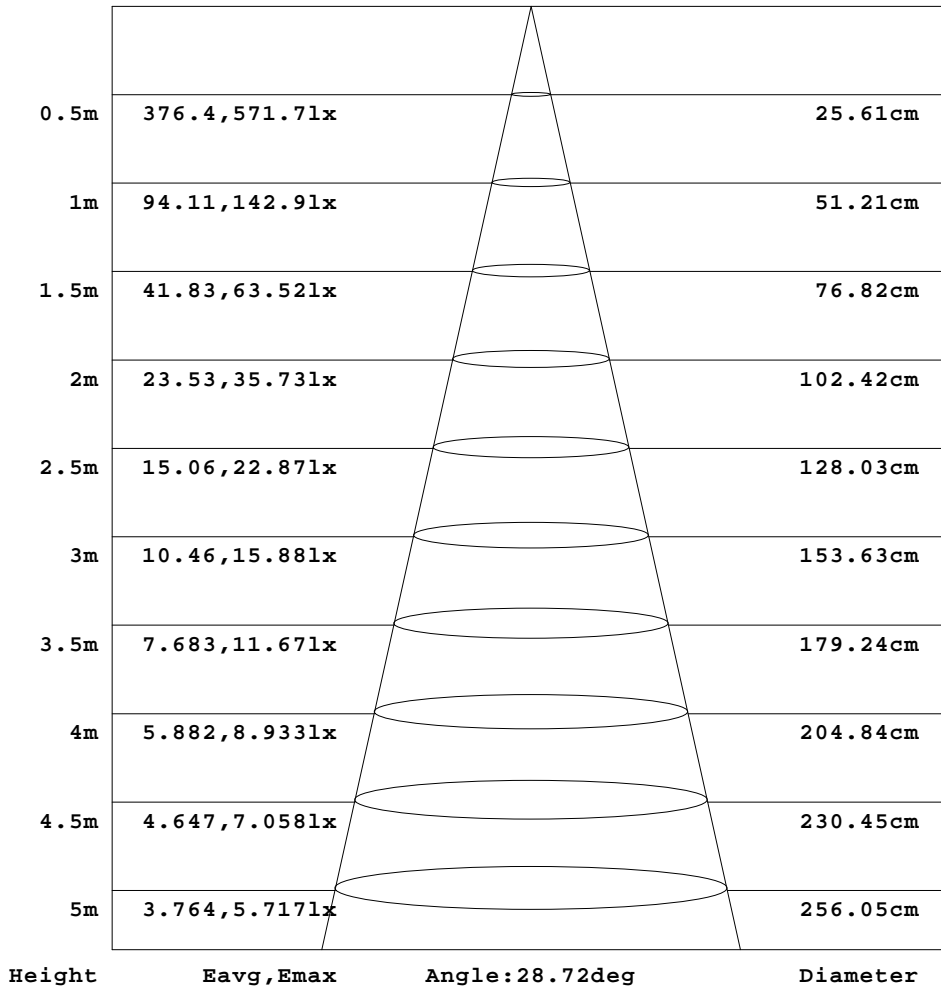

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H( $\beta$ ) Range:-90 - 90DEG  
 H( $\beta$ ) Interval: 1.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:AED  
 Test Date:2024-04-20

V(B) Range:-80 - 80DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:5.780m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.15V I:0.0256A P:2.4092W PF:0.4272 Freq:50.00Hz Lamp Flux:51.3995x1 lm		
NAME: 6617	TYPE:	WEIGHT:
SPEC.:3W	DIM.: $\phi$ 5.2*8cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

Table--1

UNIT: cd

H( DEG) V( DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.69	0.72	0.74	0.75	0.75	0.75	0.78	0.76	0.77	0.76	0.81	0.82	0.83	0.83	0.83	0.84	0.84	0.85	0.86
-75	0.77	0.74	0.75	0.76	0.77	0.77	0.79	0.81	0.79	0.80	0.83	0.85	0.86	0.86	0.87	0.88	0.88	0.88	0.89
-70	0.74	0.76	0.76	0.78	0.78	0.80	0.82	0.82	0.85	0.85	0.86	0.88	0.89	0.90	0.92	0.92	0.93	0.93	0.93
-65	0.69	0.74	0.75	0.75	0.77	0.79	0.82	0.84	0.86	0.86	0.89	0.90	0.91	0.93	0.95	0.96	0.97	0.97	0.99
-60	0.74	0.74	0.75	0.74	0.77	0.81	0.84	0.87	0.88	0.90	0.91	0.94	0.95	0.97	0.99	1.01	1.02	1.04	1.05
-55	0.68	0.74	0.75	0.76	0.78	0.80	0.85	0.87	0.89	0.90	0.92	0.95	0.97	1.02	1.05	1.09	1.13	1.16	1.18
-50	0.76	0.78	0.79	0.81	0.82	0.84	0.88	0.89	0.92	0.93	0.96	1.00	1.04	1.09	1.16	1.22	1.27	1.32	1.33
-45	0.75	0.76	0.78	0.80	0.82	0.84	0.87	0.89	0.92	0.93	0.97	1.02	1.10	1.24	1.48	1.87	2.42	2.91	3.20
-40	0.76	0.77	0.79	0.82	0.84	0.87	0.88	0.92	0.94	0.98	1.04	1.13	1.30	1.64	2.24	3.18	4.19	4.91	5.17
-35	0.70	0.74	0.77	0.78	0.83	0.86	0.88	0.91	0.94	0.98	1.08	1.24	1.70	2.89	4.73	6.84	8.87	10.4	11.3
-30	0.75	0.75	0.77	0.80	0.86	0.88	0.90	0.95	1.00	1.08	1.27	1.79	3.31	6.28	9.72	13.1	15.5	17.2	17.6
-25	0.68	0.74	0.78	0.79	0.85	0.89	0.91	0.95	1.00	1.09	1.31	2.00	4.04	7.77	12.8	18.7	25.0	30.7	33.9
-20	0.76	0.79	0.81	0.85	0.88	0.92	0.95	1.00	1.09	1.31	1.98	4.25	8.85	15.1	22.8	31.8	41.7	48.8	50.6
-15	0.72	0.76	0.80	0.83	0.84	0.88	0.92	0.98	1.05	1.22	1.70	3.54	7.87	14.6	24.3	37.5	54.5	71.7	81.2
-10	0.76	0.79	0.82	0.82	0.86	0.88	0.98	1.04	1.16	1.58	3.15	7.40	14.4	24.8	40.7	62.8	89.0	109	112
-5	0.75	0.78	0.81	0.85	0.86	0.90	0.95	1.01	1.09	1.30	1.99	4.65	10.3	18.9	32.4	52.7	81.1	111	127
0	0.80	0.82	0.85	0.89	0.93	0.96	1.02	1.09	1.23	1.64	3.33	8.01	15.6	27.6	46.6	75.2	110	137	142
5	0.78	0.79	0.82	0.85	0.89	0.92	0.96	1.01	1.09	1.26	1.84	4.08	9.29	17.4	29.7	48.1	73.9	101	116
10	0.77	0.80	0.82	0.85	0.90	0.93	0.97	1.02	1.11	1.37	2.38	5.64	12.0	20.6	33.2	50.8	70.9	87.5	92.1
15	0.78	0.77	0.79	0.81	0.87	0.90	0.93	0.97	1.03	1.12	1.42	2.50	5.50	11.0	18.7	28.9	41.7	54.6	62.6
20	0.74	0.76	0.78	0.81	0.90	0.92	0.94	0.97	1.04	1.14	1.41	2.36	5.06	10.0	15.9	22.0	28.5	33.2	34.5
25	0.77	0.77	0.79	0.80	0.86	0.89	0.90	0.93	0.97	1.02	1.11	1.38	2.23	4.29	7.65	11.5	15.8	19.8	22.1
30	0.78	0.79	0.81	0.83	0.86	0.88	0.89	0.91	0.95	0.98	1.05	1.20	1.55	2.40	4.03	6.10	8.23	9.70	10.3
35	0.78	0.76	0.79	0.81	0.84	0.85	0.87	0.89	0.91	0.94	0.96	1.01	1.13	1.41	2.04	3.02	4.17	5.22	5.78
40	0.76	0.76	0.81	0.82	0.85	0.88	0.84	0.88	0.89	0.92	0.92	0.96	1.00	1.13	1.20	1.31	1.42	1.51	1.54
45	0.84	0.78	0.79	0.81	0.82	0.82	0.85	0.87	0.88	0.89	0.90	0.91	0.94	1.00	1.03	1.07	1.19	1.25	1.28
50	0.76	0.79	0.79	0.82	0.84	0.84	0.84	0.89	0.86	0.91	0.90	0.92	0.95	0.94	0.94	1.02	1.03	1.02	1.04
55	0.75	0.78	0.78	0.80	0.80	0.81	0.84	0.84	0.86	0.86	0.87	0.90	0.92	0.95	0.92	0.92	0.97	0.98	0.98
60	0.79	0.78	0.80	0.80	0.78	0.82	0.82	0.87	0.84	0.85	0.90	0.90	0.92	0.92	0.93	0.93	0.94	0.93	0.94
65	0.72	0.78	0.78	0.81	0.81	0.82	0.83	0.83	0.85	0.85	0.85	0.89	0.90	0.90	0.90	0.91	0.90	0.90	0.91
70	0.80	0.80	0.81	0.81	0.82	0.82	0.83	0.84	0.85	0.86	0.87	0.88	0.87	0.88	0.89	0.88	0.88	0.88	0.89
75	0.81	0.81	0.82	0.82	0.83	0.83	0.83	0.84	0.84	0.85	0.85	0.86	0.87	0.86	0.86	0.87	0.85	0.86	0.87
80	0.83	0.82	0.82	0.84	0.83	0.83	0.84	0.83	0.84	0.83	0.84	0.84	0.84	0.85	0.84	0.85	0.85	0.84	0.85
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(h) Range:-90 - 90DEG  
H(h) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2024-04-20

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.15V I:0.0256A P:2.4092W PF:0.4272 Freq:50.00Hz Lamp Flux:51.3995x1 lm		
NAME: 6617	TYPE:	WEIGHT:
SPEC.:3W	DIM.: $\phi$ 5.2*8cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

Table--2

UNIT: cd

H( DEG) V( DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.85	0.85	0.85	0.85	0.84	0.84	0.83	0.83	0.83	0.81	0.82	0.76	0.76	0.77	0.78	0.76	0.73	0.65
-75	0.89	0.89	0.89	0.89	0.88	0.87	0.86	0.86	0.85	0.84	0.83	0.83	0.79	0.79	0.78	0.79	0.77	0.74
-70	0.94	0.92	0.92	0.90	0.90	0.90	0.87	0.87	0.86	0.85	0.83	0.83	0.82	0.80	0.80	0.78	0.76	0.75
-65	0.98	0.98	0.97	0.96	0.94	0.92	0.92	0.89	0.89	0.87	0.85	0.85	0.83	0.82	0.80	0.79	0.77	0.75
-60	1.03	1.03	1.00	0.98	0.96	0.95	0.92	0.90	0.88	0.88	0.86	0.84	0.82	0.82	0.80	0.78	0.76	0.72
-55	1.18	1.16	1.13	1.09	1.04	1.00	0.98	0.95	0.93	0.90	0.87	0.86	0.85	0.83	0.81	0.79	0.77	0.75
-50	1.30	1.25	1.18	1.13	1.06	1.03	0.99	0.96	0.92	0.88	0.87	0.86	0.84	0.82	0.80	0.78	0.76	0.77
-45	3.24	2.98	2.48	1.91	1.49	1.24	1.10	1.02	0.97	0.93	0.90	0.88	0.86	0.84	0.82	0.80	0.78	0.76
-40	4.93	4.14	3.07	2.14	1.57	1.25	1.10	1.02	0.96	0.92	0.90	0.88	0.86	0.84	0.81	0.79	0.76	0.76
-35	11.3	10.3	8.52	6.69	4.60	2.85	1.67	1.22	1.03	0.95	0.91	0.89	0.84	0.83	0.82	0.80	0.78	0.76
-30	16.6	14.4	11.7	8.70	5.42	2.80	1.56	1.17	1.03	0.93	0.89	0.92	0.83	0.80	0.81	0.78	0.75	0.75
-25	33.6	29.9	23.9	17.8	12.2	7.42	3.92	1.95	1.26	1.03	0.94	0.91	0.85	0.84	0.82	0.80	0.78	0.76
-20	46.8	38.5	28.6	19.8	13.0	7.38	3.50	1.72	1.19	1.02	0.93	0.91	0.87	0.84	0.82	0.79	0.75	0.72
-15	79.4	67.5	50.5	34.5	22.5	13.4	7.26	3.33	1.67	1.18	1.02	0.95	0.91	0.88	0.86	0.83	0.79	0.77
-10	99.5	76.6	52.4	33.7	20.3	11.4	5.80	2.47	1.42	1.11	1.00	0.95	0.92	0.88	0.85	0.83	0.78	0.77
-5	123	102	72.6	47.6	29.7	17.1	9.31	4.41	1.97	1.26	1.06	0.98	0.93	0.90	0.87	0.84	0.81	0.78
0	124	92.0	61.2	38.4	22.6	12.6	6.46	2.75	1.47	1.12	0.99	0.94	0.91	0.88	0.85	0.82	0.78	0.78
5	113	93.1	66.3	43.7	27.0	15.7	8.58	3.96	1.84	1.22	1.04	0.97	0.93	0.90	0.87	0.84	0.81	0.78
10	81.3	62.0	42.9	27.6	16.7	9.53	4.60	2.05	1.30	1.08	0.98	0.93	0.90	0.87	0.85	0.82	0.79	0.79
15	61.7	52.1	38.9	26.8	17.2	10.2	5.36	2.50	1.42	1.10	0.99	0.94	0.91	0.88	0.85	0.83	0.80	0.77
20	32.1	26.5	19.9	13.9	8.64	4.54	2.18	1.36	1.08	0.97	0.93	0.90	0.88	0.85	0.83	0.79	0.76	0.76
25	22.1	19.6	15.5	11.2	7.37	4.36	2.36	1.43	1.11	0.99	0.93	0.91	0.89	0.86	0.83	0.82	0.79	0.77
30	9.66	7.86	5.84	3.77	2.24	1.51	1.19	1.04	0.98	0.92	0.90	0.88	0.86	0.85	0.83	0.81	0.77	0.78
35	5.87	5.24	4.23	3.13	2.12	1.47	1.19	1.04	0.97	0.93	0.90	0.89	0.87	0.85	0.83	0.81	0.79	0.77
40	1.49	1.41	1.31	1.19	1.10	1.03	0.98	0.96	0.91	0.90	0.89	0.87	0.85	0.83	0.81	0.79	0.77	0.78
45	1.28	1.24	1.19	1.13	1.07	1.01	0.98	0.95	0.93	0.90	0.89	0.88	0.86	0.84	0.82	0.81	0.79	0.78
50	1.02	1.02	1.00	0.98	0.96	0.94	0.93	0.92	0.91	0.89	0.88	0.87	0.85	0.84	0.82	0.81	0.79	0.77
55	0.98	0.97	0.97	0.96	0.95	0.93	0.92	0.91	0.91	0.89	0.87	0.87	0.85	0.83	0.82	0.81	0.78	0.77
60	0.93	0.93	0.92	0.92	0.92	0.91	0.89	0.89	0.88	0.86	0.85	0.84	0.83	0.81	0.81	0.80	0.74	0.78
65	0.91	0.92	0.90	0.90	0.90	0.89	0.88	0.88	0.88	0.87	0.86	0.85	0.84	0.83	0.82	0.81	0.79	0.78
70	0.90	0.88	0.88	0.89	0.88	0.87	0.87	0.87	0.86	0.86	0.85	0.84	0.83	0.82	0.82	0.82	0.79	0.78
75	0.87	0.87	0.86	0.87	0.87	0.86	0.85	0.85	0.85	0.84	0.85	0.83	0.83	0.83	0.82	0.82	0.81	0.81
80	0.85	0.85	0.84	0.85	0.84	0.85	0.83	0.84	0.84	0.83	0.83	0.83	0.82	0.82	0.82	0.81	0.80	0.80
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(h) Range:-90 - 90DEG  
H(h) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2024-04-20

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks: