


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.33V I:0.1631A P:13.413W PF:0.3734 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1208.01x1 lm		
NAME: 6646	TYPE:	WEIGHT: 0
SPEC.: 12W	DIM.: 0	SERIAL No.: 1
MFR.: NORDECOR	SUR.:	Shielding Angle: 0

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 90.06 lm/W
MODEL		Imax (cd)	4973	S/MH(C0/180)		0.33
NOMINAL POWER(W)	13.6933	LOR(%)	100.0	S/MH(C90/270)		0.46
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	1208.0	η UP,DN(C0-180)		0.0,52.7
NOMINAL FLUX(lm)	1208.01	CIE CLASS	DIRECT	η UP,DN(C180-360)		0.0,47.3
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM		0.00
TEST VOLTAGE(V)	220	η down (%)	100.0	CIBSE SHR MAX		0.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

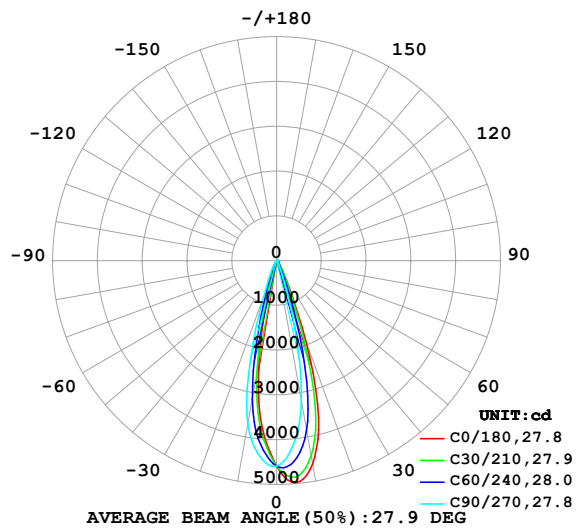

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

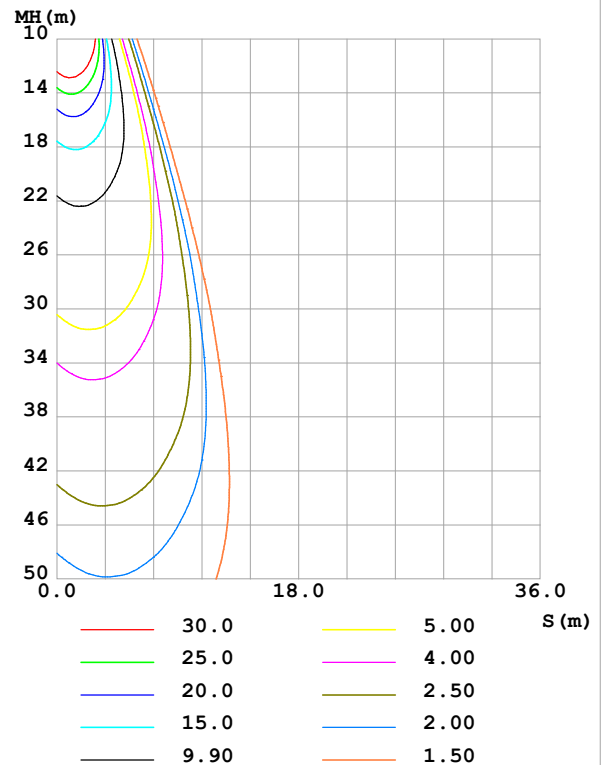

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:YAO
Test Date:2025-05-14

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.485
Humidity:65.0%
Test Distance:9.830m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	4618	4146	3203	2656	2284	2849	3711	4120	0- 10	384.3	384.3	31.8,31.8
20	1909	1281	529.2	329.9	296.7	481.3	854.0	1311	10- 20	552.7	936.9	77.6,77.6
30	267.1	200.8	92.49	72.16	65.60	98.48	146.7	174.2	20- 30	166.5	1103	91.3,91.3
40	57.83	46.00	31.46	28.42	28.51	31.48	36.89	42.68	30- 40	44.94	1148	95.1,95.1
50	28.11	26.05	23.17	21.50	20.29	21.66	22.51	23.26	40- 50	21.93	1170	96.9,96.9
60	21.78	19.91	17.31	15.11	12.75	14.13	16.08	16.98	50- 60	17.91	1188	98.4,98.4
70	13.96	12.12	9.184	7.214	5.390	6.603	8.573	9.940	60- 70	12.76	1201	99.4,99.4
80	5.728	3.853	1.911	1.343	0.6713	1.192	1.949	3.206	70- 80	5.829	1207	99.9,99.9
90	0.5259	0.3120	0.2769	0.2372	0.0928	0.0816	0.0751	0.0686	80- 90	1.010	1208	100,100
100	0.0825	0.0557	0.0610	0.1714	0.0928	0.0879	0.0751	0.0717	90-100	0.1610	1208	100,100
110	0	0	0	0	0	0	0	0	100-110	0.0064	1208	100,100
120	0	0	0	0	0	0	0	0	110-120	0	1208	100,100
130	0	0	0	0	0	0	0	0	120-130	0	1208	100,100
140	0	0	0	0	0	0	0	0	130-140	0	1208	100,100
150	0	0	0	0	0	0	0	0	140-150	0	1208	100,100
160	0	0	0	0	0	0	0	0	150-160	0	1208	100,100
170	0	0	0	0	0	0	0	0	160-170	0	1208	100,100
180	0	0	0	0	0	0	0	0	170-180	0	1208	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1160.2 lm

%lum = 96.0%

%lamp = 96.0%

Conical surface Flux(130deg): 1195.4 lm

%lum = 99.0%


%lamp = 99.0%

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:YAO
 Test Date:2025-05-14

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.485
 Humidity:65.0%
 Test Distance:9.830m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.33V I:0.1631A P:13.413W PF:0.3734 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1208.01x1 lm		
NAME: 6646	TYPE:	WEIGHT: 0
SPEC.: 12W	DIM.: 0	SERIAL No.: 1
MFR.: NORDECOR	SUR.:	Shielding Angle: 0

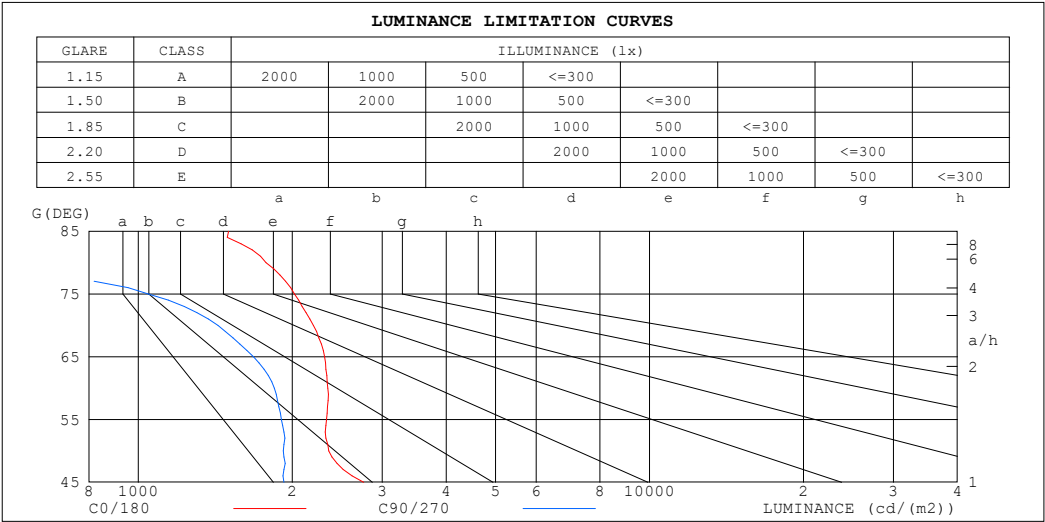

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1501	209
80	1777	587
75	2021	1047
70	2200	1431
65	2315	1679
60	2348	1845
55	2333	1905
50	2356	1921
45	2757	1927


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:YAO
Test Date:2025-05-14

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.485
Humidity:65.0%
Test Distance:9.830m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.33V I:0.1631A P:13.413W PF:0.3734 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1208.01x1 lm		
NAME: 6646	TYPE:	WEIGHT: 0
SPEC.: 12W	DIM.: 0	SERIAL No.: 1
MFR.: NORDECOR	SUR.:	Shielding Angle: 0

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
	RCR:Room Cavity Ratio															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.10	1.08	1.10	1.08	1.07	1.06	1.05	1.03	1.03	1.01	1.00	.99	.98	.97	.96
2.0	1.07	1.03	1.01	1.05	1.02	.99	1.02	.99	.97	.99	.97	.95	.96	.95	.93	.92
3.0	1.02	.98	.95	1.00	.97	.94	.98	.95	.92	.95	.93	.91	.93	.91	.90	.88
4.0	.97	.93	.90	.96	.92	.89	.94	.91	.88	.92	.89	.87	.91	.88	.86	.85
5.0	.93	.89	.86	.92	.88	.85	.91	.87	.85	.89	.86	.84	.88	.85	.83	.82
6.0	.90	.85	.82	.89	.85	.82	.88	.84	.81	.87	.83	.81	.85	.83	.80	.79
7.0	.87	.82	.79	.86	.82	.79	.85	.81	.79	.84	.81	.78	.83	.80	.78	.77
8.0	.84	.80	.77	.83	.79	.76	.82	.79	.76	.82	.78	.76	.81	.78	.76	.74
9.0	.81	.77	.74	.81	.77	.74	.80	.76	.74	.79	.76	.74	.79	.76	.73	.72
10.0	.79	.75	.72	.79	.75	.72	.78	.74	.72	.77	.74	.71	.77	.74	.71	.70

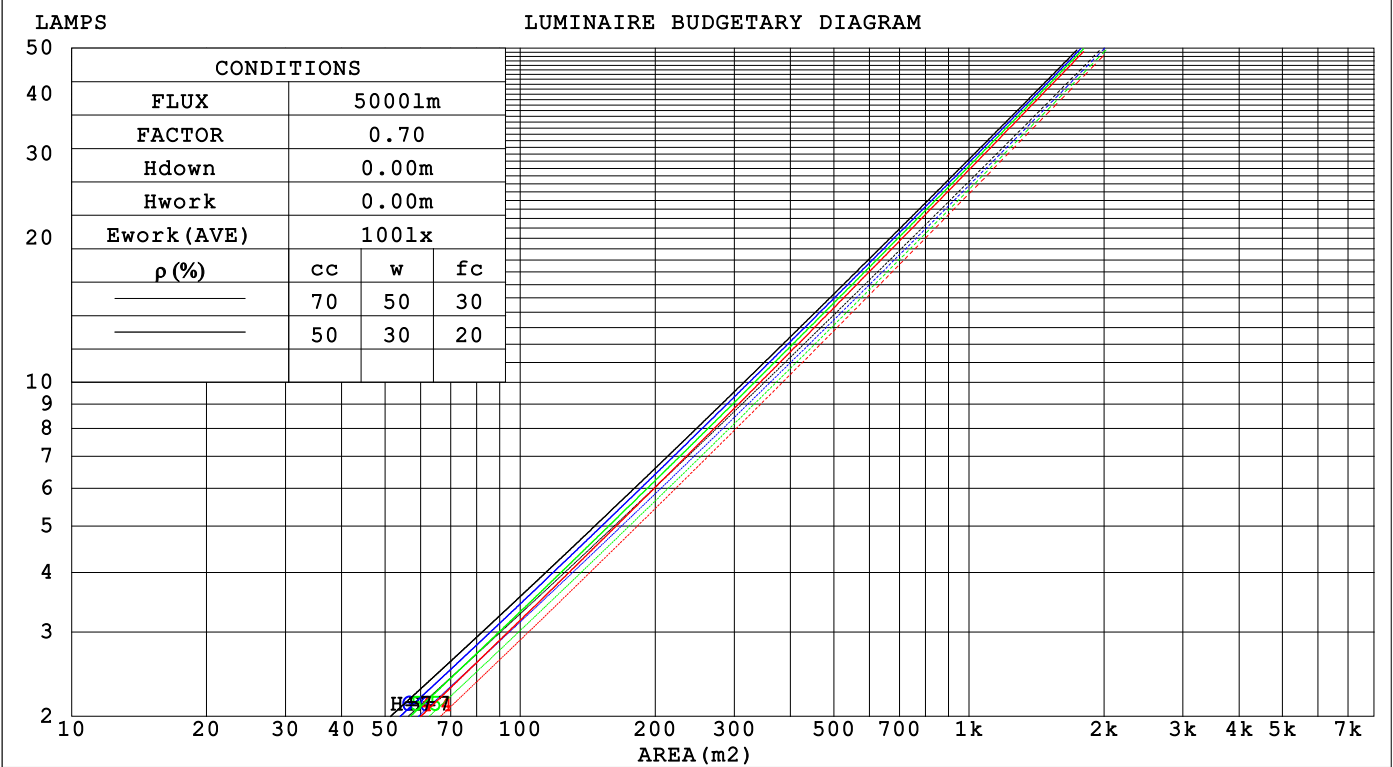

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:YAO
Test Date:2025-05-14

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.485
Humidity:65.0%
Test Distance:9.830m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:220.33V I:0.1631A P:13.413W PF:0.3734 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1208.01x1 lm		
NAME: 6646	TYPE:	WEIGHT: 0
SPEC.: 12W	DIM.: 0	SERIAL No.: 1
MFR.: NORDECOR	SUR.:	Shielding Angle: 0

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients (WEC)														
0.0																														
1.0	.148	.084	.027	.141	.080	.026	.128	.074	.024	.117	.068	.022	.106	.062	.020															
2.0	.137	.075	.023	.132	.073	.022	.121	.068	.021	.112	.063	.020	.103	.058	.018															
3.0	.128	.068	.020	.123	.066	.020	.115	.062	.019	.107	.058	.018	.099	.055	.017															
4.0	.120	.062	.018	.116	.061	.018	.108	.057	.017	.102	.055	.016	.095	.052	.016															
5.0	.112	.057	.017	.109	.056	.016	.103	.054	.016	.097	.051	.015	.092	.049	.015															
6.0	.106	.053	.015	.103	.052	.015	.098	.050	.015	.093	.048	.014	.088	.046	.014															
7.0	.100	.050	.014	.098	.049	.014	.093	.047	.014	.089	.046	.013	.085	.044	.013															
8.0	.095	.047	.013	.093	.046	.013	.089	.045	.013	.085	.043	.012	.082	.042	.012															
9.0	.091	.044	.012	.089	.043	.012	.086	.042	.012	.082	.041	.012	.079	.040	.012															
10.0	.087	.042	.012	.085	.041	.012	.082	.040	.011	.079	.039	.011	.076	.038	.011															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.169	.158	.147	.145	.135	.127	.099	.093	.088	.057	.054	.051	.018	.017	.016	
2.0	.152	.133	.117	.130	.114	.101	.089	.079	.070	.051	.046	.041	.016	.015	.013	
3.0	.137	.113	.095	.118	.098	.082	.081	.068	.057	.047	.040	.034	.015	.013	.011	
4.0	.125	.098	.078	.107	.085	.068	.074	.059	.048	.043	.035	.028	.014	.011	.009	
5.0	.115	.086	.065	.098	.074	.056	.068	.052	.040	.039	.031	.024	.013	.010	.008	
6.0	.106	.076	.055	.091	.066	.048	.063	.046	.034	.036	.027	.020	.012	.009	.007	
7.0	.098	.068	.047	.085	.059	.041	.058	.041	.029	.034	.024	.017	.011	.008	.006	
8.0	.092	.061	.040	.079	.053	.035	.055	.037	.025	.032	.022	.015	.010	.007	.005	
9.0	.086	.056	.035	.074	.048	.031	.051	.034	.022	.030	.020	.013	.010	.007	.004	
10.0	.081	.051	.031	.070	.044	.027	.049	.031	.019	.028	.018	.011	.009	.006	.004	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:YAO
Test Date:2025-05-14

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.485
Humidity:65.0%
Test Distance:9.830m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.33V I:0.1631A P:13.413W PF:0.3734 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1208.01x1 lm										
NAME: 6646					TYPE:			WEIGHT: 0		
SPEC.: 12W					DIM.: 0			SERIAL No.: 1		
MFR.: NORDECOR					SUR.:			Shielding Angle: 0		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	9.8	10.5	10.0	10.6	10.8	7.8	8.5	8.0	8.7	8.8
3H	11.0	11.6	11.2	11.8	12.0	9.0	9.6	9.2	9.8	10.0
4H	11.5	12.1	11.7	12.3	12.5	9.3	9.9	9.6	10.1	10.4
6H	11.8	12.4	12.1	12.7	12.9	9.4	10.0	9.7	10.2	10.4
8H	11.9	12.5	12.2	12.8	13.0	9.4	9.9	9.7	10.2	10.4
12H	12.0	12.5	12.3	12.8	13.1	9.3	9.9	9.6	10.1	10.4
4H 2H	10.1	10.7	10.4	10.9	11.2	8.6	9.2	8.8	9.4	9.6
3H	11.5	12.1	11.8	12.3	12.6	9.9	10.5	10.2	10.7	11.0
4H	12.1	12.6	12.5	12.9	13.2	10.3	10.8	10.6	11.1	11.4
6H	12.6	13.1	13.0	13.4	13.7	10.4	10.8	10.8	11.2	11.5
8H	12.7	13.2	13.1	13.5	13.9	10.4	10.8	10.8	11.2	11.5
12H	12.8	13.2	13.2	13.6	14.0	10.3	10.7	10.7	11.1	11.5
8H 4H	12.2	12.7	12.6	13.0	13.4	10.5	11.0	10.9	11.3	11.7
6H	12.8	13.1	13.2	13.5	13.9	10.7	11.0	11.1	11.4	11.9
8H	13.0	13.3	13.4	13.7	14.1	10.7	11.0	11.2	11.4	11.9
12H	13.1	13.4	13.6	13.8	14.3	10.7	10.9	11.1	11.4	11.9
12H 4H	12.2	12.6	12.6	12.9	13.3	10.5	10.9	11.0	11.3	11.7
6H	12.8	13.1	13.2	13.5	13.9	10.7	11.0	11.2	11.5	11.9
8H	13.0	13.2	13.4	13.7	14.1	10.8	11.0	11.2	11.5	11.9
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.5 / - 0.4					+ 0.3 / - 0.4				
1.5H	+ 1.2 / - 0.4					+ 0.2 / - 0.4				
2.0H	+ 0.1 / - 0.3					+ 0.2 / - 0.7				

CIE Pub.117, 1208 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 0.7$)
Area: 0.018725 m²

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:YAO
Test Date:2025-05-14

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.485
Humidity:65.0%
Test Distance:9.830m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.33V I:0.1631A P:13.413W PF:0.3734 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1208.01x1 lm		
NAME: 6646	TYPE:	WEIGHT: 0
SPEC.: 12W	DIM.: 0	SERIAL No.: 1
MFR.: NORDECOR	SUR.:	Shielding Angle: 0


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	89	82	79	88	82	79	87	82	79	75
0.80	96	90	86	95	90	86	94	89	86	82
1.00	100	94	91	99	94	91	97	94	90	86
1.25	104	99	95	103	98	95	101	97	94	90
1.50	106	102	98	105	101	98	103	99	97	92
2.00	109	105	102	107	104	101	105	102	99	94
2.50	110	107	104	109	105	103	106	103	101	95
3.00	112	109	106	110	107	105	107	104	103	96
4.00	114	111	109	112	110	108	108	106	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: YAO
 Test Date: 2025-05-14

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.485
 Humidity: 65.0%
 Test Distance: 9.830m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.33V I:0.1631A P:13.413W PF:0.3734 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1208.01x1 lm		
NAME: 6646	TYPE:	WEIGHT: 0
SPEC.: 12W	DIM.: 0	SERIAL No.: 1
MFR.: NORDECOR	SUR.:	Shielding Angle: 0

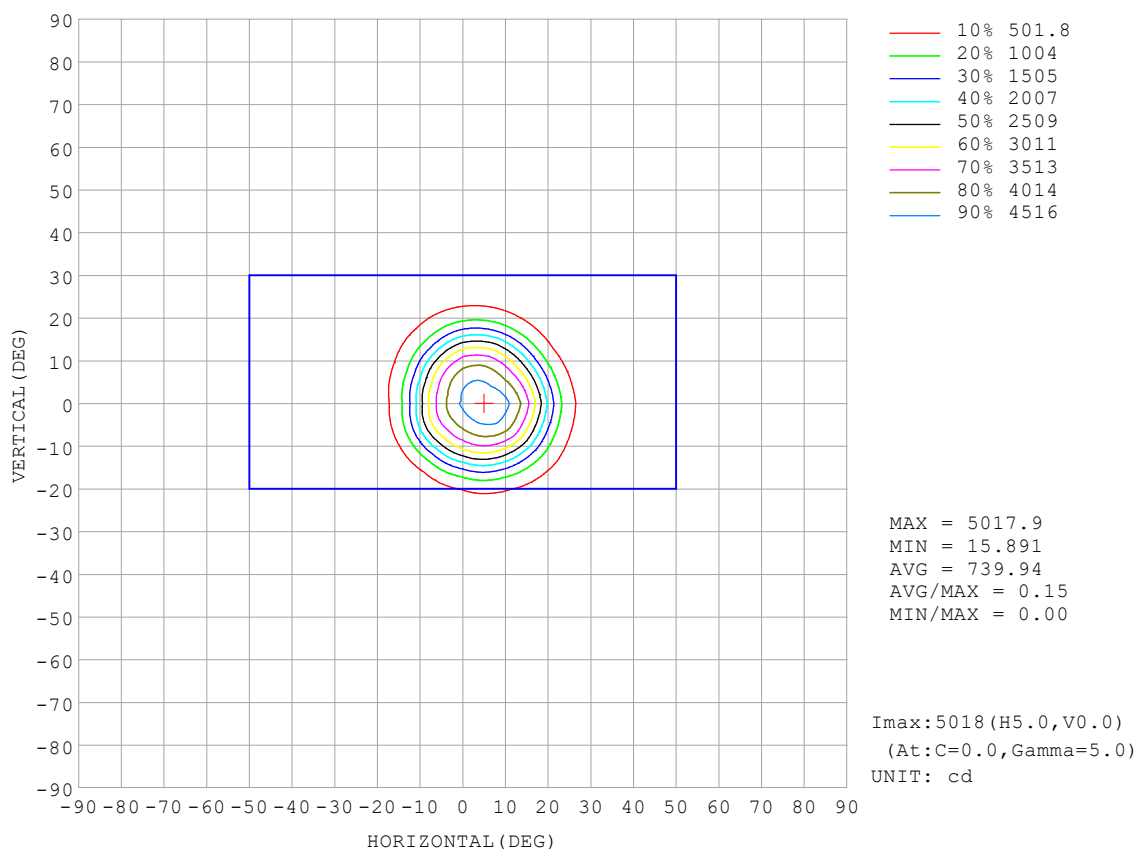


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:YAO
Test Date:2025-05-14

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.485
Humidity:65.0%
Test Distance:9.830m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.33V I:0.1631A P:13.413W PF:0.3734 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1208.01x1 lm		
NAME: 6646	TYPE:	WEIGHT: 0
SPEC.: 12W	DIM.: 0	SERIAL No.: 1
MFR.: NORDECOR	SUR.:	Shielding Angle: 0

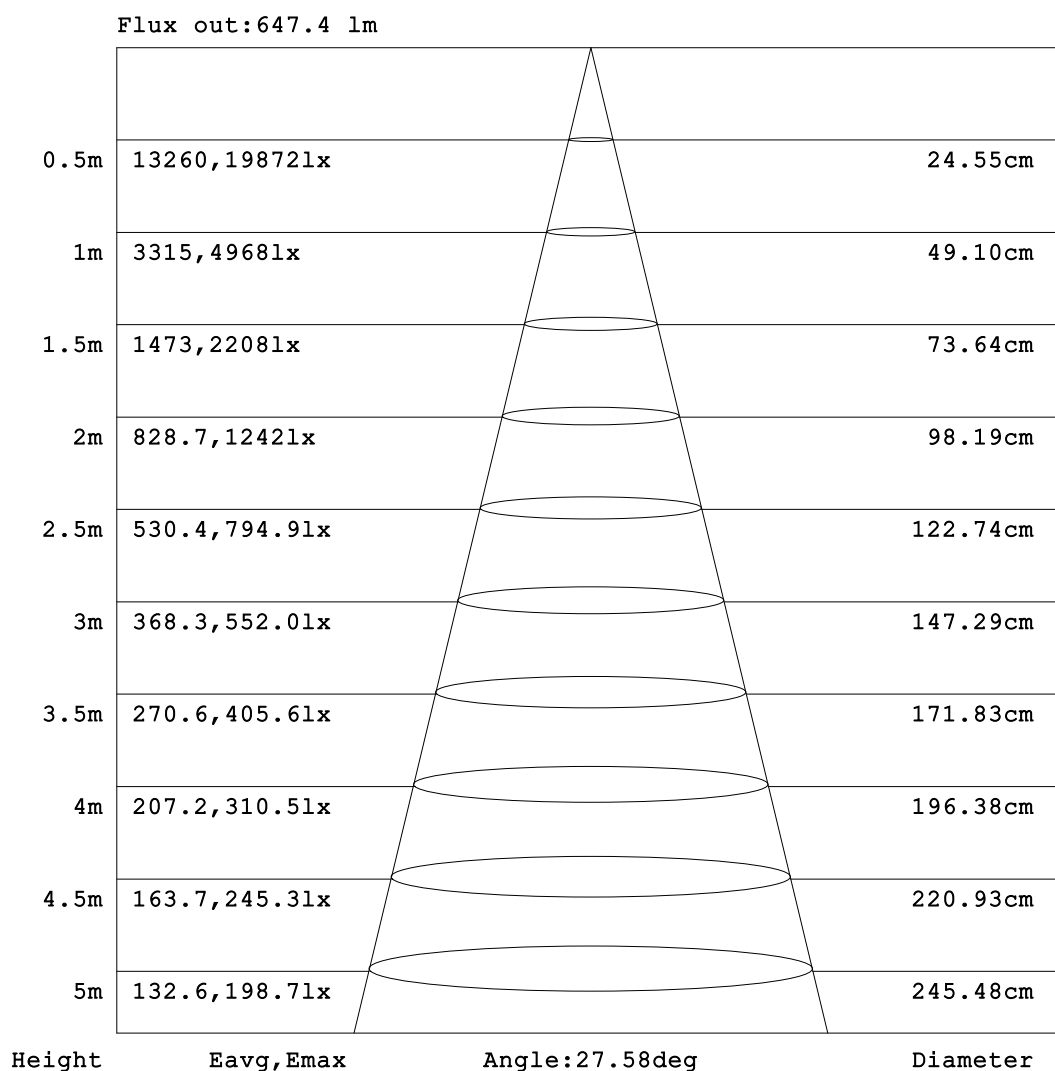


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:YAO
Test Date:2025-05-14

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.485
Humidity:65.0%
Test Distance:9.830m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.33V I:0.1631A P:13.413W PF:0.3734 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1208.01x1 lm		
NAME: 6646	TYPE:	WEIGHT: 0
SPEC.: 12W	DIM.: 0	SERIAL No.: 1
MFR.: NORDECOR	SUR.:	Shielding Angle: 0

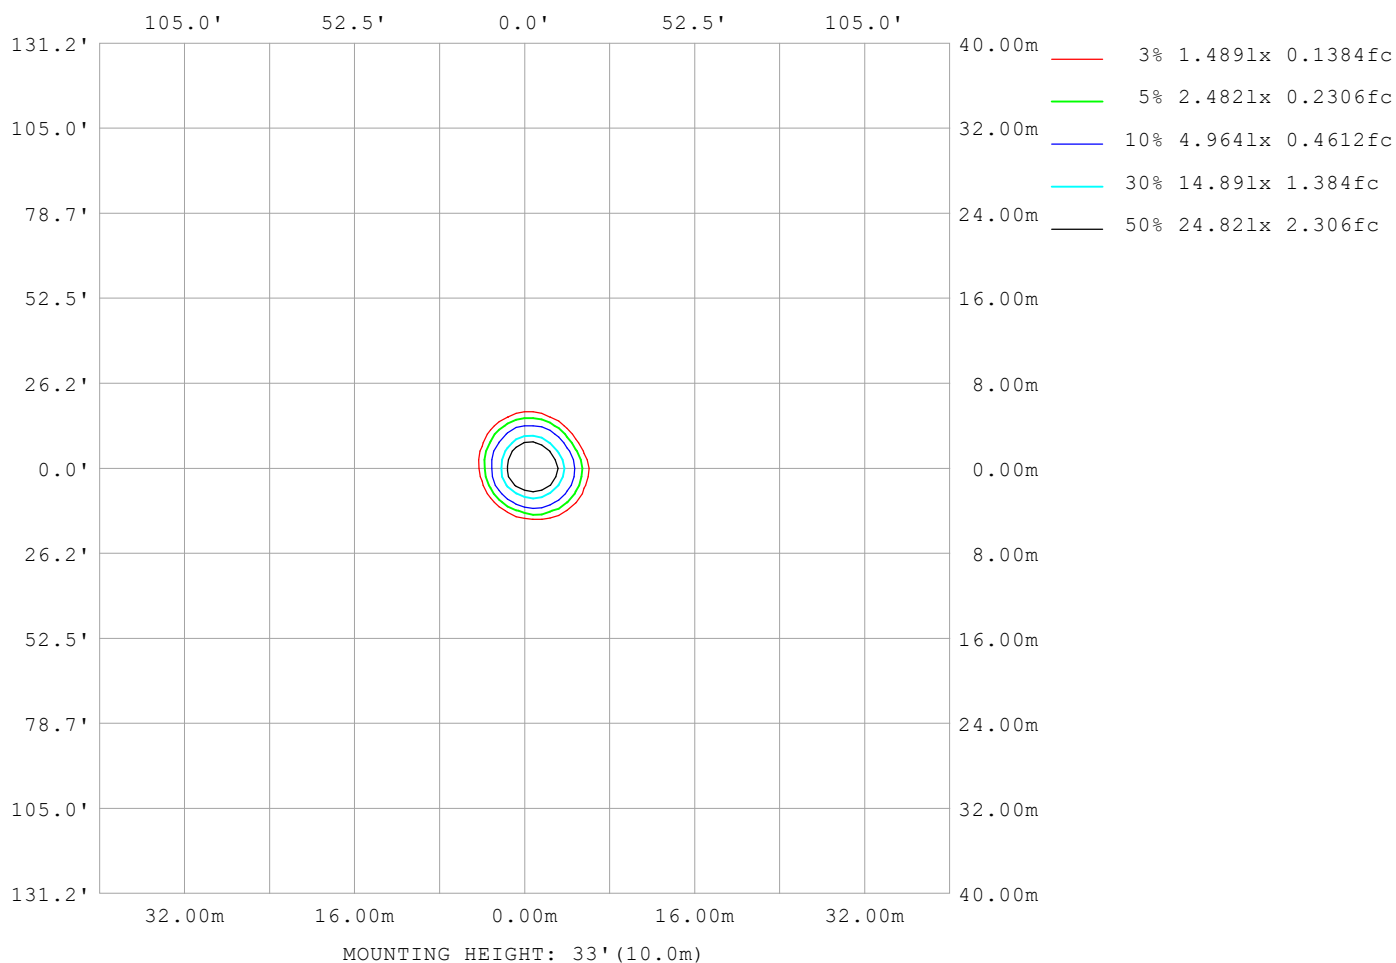

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: YAO
Test Date: 2025-05-14

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.485
Humidity: 65.0%
Test Distance: 9.830m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.33V I:0.1631A P:13.413W PF:0.3734 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1208.01x1 lm		
NAME: 6646	TYPE:	WEIGHT: 0
SPEC.: 12W	DIM.: 0	SERIAL No.: 1
MFR.: NORDECOR	SUR.:	Shielding Angle: 0


AvgL	cd/m2
L_0~180 (65) av	1697
L_0~180 (75) av	1229
L_0~180 (85) av	768
L_90~270 (65) av	1628
L_90~270 (75) av	1066
L_90~270 (85) av	225
L_45 (65) av	1610
L_45 (75) av	1104
L_45 (85) av	392

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:YAO
Test Date:2025-05-14

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.485
Humidity:65.0%
Test Distance:9.830m [K=1.0000]
Remarks:

Planar Illuminance Curve

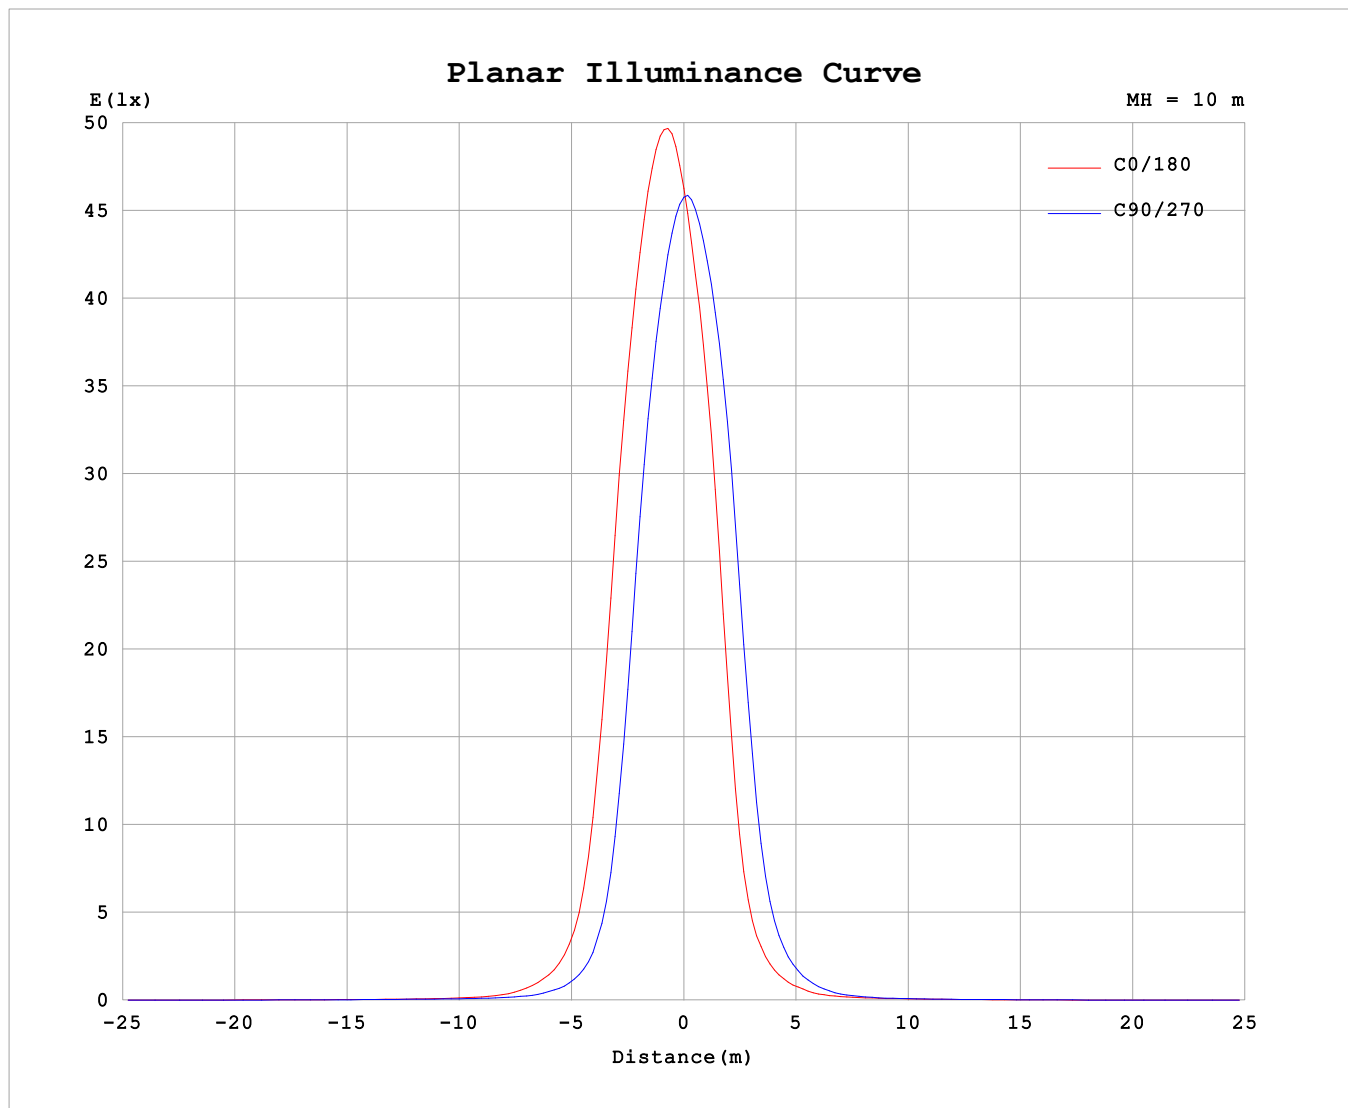

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: YAO
Test Date: 2025-05-14

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.485
Humidity: 65.0%
Test Distance: 9.830m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.33V I:0.1631A P:13.413W PF:0.3734 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1208.01x1 lm		
NAME: 6646	TYPE:	WEIGHT: 0
SPEC.: 12W	DIM.: 0	SERIAL No.: 1
MFR.: NORDECOR	SUR.:	Shielding Angle: 0

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	4586	4586	4586	4586	4586	4586	4586	4586	4586	4586	4586	4586						
5	4973	4852	4502	4152	3921	3829	3742	3864	4123	4387	4601	4743						
10	4618	4439	3853	3203	2750	2561	2284	2551	3148	3711	4031	4209						
15	3634	3320	2449	1623	1161	984	806	1019	1536	2252	2805	3127						
20	1909	1597	964	529	353	307	297	391	572	854	1173	1450						
25	666	576	344	198	145	131	137	181	254	333	408	456						
30	267	247	154	92.5	76.9	67.4	65.6	82.5	115	147	166	182						
35	126	112	69.4	45.8	41.2	37.6	38.6	43.8	53.1	65.0	77.9	86.3						
40	57.8	52.6	39.4	31.5	29.0	27.8	28.5	29.9	33.1	36.9	41.5	43.8						
45	36.2	33.9	28.6	25.6	24.4	24.0	23.9	24.4	25.8	26.1	28.0	29.3						
50	28.1	27.1	25.0	23.2	21.5	21.5	20.3	20.9	22.4	22.5	22.7	23.8						
55	24.8	24.0	22.5	20.5	18.4	18.4	16.5	16.9	18.8	19.4	19.8	20.8						
60	21.8	20.6	19.2	17.3	15.2	15.0	12.7	13.2	15.0	16.1	16.3	17.6						
65	18.2	17.1	15.5	13.3	11.3	10.9	8.70	9.33	11.0	12.4	13.1	14.2						
70	14.0	13.0	11.2	9.18	7.46	6.96	5.39	5.92	7.29	8.57	9.47	10.4						
75	9.71	8.85	6.76	5.09	3.93	3.40	2.20	2.89	4.01	5.25	6.11	7.04						
80	5.73	4.90	2.81	1.91	1.47	1.22	0.67	1.00	1.39	1.95	2.50	3.91						
85	2.43	1.69	0.76	0.34	0.26	0.33	0.08	0.08	0.09	0.39	0.74	1.34						
90	0.53	0.36	0.26	0.28	0.24	0.23	0.09	0.08	0.09	0.08	0.07	0.07						
95	0.25	0.21	0.18	0.21	0.26	0.26	0.09	0.08	0.09	0.08	0.07	0.07						
100	0.08	0.06	0.05	0.06	0.27	0.07	0.09	0.09	0.09	0.08	0.07	0.07						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:YAO
Test Date:2025-05-14

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.485
Humidity:65.0%
Test Distance:9.830m [K=1.0000]
Remarks: