


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.35V I:0.1951A P:24.409W PF:0.5677 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1919.03x1 lm		
NAME: 6649	TYPE:	WEIGHT: 0
SPEC.: 24W	DIM.: 0	SERIAL No.: 1
MFR.: NORDECOR	SUR.:	Shielding Angle: 0

DATA OF LAMP		PHOTOMETRIC DATA Eff: 78.62 lm/W			
MODEL		Imax (cd)	6346	S/MH(C0/180)	0.42
NOMINAL POWER(W)	24.9985	LOR(%)	100.0	S/MH(C90/270)	0.54
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	1919.0	η UP,DN(C0-180)	0.0,42.3
NOMINAL FLUX(lm)	1919.03	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,57.7
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	220	η down (%)	100.0	CIBSE SHR MAX	0.30

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

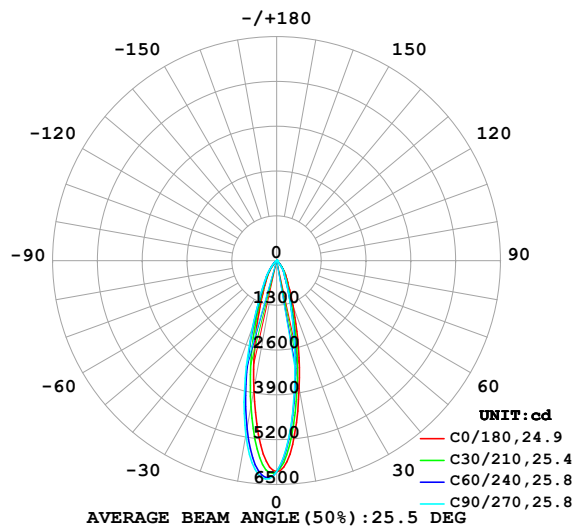

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

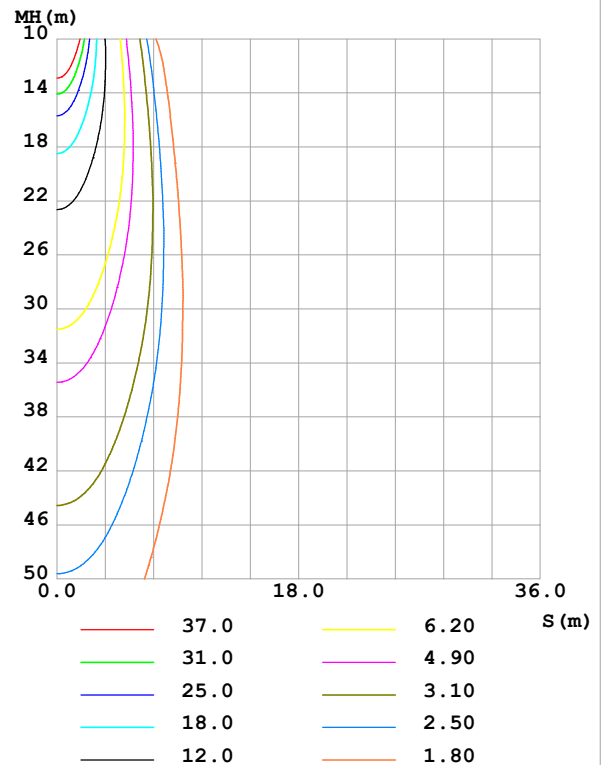

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:YAO
Test Date:2025-05-14

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.485
Humidity:65.0%
Test Distance:9.830m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	3771	3330	3095	3318	3826	4641	5162	4513	0- 10	469.6	469.6	24.5,24.5
20	1402	1124	1033	1153	1427	1824	2047	1824	10- 20	698.0	1168	60.8,60.8
30	568.3	473.3	444.1	485.6	573.6	651.7	709.0	667.0	20- 30	415.7	1583	82.5,82.5
40	213.5	195.4	161.9	176.6	159.5	235.5	254.4	264.4	30- 40	236.6	1820	94.8,94.8
50	29.49	35.20	26.15	30.66	18.12	42.44	30.63	51.26	40- 50	77.98	1898	98.9,98.9
60	10.55	11.47	9.494	9.350	5.301	7.396	7.171	9.013	50- 60	15.73	1914	99.7,99.7
70	1.765	1.699	1.357	1.458	0.0559	0.0917	0.0750	0.4164	60- 70	3.933	1918	99.9,99.9
80	0.9138	0.7163	0.6002	0.7118	0.0559	0.0563	0.0563	0.0562	70- 80	0.6065	1918	100,100
90	0.5841	0.5472	0.5066	0.5513	0.0870	0.0688	0.0563	0.0687	80- 90	0.3580	1919	100,100
100	0.6649	0.7504	0.7629	0.7711	0.0498	0.1163	0.1188	0.0943	90-100	0.3804	1919	100,100
110	0	0	0	0	0	0	0	0	100-110	0.0235	1919	100,100
120	0	0	0	0	0	0	0	0	110-120	0	1919	100,100
130	0	0	0	0	0	0	0	0	120-130	0	1919	100,100
140	0	0	0	0	0	0	0	0	130-140	0	1919	100,100
150	0	0	0	0	0	0	0	0	140-150	0	1919	100,100
160	0	0	0	0	0	0	0	0	150-160	0	1919	100,100
170	0	0	0	0	0	0	0	0	160-170	0	1919	100,100
180	0	0	0	0	0	0	0	0	170-180	0	1919	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1874 lm

%lum = 97.7%

%lamp = 97.7%

Conical surface Flux(130deg): 1916.7 lm

%lum = 99.9%


%lamp = 99.9%

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:YAO
 Test Date:2025-05-14

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.485
 Humidity:65.0%
 Test Distance:9.830m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.35V I:0.1951A P:24.409W PF:0.5677 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1919.03x1 lm		
NAME: 6649	TYPE:	WEIGHT: 0
SPEC.: 24W	DIM.: 0	SERIAL No.: 1
MFR.: NORDECOR	SUR.:	Shielding Angle: 0

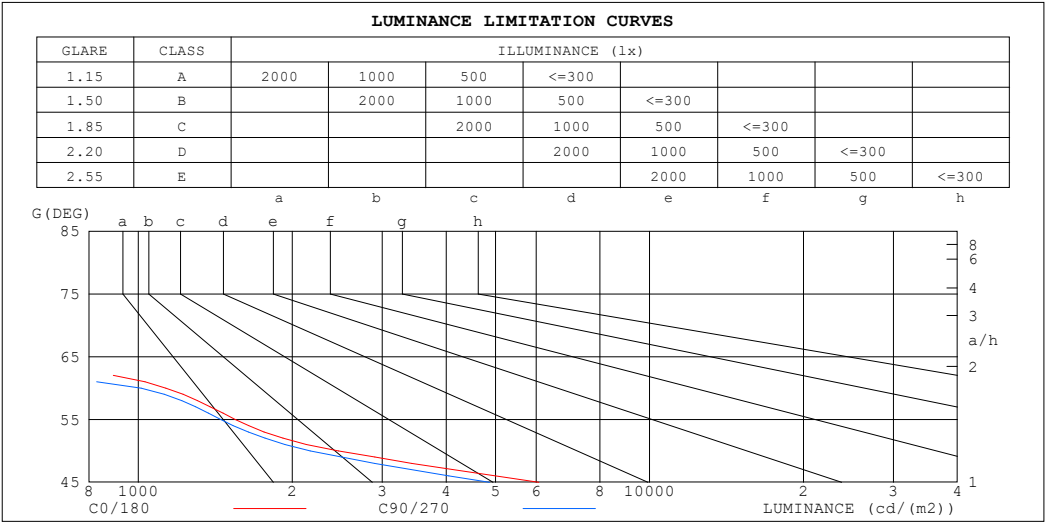

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	413	327
80	282	184
75	269	185
70	277	212
65	526	406
60	1132	1012
55	1548	1450
50	2462	2169
45	6075	4860


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:YAO
Test Date:2025-05-14

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.485
Humidity:65.0%
Test Distance:9.830m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.35V I:0.1951A P:24.409W PF:0.5677 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1919.03x1 lm		
NAME: 6649	TYPE:	WEIGHT: 0
SPEC.: 24W	DIM.: 0	SERIAL No.: 1
MFR.: NORDECOR	SUR.:	Shielding Angle: 0

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.00	.99	.98	.97	.95
2.0	1.05	1.02	.99	1.04	1.01	.98	1.01	.98	.96	.98	.96	.94	.95	.93	.92	.90
3.0	.00	.95	.92	.98	.94	.91	.96	.93	.90	.93	.91	.89	.91	.89	.87	.86
4.0	.95	.90	.86	.94	.89	.86	.91	.88	.85	.90	.86	.84	.88	.85	.83	.82
5.0	.90	.85	.81	.89	.85	.81	.87	.83	.80	.86	.82	.80	.84	.81	.79	.78
6.0	.86	.81	.77	.85	.80	.77	.84	.80	.76	.82	.79	.76	.81	.78	.75	.74
7.0	.82	.77	.73	.81	.77	.73	.80	.76	.73	.79	.75	.73	.78	.75	.72	.71
8.0	.79	.74	.70	.78	.73	.70	.77	.73	.70	.76	.72	.69	.75	.72	.69	.68
9.0	.75	.71	.67	.75	.70	.67	.74	.70	.67	.73	.69	.67	.73	.69	.66	.65
10.0	.73	.68	.64	.72	.68	.64	.71	.67	.64	.71	.67	.64	.70	.66	.64	.63

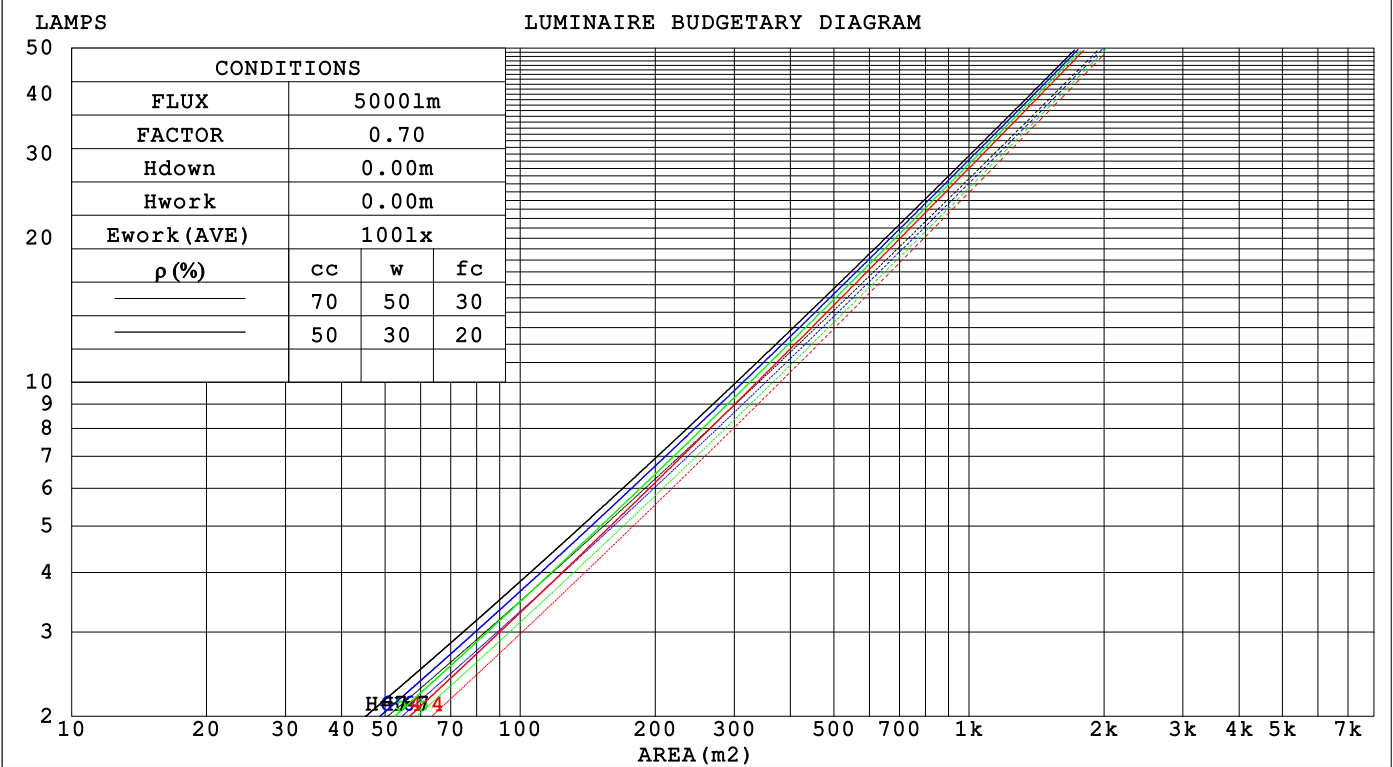

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:YAO
Test Date:2025-05-14

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.485
Humidity:65.0%
Test Distance:9.830m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:220.35V I:0.1951A P:24.409W PF:0.5677 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1919.03x1 lm		
NAME: 6649	TYPE:	WEIGHT: 0
SPEC.: 24W	DIM.: 0	SERIAL No.: 1
MFR.: NORDECOR	SUR.:	Shielding Angle: 0

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.156	.089	.028	.150	.085	.027	.137	.079	.025	.126	.072	.023	.115	.067	.021															
2.0	.148	.081	.025	.142	.078	.024	.132	.073	.023	.122	.068	.021	.113	.064	.020															
3.0	.139	.074	.022	.135	.072	.022	.126	.068	.021	.118	.065	.020	.110	.061	.019															
4.0	.132	.069	.020	.128	.067	.020	.120	.064	.019	.114	.061	.018	.107	.058	.018															
5.0	.125	.064	.018	.122	.063	.018	.115	.060	.018	.109	.058	.017	.104	.055	.017															
6.0	.119	.060	.017	.116	.059	.017	.110	.057	.016	.105	.055	.016	.100	.053	.016															
7.0	.114	.056	.016	.111	.055	.016	.106	.054	.015	.101	.052	.015	.097	.050	.015															
8.0	.108	.053	.015	.106	.052	.015	.102	.051	.015	.098	.049	.014	.094	.048	.014															
9.0	.104	.050	.014	.102	.050	.014	.098	.048	.014	.094	.047	.014	.091	.046	.013															
10.0	.099	.048	.013	.098	.047	.013	.094	.046	.013	.091	.045	.013	.088	.044	.013															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.170	.158	.147	.145	.135	.126	.099	.093	.087	.057	.054	.051	.018	.017	.016	
2.0	.153	.133	.116	.131	.114	.100	.090	.079	.070	.052	.046	.041	.017	.015	.013	
3.0	.139	.114	.093	.120	.098	.081	.082	.068	.057	.047	.040	.033	.015	.013	.011	
4.0	.128	.099	.076	.110	.085	.066	.076	.059	.046	.044	.035	.027	.014	.011	.009	
5.0	.119	.087	.063	.102	.075	.055	.070	.052	.039	.041	.031	.023	.013	.010	.008	
6.0	.110	.077	.053	.095	.067	.046	.065	.047	.033	.038	.027	.019	.012	.009	.006	
7.0	.103	.069	.045	.089	.060	.039	.061	.042	.028	.036	.025	.017	.012	.008	.005	
8.0	.097	.063	.039	.084	.054	.034	.058	.038	.024	.034	.022	.014	.011	.007	.005	
9.0	.092	.057	.034	.079	.050	.029	.055	.035	.021	.032	.021	.012	.010	.007	.004	
10.0	.087	.053	.030	.075	.046	.026	.052	.032	.018	.030	.019	.011	.010	.006	.004	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:YAO
Test Date:2025-05-14

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.485
Humidity:65.0%
Test Distance:9.830m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.35V I:0.1951A P:24.409W PF:0.5677 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1919.03x1 lm										
NAME: 6649					TYPE:			WEIGHT: 0		
SPEC.: 24W					DIM.: 0			SERIAL No.: 1		
MFR.: NORDECOR					SUR.:			Shielding Angle: 0		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	13.1	13.9	13.3	14.1	14.2	12.0	12.8	12.2	13.0	13.1
3H	13.0	13.7	13.2	13.9	14.1	11.9	12.6	12.1	12.8	13.0
4H	12.9	13.6	13.2	13.8	14.0	11.8	12.5	12.0	12.7	12.9
6H	12.8	13.5	13.1	13.7	13.9	11.7	12.3	12.0	12.6	12.8
8H	12.8	13.4	13.1	13.7	13.9	11.6	12.3	11.9	12.5	12.8
12H	12.7	13.3	13.0	13.6	13.9	11.6	12.2	11.9	12.5	12.7
4H 2H	12.9	13.6	13.2	13.8	14.0	11.8	12.5	12.1	12.7	12.9
3H	12.8	13.4	13.1	13.6	13.9	11.6	12.2	12.0	12.5	12.8
4H	12.7	13.2	13.0	13.5	13.8	11.6	12.1	11.9	12.4	12.7
6H	12.6	13.1	12.9	13.4	13.7	11.5	11.9	11.8	12.3	12.6
8H	12.5	13.0	12.9	13.3	13.7	11.4	11.9	11.8	12.2	12.6
12H	12.5	12.9	12.9	13.3	13.6	11.4	11.8	11.8	12.1	12.5
8H 4H	12.5	13.0	12.9	13.3	13.7	11.4	11.9	11.8	12.2	12.6
6H	12.4	12.8	12.8	13.2	13.6	11.3	11.7	11.7	12.1	12.5
8H	12.4	12.7	12.8	13.1	13.5	11.3	11.6	11.7	12.0	12.4
12H	12.3	12.6	12.8	13.0	13.5	11.2	11.5	11.7	11.9	12.4
12H 4H	12.5	12.9	12.9	13.2	13.6	11.4	11.8	11.8	12.1	12.5
6H	12.4	12.7	12.8	13.1	13.5	11.2	11.6	11.7	12.0	12.4
8H	12.3	12.6	12.8	13.0	13.5	11.2	11.5	11.7	11.9	12.4
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.2 / - 9.9					+ 2.7 / - 9.0				
1.5H	+ 5.4 / - 7.9					+ 4.8 / - 6.9				
2.0H	+ 5.5 / - 4.6					+ 5.1 / - 4.6				

CIE Pub.117, 1919 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 2.3$)
 Area: 0.018725 m²

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:YAO
 Test Date:2025-05-14

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.485
 Humidity:65.0%
 Test Distance:9.830m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.35V I:0.1951A P:24.409W PF:0.5677 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1919.03x1 lm		
NAME: 6649	TYPE:	WEIGHT: 0
SPEC.: 24W	DIM.: 0	SERIAL No.: 1
MFR.: NORDECOR	SUR.:	Shielding Angle: 0


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	88	82	78	88	82	78	87	82	78	75
0.80	96	90	86	95	90	86	94	89	86	82
1.00	100	95	91	99	94	91	98	94	90	86
1.25	104	99	96	103	98	95	101	97	94	90
1.50	107	102	99	105	101	98	103	100	97	93
2.00	109	105	102	108	104	101	105	102	100	95
2.50	111	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	105	103	97
4.00	114	111	109	112	110	108	108	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: YAO
 Test Date: 2025-05-14

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.485
 Humidity: 65.0%
 Test Distance: 9.830m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.35V I:0.1951A P:24.409W PF:0.5677 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1919.03x1 lm		
NAME: 6649	TYPE:	WEIGHT: 0
SPEC.: 24W	DIM.: 0	SERIAL No.: 1
MFR.: NORDECOR	SUR.:	Shielding Angle: 0

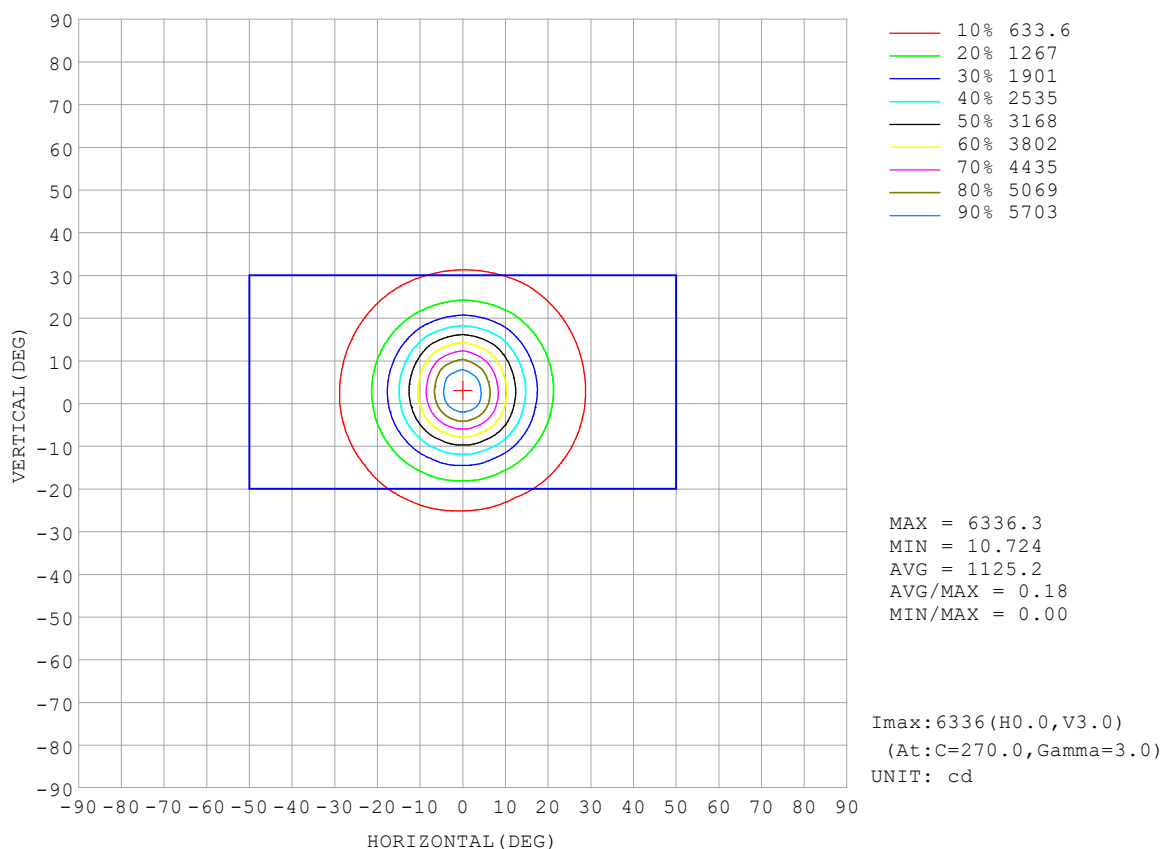


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: YAO
Test Date: 2025-05-14

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.485
Humidity: 65.0%
Test Distance: 9.830m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.35V I:0.1951A P:24.409W PF:0.5677 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1919.03x1 lm		
NAME: 6649	TYPE:	WEIGHT: 0
SPEC.: 24W	DIM.: 0	SERIAL No.: 1
MFR.: NORDECOR	SUR.:	Shielding Angle: 0

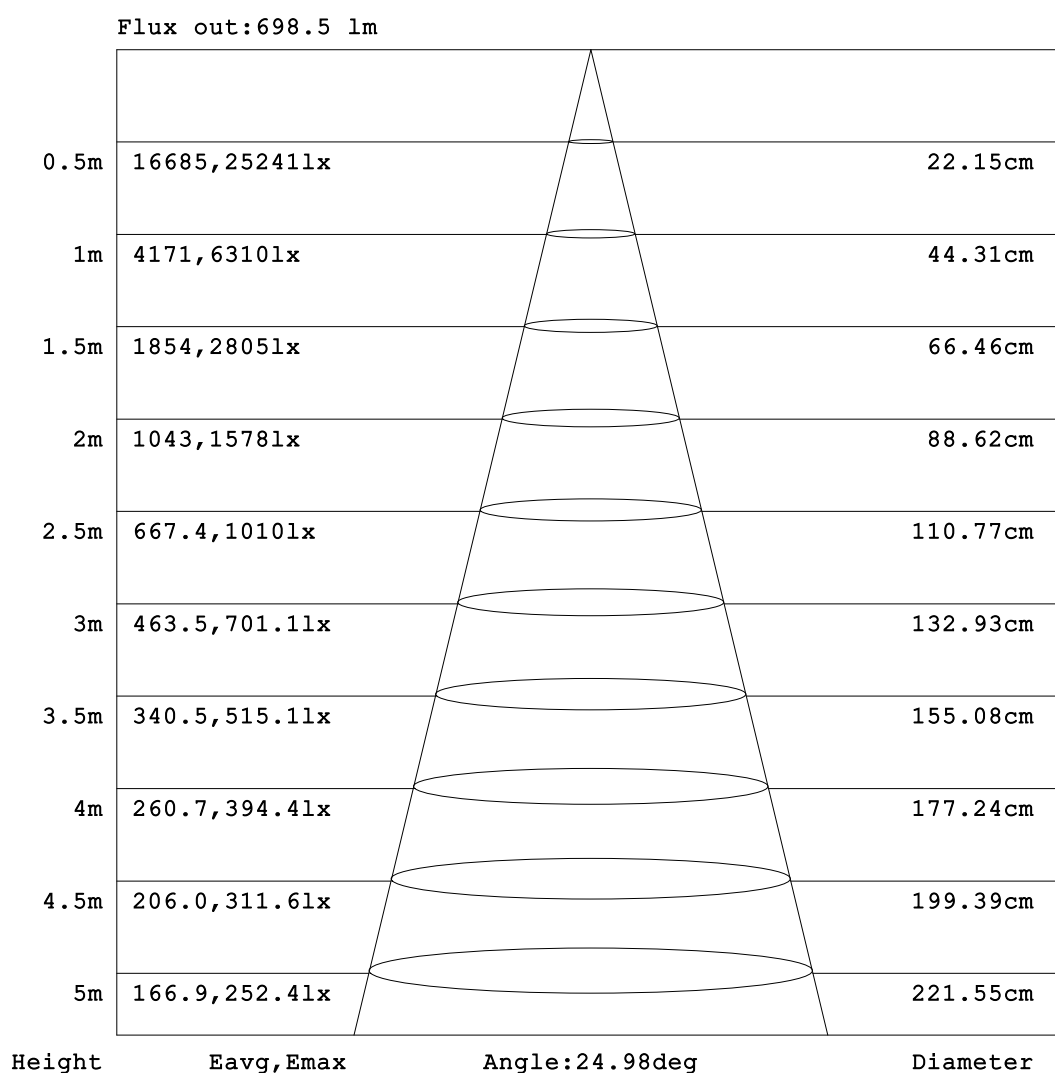


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:YAO
Test Date:2025-05-14

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.485
Humidity:65.0%
Test Distance:9.830m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.35V I:0.1951A P:24.409W PF:0.5677 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1919.03x1 lm		
NAME: 6649	TYPE:	WEIGHT: 0
SPEC.: 24W	DIM.: 0	SERIAL No.: 1
MFR.: NORDECOR	SUR.:	Shielding Angle: 0

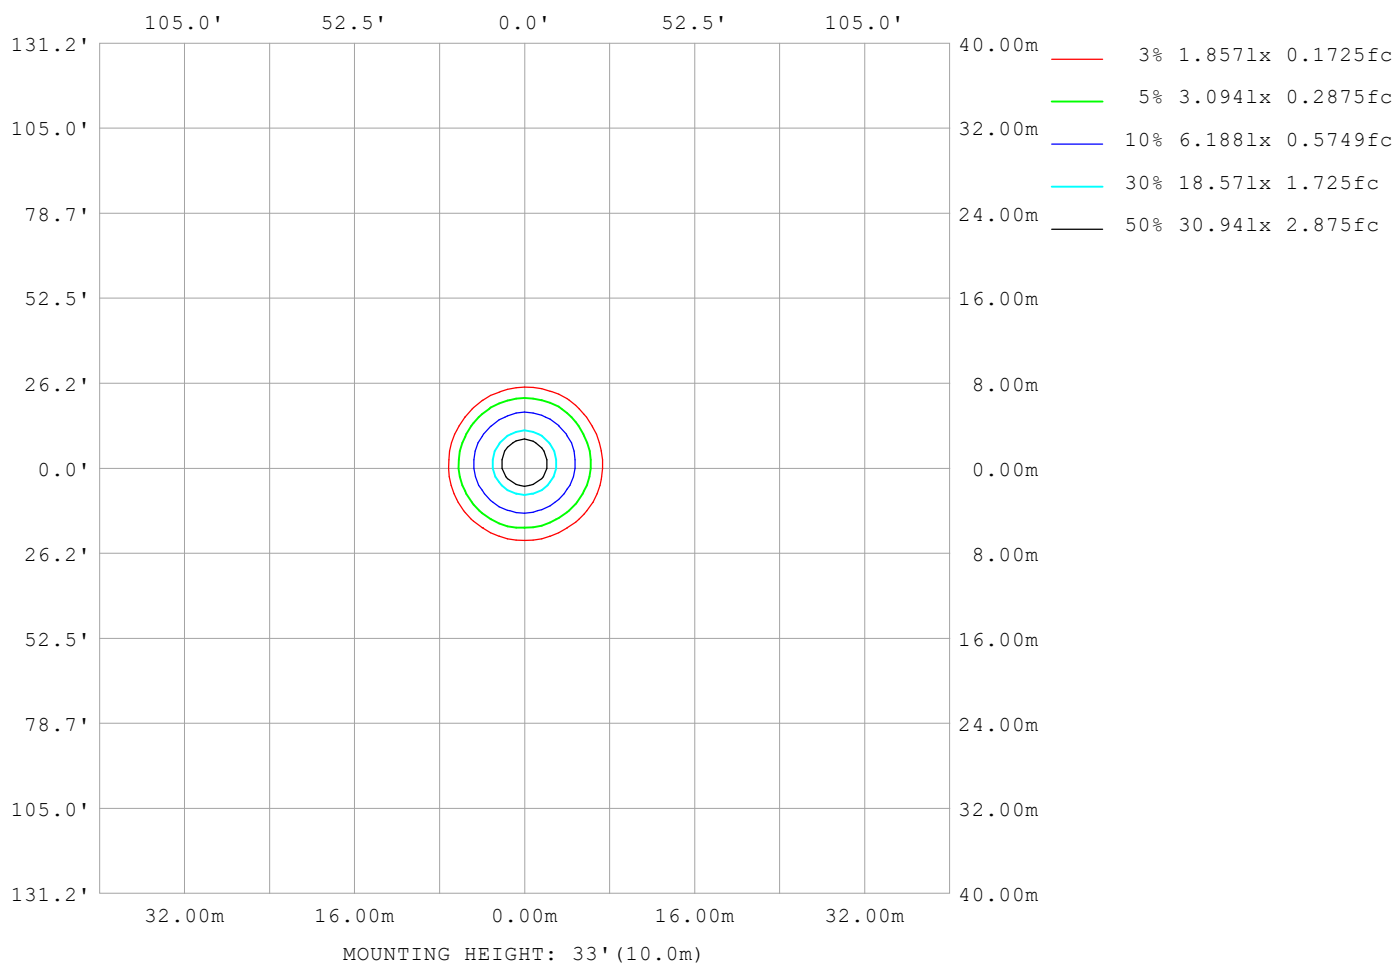

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:YAO
Test Date:2025-05-14

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.485
Humidity:65.0%
Test Distance:9.830m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.35V I:0.1951A P:24.409W PF:0.5677 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1919.03x1 lm		
NAME: 6649	TYPE:	WEIGHT: 0
SPEC.: 24W	DIM.: 0	SERIAL No.: 1
MFR.: NORDECOR	SUR.:	Shielding Angle: 0


AvgL	cd/m2
L_0~180 (65) av	317
L_0~180 (75) av	140
L_0~180 (85) av	227
L_90~270 (65) av	309
L_90~270 (75) av	99
L_90~270 (85) av	181
L_45 (65) av	535
L_45 (75) av	113
L_45 (85) av	190

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:YAO
Test Date:2025-05-14

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.485
Humidity:65.0%
Test Distance:9.830m [K=1.0000]
Remarks:

Planar Illuminance Curve

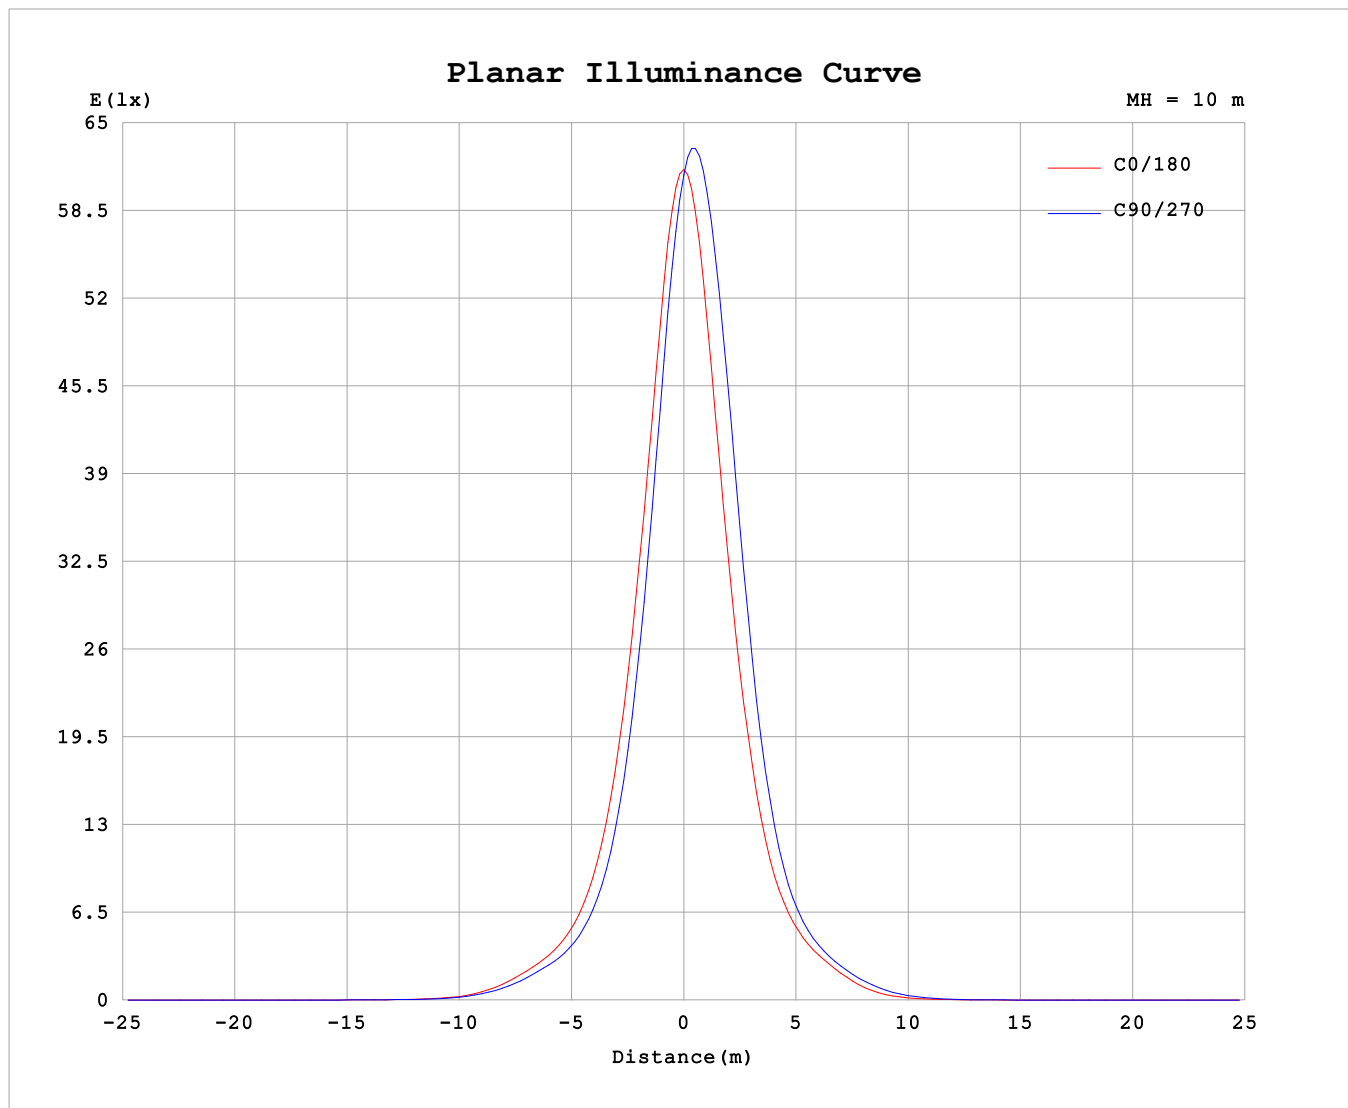

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: YAO
Test Date: 2025-05-14

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.485
Humidity: 65.0%
Test Distance: 9.830m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.35V I:0.1951A P:24.409W PF:0.5677 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1919.03x1 lm		
NAME: 6649	TYPE:	WEIGHT: 0
SPEC.: 24W	DIM.: 0	SERIAL No.: 1
MFR.: NORDECOR	SUR.:	Shielding Angle: 0

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	6125	6125	6125	6125	6125	6125	6125	6125	6125	6125	6125	6125						
5	5357	5084	4857	4804	4857	5071	5365	5739	6121	6221	6060	5692						
10	3771	3482	3178	3095	3170	3466	3826	4315	4970	5162	4810	4216						
15	2374	2109	1856	1807	1877	2109	2427	2834	3373	3536	3303	2779						
20	1402	1191	1057	1033	1088	1218	1427	1686	1962	2047	1971	1678						
25	853	726	643	644	679	746	869	975	1085	1156	1120	988						
30	568	498	448	444	465	507	574	624	679	709	700	634						
35	395	361	314	304	310	339	365	404	446	464	469	426						
40	213	209	181	162	173	180	159	215	256	254	281	248						
45	80.1	95.8	83.9	64.5	84.8	73.3	51.2	91.3	129	99.7	147	109						
50	29.5	38.0	32.4	26.2	35.4	25.9	18.1	35.1	49.8	30.6	62.6	39.9						
55	16.5	18.7	17.3	15.6	16.2	13.8	10.7	13.1	15.1	12.9	21.1	16.4						
60	10.6	11.7	11.3	9.49	9.88	8.82	5.30	7.09	7.70	7.17	8.80	9.22						
65	4.14	6.13	4.78	3.22	4.37	3.64	0.87	2.42	2.81	1.68	4.19	3.93						
70	1.77	1.92	1.48	1.36	1.45	1.47	0.06	0.12	0.06	0.08	0.43	0.40						
75	1.30	1.07	1.02	0.90	1.01	1.04	0.06	0.06	0.06	0.06	0.06	0.06						
80	0.91	0.72	0.71	0.60	0.71	0.72	0.06	0.06	0.06	0.06	0.06	0.06						
85	0.67	0.58	0.55	0.53	0.56	0.58	0.07	0.06	0.07	0.06	0.06	0.06						
90	0.58	0.56	0.53	0.51	0.54	0.56	0.09	0.06	0.08	0.06	0.08	0.06						
95	0.59	0.60	0.55	0.61	0.56	0.61	0.13	0.07	0.12	0.06	0.12	0.06						
100	0.66	0.77	0.73	0.76	0.76	0.78	0.05	0.17	0.06	0.12	0.06	0.13						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:YAO
Test Date:2025-05-14

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.485
Humidity:65.0%
Test Distance:9.830m [K=1.0000]
Remarks: