


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.35V I:0.1856A P:23.214W PF:0.5675 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:952.247x1 lm		
NAME: 6651	TYPE:	WEIGHT: 0
SPEC.: 24W	DIM.: 0	SERIAL No.: 1
MFR.: NORDECOR	SUR.: 535*35	Shielding Angle: 0

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 41.02 lm/W
MODEL		Imax (cd)	379.4	S/MH(C0/180)	1.18	
NOMINAL POWER(W)	23.9118	LOR(%)	100.0	S/MH(C90/270)	1.17	
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	952.25	η UP,DN(C0-180)	0.1,49.8	
NOMINAL FLUX(lm)	952.247	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,50.1	
LAMPS INSIDE	1	η up (%)	0.1	CIBSE SHR NOM	1.25	
TEST VOLTAGE(V)	220	η down (%)	99.9	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

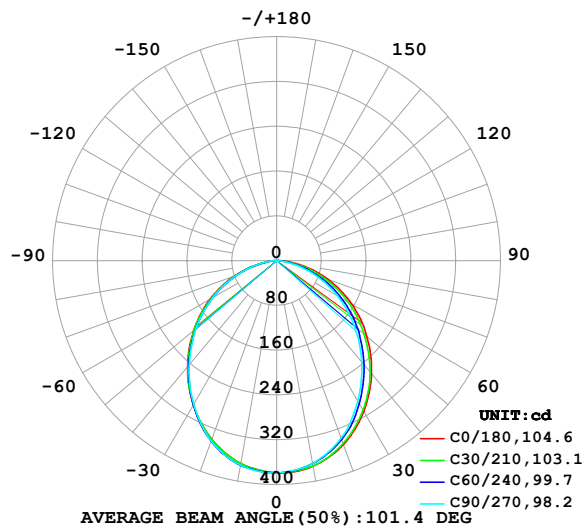

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

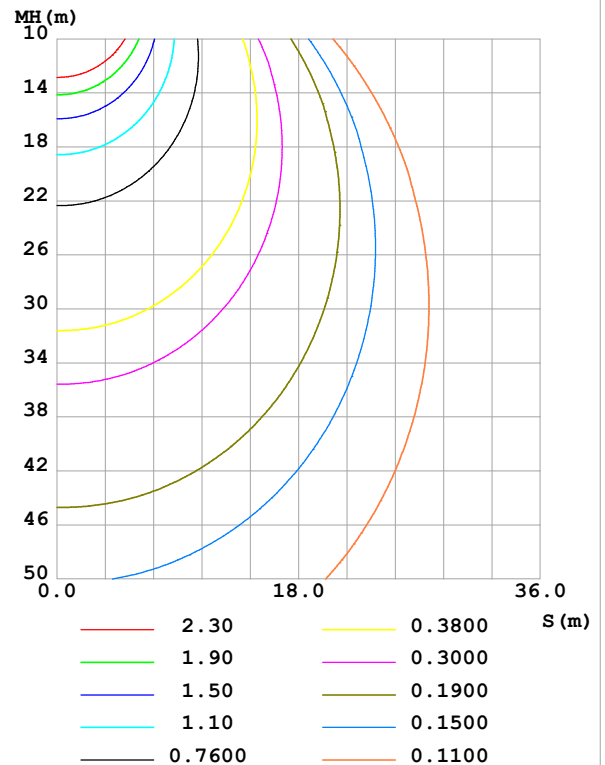

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:YAO
Test Date:2025-05-14

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.485
Humidity:65.0%
Test Distance:9.830m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	373.0	370.5	368.0	366.2	368.2	369.7	371.0	373.6	0- 10	35.74	35.74	3.75,3.75
20	349.5	343.7	337.4	335.8	339.3	341.1	342.4	349.2	10- 20	100.9	136.7	14.4,14.4
30	311.5	301.9	289.9	292.1	297.6	297.7	296.6	308.7	20- 30	148.5	285.2	29.9,29.9
40	263.7	251.3	236.6	240.9	247.8	245.6	243.3	258.0	30- 40	171.9	457.0	48,48
50	210.1	196.6	181.0	186.3	193.5	190.4	188.3	202.3	40- 50	170.7	627.7	65.9,65.9
60	154.9	140.1	125.4	130.0	137.1	133.3	131.4	145.5	50- 60	148.1	775.7	81.5,81.5
70	96.89	83.37	70.79	73.73	79.88	76.56	75.70	87.78	60- 70	107.6	883.3	92.8,92.8
80	40.71	30.26	21.87	22.64	26.76	24.75	25.25	33.43	70- 80	56.43	939.8	98.7,98.7
90	2.133	0.9866	0.9803	1.093	0.7297	0.6794	0.5808	0.7083	80- 90	11.38	951.2	99.9,99.9
100	1.403	1.311	0.4920	0.9503	0.4066	0.9802	0.8741	0.8809	90-100	1.037	952.2	100,100
110	0	0	0	0	0	0	0	0	100-110	0.0578	952.2	100,100
120	0	0	0	0	0	0	0	0	110-120	0	952.2	100,100
130	0	0	0	0	0	0	0	0	120-130	0	952.2	100,100
140	0	0	0	0	0	0	0	0	130-140	0	952.2	100,100
150	0	0	0	0	0	0	0	0	140-150	0	952.2	100,100
160	0	0	0	0	0	0	0	0	150-160	0	952.2	100,100
170	0	0	0	0	0	0	0	0	160-170	0	952.2	100,100
180	0	0	0	0	0	0	0	0	170-180	0	952.2	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 543.91 lm

%lum = 57.1%

%lamp = 57.1%

Conical surface Flux(130deg): 835.47 lm

%lum = 87.7%


%lamp = 87.7%

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:YAO
 Test Date:2025-05-14

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.485
 Humidity:65.0%
 Test Distance:9.830m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.35V I:0.1856A P:23.214W PF:0.5675 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:952.247x1 lm		
NAME: 6651	TYPE:	WEIGHT: 0
SPEC.: 24W	DIM.: 0	SERIAL No.: 1
MFR.: NORDECOR	SUR.: 535*35	Shielding Angle: 0

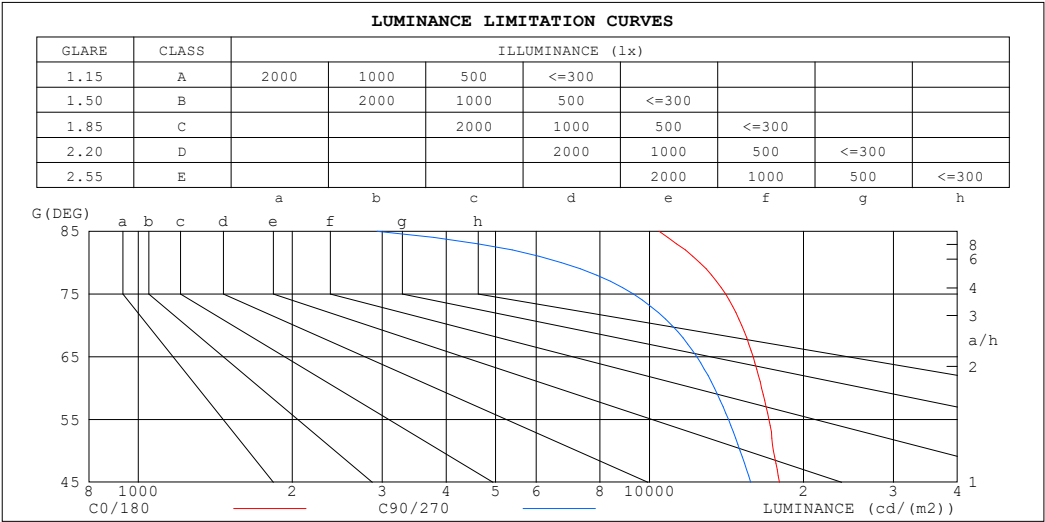

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	10437	2933
80	12536	6725
75	14084	9297
70	15147	11053
65	15947	12369
60	16568	13394
55	17116	14269
50	17481	15040
45	17955	15780


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:YAO
Test Date:2025-05-14

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.485
Humidity:65.0%
Test Distance:9.830m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.35V I:0.1856A P:23.214W PF:0.5675 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:952.247x1 lm		
NAME: 6651	TYPE:	WEIGHT: 0
SPEC.: 24W	DIM.: 0	SERIAL No.: 1
MFR.: NORDECOR	SUR.: 535*35	Shielding Angle: 0

pcc	80%			70%			50%			30%			10%			0
p _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
p _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

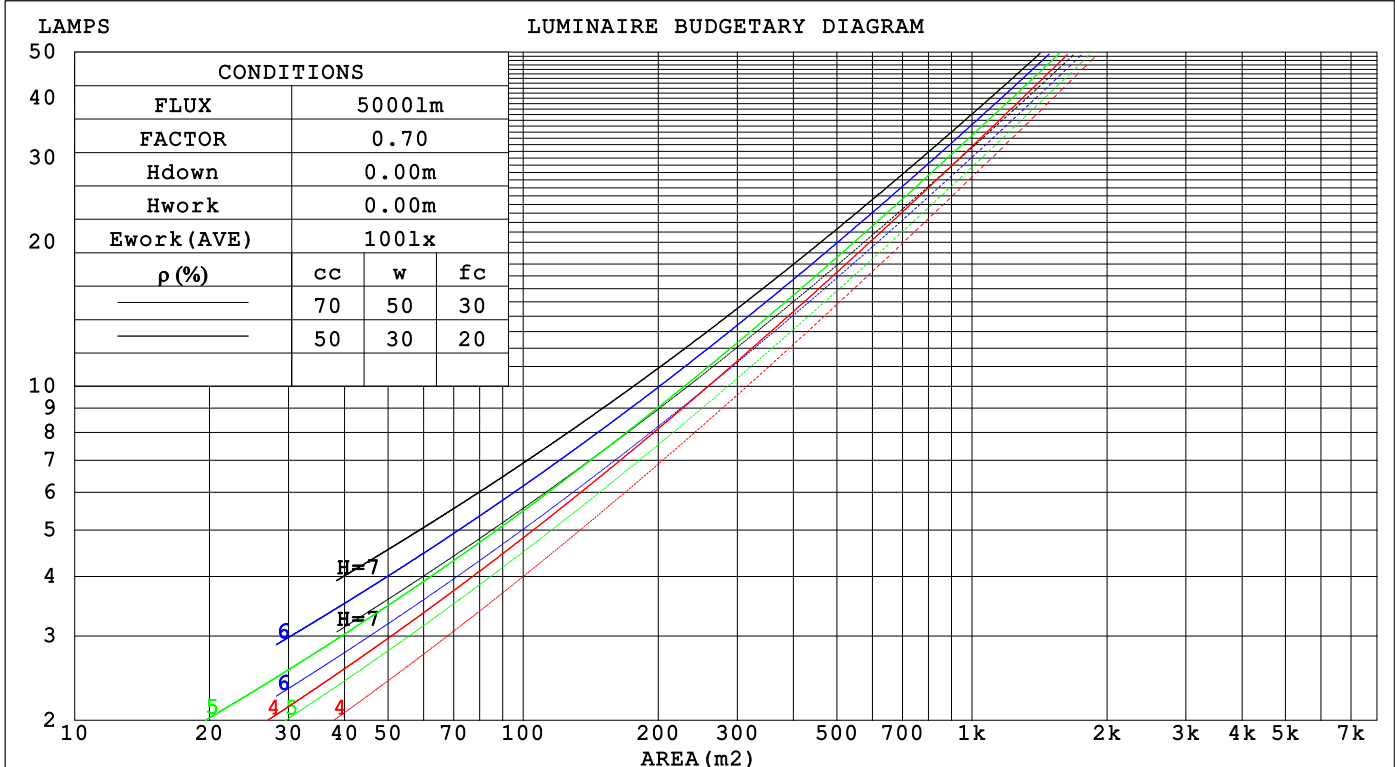

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:YAO
Test Date:2025-05-14

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.485
Humidity:65.0%
Test Distance:9.830m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:220.35V I:0.1856A P:23.214W PF:0.5675 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:952.247x1 lm		
NAME: 6651	TYPE:	WEIGHT: 0
SPEC.: 24W	DIM.: 0	SERIAL No.: 1
MFR.: NORDECOR	SUR.: 535*35	Shielding Angle: 0

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.292	.166	.053	.285	.163	.052	.272	.156	.050	.260	.150	.048	.249	.144	.046															
2.0	.279	.153	.047	.272	.150	.046	.261	.145	.045	.250	.140	.044	.240	.136	.043															
3.0	.260	.138	.041	.254	.136	.041	.244	.132	.040	.234	.128	.039	.226	.125	.039															
4.0	.241	.125	.037	.236	.123	.037	.227	.120	.036	.218	.117	.035	.211	.114	.035															
5.0	.223	.114	.033	.219	.113	.033	.211	.110	.032	.204	.107	.032	.197	.105	.032															
6.0	.208	.104	.030	.204	.103	.030	.197	.101	.029	.190	.099	.029	.184	.097	.029															
7.0	.194	.096	.027	.191	.095	.027	.184	.093	.027	.178	.091	.027	.172	.090	.026															
8.0	.182	.089	.025	.179	.088	.025	.173	.086	.025	.167	.085	.024	.162	.083	.024															
9.0	.170	.082	.023	.168	.082	.023	.163	.080	.023	.158	.079	.023	.153	.078	.022															
10.0	.161	.077	.021	.158	.076	.021	.153	.075	.021	.149	.074	.021	.145	.073	.021															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.191	.191	.191	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.180	.157	.137	.154	.135	.118	.105	.093	.081	.061	.054	.047	.019	.017	.015	
2.0	.171	.133	.100	.147	.114	.087	.101	.079	.061	.058	.046	.036	.019	.015	.012	
3.0	.163	.115	.077	.140	.099	.066	.096	.069	.047	.056	.040	.027	.018	.013	.009	
4.0	.156	.102	.060	.134	.088	.053	.092	.061	.037	.053	.036	.022	.017	.012	.007	
5.0	.148	.091	.049	.127	.079	.043	.088	.055	.030	.051	.032	.018	.016	.011	.006	
6.0	.141	.083	.041	.121	.072	.036	.084	.050	.025	.049	.030	.015	.016	.010	.005	
7.0	.134	.076	.035	.116	.066	.030	.080	.046	.021	.046	.027	.013	.015	.009	.004	
8.0	.128	.070	.030	.110	.061	.026	.076	.043	.019	.044	.025	.011	.014	.008	.004	
9.0	.122	.065	.027	.105	.056	.023	.073	.040	.016	.042	.023	.010	.014	.008	.003	
10.0	.117	.061	.024	.101	.053	.021	.070	.037	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:YAO
Test Date:2025-05-14

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.485
Humidity:65.0%
Test Distance:9.830m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.35V I:0.1856A P:23.214W PF:0.5675 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:952.247x1 lm												
NAME: 6651						TYPE:			WEIGHT: 0			
SPEC.: 24W						DIM.: 0			SERIAL No.: 1			
MFR.: NORDECOR						SUR.: 535*35			Shielding Angle: 0			
ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise					
x = 2H y = 2H		2H	22.8	24.3	23.0	24.5	24.7	21.9	23.4	22.2	23.6	23.8
		3H	24.3	25.7	24.6	25.9	26.1	23.2	24.5	23.5	24.8	25.0
		4H	24.9	26.2	25.2	26.4	26.7	23.6	24.9	23.9	25.1	25.4
		6H	25.3	26.6	25.7	26.8	27.1	23.8	25.0	24.1	25.3	25.6
		8H	25.5	26.6	25.8	26.9	27.2	23.8	25.0	24.2	25.3	25.6
		12H	25.5	26.7	25.9	27.0	27.3	23.8	24.9	24.1	25.2	25.5
4H		2H	23.3	24.6	23.6	24.8	25.1	22.6	23.9	22.9	24.1	24.4
		3H	25.0	26.1	25.3	26.4	26.7	24.0	25.1	24.4	25.4	25.7
		4H	25.7	26.7	26.1	27.0	27.4	24.5	25.6	24.9	25.9	26.2
		6H	26.2	27.2	26.6	27.5	27.9	24.8	25.7	25.2	26.1	26.5
		8H	26.4	27.3	26.8	27.6	28.0	24.9	25.7	25.3	26.1	26.5
		12H	26.5	27.3	27.0	27.7	28.1	24.9	25.6	25.3	26.0	26.4
8H		4H	25.9	26.7	26.3	27.1	27.5	24.8	25.7	25.2	26.0	26.4
		6H	26.5	27.2	27.0	27.6	28.1	25.2	25.9	25.7	26.3	26.7
		8H	26.8	27.4	27.2	27.8	28.3	25.3	25.9	25.8	26.4	26.8
		12H	27.0	27.5	27.4	27.9	28.4	25.3	25.9	25.8	26.3	26.8
12H		4H	25.8	26.6	26.3	27.0	27.4	24.8	25.6	25.2	26.0	26.4
		6H	26.5	27.2	27.0	27.6	28.0	25.3	25.9	25.7	26.3	26.8
		8H	26.8	27.4	27.3	27.8	28.3	25.4	25.9	25.9	26.4	26.8
Variations with the observer position at spacings(CIE Pub.117):												
S = 1.0H		+ 0.2 / - 0.2					+ 0.2 / - 0.3					
1.5H		+ 0.1 / - 0.3					+ 0.2 / - 0.4					
2.0H		+ 0.2 / - 0.3					+ 0.2 / - 0.4					

CIE Pub.117, 952.2 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = -0.2$)
Area: 0.018725 m²

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:YAO
Test Date:2025-05-14

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.485
Humidity:65.0%
Test Distance:9.830m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.35V I:0.1856A P:23.214W PF:0.5675 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:952.247x1 lm		
NAME: 6651	TYPE:	WEIGHT: 0
SPEC.: 24W	DIM.: 0	SERIAL No.: 1
MFR.: NORDECOR	SUR.: 535*35	Shielding Angle: 0


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	59	48	41	59	48	41	58	47	41	35
0.80	69	58	51	68	58	51	67	57	51	44
1.00	78	67	60	77	67	60	74	68	59	52
1.25	85	75	68	83	74	67	81	73	67	60
1.50	90	80	74	88	79	73	85	78	72	65
2.00	96	88	82	94	87	81	91	85	80	72
2.50	100	93	87	98	91	86	94	89	84	76
3.00	103	97	91	101	95	90	97	92	88	80
4.00	107	102	97	105	100	96	101	97	93	84
5.00	109	105	101	107	103	99	102	99	96	87
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: YAO
 Test Date: 2025-05-14

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.485
 Humidity: 65.0%
 Test Distance: 9.830m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.35V I:0.1856A P:23.214W PF:0.5675 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:952.247x1 lm		
NAME: 6651	TYPE:	WEIGHT: 0
SPEC.: 24W	DIM.: 0	SERIAL No.: 1
MFR.: NORDECOR	SUR.: 535*35	Shielding Angle: 0

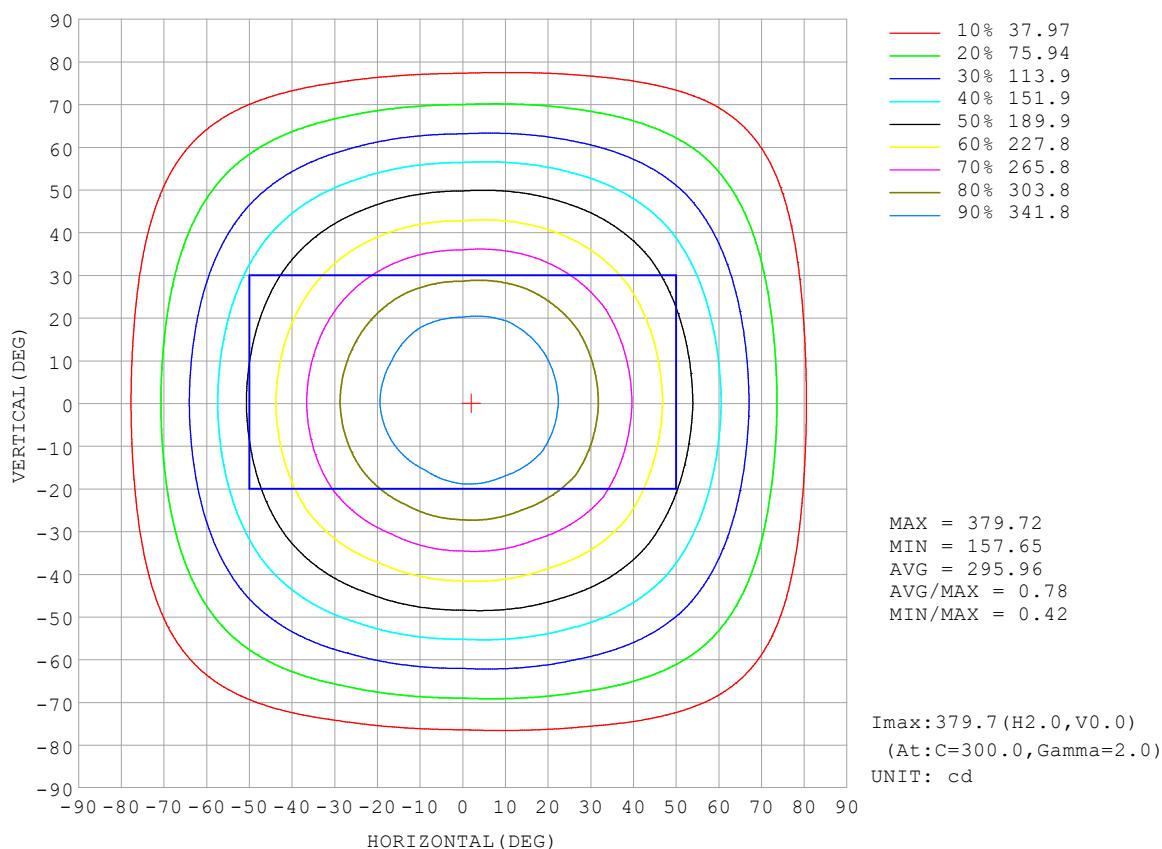


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: YAO
Test Date: 2025-05-14

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.485
Humidity: 65.0%
Test Distance: 9.830m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.35V I:0.1856A P:23.214W PF:0.5675 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:952.247x1 lm		
NAME: 6651	TYPE:	WEIGHT: 0
SPEC.: 24W	DIM.: 0	SERIAL No.: 1
MFR.: NORDECOR	SUR.: 535*35	Shielding Angle: 0

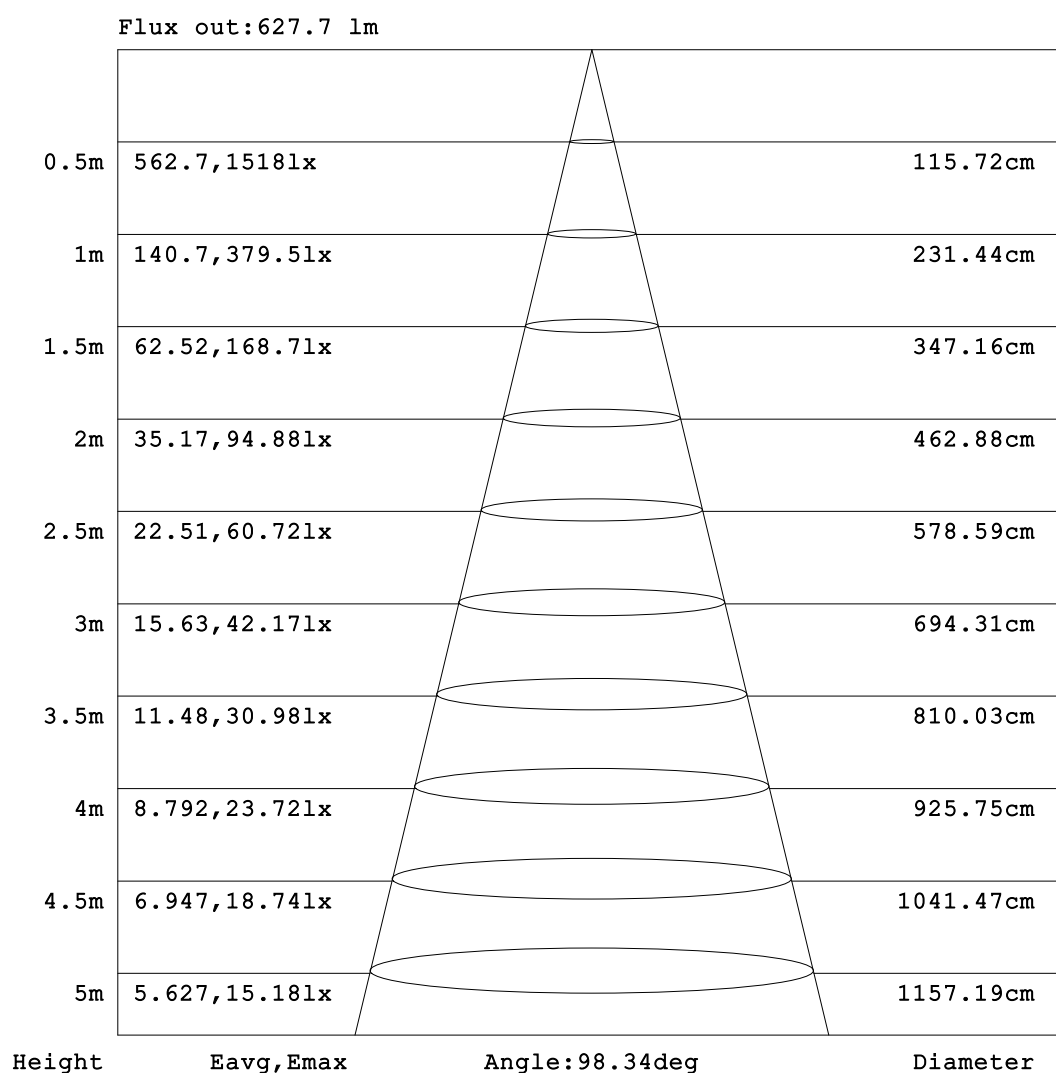


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:YAO
Test Date:2025-05-14

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.485
Humidity:65.0%
Test Distance:9.830m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.35V I:0.1856A P:23.214W PF:0.5675 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:952.247x1 lm		
NAME: 6651	TYPE:	WEIGHT: 0
SPEC.: 24W	DIM.: 0	SERIAL No.: 1
MFR.: NORDECOR	SUR.: 535*35	Shielding Angle: 0

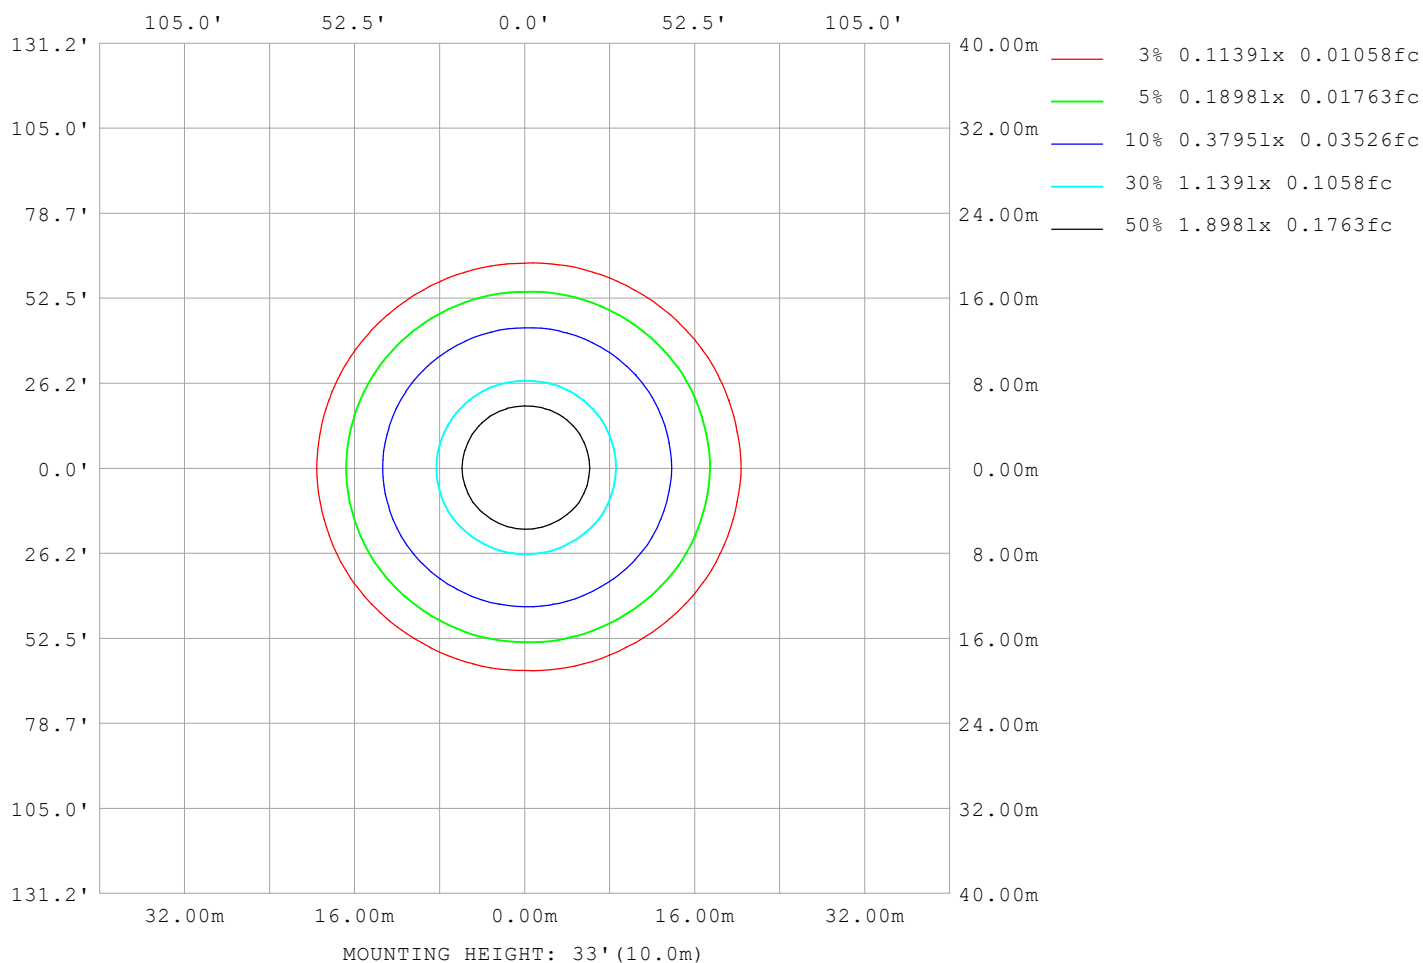

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: YAO
Test Date: 2025-05-14

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.485
Humidity: 65.0%
Test Distance: 9.830m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.35V I:0.1856A P:23.214W PF:0.5675 Freq:49.99Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:952.247x1 lm		
NAME: 6651	TYPE:	WEIGHT: 0
SPEC.: 24W	DIM.: 0	SERIAL No.: 1
MFR.: NORDECOR	SUR.: 535*35	Shielding Angle: 0


AvgL	cd/m2
L_0~180 (65) av	14813
L_0~180 (75) av	12412
L_0~180 (85) av	7375
L_90~270 (65) av	12709
L_90~270 (75) av	9742
L_90~270 (85) av	3489
L_45 (65) av	13730
L_45 (75) av	10908
L_45 (85) av	4892

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:YAO
Test Date:2025-05-14

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.485
Humidity:65.0%
Test Distance:9.830m [K=1.0000]
Remarks:

Planar Illuminance Curve

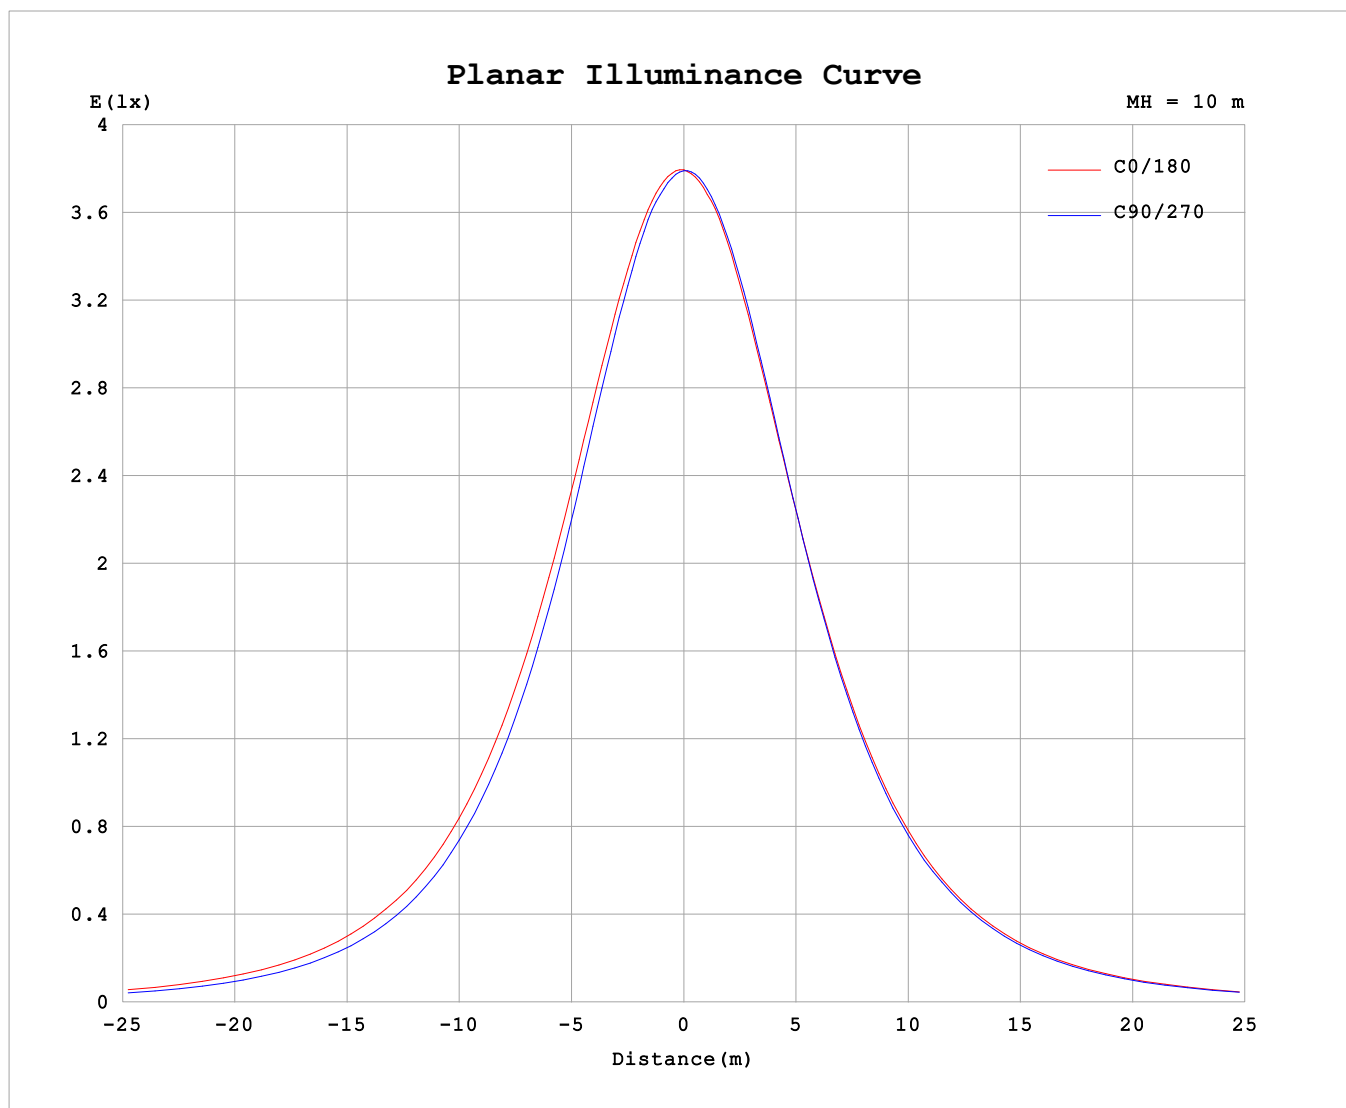

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: YAO
Test Date: 2025-05-14

γ Range: 0 - 100DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.485
Humidity: 65.0%
Test Distance: 9.830m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.35V I:0.1856A P:23.214W PF:0.5675 Freq:49.99Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:952.247x1 lm		
NAME: 6651	TYPE:	WEIGHT: 0
SPEC.: 24W	DIM.: 0	SERIAL No.: 1
MFR.: NORDECOR	SUR.: 535*35	Shielding Angle: 0

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	379	379	379	379	379	379	379	379	379	379	379	379						
5	378	377	376	375	374	375	375	376	377	378	379	379						
10	373	373	368	368	365	367	368	368	371	371	374	373						
15	363	362	356	355	351	354	356	356	360	360	364	364						
20	349	347	340	337	334	337	339	339	343	342	349	350						
25	332	329	320	315	314	317	320	320	322	321	329	332						
30	311	308	295	290	289	295	298	298	298	297	306	312						
35	289	285	270	264	263	271	273	273	272	271	280	288						
40	264	260	243	237	236	246	248	247	245	243	254	263						
45	237	232	215	209	209	218	221	219	217	215	226	235						
50	210	204	189	181	182	190	193	192	188	188	197	207						
55	184	176	161	153	154	162	165	164	160	160	169	180						
60	155	147	133	125	126	134	137	135	131	131	140	151						
65	126	118	105	97.9	98.5	105	108	107	103	103	111	122						
70	96.9	89.4	77.4	70.8	70.9	76.6	79.9	78.0	75.1	75.7	83.0	92.5						
75	68.2	61.0	50.7	45.1	44.7	49.1	52.1	50.4	48.5	49.4	55.6	63.8						
80	40.7	34.3	26.2	21.9	21.2	24.1	26.8	25.1	24.3	25.2	30.3	36.6						
85	17.0	12.2	7.24	4.79	4.21	5.62	7.06	6.13	5.88	6.60	9.65	13.7						
90	2.13	1.01	0.97	0.98	1.09	1.09	0.73	0.74	0.62	0.58	0.59	0.83						
95	1.18	1.16	1.07	1.16	1.14	1.29	0.93	0.79	0.78	0.67	0.72	0.69						
100	1.40	1.35	1.27	0.49	1.36	0.54	0.41	0.99	0.97	0.87	0.88	0.88						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:YAO
Test Date:2025-05-14

γ Range: 0 - 100DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.485
Humidity:65.0%
Test Distance:9.830m [K=1.0000]
Remarks: