

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		7292.6 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	37.3V x 31.3H
	At 50% of Imax	18.5V x 14.6H
	At 90% of Imax	4.4V x 5.5H
Beam Flux	Total	991.8 lumens per klm.
	To 10% of Imax	696.1 lumens per klm.
	To 50% of Imax	326.4 lumens per klm.
	To 90% of Imax	24.1 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	99.2 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2024-04-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.21V I:0.0256A P:2.4098W PF:0.4279 Freq:50.00Hz Lamp Flux:61.4273x1 lm		
NAME: 6441	TYPE:	WEIGHT:92g
SPEC.:2W	DIM.: Φ 5.2*8cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

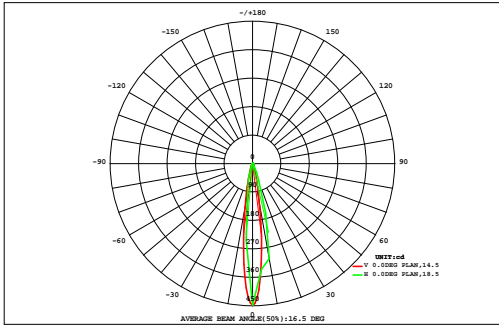

DATA OF LAMP		Eff:25.49lm/W	
MODEL		Imax(cd)	448.0
NOMINAL POWER(W)		AVAILABILITY(%)	73.0
RATED VOLTAGE(V)		Avai. FLUX(lm)	44.82
NOMINAL FLUX(lm)	61.4273	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	61.43
TEST VOLTAGE(V)	0	q @50%(H,V)	15,19DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL(DEG)	20	30	40	50	60	70	80	90			
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.00	0.35	0.00	
70	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.29	0.00
60	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.32	0.00
50	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.38	0.00
40	0.00	0.01	0.01	0.02	0.02	0.03	0.04	0.07	0.09	0.10	0.08	0.06	0.03	0.02	0.02	0.01	0.01	0.00	0.62	0.00
30	0.00	0.01	0.01	0.02	0.02	0.04	0.08	0.16	0.27	0.31	0.23	0.12	0.06	0.03	0.02	0.01	0.01	0.00	1.39	0.00
20	0.00	0.01	0.01	0.02	0.03	0.06	0.15	0.40	0.99	1.33	0.67	0.25	0.09	0.04	0.02	0.01	0.01	0.00	4.09	1.62
10	0.00	0.01	0.01	0.02	0.03	0.08	0.25	0.87	3.86	6.12	1.85	0.40	0.12	0.04	0.02	0.01	0.01	0.00	13.7	11.6
0	0.00	0.01	0.01	0.02	0.04	0.09	0.29	1.31	7.80	10.4	2.54	0.47	0.13	0.04	0.02	0.01	0.01	0.00	23.2	21.4
-10	0.00	0.01	0.01	0.02	0.03	0.08	0.24	0.94	4.14	4.63	1.39	0.36	0.11	0.04	0.02	0.01	0.01	0.00	12.0	10.1
-20	0.00	0.01	0.01	0.02	0.03	0.06	0.14	0.38	0.57	0.54	0.38	0.19	0.07	0.03	0.02	0.01	0.01	0.00	2.46	0.07
-30	0.00	0.01	0.01	0.02	0.02	0.04	0.07	0.13	0.17	0.16	0.13	0.08	0.04	0.02	0.02	0.01	0.01	0.00	0.94	0.00
-40	0.00	0.01	0.01	0.02	0.02	0.03	0.04	0.05	0.07	0.07	0.05	0.04	0.03	0.02	0.01	0.01	0.01	0.00	0.48	0.00
-50	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.35	0.00
-60	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.32	0.00
-70	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.30	0.00
-80	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.15	0.00
-90	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.15	0.00
F t	0.03	0.11	0.18	0.27	0.39	0.67	1.50	4.53	18.2	24.0	7.55	2.16	0.86	0.43	0.27	0.18	0.11	0.03	61	---
F a	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.70	16.1	22.2	4.83	0.00	0.00	0.00	0.00	0.00	0.00	0.00	---	45


one-half-peak spread: U:13.2,D:5.5 , L:7.3,R:7.4 NEMA Beam Type: Type 3

H(h) Range:-90 - 90DEG
H(h) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2024-04-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.21V I:0.0256A P:2.4098W PF:0.4279 Freq:50.00Hz Lamp Flux:61.4273x1 lm		
NAME: 6441	TYPE:	WEIGHT:92g
SPEC.:2W	DIM.: ϕ 5.2*8cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

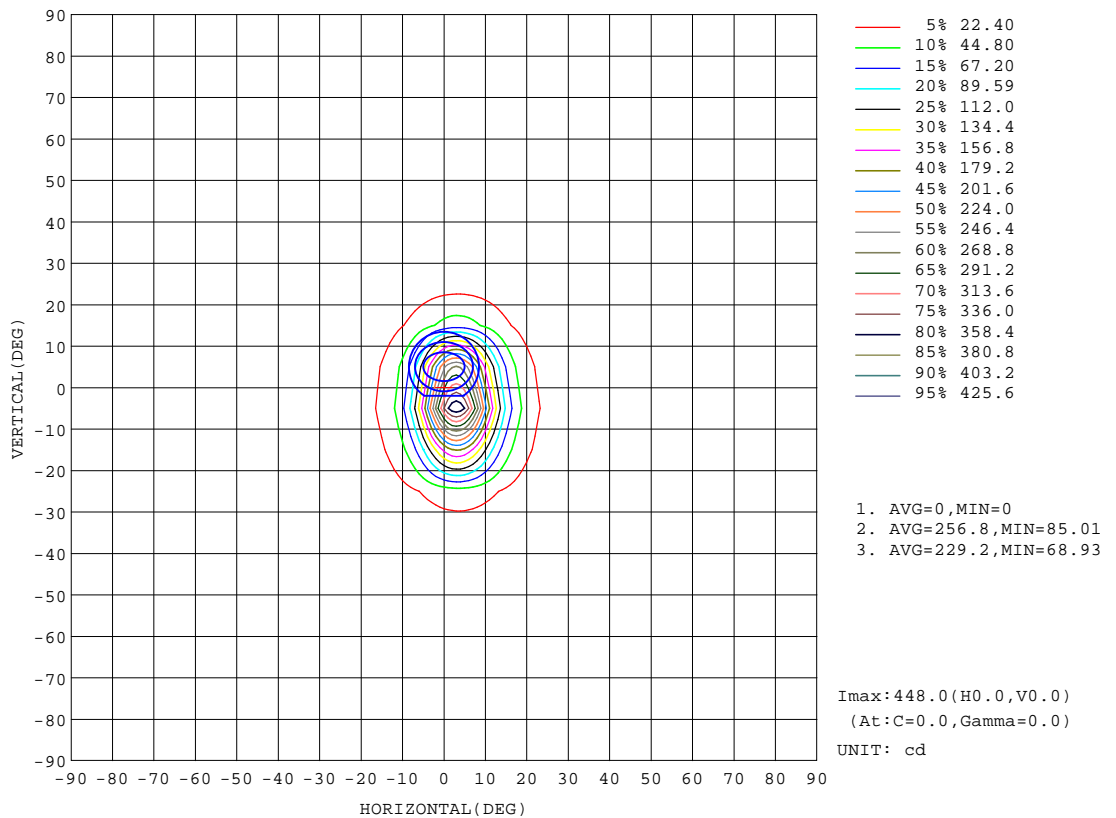


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:AED
 Test Date:2024-04-20

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:220.21V I:0.0256A P:2.4098W PF:0.4279 Freq:50.00Hz Lamp Flux:61.4273x1 lm		
NAME: 6441	TYPE:	WEIGHT:92g
SPEC.:2W	DIM.: ϕ 5.2*8cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

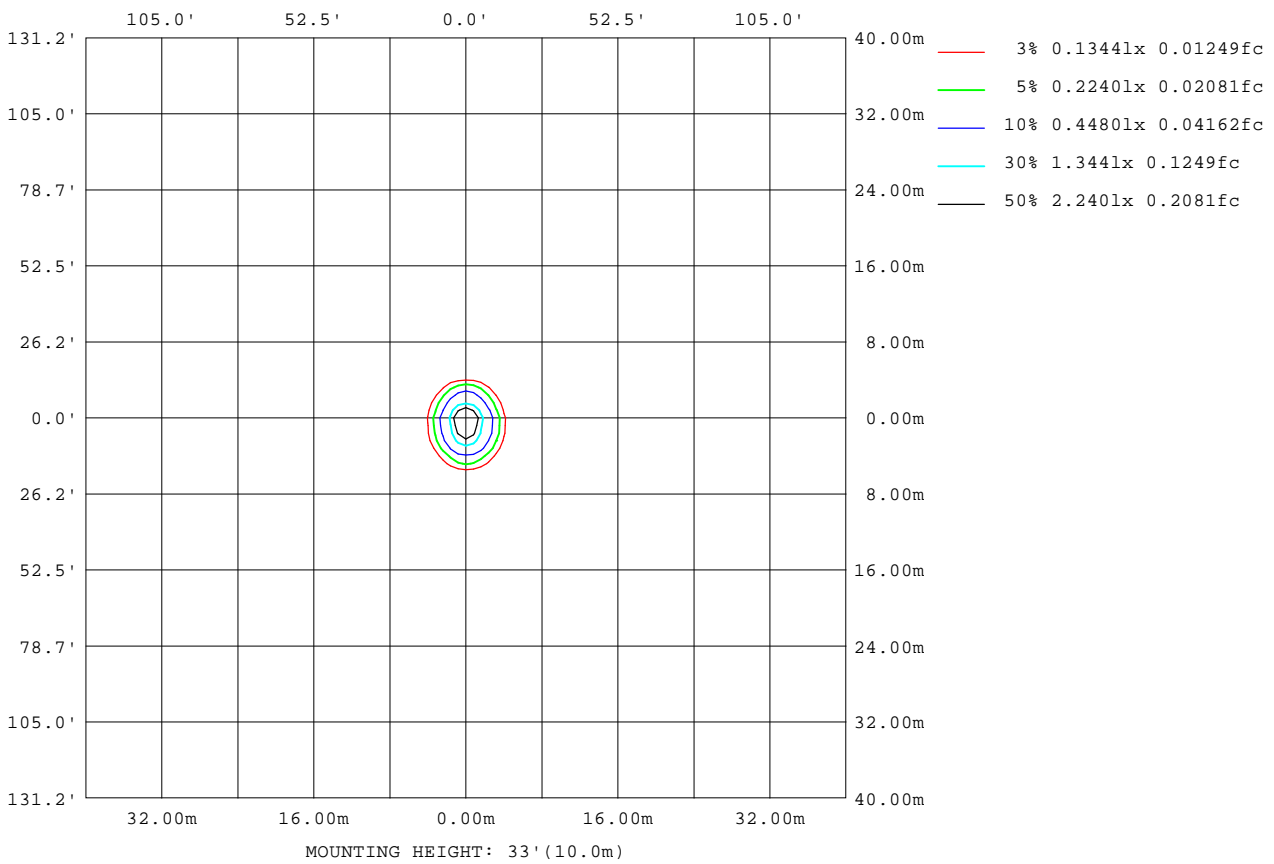

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2024-04-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

Planar Illuminance Curve

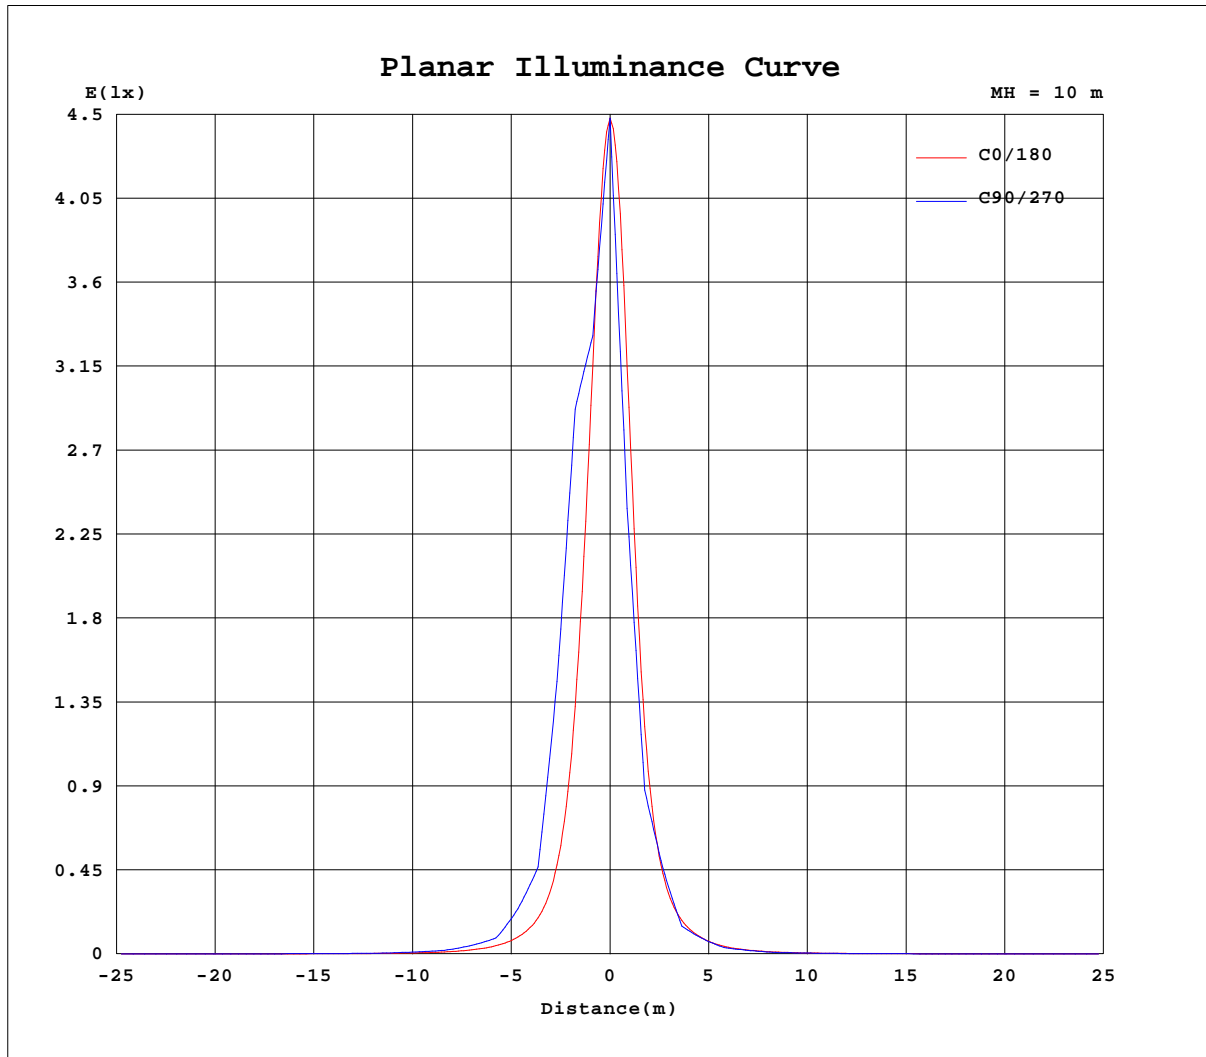


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:AED
 Test Date:2024-04-20

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.21V I:0.0256A P:2.4098W PF:0.4279 Freq:50.00Hz Lamp Flux:61.4273x1 lm		
NAME: 6441	TYPE:	WEIGHT:92g
SPEC.:2W	DIM.: ϕ 5.2*8cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

Flux out:15.96 lm

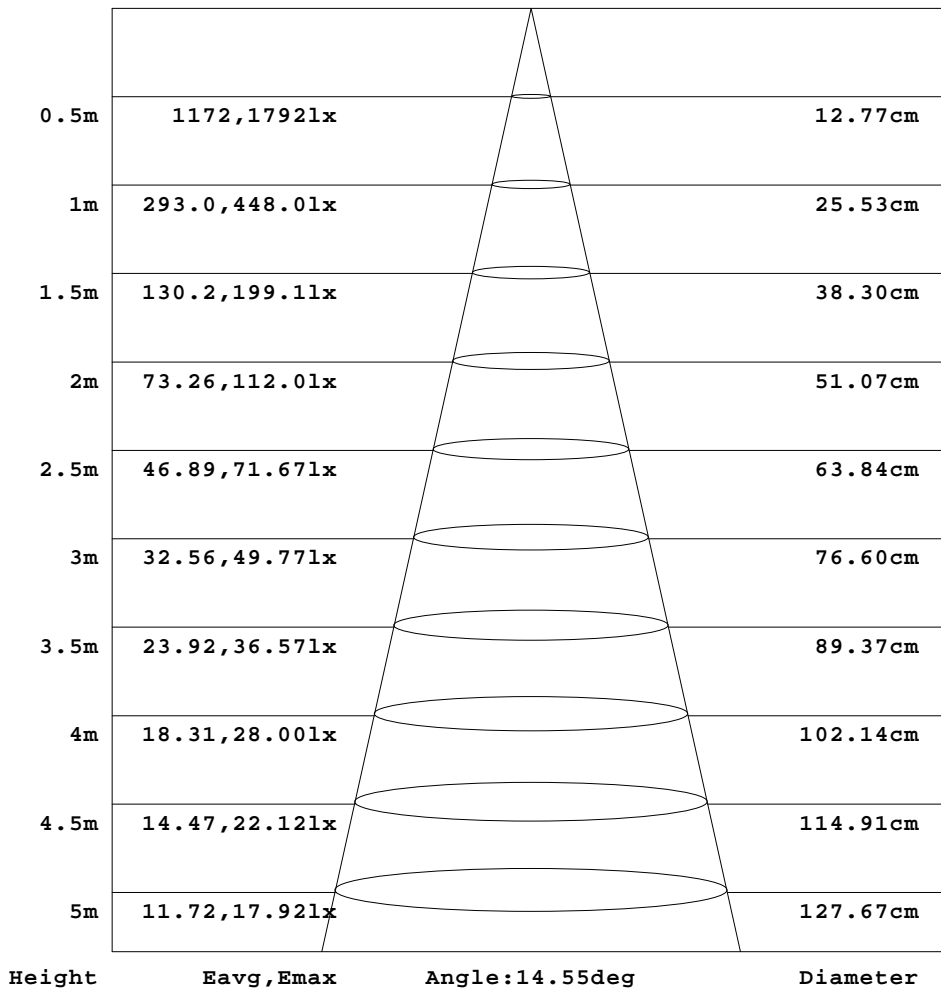

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:AED
 Test Date:2024-04-20

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.21V I:0.0256A P:2.4098W PF:0.4279 Freq:50.00Hz Lamp Flux:61.4273x1 lm		
NAME: 6441	TYPE:	WEIGHT:92g
SPEC.:2W	DIM.: ϕ 5.2*8cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

Table--1

UNIT: cd

H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.79	0.80	0.81	0.81	0.81	0.80	0.82	0.83	0.82	0.84	0.85	0.84	0.84	0.86	0.86	0.86	0.87	0.88	0.88
-75	0.78	0.80	0.80	0.80	0.82	0.82	0.82	0.83	0.84	0.85	0.85	0.86	0.87	0.87	0.89	0.90	0.91	0.92	0.92
-70	0.80	0.80	0.81	0.81	0.82	0.82	0.84	0.85	0.86	0.87	0.88	0.88	0.89	0.90	0.93	0.95	0.96	0.96	0.97
-65	0.78	0.78	0.78	0.79	0.80	0.82	0.83	0.82	0.83	0.84	0.86	0.91	0.93	0.95	0.97	1.00	1.03	1.06	1.07
-60	0.76	0.73	0.77	0.77	0.80	0.81	0.81	0.82	0.81	0.84	0.89	0.95	0.99	1.02	1.05	1.10	1.14	1.16	1.17
-55	0.77	0.76	0.77	0.78	0.79	0.81	0.82	0.82	0.83	0.86	0.89	0.95	1.01	1.06	1.12	1.21	1.31	1.38	1.45
-50	0.77	0.78	0.79	0.79	0.79	0.81	0.82	0.85	0.87	0.91	0.96	1.01	1.08	1.17	1.30	1.43	1.57	1.69	1.74
-45	0.77	0.77	0.77	0.79	0.81	0.81	0.84	0.86	0.89	0.93	0.98	1.05	1.18	1.33	1.58	1.93	2.33	2.73	3.02
-40	0.77	0.77	0.79	0.82	0.83	0.84	0.88	0.91	0.95	1.00	1.09	1.24	1.41	1.74	2.20	2.83	3.52	4.16	4.45
-35	0.79	0.77	0.79	0.81	0.83	0.85	0.88	0.91	0.97	1.05	1.15	1.35	1.66	2.24	3.16	4.40	5.91	7.49	8.59
-30	0.78	0.78	0.80	0.83	0.86	0.89	0.93	0.99	1.07	1.20	1.42	1.80	2.49	3.73	5.46	7.67	10.2	12.3	13.2
-25	0.79	0.77	0.78	0.78	0.83	0.87	0.90	0.96	1.05	1.19	1.42	1.86	2.64	4.09	6.54	10.5	16.2	24.2	32.5
-20	0.76	0.77	0.74	0.78	0.80	0.86	0.95	1.04	1.19	1.43	1.89	2.73	4.33	7.05	12.0	19.7	31.3	46.9	56.4
-15	0.78	0.76	0.77	0.78	0.83	0.88	0.91	1.01	1.12	1.34	1.73	2.49	3.87	6.37	11.2	20.3	40.5	89.5	162
-10	0.77	0.77	0.80	0.83	0.87	0.91	0.99	1.11	1.28	1.66	2.35	3.76	6.01	10.7	19.8	40.8	98.7	223	306
-5	0.76	0.77	0.80	0.82	0.86	0.90	0.95	1.05	1.18	1.43	1.93	2.89	4.62	7.79	14.2	27.5	63.4	167	335
0	0.78	0.80	0.81	0.86	0.89	0.94	1.02	1.13	1.33	1.73	2.46	3.94	6.45	11.6	21.8	47.9	128	319	448
5	0.75	0.76	0.78	0.80	0.86	0.90	0.95	1.05	1.16	1.41	1.86	2.71	4.33	7.16	12.7	23.6	50.7	124	242
10	0.73	0.75	0.76	0.78	0.88	0.92	0.99	1.09	1.25	1.56	2.12	3.28	5.15	8.55	14.7	25.3	45.5	74.8	92.1
15	0.75	0.76	0.77	0.79	0.85	0.88	0.93	1.01	1.10	1.27	1.58	2.12	3.16	4.93	8.00	13.0	21.6	35.7	51.2
20	0.76	0.78	0.79	0.84	0.87	0.88	0.96	1.02	1.13	1.29	1.61	2.10	3.08	4.60	6.77	9.84	13.4	16.5	18.0
25	0.71	0.77	0.78	0.81	0.84	0.86	0.90	0.94	1.01	1.10	1.25	1.52	1.97	2.76	3.91	5.57	7.64	9.77	11.3
30	0.76	0.77	0.79	0.80	0.83	0.86	0.88	0.94	0.99	1.06	1.19	1.41	1.73	2.20	2.93	3.71	4.51	5.13	5.41
35	0.69	0.76	0.77	0.79	0.81	0.82	0.85	0.87	0.91	0.96	1.03	1.14	1.31	1.55	1.90	2.40	2.86	3.32	3.62
40	0.76	0.76	0.77	0.79	0.80	0.82	0.84	0.86	0.90	0.93	0.98	1.06	1.14	1.29	1.45	1.63	1.79	1.91	1.97
45	0.73	0.76	0.76	0.77	0.79	0.79	0.81	0.84	0.86	0.88	0.92	0.96	1.02	1.10	1.18	1.30	1.40	1.49	1.54
50	0.75	0.75	0.76	0.78	0.78	0.81	0.82	0.84	0.86	0.88	0.90	0.93	0.97	1.00	1.05	1.09	1.12	1.15	1.14
55	0.74	0.75	0.75	0.76	0.77	0.78	0.80	0.82	0.83	0.85	0.87	0.90	0.91	0.94	0.96	1.00	1.02	1.04	1.05
60	0.73	0.75	0.76	0.78	0.77	0.79	0.81	0.82	0.83	0.85	0.86	0.88	0.88	0.90	0.92	0.93	0.95	0.94	0.96
65	0.76	0.76	0.76	0.76	0.77	0.78	0.79	0.81	0.81	0.82	0.84	0.85	0.85	0.87	0.85	0.87	0.88	0.88	0.90
70	0.76	0.77	0.78	0.78	0.78	0.78	0.80	0.81	0.81	0.81	0.82	0.83	0.84	0.84	0.82	0.82	0.82	0.83	0.84
75	0.77	0.77	0.77	0.77	0.77	0.77	0.77	0.79	0.80	0.80	0.80	0.81	0.81	0.82	0.80	0.80	0.81	0.81	0.82
80	0.76	0.77	0.77	0.76	0.76	0.76	0.77	0.78	0.78	0.78	0.79	0.78	0.79	0.79	0.79	0.79	0.80	0.81	0.80
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(h) Range:-90 - 90DEG
H(h) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2024-04-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.21V I:0.0256A P:2.4098W PF:0.4279 Freq:50.00Hz Lamp Flux:61.4273x1 lm		
NAME: 6441	TYPE:	WEIGHT:92g
SPEC.:2W	DIM.: ϕ 5.2*8cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

Table--2

UNIT: cd

H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.88	0.88	0.88	0.87	0.87	0.86	0.85	0.85	0.84	0.84	0.83	0.82	0.82	0.82	0.82	0.82	0.81	0.67
-75	0.92	0.92	0.92	0.91	0.90	0.89	0.88	0.87	0.86	0.85	0.84	0.83	0.83	0.82	0.82	0.81	0.80	0.80
-70	0.97	0.97	0.96	0.94	0.92	0.91	0.90	0.88	0.87	0.86	0.84	0.83	0.82	0.82	0.81	0.81	0.80	0.77
-65	1.07	1.06	1.05	1.02	1.00	0.96	0.94	0.92	0.89	0.87	0.85	0.84	0.83	0.82	0.81	0.80	0.80	0.78
-60	1.16	1.15	1.11	1.07	1.03	0.99	0.96	0.92	0.88	0.87	0.85	0.84	0.82	0.82	0.80	0.80	0.76	0.77
-55	1.46	1.42	1.36	1.26	1.18	1.09	1.02	0.97	0.92	0.89	0.86	0.84	0.82	0.82	0.81	0.80	0.79	0.76
-50	1.72	1.62	1.48	1.35	1.21	1.11	1.02	0.96	0.92	0.87	0.84	0.82	0.81	0.78	0.79	0.76	0.74	0.76
-45	3.07	2.88	2.56	2.17	1.76	1.48	1.26	1.11	1.00	0.92	0.87	0.83	0.83	0.82	0.80	0.79	0.77	0.75
-40	4.29	3.82	3.15	2.54	1.98	1.57	1.28	1.09	0.96	0.90	0.85	0.81	0.84	0.82	0.80	0.78	0.77	0.78
-35	8.79	8.03	6.69	5.14	3.74	2.71	1.95	1.49	1.21	1.04	0.95	0.88	0.86	0.84	0.82	0.80	0.78	0.76
-30	12.6	10.8	8.36	6.05	4.22	2.86	1.98	1.52	1.21	1.06	0.96	0.90	0.86	0.83	0.81	0.80	0.77	0.75
-25	34.5	28.1	19.4	12.8	8.16	5.16	3.30	2.18	1.58	1.25	1.07	0.96	0.90	0.85	0.83	0.80	0.79	0.77
-20	50.0	34.8	22.0	13.5	8.16	4.99	3.13	2.04	1.51	1.19	1.03	0.94	0.88	0.84	0.81	0.80	0.77	0.78
-15	175	113	54.4	26.5	14.2	8.04	4.79	2.98	1.96	1.45	1.16	1.02	0.93	0.87	0.84	0.82	0.80	0.78
-10	234	113	47.9	22.5	11.9	6.71	4.05	2.53	1.75	1.33	1.09	0.98	0.90	0.86	0.82	0.81	0.80	0.77
-5	358	210	86.5	36.0	17.6	9.55	5.53	3.40	2.16	1.54	1.20	1.04	0.94	0.88	0.85	0.82	0.81	0.80
0	319	139	53.0	23.5	12.3	6.92	4.19	2.57	1.75	1.31	1.09	0.97	0.90	0.85	0.82	0.80	0.79	0.81
5	256	151	65.4	29.2	15.1	8.54	5.10	3.18	2.05	1.48	1.19	1.03	0.95	0.88	0.85	0.82	0.81	0.79
10	76.9	47.5	26.4	15.3	9.03	5.53	3.48	2.23	1.59	1.25	1.07	0.97	0.90	0.86	0.84	0.81	0.78	0.77
15	53.8	40.6	25.2	15.3	9.47	5.97	3.80	2.47	1.73	1.32	1.11	1.00	0.93	0.87	0.84	0.82	0.79	0.77
20	17.1	14.2	10.8	7.64	5.28	3.59	2.36	1.69	1.30	1.10	1.00	0.92	0.86	0.84	0.82	0.79	0.76	0.75
25	11.7	10.6	8.71	6.65	4.77	3.39	2.36	1.70	1.32	1.11	0.98	0.90	0.88	0.84	0.81	0.80	0.78	0.76
30	5.29	4.81	4.17	3.33	2.51	1.87	1.49	1.21	1.03	0.92	0.86	0.83	0.84	0.81	0.80	0.78	0.75	0.76
35	3.70	3.53	3.18	2.75	2.20	1.76	1.42	1.20	1.05	0.96	0.89	0.84	0.84	0.81	0.79	0.78	0.76	0.75
40	1.93	1.85	1.72	1.53	1.36	1.20	1.08	1.00	0.93	0.88	0.85	0.82	0.80	0.79	0.76	0.76	0.74	0.72
45	1.56	1.53	1.46	1.37	1.26	1.15	1.05	0.99	0.93	0.89	0.84	0.81	0.79	0.78	0.77	0.75	0.74	0.72
50	1.16	1.14	1.10	1.06	1.01	0.98	0.95	0.90	0.88	0.85	0.79	0.77	0.82	0.78	0.74	0.73	0.71	0.72
55	1.05	1.05	1.03	1.00	0.97	0.93	0.91	0.91	0.85	0.83	0.81	0.80	0.78	0.76	0.76	0.74	0.72	0.73
60	0.95	0.95	0.94	0.93	0.85	0.84	0.86	0.84	0.82	0.82	0.80	0.76	0.79	0.77	0.76	0.72	0.72	0.76
65	0.90	0.89	0.90	0.90	0.85	0.83	0.85	0.87	0.83	0.81	0.81	0.81	0.80	0.78	0.78	0.77	0.75	0.76
70	0.83	0.84	0.82	0.80	0.80	0.79	0.84	0.83	0.82	0.82	0.80	0.81	0.80	0.79	0.78	0.78	0.76	0.75
75	0.83	0.81	0.82	0.84	0.81	0.80	0.82	0.81	0.82	0.81	0.78	0.78	0.77	0.78	0.77	0.76	0.76	0.76
80	0.80	0.80	0.80	0.81	0.80	0.80	0.79	0.80	0.80	0.79	0.74	0.74	0.76	0.74	0.78	0.76	0.76	0.70
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(h) Range:-90 - 90DEG
H(h) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2024-04-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks: