

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		7292.6 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax At 50% of Imax At 90% of Imax	37.3V x 31.3H 18.5V x 14.6H 4.4V x 5.5H
Beam Flux	Total To 10% of Imax To 50% of Imax To 90% of Imax	991.8 lumens per klm. 696.1 lumens per klm. 326.4 lumens per klm. 24.1 lumens per klm.
	Upward LOR Downward LOR	0.0 % 99.2 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2024-04-20

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.21V I:0.0256A P:2.4098W PF:0.4279 Freq:50.00Hz Lamp Flux:61.4273x1 lm		
NAME: 6480	TYPE:	WEIGHT:92g
SPEC.:2W	DIM.: $\phi 5.2 \times 8\text{cm}$	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

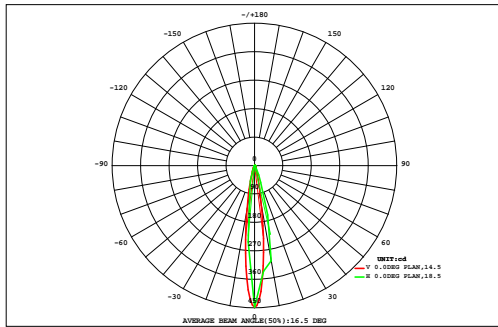

DATA OF LAMP		Eff:25.49lm/W	
MODEL		Imax(cd)	448.0
NOMINAL POWER(W)		AVAILABILITY(%)	73.0
RATED VOLTAGE(V)		Avai. FLUX(lm)	44.82
NOMINAL FLUX(lm)	61.4273	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	61.43
TEST VOLTAGE(V)	0	q @50%(H,V)	15,19DEG

VERTICAL( DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	-90	-80	-70	-60	-50	-40	-30	-20	20	30	40	50	60	70	80	90				
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.00	0.35	0.00	
70	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.29	0.00
60	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.32	0.00
50	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.38	0.00
40	0.00	0.01	0.01	0.02	0.02	0.03	0.04	0.07	0.09	0.10	0.08	0.06	0.03	0.02	0.02	0.01	0.01	0.00	0.62	0.00
30	0.00	0.01	0.01	0.02	0.02	0.04	0.08	0.16	0.27	0.31	0.23	0.12	0.06	0.03	0.02	0.01	0.01	0.00	1.39	0.00
20	0.00	0.01	0.01	0.02	0.03	0.06	0.15	0.40	0.99	1.33	0.67	0.25	0.09	0.04	0.02	0.01	0.01	0.00	4.09	1.62
10	0.00	0.01	0.01	0.02	0.03	0.08	0.25	0.87	3.86	6.12	1.85	0.40	0.12	0.04	0.02	0.01	0.01	0.00	13.7	11.6
0	0.00	0.01	0.01	0.02	0.04	0.09	0.29	1.31	7.80	10.4	2.54	0.47	0.13	0.04	0.02	0.01	0.01	0.00	23.2	21.4
-10	0.00	0.01	0.01	0.02	0.03	0.08	0.24	0.94	4.14	4.63	1.39	0.36	0.11	0.04	0.02	0.01	0.01	0.00	12.0	10.1
-20	0.00	0.01	0.01	0.02	0.03	0.06	0.14	0.38	0.57	0.54	0.38	0.19	0.07	0.03	0.02	0.01	0.01	0.00	2.46	0.07
-30	0.00	0.01	0.01	0.02	0.02	0.04	0.07	0.13	0.17	0.16	0.13	0.08	0.04	0.02	0.02	0.01	0.01	0.00	0.94	0.00
-40	0.00	0.01	0.01	0.02	0.02	0.03	0.04	0.05	0.07	0.07	0.05	0.04	0.03	0.02	0.01	0.01	0.01	0.00	0.48	0.00
-50	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.35	0.00
-60	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.32	0.00
-70	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.30	0.00
-80	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.15	0.00
-90	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.15	0.00
F t	0.03	0.11	0.18	0.27	0.39	0.67	1.50	4.53	18.2	24.0	7.55	2.16	0.86	0.43	0.27	0.18	0.11	0.03	61	---
F a	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.70	16.1	22.2	4.83	0.00	0.00	0.00	0.00	0.00	0.00	0.00	---	45


one-half-peak spread: U:13.2,D:5.5 , L:7.3,R:7.4 NEMA Beam Type: Type 3

H(h) Range:-90 - 90DEG  
H(h) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2024-04-20

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.21V I:0.0256A P:2.4098W PF:0.4279 Freq:50.00Hz Lamp Flux:61.4273x1 lm		
NAME: 6480	TYPE:	WEIGHT:92g
SPEC.:2W	DIM.: $\phi 5.2 \times 8\text{cm}$	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

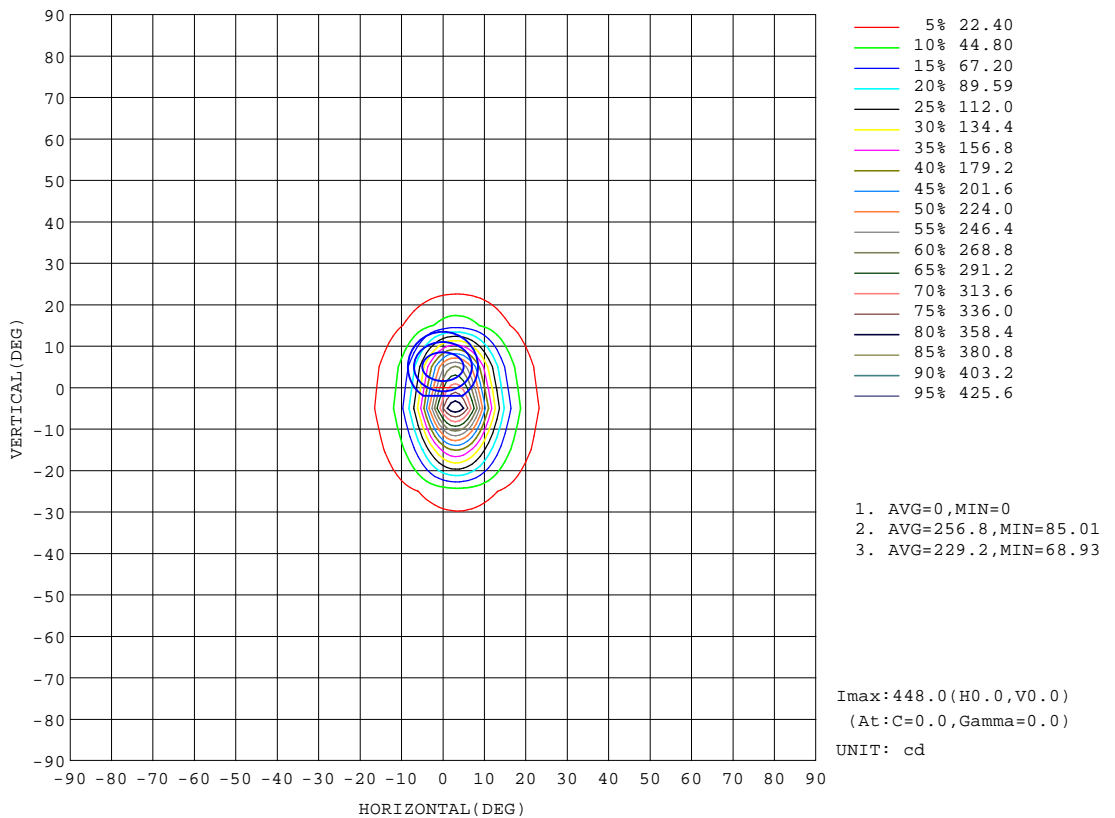


H( $\beta$ ) Range:-90 - 90DEG  
 H( $\beta$ ) Interval: 1.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:AED  
 Test Date:2024-04-20

V(B) Range:-80 - 80DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:5.780m [K=1.0000]  
 Remarks:

ISOLUX DIAGRAM


Test:U:220.21V I:0.0256A P:2.4098W PF:0.4279 Freq:50.00Hz Lamp Flux:61.4273x1 lm		
NAME: 6480	TYPE:	WEIGHT:92g
SPEC.:2W	DIM.: $\phi$ 5.2*8cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

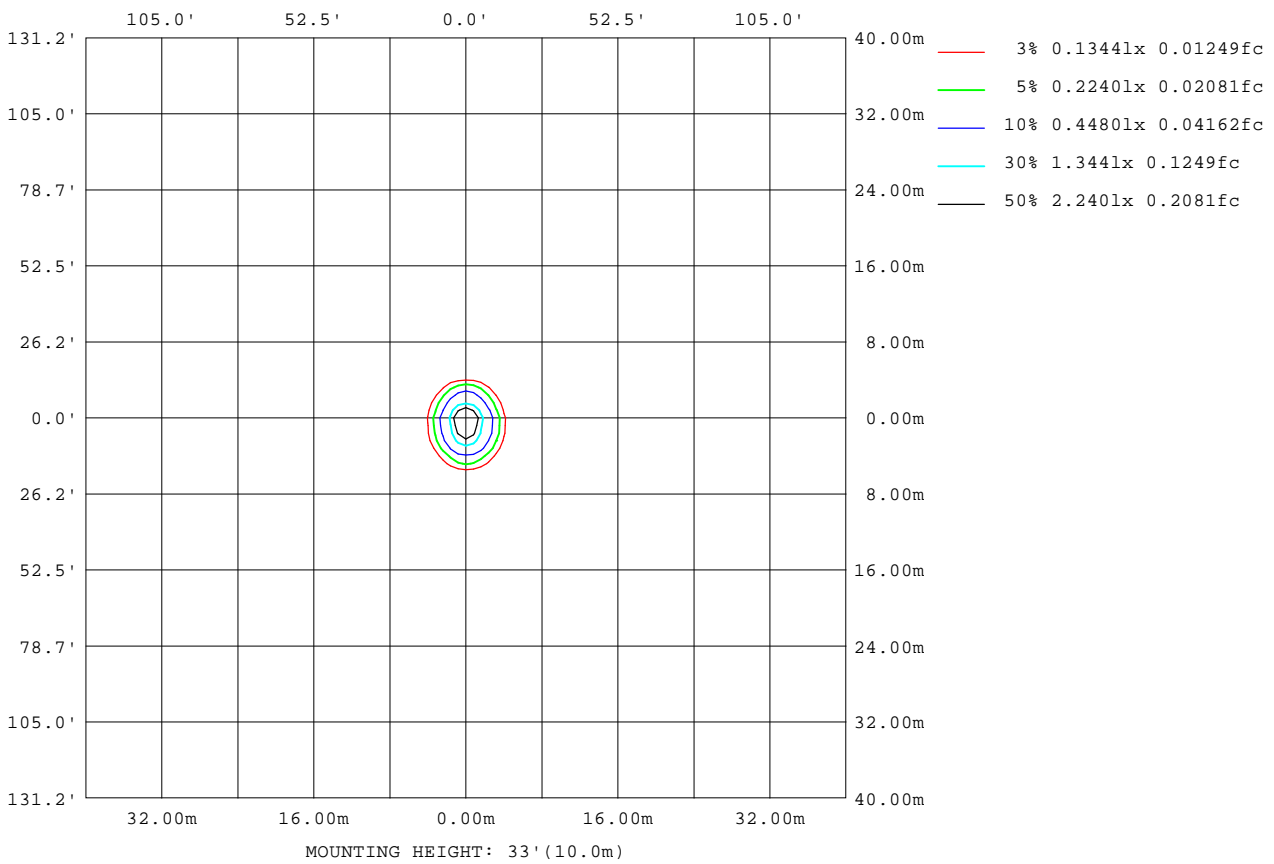

H( $\beta$ ) Range:-90 - 90DEG  
 H( $\beta$ ) Interval: 1.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:AED  
 Test Date:2024-04-20

V(B) Range:-80 - 80DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:5.780m [K=1.0000]  
 Remarks:

Planar Illuminance Curve

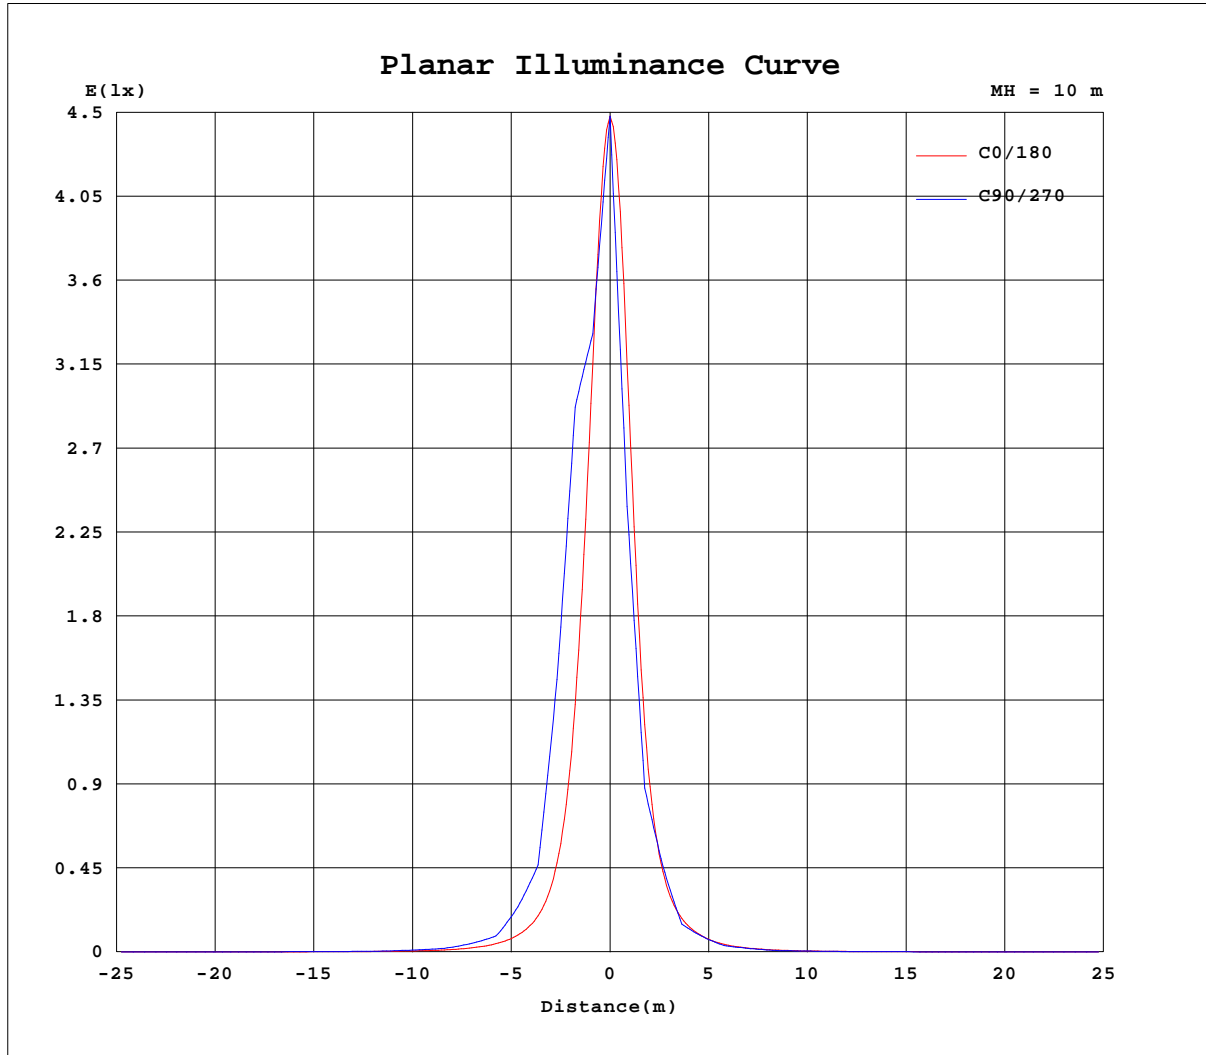


H( $\beta$ ) Range:-90 - 90DEG  
 H( $\beta$ ) Interval: 1.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:AED  
 Test Date:2024-04-20

V(B) Range:-80 - 80DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:5.780m [K=1.0000]  
 Remarks:

AAI Figure

Test:U:220.21V I:0.0256A P:2.4098W PF:0.4279 Freq:50.00Hz Lamp Flux:61.4273x1 lm		
NAME: 6480	TYPE:	WEIGHT:92g
SPEC.:2W	DIM.: $\phi$ 5.2*8cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

Flux out:15.96 lm

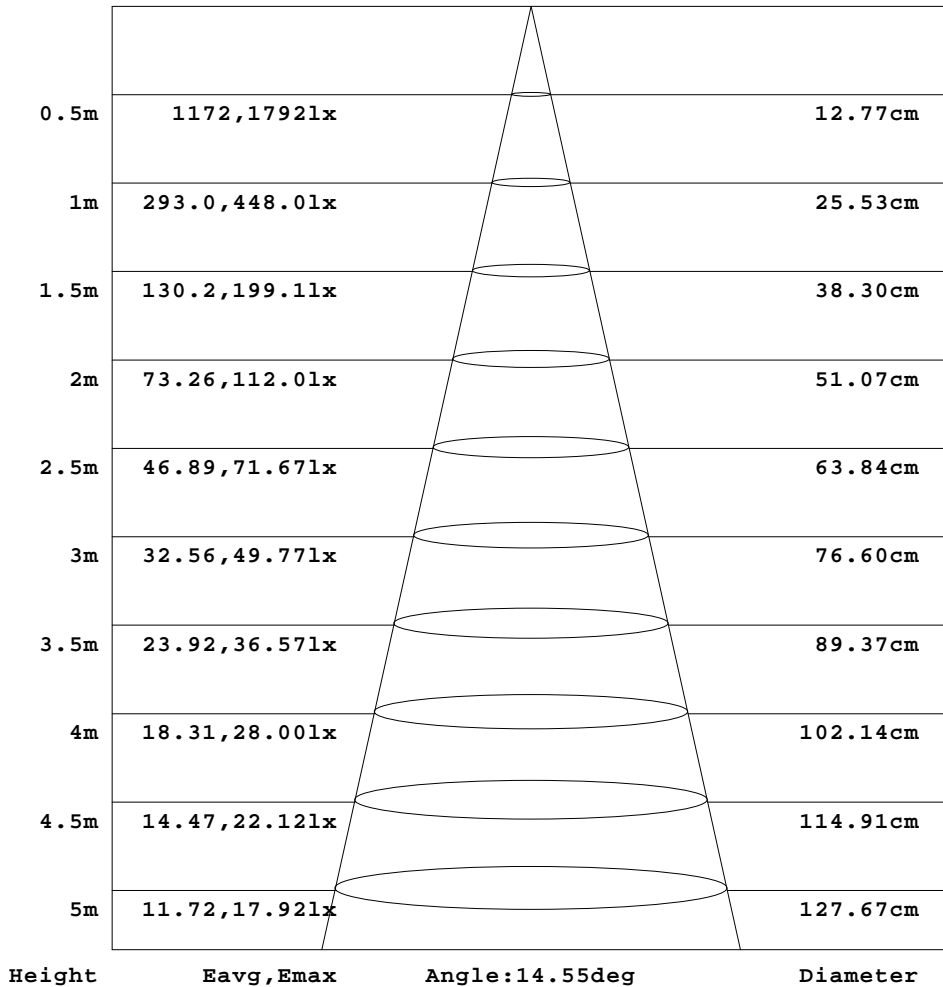

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2024-04-20

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.21V I:0.0256A P:2.4098W PF:0.4279 Freq:50.00Hz Lamp Flux:61.4273x1 lm		
NAME: 6480	TYPE:	WEIGHT:92g
SPEC.:2W	DIM.: $\phi$ 5.2*8cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

Table--1

UNIT: cd

H( DEG) V( DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.79	0.80	0.81	0.81	0.81	0.80	0.82	0.83	0.82	0.84	0.85	0.84	0.84	0.86	0.86	0.86	0.87	0.88	0.88
-75	0.78	0.80	0.80	0.80	0.82	0.82	0.82	0.83	0.84	0.85	0.85	0.86	0.87	0.87	0.89	0.90	0.91	0.92	0.92
-70	0.80	0.80	0.81	0.81	0.82	0.82	0.84	0.85	0.86	0.87	0.88	0.88	0.89	0.90	0.93	0.95	0.96	0.96	0.97
-65	0.78	0.78	0.78	0.79	0.80	0.82	0.83	0.82	0.83	0.84	0.86	0.91	0.93	0.95	0.97	1.00	1.03	1.06	1.07
-60	0.76	0.73	0.77	0.77	0.80	0.81	0.81	0.82	0.81	0.84	0.89	0.95	0.99	1.02	1.05	1.10	1.14	1.16	1.17
-55	0.77	0.76	0.77	0.78	0.79	0.81	0.82	0.82	0.83	0.86	0.89	0.95	1.01	1.06	1.12	1.21	1.31	1.38	1.45
-50	0.77	0.78	0.79	0.79	0.79	0.81	0.82	0.85	0.87	0.91	0.96	1.01	1.08	1.17	1.30	1.43	1.57	1.69	1.74
-45	0.77	0.77	0.77	0.79	0.81	0.81	0.84	0.86	0.89	0.93	0.98	1.05	1.18	1.33	1.58	1.93	2.33	2.73	3.02
-40	0.77	0.77	0.79	0.82	0.83	0.84	0.88	0.91	0.95	1.00	1.09	1.24	1.41	1.74	2.20	2.83	3.52	4.16	4.45
-35	0.79	0.77	0.79	0.81	0.83	0.85	0.88	0.91	0.97	1.05	1.15	1.35	1.66	2.24	3.16	4.40	5.91	7.49	8.59
-30	0.78	0.78	0.80	0.83	0.86	0.89	0.93	0.99	1.07	1.20	1.42	1.80	2.49	3.73	5.46	7.67	10.2	12.3	13.2
-25	0.79	0.77	0.78	0.78	0.83	0.87	0.90	0.96	1.05	1.19	1.42	1.86	2.64	4.09	6.54	10.5	16.2	24.2	32.5
-20	0.76	0.77	0.74	0.78	0.80	0.86	0.95	1.04	1.19	1.43	1.89	2.73	4.33	7.05	12.0	19.7	31.3	46.9	56.4
-15	0.78	0.76	0.77	0.78	0.83	0.88	0.91	1.01	1.12	1.34	1.73	2.49	3.87	6.37	11.2	20.3	40.5	89.5	162
-10	0.77	0.77	0.80	0.83	0.87	0.91	0.99	1.11	1.28	1.66	2.35	3.76	6.01	10.7	19.8	40.8	98.7	223	306
-5	0.76	0.77	0.80	0.82	0.86	0.90	0.95	1.05	1.18	1.43	1.93	2.89	4.62	7.79	14.2	27.5	63.4	167	335
0	0.78	0.80	0.81	0.86	0.89	0.94	1.02	1.13	1.33	1.73	2.46	3.94	6.45	11.6	21.8	47.9	128	319	448
5	0.75	0.76	0.78	0.80	0.86	0.90	0.95	1.05	1.16	1.41	1.86	2.71	4.33	7.16	12.7	23.6	50.7	124	242
10	0.73	0.75	0.76	0.78	0.88	0.92	0.99	1.09	1.25	1.56	2.12	3.28	5.15	8.55	14.7	25.3	45.5	74.8	92.1
15	0.75	0.76	0.77	0.79	0.85	0.88	0.93	1.01	1.10	1.27	1.58	2.12	3.16	4.93	8.00	13.0	21.6	35.7	51.2
20	0.76	0.78	0.79	0.84	0.87	0.88	0.96	1.02	1.13	1.29	1.61	2.10	3.08	4.60	6.77	9.84	13.4	16.5	18.0
25	0.71	0.77	0.78	0.81	0.84	0.86	0.90	0.94	1.01	1.10	1.25	1.52	1.97	2.76	3.91	5.57	7.64	9.77	11.3
30	0.76	0.77	0.79	0.80	0.83	0.86	0.88	0.94	0.99	1.06	1.19	1.41	1.73	2.20	2.93	3.71	4.51	5.13	5.41
35	0.69	0.76	0.77	0.79	0.81	0.82	0.85	0.87	0.91	0.96	1.03	1.14	1.31	1.55	1.90	2.40	2.86	3.32	3.62
40	0.76	0.76	0.77	0.79	0.80	0.82	0.84	0.86	0.90	0.93	0.98	1.06	1.14	1.29	1.45	1.63	1.79	1.91	1.97
45	0.73	0.76	0.76	0.77	0.79	0.79	0.81	0.84	0.86	0.88	0.92	0.96	1.02	1.10	1.18	1.30	1.40	1.49	1.54
50	0.75	0.75	0.76	0.78	0.78	0.81	0.82	0.84	0.86	0.88	0.90	0.93	0.97	1.00	1.05	1.09	1.12	1.15	1.14
55	0.74	0.75	0.75	0.76	0.77	0.78	0.80	0.82	0.83	0.85	0.87	0.90	0.91	0.94	0.96	1.00	1.02	1.04	1.05
60	0.73	0.75	0.76	0.78	0.77	0.79	0.81	0.82	0.83	0.85	0.86	0.88	0.88	0.90	0.92	0.93	0.95	0.94	0.96
65	0.76	0.76	0.76	0.76	0.77	0.78	0.79	0.81	0.81	0.82	0.84	0.85	0.85	0.87	0.85	0.87	0.88	0.88	0.90
70	0.76	0.77	0.78	0.78	0.78	0.78	0.80	0.81	0.81	0.81	0.82	0.83	0.84	0.84	0.82	0.82	0.82	0.83	0.84
75	0.77	0.77	0.77	0.77	0.77	0.77	0.77	0.79	0.80	0.80	0.80	0.81	0.81	0.82	0.80	0.80	0.81	0.81	0.82
80	0.76	0.77	0.77	0.76	0.76	0.76	0.77	0.78	0.78	0.78	0.79	0.78	0.79	0.79	0.79	0.79	0.80	0.81	0.80
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H<sub>(h)</sub> Range:-90 - 90DEG  
H<sub>(h)</sub> Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2024-04-20

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.21V I:0.0256A P:2.4098W PF:0.4279 Freq:50.00Hz Lamp Flux:61.4273x1 lm		
NAME: 6480	TYPE:	WEIGHT:92g
SPEC.:2W	DIM.: $\phi$ 5.2*8cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

Table--2

UNIT: cd

H( DEG) V( DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.88	0.88	0.88	0.87	0.87	0.86	0.85	0.85	0.84	0.84	0.83	0.82	0.82	0.82	0.82	0.82	0.81	0.67
-75	0.92	0.92	0.92	0.91	0.90	0.89	0.88	0.87	0.86	0.85	0.84	0.83	0.83	0.82	0.82	0.81	0.80	0.80
-70	0.97	0.97	0.96	0.94	0.92	0.91	0.90	0.88	0.87	0.86	0.84	0.83	0.82	0.82	0.81	0.81	0.80	0.77
-65	1.07	1.06	1.05	1.02	1.00	0.96	0.94	0.92	0.89	0.87	0.85	0.84	0.83	0.82	0.81	0.80	0.80	0.78
-60	1.16	1.15	1.11	1.07	1.03	0.99	0.96	0.92	0.88	0.87	0.85	0.84	0.82	0.82	0.80	0.80	0.76	0.77
-55	1.46	1.42	1.36	1.26	1.18	1.09	1.02	0.97	0.92	0.89	0.86	0.84	0.82	0.82	0.81	0.80	0.79	0.76
-50	1.72	1.62	1.48	1.35	1.21	1.11	1.02	0.96	0.92	0.87	0.84	0.82	0.81	0.78	0.79	0.76	0.74	0.76
-45	3.07	2.88	2.56	2.17	1.76	1.48	1.26	1.11	1.00	0.92	0.87	0.83	0.83	0.82	0.80	0.79	0.77	0.75
-40	4.29	3.82	3.15	2.54	1.98	1.57	1.28	1.09	0.96	0.90	0.85	0.81	0.84	0.82	0.80	0.78	0.77	0.78
-35	8.79	8.03	6.69	5.14	3.74	2.71	1.95	1.49	1.21	1.04	0.95	0.88	0.86	0.84	0.82	0.80	0.78	0.76
-30	12.6	10.8	8.36	6.05	4.22	2.86	1.98	1.52	1.21	1.06	0.96	0.90	0.86	0.83	0.81	0.80	0.77	0.75
-25	34.5	28.1	19.4	12.8	8.16	5.16	3.30	2.18	1.58	1.25	1.07	0.96	0.90	0.85	0.83	0.80	0.79	0.77
-20	50.0	34.8	22.0	13.5	8.16	4.99	3.13	2.04	1.51	1.19	1.03	0.94	0.88	0.84	0.81	0.80	0.77	0.78
-15	175	113	54.4	26.5	14.2	8.04	4.79	2.98	1.96	1.45	1.16	1.02	0.93	0.87	0.84	0.82	0.80	0.78
-10	234	113	47.9	22.5	11.9	6.71	4.05	2.53	1.75	1.33	1.09	0.98	0.90	0.86	0.82	0.81	0.80	0.77
-5	358	210	86.5	36.0	17.6	9.55	5.53	3.40	2.16	1.54	1.20	1.04	0.94	0.88	0.85	0.82	0.81	0.80
0	319	139	53.0	23.5	12.3	6.92	4.19	2.57	1.75	1.31	1.09	0.97	0.90	0.85	0.82	0.80	0.79	0.81
5	256	151	65.4	29.2	15.1	8.54	5.10	3.18	2.05	1.48	1.19	1.03	0.95	0.88	0.85	0.82	0.81	0.79
10	76.9	47.5	26.4	15.3	9.03	5.53	3.48	2.23	1.59	1.25	1.07	0.97	0.90	0.86	0.84	0.81	0.78	0.77
15	53.8	40.6	25.2	15.3	9.47	5.97	3.80	2.47	1.73	1.32	1.11	1.00	0.93	0.87	0.84	0.82	0.79	0.77
20	17.1	14.2	10.8	7.64	5.28	3.59	2.36	1.69	1.30	1.10	1.00	0.92	0.86	0.84	0.82	0.79	0.76	0.75
25	11.7	10.6	8.71	6.65	4.77	3.39	2.36	1.70	1.32	1.11	0.98	0.90	0.88	0.84	0.81	0.80	0.78	0.76
30	5.29	4.81	4.17	3.33	2.51	1.87	1.49	1.21	1.03	0.92	0.86	0.83	0.84	0.81	0.80	0.78	0.75	0.76
35	3.70	3.53	3.18	2.75	2.20	1.76	1.42	1.20	1.05	0.96	0.89	0.84	0.84	0.81	0.79	0.78	0.76	0.75
40	1.93	1.85	1.72	1.53	1.36	1.20	1.08	1.00	0.93	0.88	0.85	0.82	0.80	0.79	0.76	0.76	0.74	0.72
45	1.56	1.53	1.46	1.37	1.26	1.15	1.05	0.99	0.93	0.89	0.84	0.81	0.79	0.78	0.77	0.75	0.74	0.72
50	1.16	1.14	1.10	1.06	1.01	0.98	0.95	0.90	0.88	0.85	0.79	0.77	0.82	0.78	0.74	0.73	0.71	0.72
55	1.05	1.05	1.03	1.00	0.97	0.93	0.91	0.91	0.85	0.83	0.81	0.80	0.78	0.76	0.76	0.74	0.72	0.73
60	0.95	0.95	0.94	0.93	0.85	0.84	0.86	0.84	0.82	0.82	0.80	0.76	0.79	0.77	0.76	0.72	0.72	0.76
65	0.90	0.89	0.90	0.90	0.85	0.83	0.85	0.87	0.83	0.81	0.81	0.81	0.80	0.78	0.78	0.77	0.75	0.76
70	0.83	0.84	0.82	0.80	0.80	0.79	0.84	0.83	0.82	0.82	0.80	0.81	0.80	0.79	0.78	0.78	0.76	0.75
75	0.83	0.81	0.82	0.84	0.81	0.80	0.82	0.81	0.82	0.81	0.78	0.78	0.77	0.78	0.77	0.76	0.76	0.76
80	0.80	0.80	0.80	0.81	0.80	0.80	0.79	0.80	0.80	0.79	0.74	0.74	0.76	0.74	0.78	0.76	0.76	0.70
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2024-04-20

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks: