

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		4057.6 cd per klm. 0.0 degrees vertical -1.0 degrees horizontal
Beam Spread	At 10% of Imax	52.3V x 53.3H
	At 50% of Imax	22.9V x 22.2H
	At 90% of Imax	5.8V x 8.6H
Beam Flux	Total	997.1 lumens per klm.
	To 10% of Imax	801.1 lumens per klm.
	To 50% of Imax	338.5 lumens per klm.
	To 90% of Imax	33.3 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	99.7 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2024-04-16

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.20V I:0.0947A P:9.7789W PF:0.4689 Freq:50.00Hz Lamp Flux:420.836x1 lm		
NAME: 6628	TYPE:	WEIGHT:530g
SPEC.:10W	DIM.: $\phi 5 \times 12 \text{cm}$	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

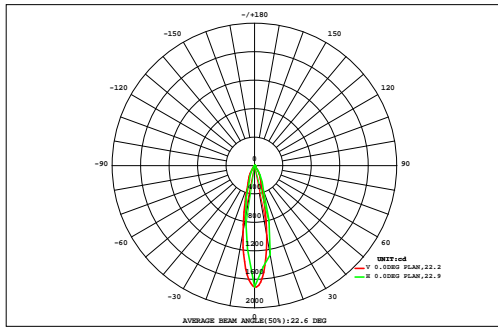

DATA OF LAMP		Eff:43.04lm/W	
MODEL		Imax(cd)	1708
NOMINAL POWER(W)		AVAILABILITY(%)	81.5
RATED VOLTAGE(V)		Avai. FLUX(lm)	343.1
NOMINAL FLUX(lm)	420.836	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	420.8
TEST VOLTAGE(V)	0	q @50%(H,V)	22,23DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	90	80	70	60	50	40	30	20	10	0	10	20	30	40	50	60	70	80	90	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.07	0.07	0.07	0.06	0.05	0.04	0.03	0.02	0.01	0.00	0.73	0.00
70	0.00	0.01	0.02	0.03	0.05	0.06	0.07	0.07	0.08	0.08	0.07	0.06	0.05	0.04	0.03	0.02	0.01	0.00	0.77	0.00
60	0.00	0.01	0.02	0.04	0.05	0.06	0.08	0.10	0.11	0.11	0.10	0.08	0.06	0.04	0.03	0.02	0.01	0.00	0.93	0.00
50	0.00	0.01	0.02	0.04	0.05	0.08	0.12	0.17	0.19	0.19	0.16	0.12	0.08	0.05	0.03	0.02	0.01	0.00	1.37	0.00
40	0.00	0.01	0.03	0.04	0.07	0.12	0.22	0.57	1.11	1.22	0.82	0.32	0.13	0.06	0.04	0.02	0.01	0.00	4.80	0.00
30	0.00	0.02	0.03	0.05	0.10	0.20	0.83	2.60	4.24	4.44	3.10	1.39	0.32	0.10	0.05	0.03	0.01	0.00	17.5	4.36
20	0.00	0.02	0.04	0.07	0.14	0.43	2.76	6.09	10.6	12.5	7.90	3.62	0.92	0.15	0.06	0.03	0.02	0.00	45.4	37.3
10	0.00	0.02	0.04	0.08	0.17	1.01	4.55	10.1	26.8	32.3	15.6	5.66	1.74	0.22	0.07	0.03	0.02	0.00	98.4	92.1
0	0.00	0.02	0.04	0.08	0.19	1.32	4.90	13.9	39.5	44.3	19.2	6.09	1.95	0.22	0.07	0.03	0.02	0.00	132	125
-10	0.00	0.02	0.04	0.08	0.16	1.07	4.01	9.99	22.5	23.2	11.1	4.71	1.37	0.15	0.06	0.03	0.02	0.00	78.5	70.4
-20	0.00	0.02	0.03	0.06	0.12	0.51	2.19	4.44	5.62	5.38	4.21	2.57	0.53	0.10	0.05	0.03	0.01	0.00	25.9	13.7
-30	0.00	0.01	0.03	0.05	0.08	0.16	0.66	1.83	2.45	2.37	1.86	0.68	0.12	0.07	0.04	0.02	0.01	0.00	10.4	0.00
-40	0.00	0.01	0.03	0.04	0.06	0.09	0.10	0.13	0.25	0.29	0.19	0.10	0.07	0.05	0.03	0.02	0.01	0.00	1.49	0.00
-50	0.00	0.01	0.02	0.04	0.05	0.07	0.10	0.12	0.11	0.10	0.10	0.09	0.06	0.04	0.03	0.02	0.01	0.00	0.99	0.00
-60	0.00	0.01	0.02	0.03	0.05	0.06	0.07	0.09	0.09	0.09	0.08	0.07	0.06	0.04	0.03	0.02	0.01	0.00	0.85	0.00
-70	0.00	0.01	0.02	0.03	0.04	0.05	0.06	0.06	0.06	0.06	0.06	0.05	0.05	0.04	0.03	0.02	0.01	0.00	0.64	0.00
-80	0.00	0.01	0.02	0.03	0.04	0.05	0.06	0.06	0.06	0.06	0.06	0.05	0.05	0.04	0.03	0.02	0.01	0.00	0.25	0.00
-90	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.00	0.00	0.25	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL(DEG)	20	30	40	50	60	70	80	90			
F t	0.06	0.23	0.46	0.79	1.43	5.38	20.8	50.4	114	127	64.6	25.7	7.59	1.44	0.70	0.40	0.22	0.06	421	---
F a	0.00	0.00	0.00	0.00	0.00	0.05	8.98	40.7	104	119	55.6	14.1	0.23	0.00	0.00	0.00	0.00	0.00	---	343


one-half-peak spread: U:14.5,D:8.5 , L:10.4,R:12.0 NEMA Beam Type: Type 4

H(h) Range:-90 - 90DEG
H(h) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2024-04-16

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.20V I:0.0947A P:9.7789W PF:0.4689 Freq:50.00Hz Lamp Flux:420.836x1 lm		
NAME: 6628	TYPE:	WEIGHT:530g
SPEC.:10W	DIM.: $\phi 5 \times 12 \text{cm}$	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

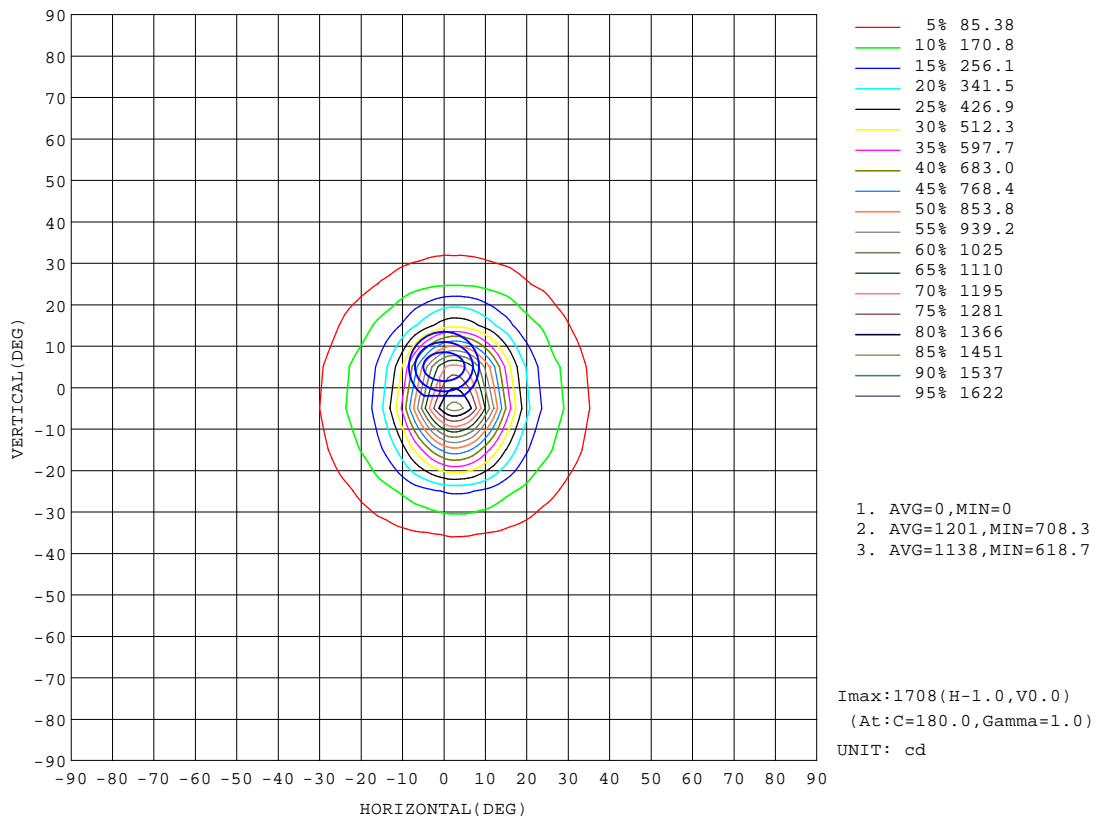


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:AED
 Test Date:2024-04-16

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:220.20V I:0.0947A P:9.7789W PF:0.4689 Freq:50.00Hz Lamp Flux:420.836x1 lm		
NAME: 6628	TYPE:	WEIGHT:530g
SPEC.:10W	DIM.: $\phi 5 \times 12$ cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

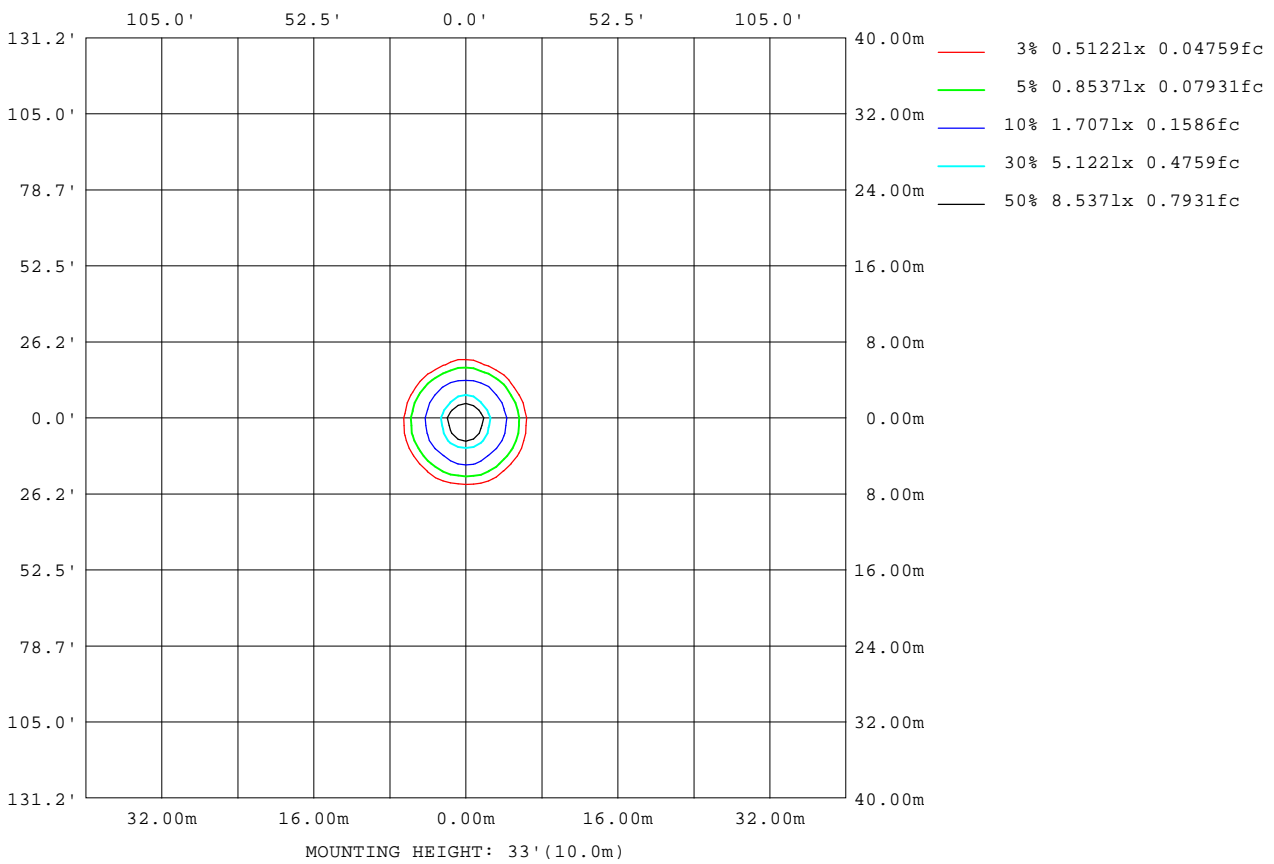

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:AED
 Test Date:2024-04-16

V(β) Range:-80 - 80DEG
 V(β) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

Planar Illuminance Curve

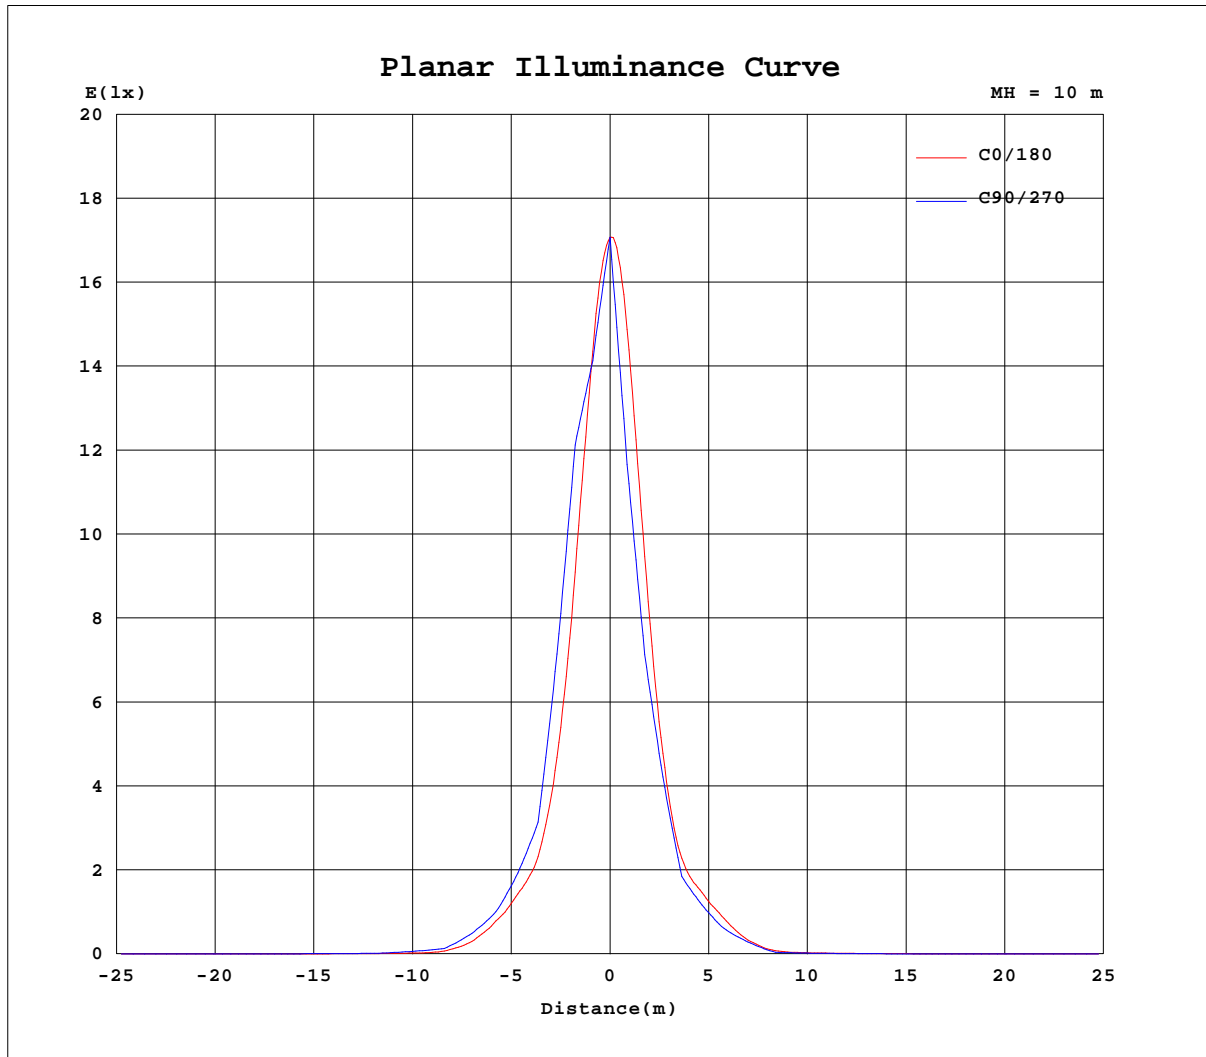


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:AED
 Test Date:2024-04-16

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.20V I:0.0947A P:9.7789W PF:0.4689 Freq:50.00Hz Lamp Flux:420.836x1 lm		
NAME: 6628	TYPE:	WEIGHT:530g
SPEC.:10W	DIM.: $\phi 5 \times 12$ cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

Flux out:142.5 lm

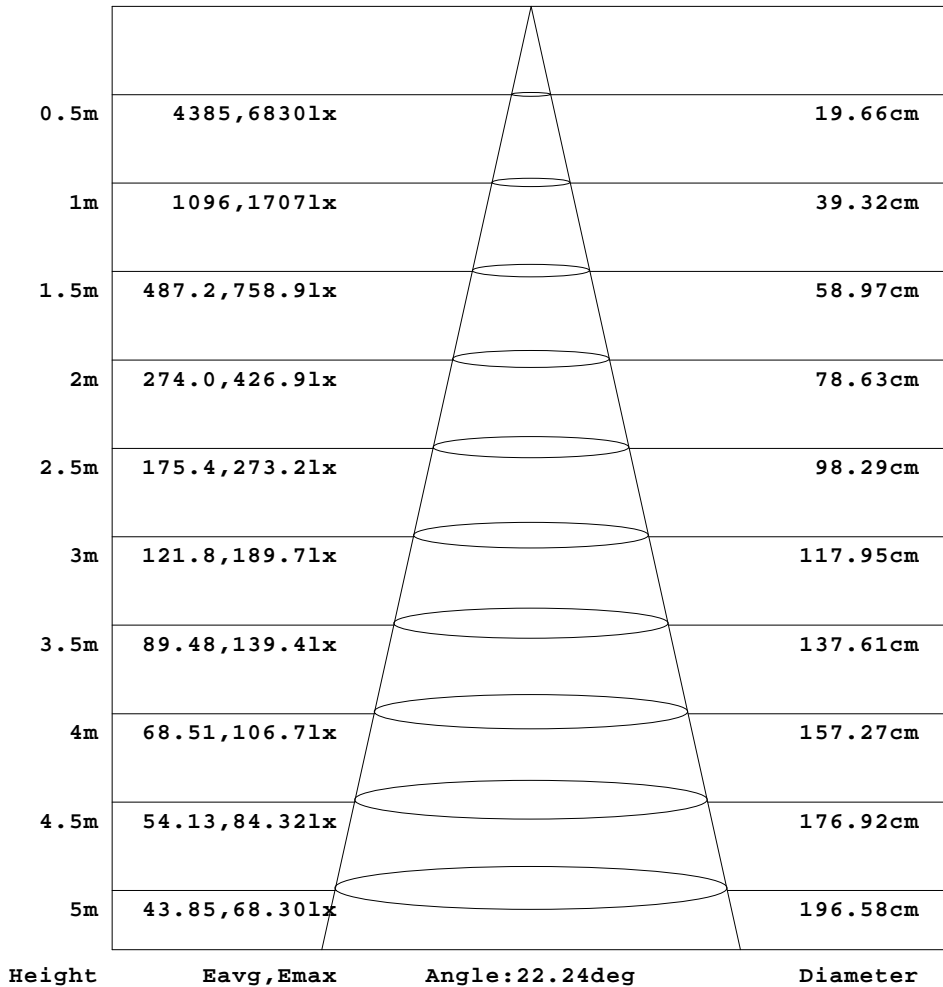

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:AED
 Test Date:2024-04-16

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.20V I:0.0947A P:9.7789W PF:0.4689 Freq:50.00Hz Lamp Flux:420.836x1 lm		
NAME: 6628	TYPE:	WEIGHT:530g
SPEC.:10W	DIM.: ϕ 5*12cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

Table--1

UNIT: cd

H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	1.04	1.08	1.09	1.10	1.10	1.12	1.18	1.28	1.37	1.49	1.57	1.65	1.70	1.73	1.75	1.77	1.80	1.80	1.79
-75	1.08	1.11	1.14	1.16	1.20	1.31	1.42	1.52	1.61	1.71	1.80	1.88	1.95	2.01	2.05	2.09	2.13	2.17	2.17
-70	1.15	1.18	1.22	1.26	1.43	1.63	1.80	1.88	1.98	2.05	2.12	2.19	2.28	2.35	2.41	2.46	2.51	2.54	2.54
-65	1.15	1.18	1.20	1.27	1.46	1.66	1.82	1.92	2.01	2.11	2.23	2.37	2.51	2.68	2.85	2.99	3.13	3.23	3.29
-60	1.18	1.20	1.25	1.50	1.75	1.89	1.97	2.08	2.17	2.32	2.50	2.69	2.93	3.21	3.46	3.68	3.88	4.01	4.02
-55	1.15	1.17	1.19	1.40	1.68	1.84	1.93	2.02	2.13	2.28	2.50	2.81	3.21	3.66	4.13	4.56	4.97	5.29	5.45
-50	1.15	1.17	1.34	1.67	1.82	1.90	2.00	2.10	2.26	2.49	2.85	3.39	4.01	4.67	5.32	5.94	6.49	6.81	6.84
-45	1.18	1.18	1.24	1.60	1.84	1.94	2.02	2.13	2.28	2.52	2.97	3.65	4.53	5.47	6.74	8.80	12.4	15.2	18.4
-40	1.20	1.23	1.55	1.86	1.98	2.06	2.19	2.33	2.55	3.03	3.85	4.90	6.18	7.74	10.7	15.9	21.6	28.6	30.4
-35	1.23	1.24	1.37	1.83	2.05	2.17	2.33	2.53	2.84	3.37	4.26	5.61	8.27	18.3	34.5	54.0	72.3	83.8	90.0
-30	1.25	1.31	1.78	2.07	2.26	2.44	2.69	3.05	3.71	4.66	6.18	8.91	20.8	46.4	81.1	116	141	147	155
-25	1.27	1.31	1.53	2.03	2.27	2.49	2.78	3.20	3.90	4.90	6.43	10.4	27.0	61.8	103	143	182	223	260
-20	1.32	1.41	1.96	2.28	2.54	2.86	3.34	4.11	5.19	6.78	9.44	30.0	72.0	122	176	213	278	349	379
-15	1.30	1.35	1.65	2.17	2.45	2.78	3.23	3.90	5.00	6.46	8.92	20.9	63.1	123	175	252	395	612	793
-10	1.32	1.45	2.05	2.43	2.74	3.19	3.84	4.95	6.38	8.51	15.6	58.9	121	186	257	438	776	1125	1270
-5	1.29	1.36	1.71	2.24	2.55	2.92	3.47	4.27	5.55	7.31	10.3	29.4	85.4	156	212	332	621	1063	1429
0	1.36	1.48	2.10	2.45	2.79	3.25	3.92	5.06	6.61	9.11	17.8	60.8	131	197	275	531	992	1505	1707
5	1.29	1.35	1.69	2.22	2.53	2.87	3.38	4.14	5.33	7.07	9.78	23.5	74.1	143	202	296	520	876	1180
10	1.30	1.42	2.01	2.36	2.65	3.06	3.61	4.57	5.97	8.02	11.5	37.9	96.5	165	217	295	471	655	747
15	1.28	1.33	1.61	2.13	2.39	2.65	3.03	3.58	4.50	5.89	7.97	12.7	38.0	89.1	143	194	266	375	468
20	1.33	1.40	1.91	2.23	2.43	2.68	3.02	3.62	4.55	6.04	7.95	11.3	32.9	80.4	129	165	195	217	223
25	1.27	1.30	1.48	1.96	2.18	2.35	2.57	2.86	3.41	4.29	5.59	7.48	11.3	30.6	59.8	91.4	121	142	157
30	1.25	1.29	1.70	2.00	2.13	2.27	2.43	2.69	3.21	4.02	5.23	6.84	9.12	14.3	28.3	52.8	74.1	91.7	94.2
35	1.21	1.24	1.33	1.74	1.96	2.06	2.18	2.33	2.57	3.02	3.73	4.75	5.98	7.74	12.5	21.8	35.1	44.9	52.4
40	1.21	1.23	1.45	1.79	1.91	1.99	2.08	2.20	2.43	2.79	3.40	4.19	5.06	5.97	6.88	7.71	8.51	8.94	8.98
45	1.17	1.20	1.23	1.51	1.78	1.89	1.98	2.08	2.19	2.42	2.74	3.23	3.85	4.50	5.18	5.76	6.28	6.69	6.84
50	1.18	1.20	1.29	1.59	1.80	1.89	1.98	2.08	2.20	2.39	2.62	2.94	3.40	3.84	4.21	4.43	4.59	4.67	4.64
55	1.22	1.22	1.23	1.35	1.60	1.79	1.91	2.01	2.10	2.23	2.38	2.56	2.80	3.09	3.35	3.54	3.66	3.73	3.74
60	1.24	1.25	1.27	1.39	1.65	1.84	1.95	2.05	2.13	2.23	2.33	2.44	2.57	2.66	2.75	2.81	2.82	2.82	2.78
65	1.28	1.28	1.29	1.31	1.42	1.58	1.73	1.86	1.98	2.08	2.17	2.24	2.32	2.40	2.45	2.50	2.53	2.54	2.53
70	1.29	1.31	1.32	1.32	1.38	1.49	1.67	1.84	1.95	2.03	2.09	2.13	2.18	2.22	2.23	2.24	2.25	2.24	2.24
75	1.32	1.32	1.33	1.33	1.34	1.39	1.46	1.55	1.63	1.69	1.74	1.78	1.81	1.85	1.89	1.91	1.94	1.95	1.95
80	1.32	1.33	1.33	1.35	1.36	1.36	1.36	1.37	1.39	1.39	1.42	1.46	1.49	1.54	1.57	1.60	1.63	1.64	1.65
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(h) Range:-90 - 90DEG
H(h) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2024-04-16

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.20V I:0.0947A P:9.7789W PF:0.4689 Freq:50.00Hz Lamp Flux:420.836x1 lm		
NAME: 6628	TYPE:	WEIGHT:530g
SPEC.:10W	DIM.: $\phi 5 \times 12 \text{cm}$	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

Table--2

UNIT: cd

H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	1.78	1.77	1.75	1.71	1.67	1.65	1.60	1.56	1.50	1.45	1.37	1.29	1.20	1.15	1.09	1.06	1.04	0.96
-75	2.16	2.13	2.09	2.05	1.98	1.92	1.87	1.80	1.73	1.66	1.58	1.52	1.43	1.36	1.26	1.16	1.11	1.08
-70	2.52	2.46	2.39	2.31	2.22	2.14	2.04	1.95	1.87	1.79	1.72	1.64	1.56	1.45	1.31	1.19	1.12	1.10
-65	3.27	3.18	3.05	2.87	2.68	2.49	2.32	2.16	2.02	1.91	1.81	1.74	1.66	1.58	1.48	1.32	1.19	1.14
-60	3.94	3.75	3.51	3.20	2.90	2.65	2.41	2.20	2.03	1.90	1.80	1.73	1.67	1.59	1.47	1.28	1.17	1.16
-55	5.40	5.16	4.76	4.28	3.78	3.31	2.86	2.46	2.16	1.96	1.84	1.73	1.66	1.60	1.54	1.40	1.20	1.12
-50	6.62	6.11	5.43	4.74	4.10	3.43	2.80	2.33	2.03	1.86	1.74	1.66	1.59	1.55	1.48	1.28	1.10	1.11
-45	18.4	15.7	12.8	9.02	6.42	4.85	3.87	3.06	2.44	2.07	1.86	1.74	1.66	1.61	1.55	1.45	1.23	1.10
-40	27.7	21.8	15.1	10.7	6.66	5.05	3.95	2.96	2.34	2.00	1.82	1.72	1.65	1.61	1.55	1.39	1.14	1.13
-35	92.3	86.4	73.7	56.8	35.3	16.7	6.77	4.67	3.48	2.65	2.19	1.97	1.85	1.76	1.69	1.59	1.35	1.16
-30	149	140	113	75.4	41.8	13.4	6.56	4.76	3.51	2.66	2.25	2.06	1.93	1.83	1.73	1.55	1.24	1.17
-25	266	237	187	149	106	64.0	27.5	8.48	5.27	3.84	2.95	2.41	2.17	2.01	1.88	1.75	1.48	1.24
-20	353	274	215	164	123	69.1	19.7	7.20	5.11	3.79	2.94	2.45	2.22	2.03	1.89	1.71	1.33	1.29
-15	802	638	426	265	186	126	63.9	19.8	7.29	5.10	3.81	2.93	2.49	2.24	2.05	1.91	1.64	1.35
-10	1087	748	421	257	172	110	48.0	11.5	6.40	4.73	3.60	2.80	2.44	2.19	2.04	1.87	1.50	1.36
-5	1441	1105	679	370	230	157	87.3	32.7	9.16	5.85	4.37	3.28	2.68	2.36	2.14	2.00	1.75	1.46
0	1453	953	520	280	193	121	54.5	16.5	6.93	5.11	3.86	2.92	2.50	2.22	2.06	1.90	1.54	1.49
5	1191	922	575	331	213	144	77.2	29.8	8.95	5.78	4.30	3.17	2.63	2.31	2.11	1.96	1.70	1.41
10	651	468	296	219	148	87.2	35.7	10.4	6.19	4.55	3.43	2.68	2.37	2.12	1.96	1.77	1.40	1.34
15	475	393	290	202	148	88.7	40.5	15.8	6.88	4.83	3.61	2.72	2.36	2.13	1.97	1.83	1.55	1.28
20	215	189	162	122	71.5	30.6	10.7	6.69	4.75	3.52	2.63	2.28	2.07	1.93	1.81	1.61	1.27	1.20
25	157	142	123	91.5	63.6	30.1	13.1	6.98	4.82	3.49	2.70	2.24	2.03	1.90	1.79	1.67	1.41	1.20
30	87.3	69.7	47.0	26.9	12.9	7.89	5.82	4.32	3.10	2.45	2.08	1.92	1.81	1.73	1.64	1.46	1.20	1.15
35	51.4	44.4	35.3	21.9	13.6	7.19	5.36	4.17	3.16	2.45	2.07	1.88	1.77	1.69	1.61	1.51	1.28	1.13
40	8.75	8.02	7.05	6.07	5.20	4.34	3.48	2.77	2.25	1.97	1.80	1.69	1.63	1.57	1.48	1.30	1.10	1.08
45	6.79	6.45	5.90	5.26	4.63	3.95	3.32	2.76	2.33	2.03	1.85	1.73	1.64	1.58	1.51	1.39	1.17	1.08
50	4.50	4.27	4.00	3.69	3.23	2.78	2.46	2.21	2.01	1.86	1.74	1.65	1.57	1.51	1.41	1.21	1.07	1.09
55	3.69	3.56	3.42	3.24	3.01	2.71	2.45	2.25	2.08	1.94	1.83	1.74	1.66	1.58	1.48	1.33	1.16	1.11
60	2.75	2.70	2.61	2.54	2.42	2.30	2.19	2.08	1.99	1.88	1.81	1.72	1.66	1.55	1.38	1.24	1.16	1.13
65	2.50	2.46	2.44	2.38	2.32	2.24	2.15	2.07	1.99	1.91	1.83	1.76	1.68	1.57	1.45	1.32	1.22	1.20
70	2.22	2.21	2.18	2.15	2.11	2.06	2.02	1.97	1.91	1.85	1.79	1.70	1.60	1.47	1.35	1.27	1.25	1.20
75	1.94	1.94	1.94	1.91	1.89	1.86	1.82	1.79	1.74	1.69	1.64	1.60	1.54	1.45	1.39	1.33	1.30	1.29
80	1.66	1.66	1.66	1.65	1.63	1.61	1.59	1.56	1.52	1.47	1.45	1.41	1.38	1.35	1.35	1.34	1.33	1.31
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H_(b) Range:-90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2024-04-16

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks: