

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		4066.9 cd per klm. 0.0 degrees vertical -4.0 degrees horizontal
Beam Spread	At 10% of Imax	46.9V x 45.3H
	At 50% of Imax	27.2V x 26.3H
	At 90% of Imax	10.5V x 11.4H
Beam Flux	Total	994.2 lumens per klm.
	To 10% of Imax	820.0 lumens per klm.
	To 50% of Imax	471.9 lumens per klm.
	To 90% of Imax	65.4 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	99.4 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2024-05-22

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.10V I:0.0327A P:3.0321W PF:0.4212 Freq:50.00Hz Lamp Flux:123.771x1 lm		
NAME: 6630	TYPE:	WEIGHT:100g
SPEC.:3W	DIM.: 4.6*4.6*5.2cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

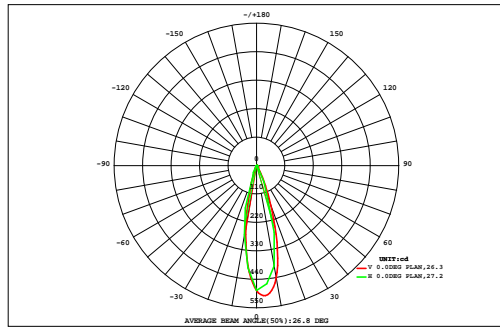

DATA OF LAMP		Eff:40.82lm/W	
MODEL		Imax(cd)	503.4
NOMINAL POWER(W)		AVAILABILITY(%)	83.4
RATED VOLTAGE(V)		Avai. FLUX(lm)	103.2
NOMINAL FLUX(lm)	123.771	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	123.8
TEST VOLTAGE(V)	0	q @50%(H,V)	26,27DEG

AREA FLUX DIAGRAM																UNIT:lm		F t	F a	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.01	0.01	0.02	0.03	0.03	0.04	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.01	0.01	0.00	0.44	0.00	
70	0.00	0.01	0.01	0.02	0.03	0.03	0.04	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.01	0.01	0.00	0.43	0.00	
60	0.00	0.01	0.01	0.02	0.03	0.04	0.04	0.05	0.05	0.05	0.05	0.04	0.03	0.03	0.02	0.01	0.01	0.00	0.49	0.00
50	0.00	0.01	0.02	0.02	0.03	0.04	0.05	0.07	0.07	0.07	0.06	0.05	0.04	0.03	0.02	0.01	0.01	0.00	0.60	0.00
40	0.00	0.01	0.02	0.03	0.04	0.06	0.09	0.14	0.16	0.15	0.11	0.07	0.04	0.03	0.02	0.01	0.01	0.00	0.99	0.00
30	0.00	0.01	0.02	0.03	0.05	0.10	0.21	0.44	0.72	0.63	0.31	0.13	0.06	0.04	0.02	0.02	0.01	0.00	2.80	0.00
	0.00	0.01	0.02	0.03	0.07	0.18	0.54	2.01	4.05	3.56	1.30	0.29	0.10	0.05	0.03	0.02	0.01	0.00	12.3	9.54
	0.00	0.01	0.02	0.04	0.10	0.26	1.29	5.68	11.3	9.69	3.41	0.55	0.13	0.05	0.03	0.02	0.01	0.00	32.6	30.7
	0.00	0.01	0.02	0.04	0.10	0.30	1.71	7.53	14.1	12.2	4.27	0.62	0.14	0.06	0.03	0.02	0.01	0.00	41.3	39.5
	0.00	0.01	0.02	0.04	0.09	0.25	1.11	4.41	8.32	6.71	2.04	0.38	0.11	0.05	0.03	0.02	0.01	0.00	23.6	21.8
	0.00	0.01	0.02	0.03	0.06	0.15	0.37	0.91	1.39	1.08	0.45	0.17	0.08	0.04	0.03	0.02	0.01	0.00	4.79	1.71
-30	0.00	0.01	0.02	0.03	0.04	0.08	0.14	0.17	0.19	0.18	0.13	0.08	0.05	0.03	0.02	0.02	0.01	0.00	1.20	0.00
-40	0.00	0.01	0.02	0.02	0.03	0.05	0.07	0.10	0.09	0.09	0.07	0.06	0.04	0.03	0.02	0.01	0.01	0.00	0.73	0.00
-50	0.00	0.01	0.02	0.02	0.03	0.04	0.05	0.06	0.06	0.06	0.05	0.04	0.03	0.03	0.02	0.01	0.01	0.00	0.56	0.00
-60	0.00	0.01	0.01	0.02	0.03	0.04	0.04	0.05	0.05	0.05	0.04	0.04	0.03	0.03	0.02	0.01	0.01	0.00	0.48	0.00
-70	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.41	0.00
-80	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.41	0.00
-90	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.17	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL(DEG)	20	30	40	50	60	70	80	90			
F t	0.04	0.15	0.28	0.45	0.80	1.69	5.84	21.7	40.7	34.7	12.4	2.64	0.99	0.57	0.38	0.25	0.13	0.04	124	---
F a	0.00	0.00	0.00	0.00	0.00	0.00	2.94	19.3	38.6	32.2	9.94	0.24	0.00	0.00	0.00	0.00	0.00	0.00	---	103


one-half-peak spread: U:15.8,D:11.6 , L:12.8,NEMA. Beam Type: Type 3 x 4 (H x V)

H(h) Range:-90 - 90DEG
 H(h) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:AED
 Test Date:2024-05-22

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.10V I:0.0327A P:3.0321W PF:0.4212 Freq:50.00Hz Lamp Flux:123.77lx1 lm		
NAME: 6630	TYPE:	WEIGHT:100g
SPEC.:3W	DIM.: 4.6*4.6*5.2cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

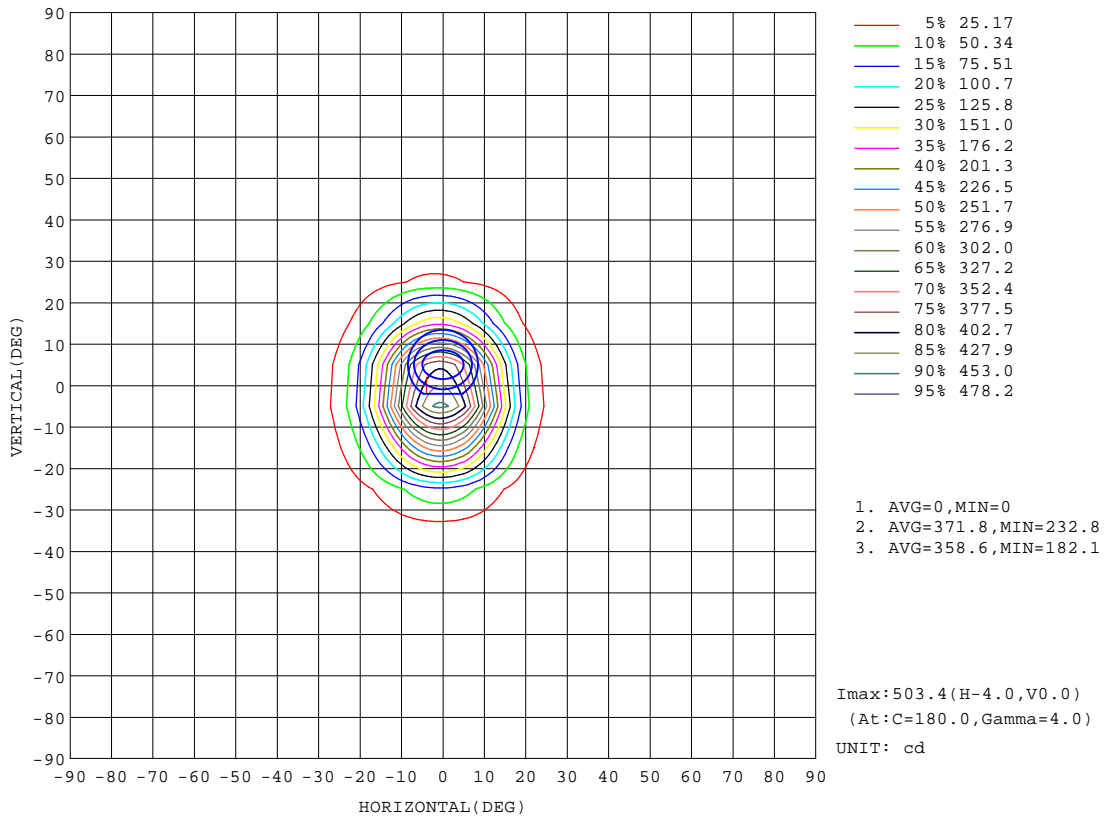


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:AED
 Test Date:2024-05-22

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:220.10V I:0.0327A P:3.0321W PF:0.4212 Freq:50.00Hz Lamp Flux:123.77lx1 lm		
NAME: 6630	TYPE:	WEIGHT:100g
SPEC.:3W	DIM.: 4.6*4.6*5.2cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

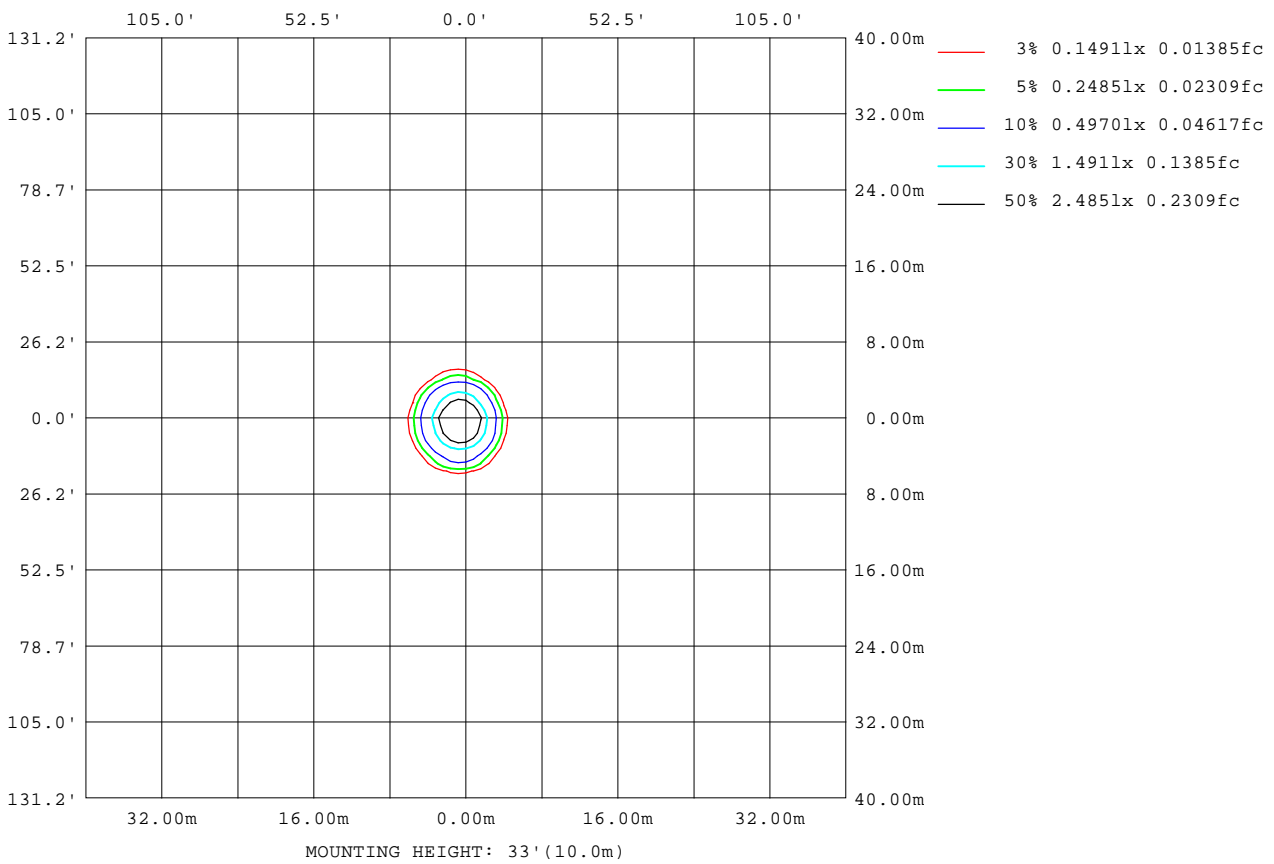

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:AED
 Test Date:2024-05-22

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

Planar Illuminance Curve

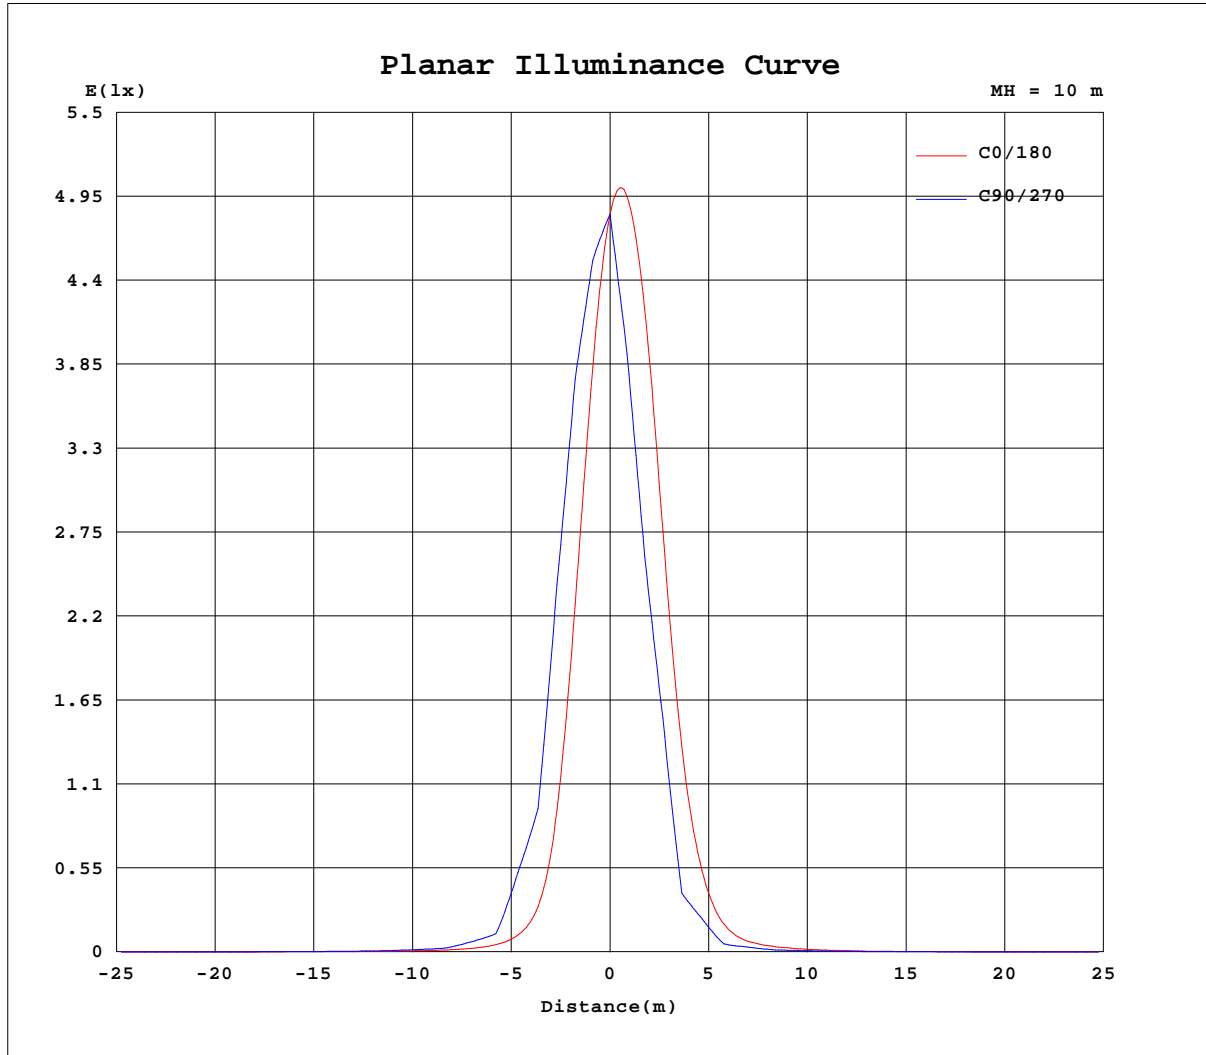


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:AED
 Test Date:2024-05-22

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.10V I:0.0327A P:3.0321W PF:0.4212 Freq:50.00Hz Lamp Flux:123.771x1 lm		
NAME: 6630	TYPE:	WEIGHT:100g
SPEC.:3W	DIM.: 4.6*4.6*5.2cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

Flux out:59.24 lm

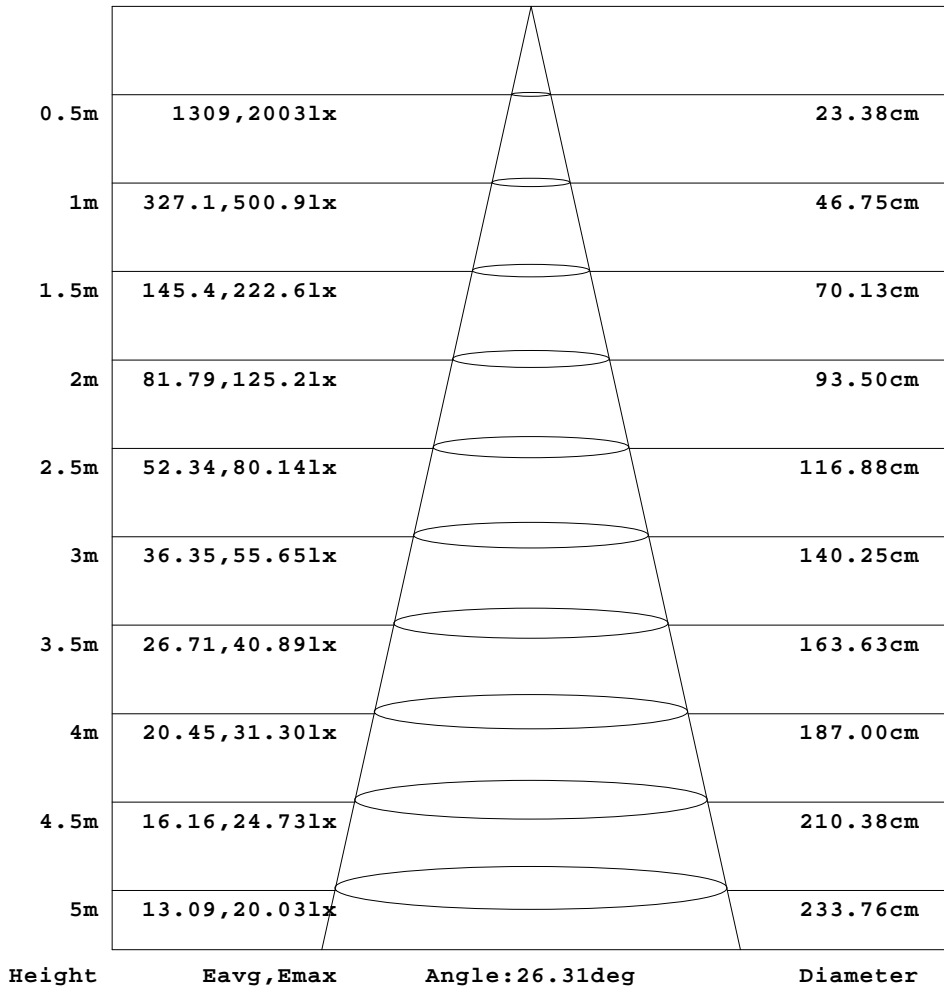

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2024-05-22

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.10V I:0.0327A P:3.0321W PF:0.4212 Freq:50.00Hz Lamp Flux:123.77lx1 lm		
NAME: 6630	TYPE:	WEIGHT:100g
SPEC.:3W	DIM.: 4.6*4.6*5.2cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

Table--1

UNIT: cd

H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.86	0.90	0.92	0.94	0.95	0.98	1.00	1.01	1.03	1.05	1.07	1.09	1.08	1.11	1.12	1.12	1.13	1.13	1.13
-75	0.86	0.87	0.91	0.95	0.98	1.01	1.04	1.08	1.11	1.14	1.17	1.21	1.23	1.24	1.26	1.28	1.29	1.29	1.29
-70	0.88	0.90	0.94	0.97	1.02	1.06	1.12	1.17	1.22	1.26	1.31	1.34	1.38	1.41	1.43	1.45	1.46	1.46	1.45
-65	0.87	0.87	0.92	0.96	1.02	1.08	1.14	1.20	1.26	1.32	1.38	1.43	1.48	1.53	1.58	1.61	1.64	1.65	1.64
-60	0.86	0.91	0.95	1.01	1.08	1.15	1.23	1.31	1.37	1.45	1.50	1.58	1.65	1.71	1.75	1.81	1.84	1.84	1.82
-55	0.88	0.87	0.93	0.99	1.07	1.15	1.23	1.30	1.38	1.45	1.51	1.61	1.71	1.85	2.02	2.16	2.28	2.35	2.36
-50	0.86	0.90	0.96	1.06	1.15	1.24	1.31	1.38	1.45	1.54	1.62	1.75	1.94	2.19	2.45	2.67	2.83	2.87	2.81
-45	0.85	0.87	0.94	1.04	1.13	1.23	1.32	1.39	1.45	1.54	1.67	1.92	2.26	2.72	3.23	3.71	4.09	4.31	4.33
-40	0.88	0.94	1.03	1.13	1.23	1.32	1.41	1.48	1.55	1.69	2.00	2.47	3.10	3.86	4.60	5.24	5.68	5.83	5.63
-35	0.85	0.89	0.99	1.10	1.22	1.34	1.44	1.52	1.61	1.80	2.22	2.94	3.88	5.05	6.53	8.45	10.5	12.1	12.5
-30	0.89	0.96	1.09	1.23	1.36	1.47	1.56	1.66	1.87	2.36	3.23	4.50	6.00	7.92	10.7	14.2	17.5	19.3	18.4
-25	0.87	0.92	1.03	1.17	1.32	1.46	1.59	1.70	1.91	2.45	3.47	4.95	7.04	10.8	18.1	30.8	48.1	64.4	70.1
-20	0.90	1.00	1.14	1.31	1.45	1.60	1.76	1.95	2.50	3.65	5.36	7.71	11.9	21.3	39.5	67.4	99.7	120	114
-15	0.90	0.93	1.05	1.22	1.39	1.55	1.71	1.89	2.33	3.35	5.05	7.46	12.0	23.9	52.1	105	180	246	267
-10	0.90	0.99	1.15	1.34	1.51	1.69	1.88	2.27	3.23	4.93	7.39	11.7	23.4	55.2	122	230	347	411	393
-5	0.87	0.94	1.07	1.24	1.42	1.59	1.78	2.01	2.60	3.96	6.01	9.07	16.0	37.0	89.0	188	323	428	458
0	0.90	1.02	1.17	1.35	1.54	1.72	1.91	2.33	3.41	5.26	7.91	12.9	28.3	71.6	162	306	441	501	483
5	0.87	0.94	1.06	1.23	1.41	1.58	1.76	1.97	2.52	3.79	5.74	8.59	14.7	33.3	79.6	166	282	371	396
10	0.84	1.00	1.14	1.32	1.49	1.65	1.83	2.13	2.95	4.50	6.65	10.1	18.5	42.0	90.6	164	244	288	271
15	0.91	0.93	1.04	1.20	1.37	1.51	1.67	1.82	2.16	2.98	4.38	6.39	9.67	17.7	37.0	71.8	118	159	170
20	0.89	0.98	1.12	1.27	1.43	1.55	1.68	1.81	2.19	3.00	4.36	6.09	8.50	13.0	21.7	34.1	46.1	51.3	46.6
25	0.90	0.92	1.01	1.15	1.29	1.41	1.53	1.63	1.77	2.11	2.82	3.89	5.31	7.32	10.8	16.5	23.5	28.9	29.5
30	0.88	0.94	1.06	1.19	1.32	1.41	1.50	1.57	1.69	1.97	2.49	3.30	4.29	5.30	6.25	7.27	8.12	8.48	8.10
35	0.88	0.89	0.97	1.07	1.19	1.29	1.37	1.45	1.53	1.63	1.86	2.27	2.86	3.53	4.19	4.84	5.44	5.84	5.85
40	0.86	0.92	0.99	1.09	1.18	1.28	1.35	1.41	1.48	1.55	1.67	1.91	2.23	2.57	2.88	3.15	3.30	3.30	3.19
45	0.87	0.87	0.93	1.01	1.10	1.19	1.26	1.33	1.40	1.45	1.52	1.64	1.80	2.00	2.20	2.38	2.51	2.58	2.57
50	0.85	0.89	0.96	1.01	1.11	1.19	1.26	1.33	1.39	1.44	1.49	1.55	1.60	1.66	1.73	1.80	1.84	1.86	1.83
55	0.87	0.86	0.91	0.97	1.04	1.10	1.17	1.24	1.31	1.36	1.41	1.46	1.49	1.54	1.58	1.63	1.66	1.67	1.67
60	0.86	0.90	0.94	0.98	1.04	1.11	1.16	1.23	1.28	1.34	1.37	1.41	1.44	1.48	1.49	1.49	1.49	1.50	1.48
65	0.90	0.86	0.90	0.92	0.96	1.01	1.08	1.12	1.18	1.22	1.26	1.29	1.31	1.35	1.35	1.38	1.38	1.38	1.37
70	0.88	0.87	0.91	0.90	0.92	1.02	1.04	1.08	1.12	1.16	1.16	1.20	1.23	1.25	1.25	1.26	1.26	1.26	1.25
75	0.90	0.86	0.88	0.88	0.90	0.93	0.97	0.99	1.01	1.05	1.06	1.08	1.09	1.11	1.11	1.12	1.12	1.13	1.13
80	0.86	0.88	0.87	0.89	0.90	0.92	0.93	0.94	0.94	0.96	0.98	0.97	0.97	0.98	0.99	0.98	0.99	1.00	0.98
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2024-05-22

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.10V I:0.0327A P:3.0321W PF:0.4212 Freq:50.00Hz Lamp Flux:123.77lx1 lm		
NAME: 6630	TYPE:	WEIGHT:100g
SPEC.:3W	DIM.: 4.6*4.6*5.2cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

Table--2

UNIT: cd

H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	1.12	1.11	1.10	1.08	1.06	1.04	1.04	1.01	1.00	0.98	0.96	0.94	0.93	0.92	0.90	0.90	0.86	0.83
-75	1.28	1.27	1.24	1.23	1.20	1.17	1.15	1.12	1.09	1.06	1.03	1.00	0.97	0.95	0.92	0.90	0.89	0.84
-70	1.43	1.39	1.37	1.33	1.30	1.26	1.23	1.18	1.14	1.10	1.06	1.01	0.98	0.95	0.92	0.88	0.86	0.87
-65	1.63	1.58	1.54	1.48	1.43	1.37	1.32	1.27	1.23	1.19	1.14	1.09	1.03	0.99	0.94	0.92	0.88	0.86
-60	1.77	1.71	1.63	1.58	1.49	1.43	1.36	1.31	1.26	1.20	1.15	1.10	1.04	0.99	0.94	0.89	0.86	0.83
-55	2.29	2.16	2.02	1.86	1.70	1.56	1.46	1.38	1.32	1.27	1.21	1.16	1.10	1.03	0.97	0.92	0.88	0.85
-50	2.65	2.44	2.20	1.95	1.74	1.57	1.45	1.37	1.31	1.25	1.20	1.13	1.09	1.02	0.95	0.88	0.83	0.84
-45	4.10	3.71	3.24	2.73	2.30	1.97	1.72	1.53	1.39	1.32	1.26	1.20	1.15	1.08	1.01	0.93	0.87	0.84
-40	5.12	4.41	3.66	2.96	2.45	2.05	1.75	1.52	1.39	1.31	1.25	1.20	1.14	1.06	0.97	0.90	0.83	0.82
-35	11.5	9.36	7.13	5.20	3.82	2.90	2.30	1.89	1.61	1.43	1.36	1.28	1.22	1.15	1.07	0.98	0.89	0.84
-30	15.4	11.6	8.16	5.69	3.98	2.94	2.34	1.87	1.60	1.46	1.38	1.29	1.23	1.13	1.03	0.94	0.86	0.88
-25	60.6	41.6	24.2	13.6	7.88	4.90	3.34	2.51	2.01	1.67	1.50	1.39	1.32	1.22	1.13	1.03	0.93	0.85
-20	83.9	49.3	26.0	13.8	7.73	4.73	3.22	2.46	2.00	1.67	1.48	1.39	1.29	1.20	1.10	0.98	0.89	0.89
-15	236	162	85.0	35.5	15.7	8.10	4.76	3.23	2.45	1.97	1.65	1.49	1.39	1.28	1.18	1.07	0.97	0.88
-10	303	179	75.7	28.9	13.1	6.80	4.17	2.94	2.29	1.86	1.59	1.46	1.35	1.24	1.14	1.03	0.94	0.89
-5	411	292	155	59.4	22.6	10.6	5.73	3.68	2.69	2.13	1.73	1.54	1.42	1.31	1.21	1.07	0.96	0.90
0	387	239	104	36.0	15.0	7.51	4.46	3.06	2.35	1.90	1.61	1.46	1.35	1.26	1.09	1.03	0.92	0.91
5	351	247	130	50.9	20.1	9.61	5.34	3.49	2.59	2.07	1.71	1.52	1.41	1.29	1.20	1.06	0.95	0.89
10	200	111	48.0	20.8	10.3	5.73	3.68	2.69	2.15	1.76	1.55	1.43	1.33	1.23	1.12	1.01	0.92	0.88
15	145	96.7	49.9	22.6	11.3	6.29	3.95	2.82	2.22	1.83	1.57	1.44	1.35	1.25	1.15	1.05	0.95	0.87
20	35.0	22.9	14.0	8.50	5.37	3.62	2.68	2.15	1.78	1.54	1.42	1.33	1.25	1.18	1.06	0.96	0.87	0.85
25	25.1	18.2	12.1	7.82	5.14	3.57	2.67	2.13	1.78	1.52	1.39	1.35	1.26	1.17	1.08	0.99	0.89	0.84
30	7.12	5.86	4.63	3.60	2.82	2.32	1.95	1.67	1.43	1.32	1.29	1.23	1.14	1.08	0.98	0.88	0.83	0.77
35	5.44	4.74	3.96	3.23	2.64	2.20	1.87	1.63	1.45	1.32	1.26	1.25	1.17	1.09	1.01	0.94	0.86	0.82
40	2.97	2.69	2.40	2.15	1.89	1.67	1.49	1.36	1.30	1.25	1.20	1.14	1.09	1.02	0.94	0.88	0.82	0.83
45	2.46	2.30	2.13	1.93	1.76	1.61	1.48	1.38	1.30	1.25	1.21	1.16	1.10	1.04	0.97	0.91	0.85	0.82
50	1.78	1.71	1.61	1.53	1.45	1.38	1.34	1.29	1.23	1.19	1.15	1.10	1.04	0.98	0.92	0.87	0.82	0.80
55	1.64	1.60	1.55	1.49	1.43	1.37	1.32	1.28	1.24	1.19	1.15	1.10	1.05	0.99	0.94	0.89	0.85	0.83
60	1.46	1.43	1.40	1.36	1.33	1.28	1.26	1.21	1.17	1.14	1.09	1.04	0.99	0.94	0.90	0.86	0.84	0.86
65	1.35	1.32	1.30	1.27	1.27	1.23	1.20	1.15	1.14	1.09	1.04	1.01	0.98	0.95	0.89	0.86	0.85	0.84
70	1.25	1.19	1.17	1.22	1.15	1.12	1.11	1.03	1.03	1.01	0.93	0.95	0.96	0.94	0.81	0.86	0.85	0.82
75	1.11	1.09	1.08	1.06	1.08	1.05	1.03	1.00	1.00	0.97	0.95	0.92	0.92	0.91	0.87	0.86	0.86	0.84
80	0.98	0.98	0.97	0.97	0.96	0.96	0.95	0.94	0.93	0.92	0.91	0.90	0.89	0.87	0.87	0.86	0.86	0.83
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AED
Test Date:2024-05-22

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks: