

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2558.7 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	64.8V x 60.5H
	At 50% of Imax	32.0V x 30.3H
	At 90% of Imax	8.5V x 11.5H
Beam Flux	Total	999.8 lumens per klm.
	To 10% of Imax	824.5 lumens per klm.
	To 50% of Imax	406.3 lumens per klm.
	To 90% of Imax	46.3 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2024-07-12

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.18V I:0.0244A P:2.5827W PF:0.4802 Freq:50.00Hz Lamp Flux:115.076x1 lm		
NAME: 6688	TYPE:	WEIGHT:
SPEC.:6W	DIM.:	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:30°

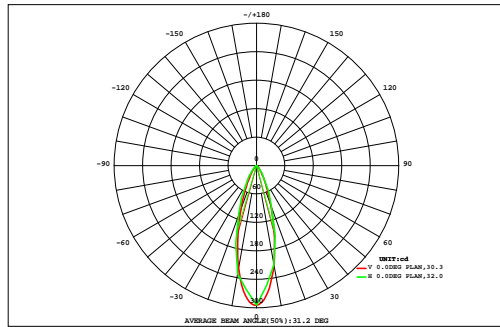

DATA OF LAMP		Eff:44.56lm/W	
MODEL		Imax(cd)	294.4
NOMINAL POWER(W)		AVAILABILITY(%)	83.3
RATED VOLTAGE(V)		Avai. FLUX(lm)	95.86
NOMINAL FLUX(lm)	115.076	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	115.1
TEST VOLTAGE(V)	0	q @50%(H,V)	30,32DEG

VERTICAL( DEG)	AREA FLUX DIAGRAM															UNIT:lm		F t	F a		
	90	80	70	60	50	40	30	20	10	0	10	20	30	40	50	60	70			80	90
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
80	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.00	0.31	0.00		
70	0.00	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.33	0.00	
60	0.00	0.00	0.01	0.01	0.02	0.03	0.05	0.07	0.09	0.09	0.08	0.05	0.03	0.02	0.02	0.01	0.01	0.00	0.60	0.00	
50	0.00	0.00	0.01	0.02	0.03	0.06	0.12	0.21	0.28	0.29	0.23	0.14	0.07	0.03	0.02	0.01	0.01	0.00	1.52	0.00	
40	0.00	0.01	0.01	0.02	0.04	0.12	0.28	0.53	0.75	0.79	0.59	0.33	0.15	0.05	0.02	0.01	0.01	0.00	3.72	1.00	
30	0.00	0.01	0.01	0.02	0.08	0.22	0.55	1.20	1.94	2.06	1.42	0.69	0.27	0.09	0.03	0.01	0.01	0.00	8.61	6.78	
20	0.00	0.01	0.01	0.03	0.11	0.33	0.96	2.46	4.41	4.70	2.93	1.21	0.41	0.13	0.04	0.01	0.01	0.00	17.7	16.3	
10	0.00	0.01	0.01	0.04	0.13	0.40	1.33	3.81	7.22	7.62	4.43	1.65	0.50	0.15	0.04	0.01	0.01	0.00	27.4	26.1	
0	0.00	0.01	0.01	0.04	0.12	0.39	1.32	3.87	7.31	7.60	4.37	1.60	0.48	0.14	0.04	0.01	0.01	0.00	27.3	26.0	
-10	0.00	0.01	0.01	0.03	0.10	0.30	0.92	2.42	4.30	4.39	2.60	1.04	0.35	0.11	0.03	0.01	0.01	0.00	16.6	15.2	
-20	0.00	0.01	0.01	0.02	0.07	0.18	0.46	0.97	1.50	1.53	1.04	0.51	0.21	0.07	0.03	0.01	0.01	0.00	6.63	4.51	
-30	0.00	0.00	0.01	0.02	0.04	0.10	0.20	0.34	0.44	0.44	0.35	0.21	0.10	0.04	0.02	0.01	0.01	0.00	2.34	0.00	
-40	0.00	0.00	0.01	0.02	0.02	0.04	0.08	0.12	0.15	0.15	0.12	0.08	0.05	0.03	0.02	0.01	0.00	0.00	0.92	0.00	
-50	0.00	0.00	0.01	0.01	0.02	0.03	0.04	0.05	0.05	0.05	0.05	0.04	0.03	0.02	0.02	0.01	0.00	0.00	0.42	0.00	
-60	0.00	0.00	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.00	0.29	0.00
-70	0.00	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.22	0.00
-80	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.09	0.00
-90	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.09	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL( DEG)	20	30	40	50	60	70	80	90				
F t	0.03	0.08	0.17	0.33	0.84	2.29	6.40	16.2	28.6	29.8	18.3	7.67	2.74	0.96	0.37	0.18	0.09	0.03	115	---	
F a	0.00	0.00	0.00	0.00	0.00	0.02	3.88	14.3	27.0	28.4	16.6	5.51	0.15	0.00	0.00	0.00	0.00	0.00	---	96	


one-half-peak spread: U:15.4,D:16.8 , L:14.9,R:15.6 NEMA Beam Type: Type 4

H(h) Range:-90 - 90DEG  
H(h) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2024-07-12

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.18V I:0.0244A P:2.5827W PF:0.4802 Freq:50.00Hz Lamp Flux:115.076x1 lm		
NAME: 6688	TYPE:	WEIGHT:
SPEC.:6W	DIM.:	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:30°

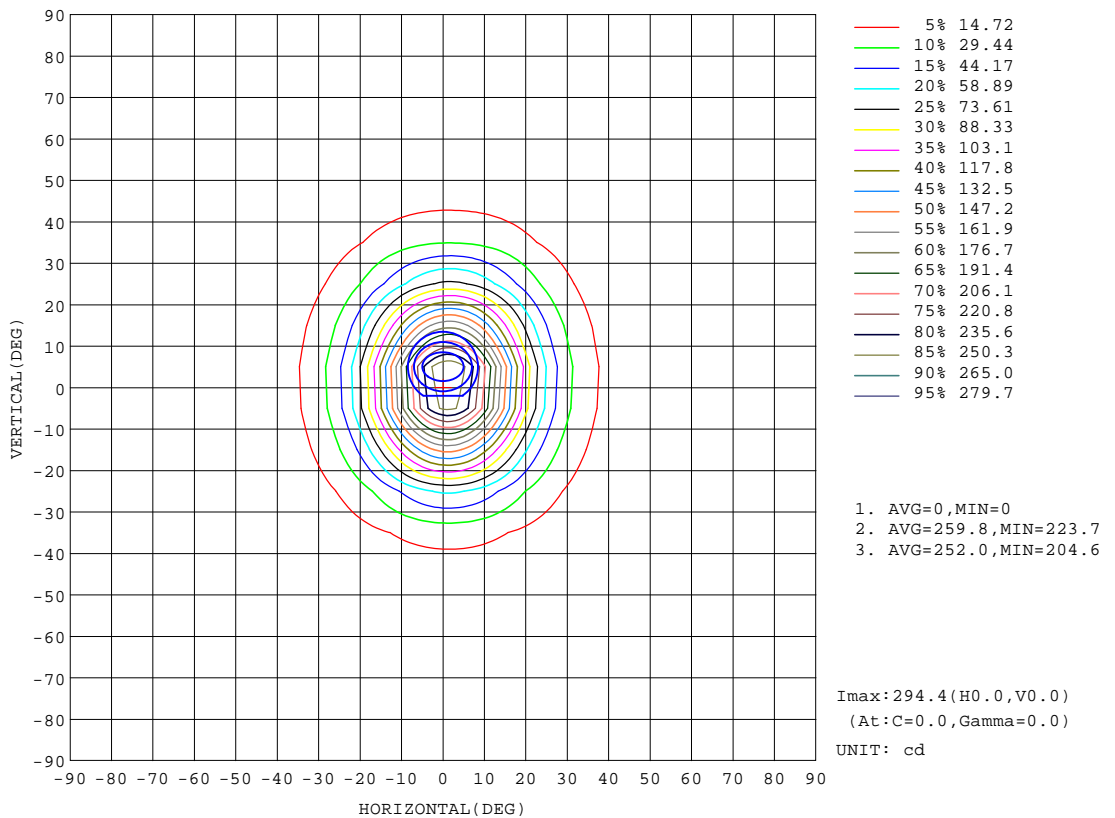


H(h) Range:-90 - 90DEG  
 H(h) Interval: 1.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:AED  
 Test Date:2024-07-12

V(B) Range:-80 - 80DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:5.780m [K=1.0000]  
 Remarks:

ISOLUX DIAGRAM


Test:U:220.18V I:0.0244A P:2.5827W PF:0.4802 Freq:50.00Hz Lamp Flux:115.076x1 lm		
NAME: 6688	TYPE:	WEIGHT:
SPEC.:6W	DIM.:	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:30°

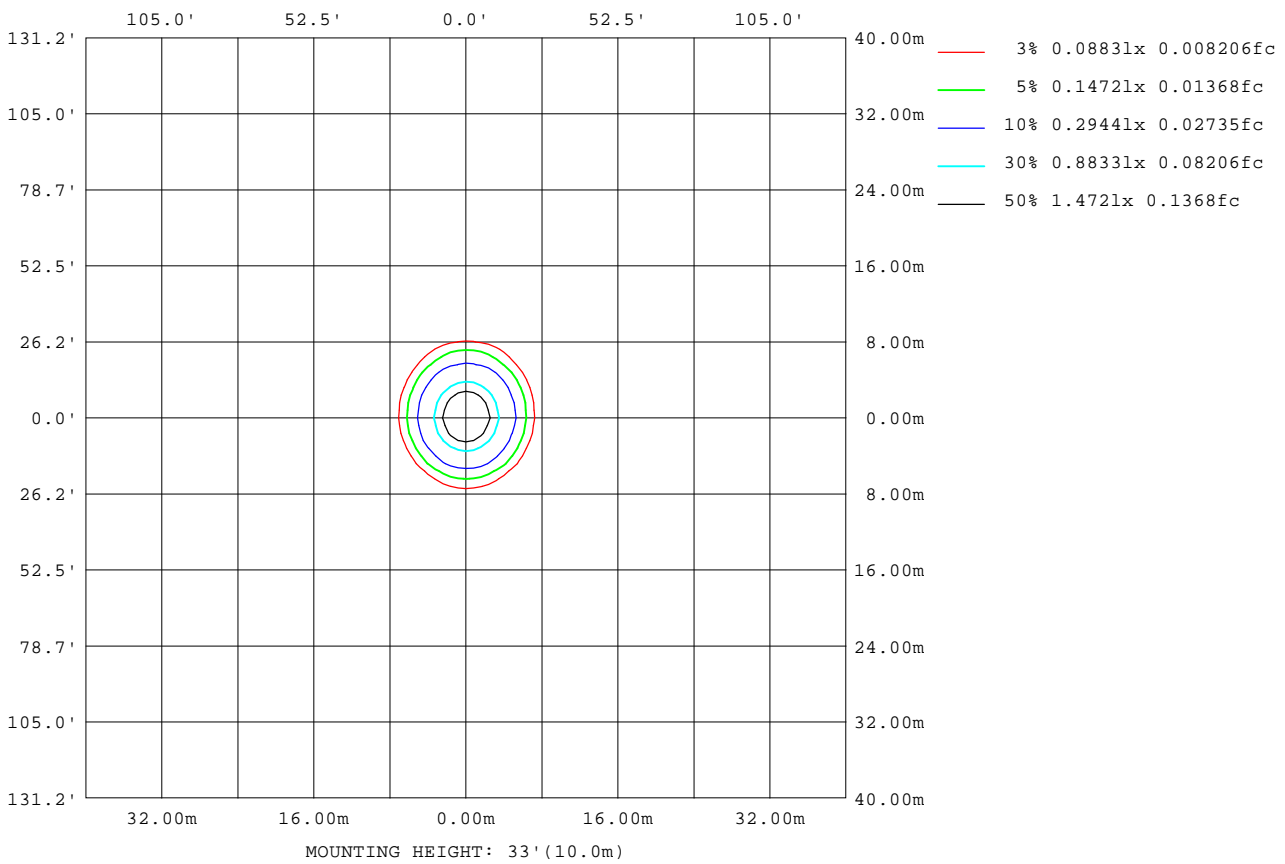

H( $\beta$ ) Range:-90 - 90DEG  
 H( $\beta$ ) Interval: 1.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:AED  
 Test Date:2024-07-12

V(B) Range:-80 - 80DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:5.780m [K=1.0000]  
 Remarks:

Planar Illuminance Curve

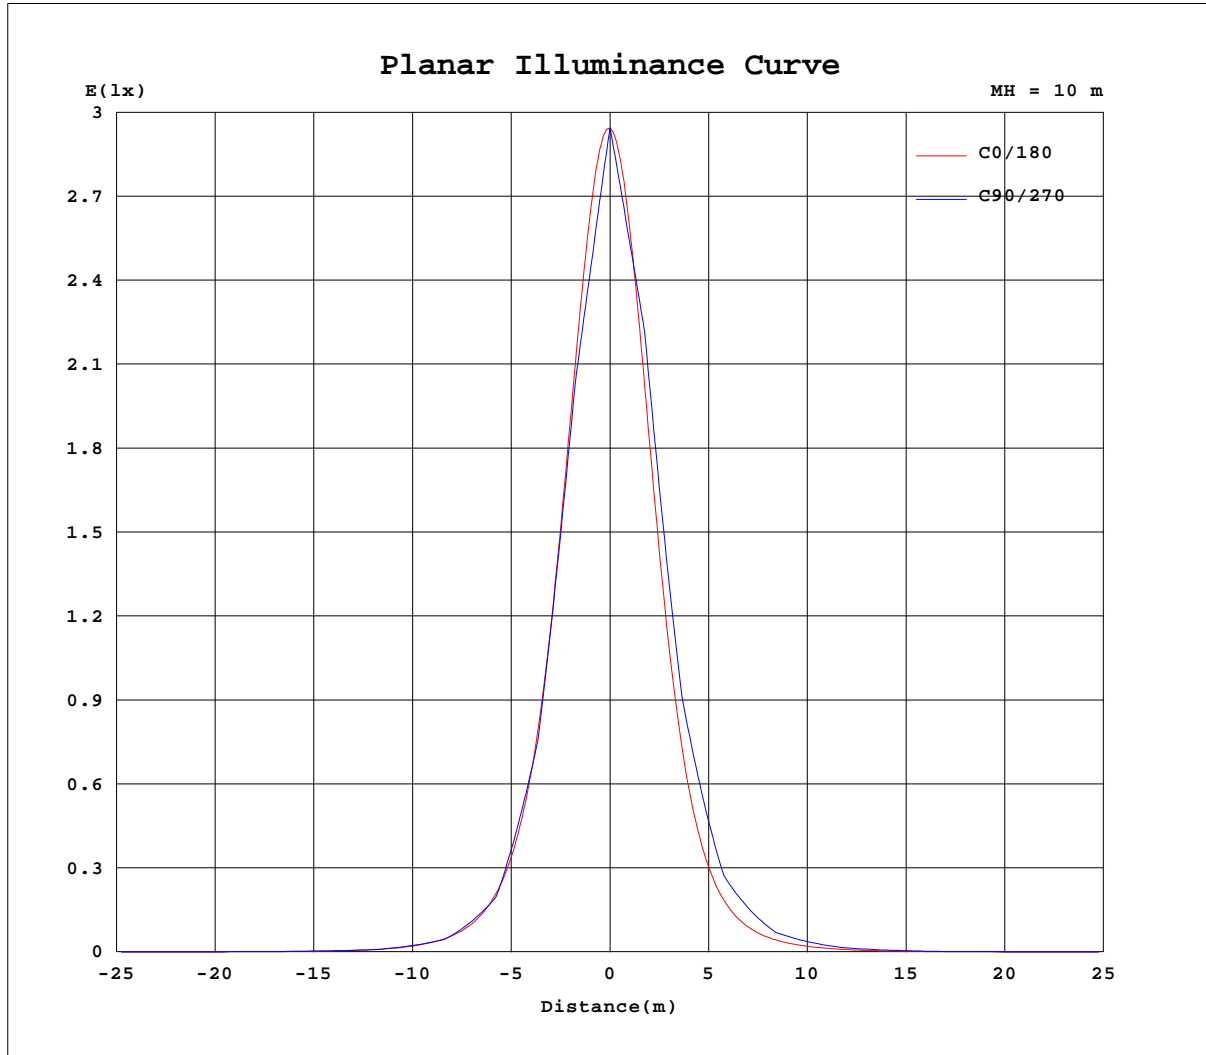


H( $\beta$ ) Range:-90 - 90DEG  
 H( $\beta$ ) Interval: 1.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:AED  
 Test Date:2024-07-12

V(B) Range:-80 - 80DEG  
 V(B) Interval: 5.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:5.780m [K=1.0000]  
 Remarks:

AAI Figure

Test:U:220.18V I:0.0244A P:2.5827W PF:0.4802 Freq:50.00Hz Lamp Flux:115.076x1 lm		
NAME: 6688	TYPE:	WEIGHT:
SPEC.:6W	DIM.:	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:30°

Flux out:46.79 lm

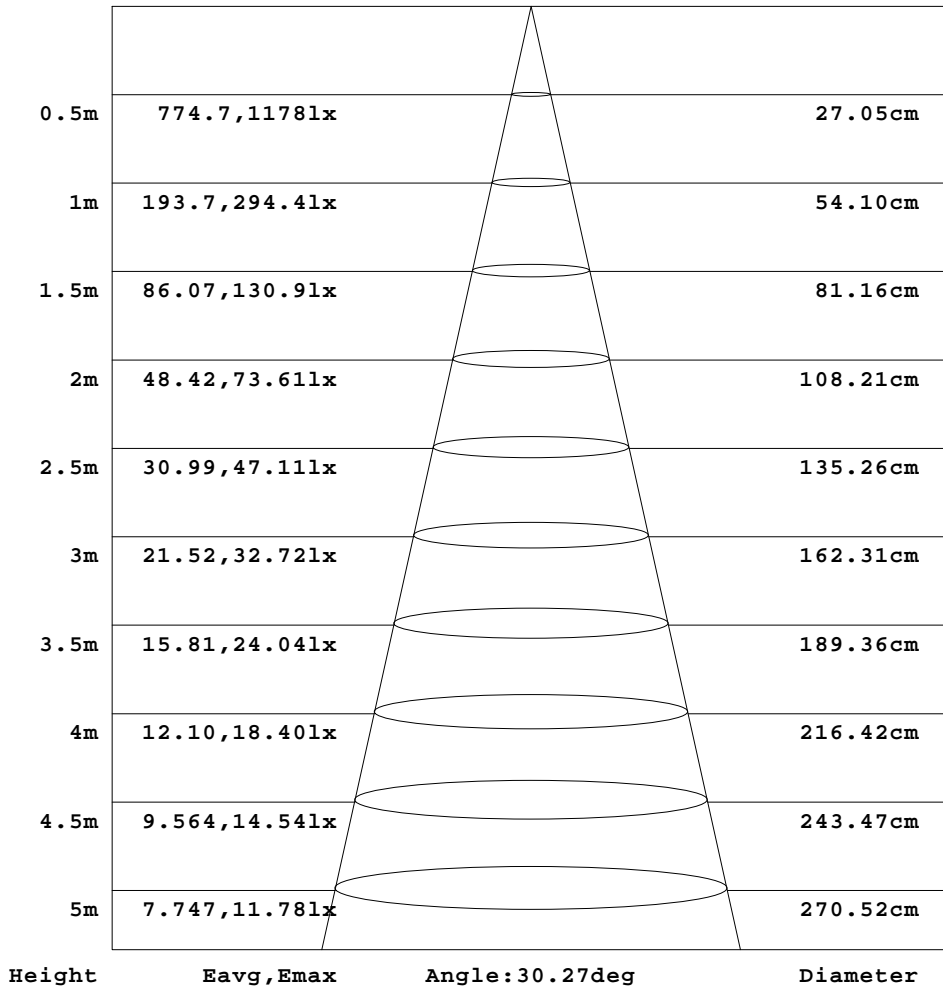

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG  
H(β) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2024-07-12

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.18V I:0.0244A P:2.5827W PF:0.4802 Freq:50.00Hz Lamp Flux:115.076x1 lm		
NAME: 6688	TYPE:	WEIGHT:
SPEC.:6W	DIM.:	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:30°

Table--1

UNIT: cd

H( DEG) V( DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.49	0.49	0.49	0.50	0.50	0.50	0.51	0.52	0.52	0.54	0.54	0.56	0.56	0.56	0.57	0.58	0.58	0.59	0.59
-75	0.49	0.50	0.50	0.51	0.51	0.52	0.54	0.55	0.56	0.57	0.59	0.61	0.64	0.66	0.69	0.71	0.73	0.74	0.75
-70	0.50	0.51	0.51	0.53	0.54	0.55	0.57	0.59	0.60	0.61	0.64	0.68	0.72	0.77	0.81	0.85	0.89	0.89	0.91
-65	0.51	0.51	0.52	0.54	0.55	0.57	0.59	0.61	0.67	0.72	0.77	0.83	0.88	0.94	0.99	1.04	1.08	1.11	1.13
-60	0.52	0.52	0.54	0.56	0.58	0.59	0.62	0.66	0.76	0.84	0.93	1.01	1.07	1.14	1.19	1.24	1.29	1.32	1.35
-55	0.53	0.53	0.54	0.56	0.58	0.60	0.65	0.73	0.84	0.94	1.03	1.14	1.27	1.48	1.71	1.94	2.14	2.28	2.35
-50	0.52	0.53	0.54	0.57	0.60	0.61	0.72	0.85	0.96	1.06	1.17	1.31	1.55	1.92	2.32	2.72	3.06	3.28	3.36
-45	0.54	0.53	0.55	0.58	0.61	0.65	0.77	0.90	1.02	1.17	1.44	1.86	2.44	3.20	4.07	4.97	5.77	6.39	6.68
-40	0.54	0.54	0.56	0.60	0.62	0.73	0.87	1.00	1.14	1.36	1.85	2.61	3.61	4.81	6.18	7.56	8.78	9.66	10.0
-35	0.54	0.54	0.57	0.61	0.64	0.75	0.91	1.06	1.27	1.72	2.51	3.70	5.32	7.48	10.2	13.3	16.4	18.9	20.1
-30	0.54	0.56	0.58	0.63	0.66	0.86	1.01	1.19	1.52	2.33	3.59	5.35	7.80	11.1	15.4	20.4	25.2	28.8	30.3
-25	0.56	0.56	0.59	0.64	0.69	0.88	1.06	1.27	1.76	2.79	4.38	6.77	10.4	15.8	23.5	33.8	45.4	55.5	60.7
-20	0.57	0.58	0.62	0.67	0.77	0.99	1.18	1.47	2.30	3.79	5.97	9.37	14.8	23.1	35.5	51.8	70.1	85.3	91.6
-15	0.57	0.57	0.61	0.66	0.75	0.98	1.18	1.52	2.45	4.09	6.59	10.6	17.4	28.9	47.4	74.3	107	136	152
-10	0.56	0.58	0.63	0.68	0.82	1.05	1.29	1.80	3.15	5.23	8.50	14.0	23.8	40.8	68.9	109	157	197	213
-5	0.58	0.58	0.63	0.68	0.79	1.04	1.27	1.73	2.98	5.03	8.24	13.7	23.4	41.0	70.9	116	173	225	252
0	0.58	0.60	0.66	0.71	0.87	1.12	1.36	2.00	3.52	5.86	9.69	16.3	28.5	50.8	88.6	144	212	269	294
5	0.59	0.59	0.64	0.69	0.80	1.06	1.28	1.75	3.06	5.20	8.54	14.2	24.3	42.5	73.3	120	178	232	262
10	0.58	0.60	0.64	0.69	0.84	1.08	1.32	1.88	3.36	5.62	9.19	15.2	25.8	44.2	74.2	117	168	212	232
15	0.59	0.60	0.63	0.69	0.76	1.02	1.23	1.59	2.64	4.55	7.39	12.0	19.6	32.5	53.2	82.7	118	152	170
20	0.60	0.61	0.65	0.70	0.79	1.03	1.24	1.58	2.56	4.42	7.07	11.1	17.6	27.6	42.6	62.1	83.7	102	110
25	0.58	0.59	0.63	0.67	0.72	0.93	1.12	1.34	1.92	3.27	5.34	8.33	12.8	19.5	29.4	42.1	56.2	68.8	75.8
30	0.57	0.59	0.62	0.66	0.70	0.90	1.08	1.26	1.70	2.88	4.64	7.03	10.4	14.9	20.8	27.6	34.4	39.6	42.0
35	0.57	0.58	0.60	0.64	0.67	0.78	0.98	1.14	1.39	1.99	3.16	4.89	7.24	10.3	14.2	18.7	23.1	26.8	28.7
40	0.58	0.58	0.60	0.62	0.66	0.72	0.95	1.11	1.26	1.55	2.28	3.62	5.23	7.08	9.25	11.5	13.6	15.1	15.7
45	0.58	0.59	0.59	0.62	0.65	0.68	0.82	0.98	1.12	1.29	1.68	2.37	3.34	4.54	6.03	7.64	9.06	10.1	10.6
50	0.59	0.59	0.60	0.62	0.64	0.66	0.74	0.92	1.04	1.15	1.29	1.49	1.90	2.55	3.45	4.36	5.02	5.47	5.62
55	0.59	0.60	0.60	0.62	0.64	0.65	0.69	0.79	0.88	1.03	1.14	1.26	1.47	1.80	2.27	2.76	3.14	3.41	3.52
60	0.60	0.60	0.61	0.62	0.64	0.66	0.67	0.70	0.78	0.95	1.02	1.10	1.15	1.23	1.29	1.35	1.39	1.42	1.43
65	0.61	0.62	0.61	0.62	0.63	0.64	0.66	0.68	0.71	0.81	0.87	0.90	0.95	0.99	1.05	1.11	1.15	1.18	1.21
70	0.62	0.62	0.63	0.63	0.63	0.64	0.65	0.66	0.67	0.70	0.73	0.72	0.75	0.78	0.85	0.89	0.94	0.96	0.99
75	0.61	0.63	0.62	0.63	0.63	0.64	0.64	0.65	0.67	0.67	0.69	0.70	0.71	0.72	0.75	0.78	0.79	0.81	0.83
80	0.63	0.64	0.64	0.64	0.63	0.64	0.65	0.65	0.66	0.65	0.65	0.67	0.67	0.67	0.66	0.66	0.67	0.67	0.69
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(h) Range:-90 - 90DEG  
H(h) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2024-07-12

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.18V I:0.0244A P:2.5827W PF:0.4802 Freq:50.00Hz Lamp Flux:115.076x1 lm		
NAME: 6688	TYPE:	WEIGHT:
SPEC.:6W	DIM.:	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:30°

Table--2

UNIT: cd

H(DEG)\V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.60	0.59	0.59	0.59	0.58	0.57	0.58	0.56	0.56	0.56	0.55	0.54	0.53	0.52	0.52	0.52	0.49	0.49
-75	0.75	0.75	0.74	0.73	0.71	0.69	0.67	0.64	0.61	0.60	0.58	0.57	0.56	0.55	0.54	0.53	0.51	0.49
-70	0.91	0.90	0.89	0.87	0.83	0.80	0.75	0.71	0.66	0.63	0.61	0.60	0.58	0.57	0.55	0.54	0.51	0.50
-65	1.12	1.12	1.09	1.06	1.01	0.97	0.91	0.86	0.80	0.76	0.70	0.64	0.60	0.58	0.56	0.55	0.52	0.50
-60	1.33	1.32	1.27	1.23	1.18	1.12	1.05	0.99	0.93	0.86	0.77	0.66	0.61	0.59	0.58	0.55	0.51	0.50
-55	2.32	2.23	2.06	1.87	1.66	1.46	1.27	1.13	1.04	0.96	0.87	0.77	0.68	0.60	0.58	0.56	0.54	0.51
-50	3.29	3.08	2.78	2.42	2.06	1.71	1.43	1.25	1.11	1.02	0.93	0.83	0.72	0.60	0.59	0.56	0.52	0.51
-45	6.60	6.18	5.46	4.60	3.72	2.89	2.20	1.71	1.36	1.14	1.01	0.91	0.79	0.66	0.59	0.57	0.55	0.51
-40	9.81	9.03	7.82	6.42	5.03	3.77	2.73	2.02	1.51	1.21	1.05	0.94	0.81	0.67	0.59	0.57	0.54	0.50
-35	19.7	17.9	15.1	12.0	9.02	6.51	4.53	3.09	2.10	1.52	1.19	1.02	0.90	0.76	0.63	0.59	0.57	0.52
-30	29.1	25.9	21.2	16.3	11.9	8.36	5.65	3.70	2.42	1.66	1.25	1.06	0.93	0.79	0.64	0.60	0.57	0.52
-25	59.1	51.4	40.4	29.3	20.2	13.4	8.68	5.50	3.43	2.19	1.50	1.16	0.99	0.85	0.69	0.61	0.59	0.53
-20	86.8	72.8	54.9	38.2	25.3	16.2	10.2	6.31	3.84	2.36	1.56	1.18	1.00	0.86	0.68	0.62	0.59	0.54
-15	146	122	90.1	60.4	38.1	23.3	14.1	8.45	5.03	2.99	1.88	1.31	1.08	0.92	0.75	0.64	0.61	0.55
-10	197	159	113	72.3	43.8	25.8	15.2	8.93	5.24	3.05	1.90	1.32	1.09	0.93	0.74	0.66	0.62	0.57
-5	242	200	144	92.9	55.8	32.4	18.7	10.9	6.32	3.66	2.18	1.42	1.13	0.97	0.78	0.66	0.63	0.57
0	274	219	154	96.1	56.4	32.2	18.4	10.6	6.11	3.51	2.07	1.36	1.10	0.94	0.76	0.66	0.62	0.58
5	252	209	151	97.3	58.5	34.1	19.7	11.4	6.60	3.81	2.23	1.44	1.15	0.98	0.80	0.68	0.64	0.58
10	217	176	125	80.5	48.7	28.8	16.8	9.85	5.75	3.30	1.97	1.34	1.11	0.95	0.76	0.68	0.64	0.59
15	165	139	104	70.1	44.2	27.0	16.2	9.65	5.69	3.31	1.99	1.34	1.10	0.95	0.77	0.66	0.63	0.57
20	106	89.5	68.3	47.9	31.6	20.0	12.3	7.53	4.50	2.63	1.64	1.20	1.03	0.88	0.70	0.63	0.61	0.56
25	74.5	65.3	51.9	37.9	26.0	17.0	10.8	6.72	4.09	2.47	1.58	1.19	1.02	0.89	0.72	0.64	0.62	0.56
30	40.7	36.2	29.7	22.7	16.3	11.2	7.34	4.67	2.90	1.84	1.30	1.09	0.96	0.83	0.67	0.63	0.61	0.57
35	28.3	25.8	21.8	17.2	12.7	8.91	6.03	3.91	2.49	1.65	1.23	1.05	0.93	0.81	0.66	0.63	0.61	0.56
40	15.3	14.1	12.1	9.76	7.42	5.38	3.76	2.47	1.66	1.25	1.07	0.95	0.86	0.72	0.63	0.62	0.58	0.55
45	10.5	9.76	8.54	6.99	5.36	3.95	2.84	2.01	1.48	1.19	1.04	0.93	0.84	0.71	0.64	0.62	0.60	0.56
50	5.47	5.06	4.40	3.55	2.69	2.03	1.56	1.29	1.14	1.05	0.96	0.87	0.77	0.66	0.64	0.62	0.58	0.56
55	3.48	3.28	2.95	2.51	2.04	1.66	1.37	1.19	1.08	1.00	0.91	0.82	0.74	0.66	0.65	0.62	0.61	0.57
60	1.42	1.39	1.33	1.27	1.21	1.15	1.10	1.05	0.98	0.90	0.83	0.73	0.68	0.66	0.64	0.62	0.59	0.58
65	1.21	1.19	1.16	1.12	1.08	1.03	0.99	0.93	0.88	0.83	0.77	0.72	0.68	0.66	0.66	0.64	0.62	0.59
70	0.99	0.98	0.97	0.95	0.93	0.90	0.85	0.81	0.76	0.72	0.71	0.70	0.68	0.67	0.66	0.65	0.62	0.61
75	0.83	0.84	0.84	0.83	0.82	0.80	0.78	0.76	0.73	0.70	0.69	0.69	0.68	0.67	0.66	0.66	0.64	0.62
80	0.68	0.68	0.70	0.71	0.71	0.70	0.69	0.70	0.70	0.68	0.67	0.68	0.68	0.66	0.66	0.66	0.64	0.62
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(h) Range:-90 - 90DEG  
H(h) Interval: 1.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:AED  
Test Date:2024-07-12

V(B) Range:-80 - 80DEG  
V(B) Interval: 5.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:5.780m [K=1.0000]  
Remarks: