

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2376.1 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	63.5V x 62.0H
	At 50% of Imax	35.8V x 34.6H
	At 90% of Imax	15.3V x 14.0H
Beam Flux	Total	998.7 lumens per klm.
	To 10% of Imax	872.4 lumens per klm.
	To 50% of Imax	489.4 lumens per klm.
	To 90% of Imax	95.3 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-08-24

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.11V I:0.0246A P:2.6403W PF:0.4883 Freq:50.00Hz Lamp Flux:145.293x1 lm		
NAME: 6728	TYPE:	WEIGHT:148g
SPEC.:4W	DIM.: 6.9*4.6*5.2CM	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:38°

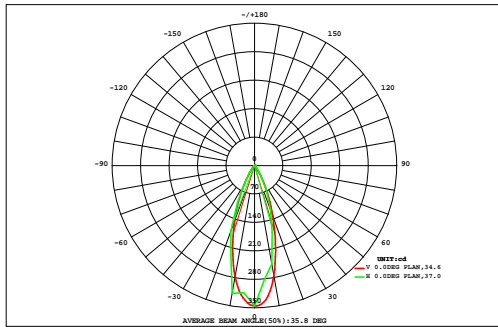

DATA OF LAMP		Eff:55.03lm/W	
MODEL		Imax(cd)	345.2
NOMINAL POWER(W)		AVAILABILITY(%)	88.8
RATED VOLTAGE(V)		Avai. FLUX(lm)	129.0
NOMINAL FLUX(lm)	145.293	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	145.3
TEST VOLTAGE(V)	0	q @50%(H,V)	35,36DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM															UNIT:lm		F t	F a	
	90	80	70	60	50	40	30	20	10	0	10	20	30	40	50	60	70			80
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.01	0.01	0.00	0.38	0.00	
70	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.01	0.01	0.00	0.39	0.00
60	0.00	0.01	0.01	0.02	0.03	0.03	0.04	0.05	0.05	0.05	0.05	0.04	0.04	0.03	0.02	0.01	0.01	0.00	0.49	0.00
50	0.00	0.01	0.01	0.02	0.03	0.04	0.05	0.06	0.08	0.10	0.09	0.06	0.04	0.03	0.02	0.02	0.01	0.00	0.67	0.00
40	0.00	0.01	0.01	0.02	0.03	0.04	0.08	0.18	0.44	0.65	0.50	0.22	0.09	0.04	0.03	0.02	0.01	0.00	2.38	0.52
30	0.00	0.01	0.02	0.03	0.04	0.07	0.26	1.01	2.30	2.92	2.15	1.02	0.27	0.07	0.03	0.02	0.01	0.00	10.2	8.54
20	0.00	0.01	0.02	0.03	0.05	0.15	0.80	3.07	5.94	7.08	5.21	2.36	0.62	0.12	0.03	0.02	0.01	0.00	25.5	24.3
10	0.00	0.01	0.02	0.03	0.06	0.26	1.53	4.76	8.86	10.1	7.13	3.23	0.88	0.16	0.04	0.02	0.01	0.00	37.1	36.1
0	0.00	0.01	0.02	0.03	0.06	0.30	1.59	4.62	8.22	9.01	6.36	2.94	0.84	0.16	0.04	0.02	0.01	0.00	34.3	33.2
-10	0.00	0.01	0.02	0.03	0.06	0.23	1.09	2.90	4.89	5.31	3.75	1.75	0.53	0.12	0.04	0.02	0.01	0.00	20.8	19.6
-20	0.00	0.01	0.02	0.03	0.05	0.13	0.46	1.16	1.89	2.03	1.45	0.71	0.26	0.07	0.03	0.02	0.01	0.00	8.33	6.72
-30	0.00	0.01	0.02	0.03	0.04	0.06	0.16	0.30	0.46	0.49	0.38	0.22	0.10	0.04	0.03	0.02	0.01	0.00	2.38	0.00
-40	0.00	0.01	0.01	0.02	0.04	0.05	0.06	0.10	0.12	0.13	0.11	0.08	0.04	0.04	0.03	0.02	0.01	0.00	0.87	0.00
-50	0.00	0.01	0.01	0.02	0.03	0.04	0.06	0.06	0.05	0.05	0.05	0.05	0.05	0.04	0.03	0.02	0.01	0.00	0.57	0.00
-60	0.00	0.01	0.01	0.02	0.03	0.03	0.04	0.05	0.05	0.06	0.06	0.05	0.04	0.03	0.02	0.01	0.01	0.00	0.52	0.00
-70	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.04	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.35	0.00
-80	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.11	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
F t	0.03	0.11	0.24	0.40	0.60	1.53	6.31	18.4	33.5	38.1	27.4	12.8	3.90	1.03	0.45	0.27	0.13	0.03	145	---
F a	0.00	0.00	0.00	0.00	0.00	0.10	4.47	16.8	32.0	36.8	25.8	11.2	1.91	0.00	0.00	0.00	0.00	0.00	---	129


one-half-peak spread: U:14.9,D:21.1 , L:17.0,R:17.8 NEMA Beam Type: Type 4

H(h) Range:-90 - 90DEG
H(h) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-08-24

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.11V I:0.0246A P:2.6403W PF:0.4883 Freq:50.00Hz Lamp Flux:145.293x1 lm		
NAME: 6728	TYPE:	WEIGHT:148g
SPEC.:4W	DIM.: 6.9*4.6*5.2CM	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:38°

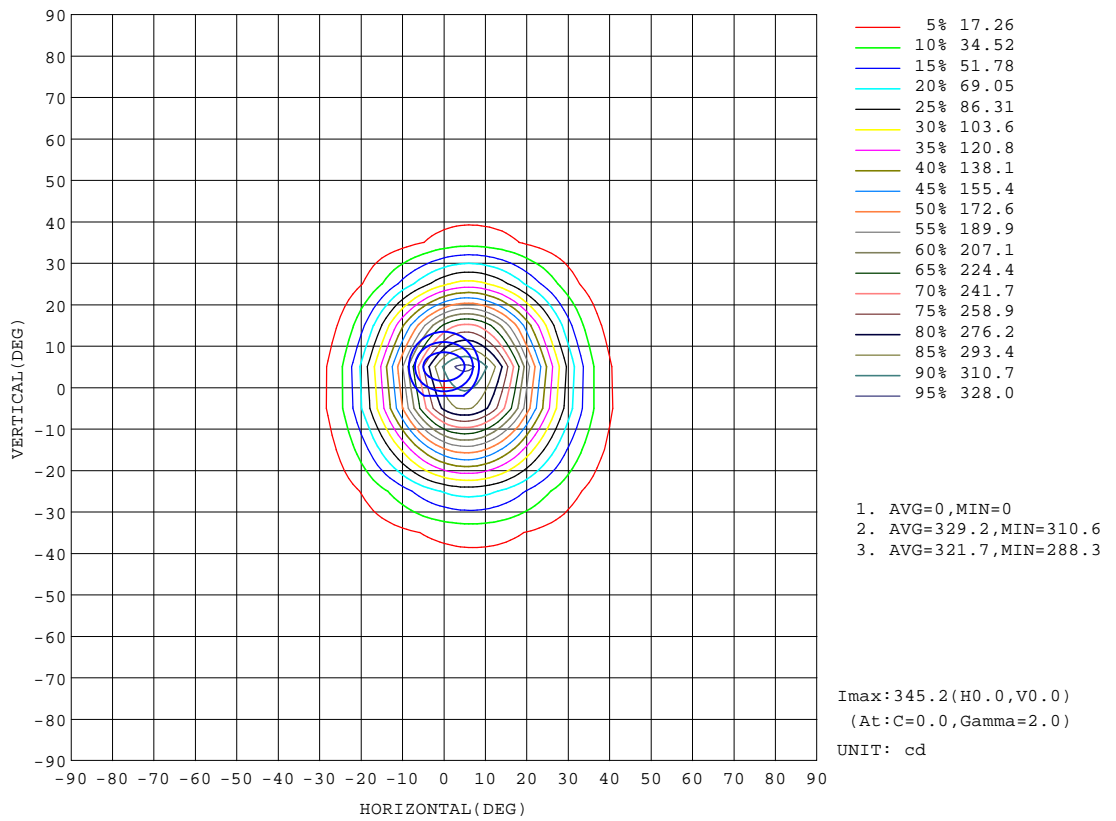


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:NORDECOR
 Test Date:2024-08-24

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:220.11V I:0.0246A P:2.6403W PF:0.4883 Freq:50.00Hz Lamp Flux:145.293x1 lm		
NAME: 6728	TYPE:	WEIGHT:148g
SPEC.:4W	DIM.: 6.9*4.6*5.2CM	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:38°

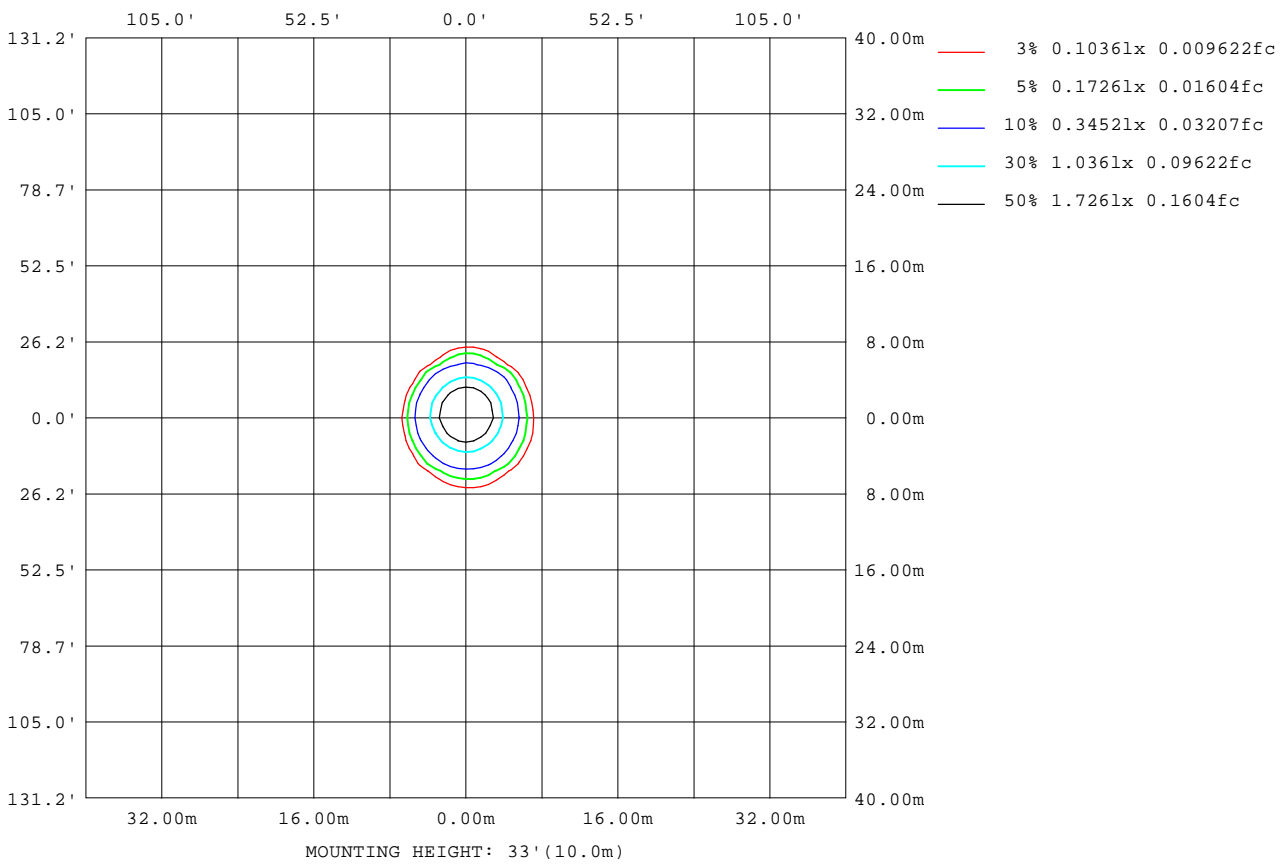

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:NORDECOR
 Test Date:2024-08-24

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

Planar Illuminance Curve

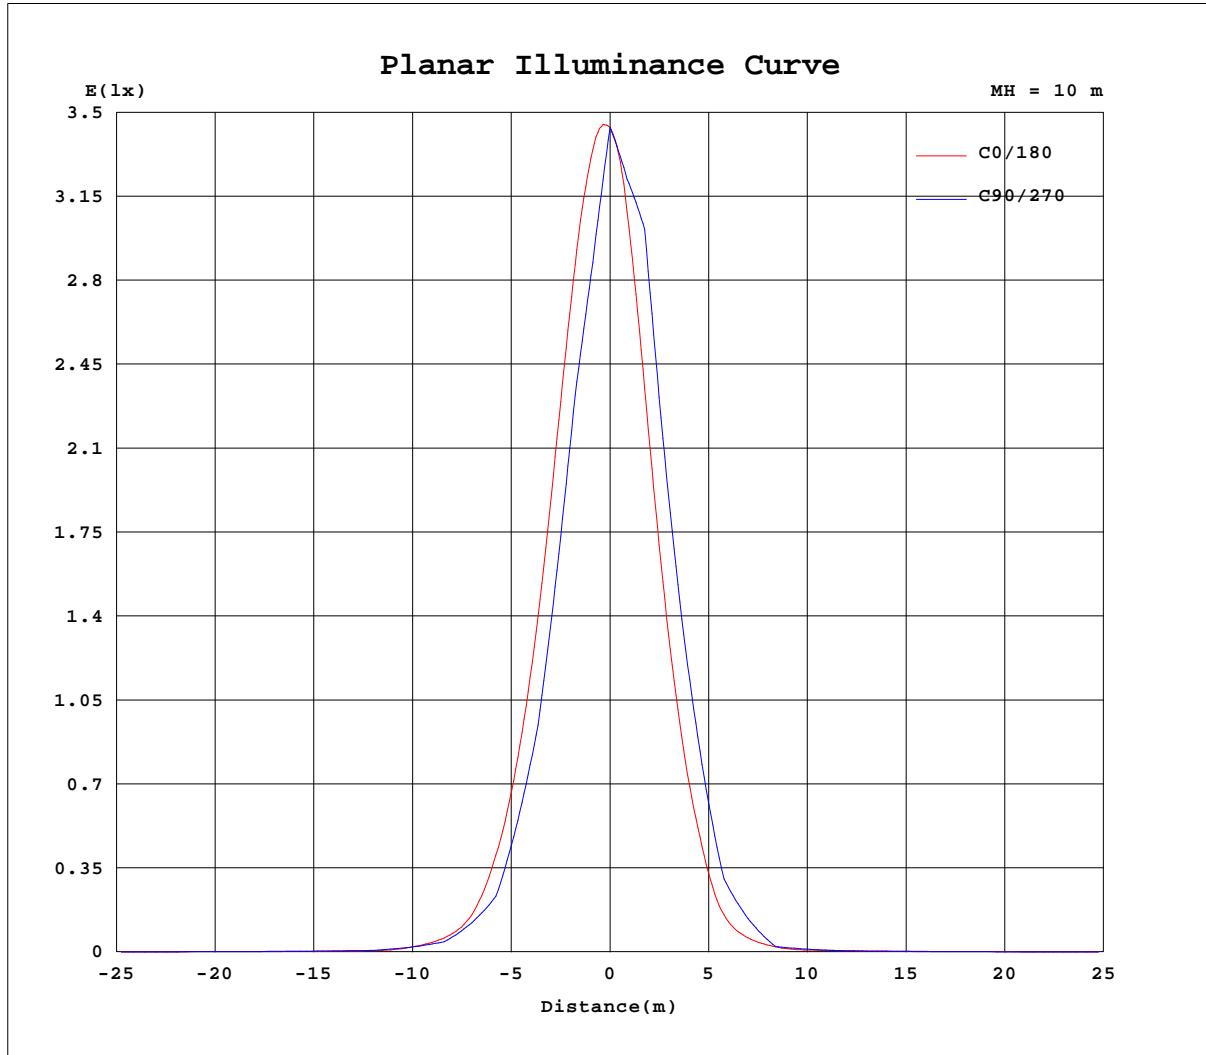


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:NORDECOR
 Test Date:2024-08-24

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.11V I:0.0246A P:2.6403W PF:0.4883 Freq:50.00Hz Lamp Flux:145.293x1 lm		
NAME: 6728	TYPE:	WEIGHT:148g
SPEC.:4W	DIM.: 6.9*4.6*5.2CM	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:38°

Flux out:70.41 lm

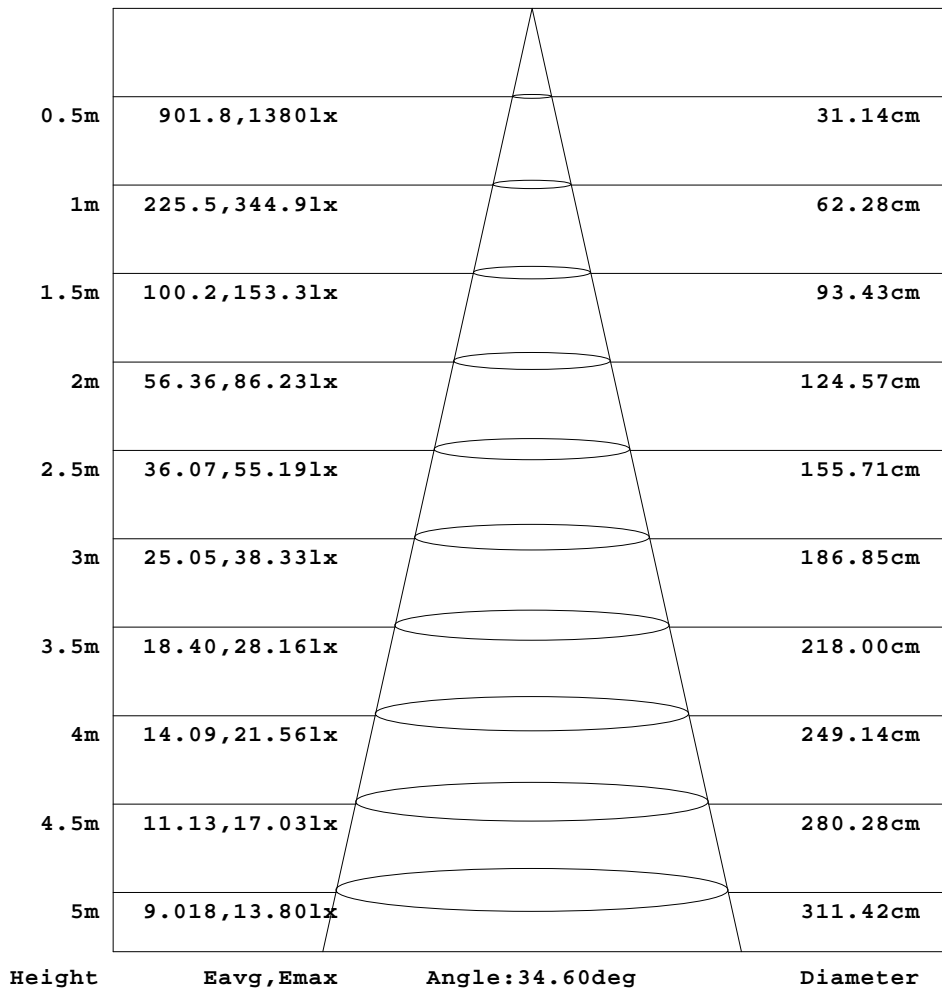

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-08-24

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.11V I:0.0246A P:2.6403W PF:0.4883 Freq:50.00Hz Lamp Flux:145.293x1 lm		
NAME: 6728	TYPE:	WEIGHT:148g
SPEC.:4W	DIM.: 6.9*4.6*5.2CM	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:38°

Table--1

UNIT: cd

H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.66	0.67	0.68	0.67	0.68	0.68	0.69	0.69	0.72	0.75	0.79	0.79	0.78	0.77	0.76	0.76	0.78	0.78	0.79
-75	0.68	0.68	0.69	0.70	0.70	0.70	0.72	0.78	0.82	0.87	0.91	0.96	0.98	0.99	1.00	1.01	1.03	1.06	1.10
-70	0.69	0.72	0.72	0.73	0.73	0.76	0.86	0.95	1.03	1.08	1.13	1.18	1.21	1.23	1.26	1.30	1.35	1.42	1.50
-65	0.69	0.70	0.72	0.73	0.74	0.78	0.85	0.97	1.07	1.15	1.24	1.32	1.40	1.48	1.55	1.61	1.68	1.74	1.80
-60	0.71	0.73	0.75	0.75	0.82	0.95	1.07	1.19	1.28	1.39	1.52	1.63	1.75	1.86	1.96	2.06	2.13	2.18	2.21
-55	0.70	0.71	0.73	0.75	0.78	0.88	1.02	1.15	1.28	1.39	1.52	1.66	1.79	1.93	2.05	2.17	2.27	2.36	2.41
-50	0.72	0.73	0.75	0.82	0.95	1.10	1.24	1.37	1.51	1.65	1.79	1.95	2.10	2.24	2.37	2.49	2.59	2.65	2.67
-45	0.76	0.72	0.74	0.76	0.85	1.01	1.17	1.31	1.45	1.59	1.74	1.90	2.05	2.20	2.47	3.52	4.55	5.32	5.90
-40	0.73	0.75	0.77	0.88	1.07	1.23	1.38	1.53	1.68	1.84	2.00	2.15	2.30	2.70	4.67	6.61	8.05	9.14	9.93
-35	0.78	0.73	0.75	0.79	0.93	1.12	1.30	1.45	1.61	1.77	1.92	2.08	2.56	4.34	6.44	9.82	13.8	17.9	21.3
-30	0.74	0.76	0.80	0.97	1.18	1.37	1.53	1.69	1.86	2.01	2.16	2.97	6.38	10.2	15.0	21.0	27.7	33.4	36.5
-25	0.74	0.75	0.78	0.83	1.02	1.24	1.44	1.61	1.80	1.98	2.13	2.82	5.32	10.0	18.0	30.7	44.6	59.5	70.8
-20	0.76	0.80	0.86	1.06	1.30	1.51	1.70	1.90	2.09	2.25	3.48	7.66	13.7	25.8	46.5	68.2	91.3	108	116
-15	0.74	0.76	0.80	0.87	1.09	1.34	1.55	1.76	1.98	2.19	2.45	4.87	9.97	20.2	42.2	72.5	107	142	169
-10	0.76	0.80	0.88	1.11	1.38	1.59	1.82	2.06	2.28	2.64	6.26	12.3	26.7	58.5	98.5	145	193	231	245
-5	0.76	0.76	0.80	0.89	1.12	1.39	1.61	1.86	2.09	2.32	2.74	6.57	13.4	31.0	67.9	115	173	234	280
0	0.76	0.81	0.89	1.13	1.40	1.64	1.89	2.13	2.36	2.85	6.88	14.5	35.4	77.2	132	201	275	330	345
5	0.75	0.75	0.80	0.88	1.10	1.38	1.60	1.83	2.07	2.30	2.66	6.05	13.1	31.6	71.9	124	189	259	314
10	0.74	0.79	0.86	1.08	1.35	1.55	1.78	2.01	2.23	2.46	5.22	11.7	27.8	66.6	116	177	243	297	319
15	0.71	0.75	0.78	0.84	1.05	1.30	1.51	1.71	1.91	2.11	2.30	3.88	8.80	19.8	46.1	86.6	136	186	227
20	0.75	0.78	0.83	1.01	1.26	1.46	1.64	1.81	1.99	2.13	2.54	5.86	11.7	25.6	56.7	94.7	129	157	170
25	0.71	0.74	0.77	0.81	0.96	1.19	1.38	1.54	1.69	1.84	1.97	2.22	3.95	7.85	16.4	34.1	56.8	79.5	99.4
30	0.73	0.76	0.79	0.91	1.12	1.30	1.44	1.57	1.69	1.80	1.90	2.04	3.97	7.24	11.5	18.8	30.4	42.2	48.5
35	0.72	0.73	0.76	0.78	0.86	1.04	1.22	1.35	1.47	1.58	1.68	1.77	1.88	2.88	4.54	6.80	10.8	17.1	23.4
40	0.73	0.75	0.77	0.81	0.95	1.14	1.27	1.38	1.47	1.55	1.64	1.72	1.79	1.84	2.06	2.80	3.71	4.67	5.37
45	0.69	0.73	0.75	0.76	0.79	0.88	1.04	1.17	1.29	1.37	1.46	1.53	1.61	1.68	1.74	1.88	2.28	2.75	3.24
50	0.73	0.75	0.75	0.77	0.82	0.93	1.08	1.20	1.28	1.36	1.43	1.50	1.57	1.63	1.70	1.75	1.79	1.81	1.83
55	0.71	0.73	0.74	0.74	0.76	0.79	0.86	0.96	1.05	1.14	1.22	1.30	1.38	1.46	1.52	1.57	1.61	1.65	1.67
60	0.72	0.73	0.73	0.75	0.76	0.78	0.84	0.91	1.00	1.09	1.17	1.27	1.34	1.41	1.44	1.48	1.50	1.53	1.54
65	0.70	0.73	0.73	0.74	0.75	0.76	0.77	0.81	0.85	0.90	0.95	1.00	1.06	1.11	1.16	1.19	1.23	1.27	1.31
70	0.73	0.73	0.74	0.75	0.76	0.76	0.78	0.79	0.80	0.81	0.82	0.85	0.88	0.91	0.94	0.98	1.04	1.10	1.16
75	0.70	0.73	0.74	0.75	0.75	0.76	0.76	0.77	0.78	0.79	0.80	0.81	0.82	0.84	0.85	0.87	0.90	0.92	0.96
80	0.73	0.75	0.75	0.75	0.76	0.75	0.77	0.78	0.78	0.78	0.79	0.80	0.80	0.80	0.81	0.81	0.81	0.81	0.81
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-08-24

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.11V I:0.0246A P:2.6403W PF:0.4883 Freq:50.00Hz Lamp Flux:145.293x1 lm		
NAME: 6728	TYPE:	WEIGHT:148g
SPEC.:4W	DIM.: 6.9*4.6*5.2CM	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:38°

Table--2

UNIT: cd

H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.79	0.78	0.77	0.77	0.76	0.77	0.78	0.77	0.78	0.75	0.74	0.72	0.70	0.69	0.68	0.67	0.66	0.66
-75	1.14	1.18	1.19	1.19	1.17	1.15	1.12	1.08	1.04	1.00	0.94	0.89	0.83	0.78	0.73	0.70	0.68	0.67
-70	1.57	1.61	1.60	1.57	1.53	1.47	1.39	1.30	1.22	1.13	1.04	0.94	0.85	0.77	0.71	0.69	0.67	0.68
-65	1.85	1.89	1.90	1.88	1.83	1.76	1.68	1.59	1.50	1.40	1.30	1.19	1.07	0.95	0.84	0.75	0.69	0.68
-60	2.21	2.19	2.15	2.08	2.00	1.90	1.80	1.69	1.58	1.47	1.34	1.20	1.04	0.91	0.78	0.70	0.68	0.66
-55	2.44	2.44	2.41	2.36	2.27	2.17	2.05	1.94	1.81	1.67	1.55	1.41	1.27	1.12	0.96	0.81	0.71	0.69
-50	2.68	2.63	2.57	2.47	2.35	2.21	2.07	1.92	1.77	1.62	1.48	1.35	1.20	1.02	0.85	0.72	0.69	0.66
-45	6.30	6.42	6.07	5.45	4.56	3.45	2.36	2.13	1.99	1.83	1.68	1.53	1.39	1.23	1.05	0.88	0.72	0.68
-40	10.2	9.52	8.33	6.66	4.56	2.51	2.20	2.06	1.90	1.74	1.59	1.43	1.25	1.08	0.92	0.72	0.67	0.85
-35	23.2	23.0	20.5	16.7	12.6	8.94	5.79	3.73	2.15	1.96	1.81	1.65	1.49	1.33	1.15	0.96	0.76	0.70
-30	35.8	31.5	25.0	18.6	13.3	9.07	5.26	2.24	2.02	1.87	1.71	1.55	1.40	1.23	1.01	0.80	0.72	0.73
-25	76.2	73.9	64.4	50.7	36.5	24.0	14.5	8.44	4.10	2.12	1.94	1.78	1.62	1.45	1.28	1.05	0.83	0.73
-20	112	97.3	76.4	54.4	34.6	19.9	11.6	5.97	2.22	2.01	1.86	1.69	1.50	1.33	1.09	0.85	0.74	0.78
-15	181	172	148	115	80.6	50.3	27.9	14.8	7.44	2.77	2.08	1.92	1.74	1.55	1.37	1.12	0.88	0.75
-10	232	198	153	107	65.9	36.0	17.9	8.92	3.32	2.15	1.98	1.79	1.60	1.40	1.16	0.90	0.77	0.75
-5	295	279	237	182	125	77.3	41.5	19.3	9.46	3.66	2.17	1.99	1.80	1.61	1.41	1.16	0.90	0.78
0	326	277	210	144	88.7	47.1	20.6	10.00	4.01	2.19	2.01	1.81	1.62	1.42	1.17	0.90	0.78	0.76
5	332	313	264	199	135	82.4	41.9	18.5	9.09	3.53	2.14	1.97	1.79	1.59	1.40	1.16	0.90	0.78
10	301	252	188	127	76.0	36.7	16.5	8.18	3.05	2.09	1.93	1.76	1.57	1.39	1.15	0.89	0.77	0.72
15	245	232	195	147	100.0	57.7	27.8	13.2	6.36	2.52	1.99	1.84	1.68	1.51	1.33	1.11	0.86	0.75
20	163	139	107	73.2	39.3	18.8	9.93	4.54	2.00	1.89	1.75	1.60	1.44	1.28	1.06	0.82	0.73	0.72
25	109	105	88.1	66.3	44.7	25.0	12.6	6.46	3.20	1.89	1.79	1.66	1.53	1.38	1.23	1.03	0.81	0.72
30	46.1	37.1	25.3	16.2	10.7	6.35	3.00	1.85	1.79	1.68	1.57	1.45	1.33	1.18	0.99	0.79	0.71	0.72
35	26.9	25.8	21.2	14.9	9.65	6.33	4.07	2.36	1.76	1.68	1.59	1.48	1.38	1.26	1.12	0.94	0.76	0.70
40	5.60	5.32	4.49	3.09	1.99	1.79	1.73	1.66	1.57	1.49	1.39	1.30	1.20	1.06	0.89	0.73	0.69	0.70
45	3.60	3.72	3.57	3.14	2.41	1.83	1.70	1.64	1.58	1.49	1.41	1.32	1.24	1.14	1.00	0.85	0.72	0.69
50	1.83	1.81	1.78	1.74	1.68	1.62	1.55	1.49	1.42	1.33	1.26	1.17	1.08	0.95	0.81	0.71	0.69	0.65
55	1.69	1.68	1.67	1.65	1.61	1.57	1.52	1.46	1.40	1.33	1.27	1.20	1.12	1.02	0.90	0.78	0.71	0.69
60	1.54	1.53	1.51	1.48	1.46	1.41	1.37	1.31	1.25	1.21	1.14	1.06	0.96	0.86	0.76	0.71	0.69	0.70
65	1.35	1.37	1.38	1.36	1.35	1.32	1.29	1.26	1.21	1.17	1.12	1.06	0.99	0.90	0.81	0.74	0.72	0.71
70	1.20	1.23	1.21	1.21	1.19	1.18	1.15	1.12	1.09	1.04	0.98	0.91	0.84	0.77	0.73	0.74	0.72	0.75
75	0.99	1.01	1.02	1.02	1.03	1.03	1.04	1.03	1.01	0.98	0.94	0.90	0.85	0.80	0.76	0.74	0.74	0.73
80	0.82	0.82	0.83	0.84	0.88	0.91	0.91	0.90	0.87	0.84	0.82	0.78	0.76	0.75	0.75	0.75	0.75	0.70
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-08-24

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks: