

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		6742.6 cd per klm. 0.0 degrees vertical 5.0 degrees horizontal
Beam Spread	At 10% of Imax At 50% of Imax At 90% of Imax	40.3V x 35.7H 20.6V x 19.2H 13.1V x 7.3H
Beam Flux	Total To 10% of Imax To 50% of Imax To 90% of Imax	983.9 lumens per klm. 828.9 lumens per klm. 410.7 lumens per klm. 35.3 lumens per klm.
	Upward LOR Downward LOR	0.0 % 98.4 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-10-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.35V I:0.0223A P:2.3786W PF:0.4840 Freq:50.00Hz Lamp Flux:83.1591x1 lm		
NAME: 6780	TYPE:	WEIGHT:94g
SPEC.:2W	DIM.: 4.6*4.6*5.2CM	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

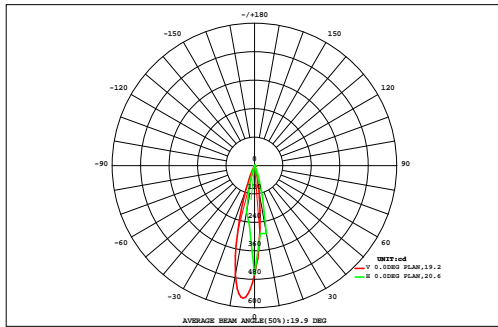

DATA OF LAMP		Eff:34.96lm/W	
MODEL		Imax(cd)	560.7
NOMINAL POWER(W)		AVAILABILITY(%)	86.9
RATED VOLTAGE(V)		Avai. FLUX(lm)	72.28
NOMINAL FLUX(lm)	83.1591	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	83.16
TEST VOLTAGE(V)	0	q @50%(H,V)	19,21DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM															UNIT:lm		F t	F a	
	90	80	70	60	50	40	30	20	10	0	10	20	30	40	50	60	70			80
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.24	0.00	
70	0.00	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.20	0.00	
60	0.00	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.20	0.00	
50	0.00	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.21	0.00	
40	0.00	0.00	0.01	0.01	0.01	0.01	0.02	0.03	0.04	0.06	0.05	0.03	0.02	0.01	0.01	0.01	0.00	0.32	0.00	
30	0.00	0.00	0.01	0.01	0.01	0.02	0.03	0.07	0.17	0.32	0.24	0.10	0.03	0.01	0.01	0.01	0.00	1.03	0.00	
20	0.00	0.00	0.01	0.01	0.01	0.02	0.05	0.21	1.20	2.86	2.06	0.45	0.07	0.02	0.01	0.01	0.00	7.01	5.05	
10	0.00	0.00	0.01	0.01	0.02	0.03	0.09	0.58	4.45	10.5	7.05	1.27	0.12	0.03	0.01	0.01	0.00	24.2	22.8	
0	0.00	0.00	0.01	0.01	0.02	0.03	0.10	0.88	6.46	14.6	9.00	1.54	0.13	0.03	0.01	0.01	0.00	32.8	31.5	
-10	0.00	0.00	0.01	0.01	0.02	0.03	0.07	0.48	3.15	6.23	3.56	0.64	0.08	0.02	0.01	0.01	0.00	14.3	13.0	
-20	0.00	0.00	0.01	0.01	0.01	0.02	0.03	0.09	0.23	0.43	0.37	0.12	0.03	0.01	0.01	0.01	0.00	1.40	0.00	
-30	0.00	0.00	0.01	0.01	0.01	0.01	0.02	0.03	0.03	0.04	0.04	0.03	0.02	0.01	0.01	0.01	0.00	0.28	0.00	
-40	0.00	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.20	0.00	
-50	0.00	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.22	0.00
-60	0.00	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.22	0.00
-70	0.00	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.20	0.00	
-80	0.00	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.20	0.00	
-90	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.09	0.00	
	-90	-80	-70	-60	-50	-40	-30	-20	20	30	40	50	60	70	80	90				
F t	0.02	0.07	0.12	0.17	0.22	0.29	0.55	2.50	15.9	35.2	22.5	4.32	0.63	0.25	0.17	0.12	0.07	0.02	83	---
F a	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.83	14.3	33.7	21.3	2.21	0.00	0.00	0.00	0.00	0.00	0.00	---	72


one-half-peak spread: U:14.6,D:6.2 , L:9.7,R:9.7 NEMA Beam Type: Type 3

H(h) Range:-90 - 90DEG
H(h) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-10-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.35V I:0.0223A P:2.3786W PF:0.4840 Freq:50.00Hz Lamp Flux:83.159lx1 lm		
NAME: 6780	TYPE:	WEIGHT:94g
SPEC.:2W	DIM.: 4.6*4.6*5.2CM	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

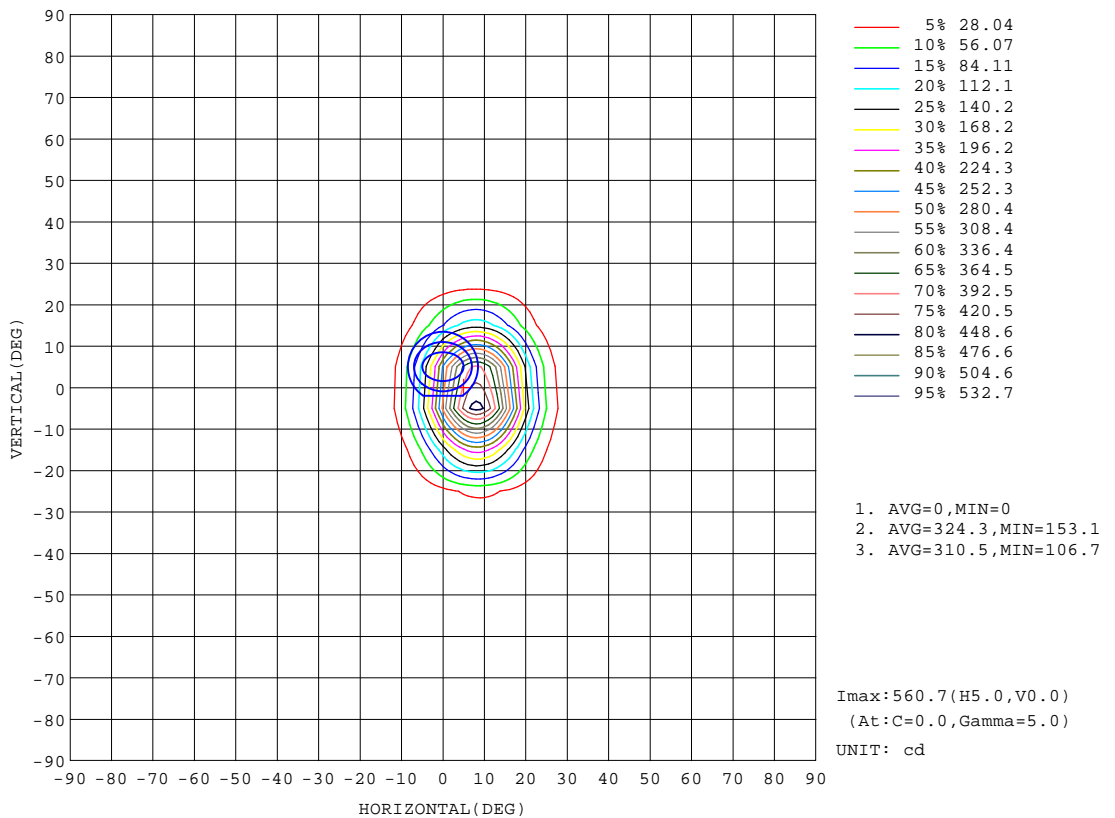


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:NORDECOR
 Test Date:2024-10-10

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:220.35V I:0.0223A P:2.3786W PF:0.4840 Freq:50.00Hz Lamp Flux:83.1591lx1 lm		
NAME: 6780	TYPE:	WEIGHT:94g
SPEC.:2W	DIM.: 4.6*4.6*5.2CM	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

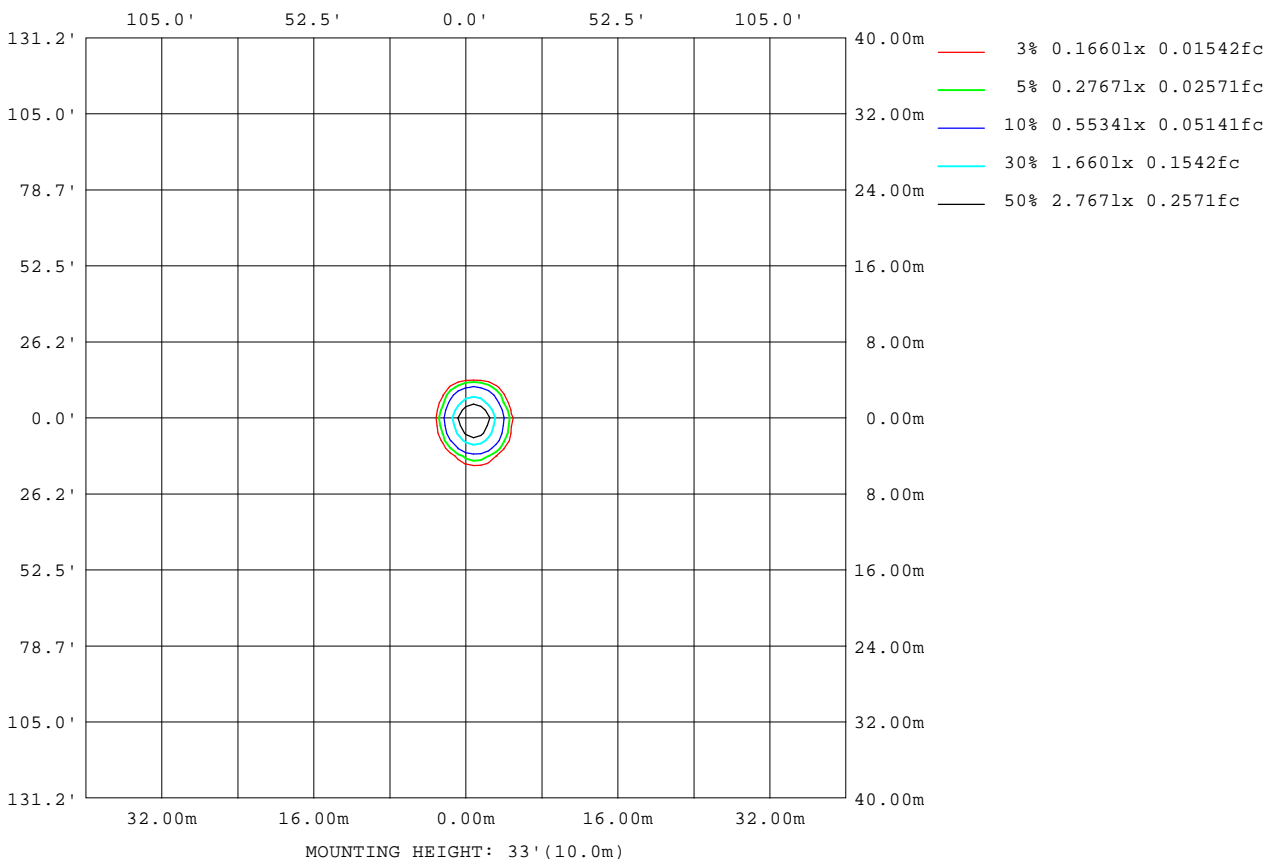

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-10-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

Planar Illuminance Curve

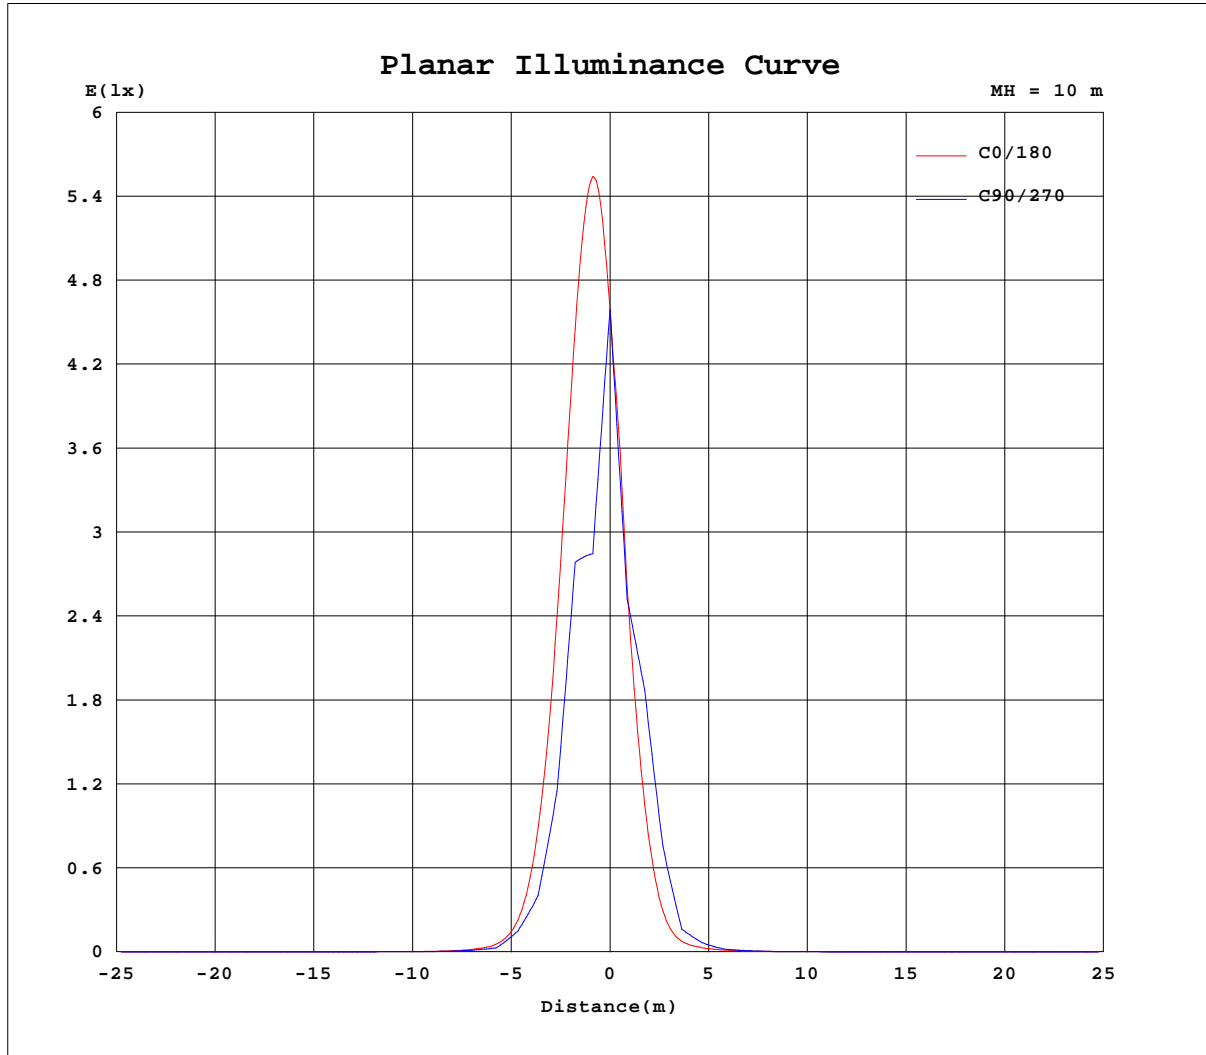


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:NORDECOR
 Test Date:2024-10-10

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.35V I:0.0223A P:2.3786W PF:0.4840 Freq:50.00Hz Lamp Flux:83.159lx1 lm		
NAME: 6780	TYPE:	WEIGHT:94g
SPEC.:2W	DIM.: 4.6*4.6*5.2CM	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

Flux out:28.68 lm

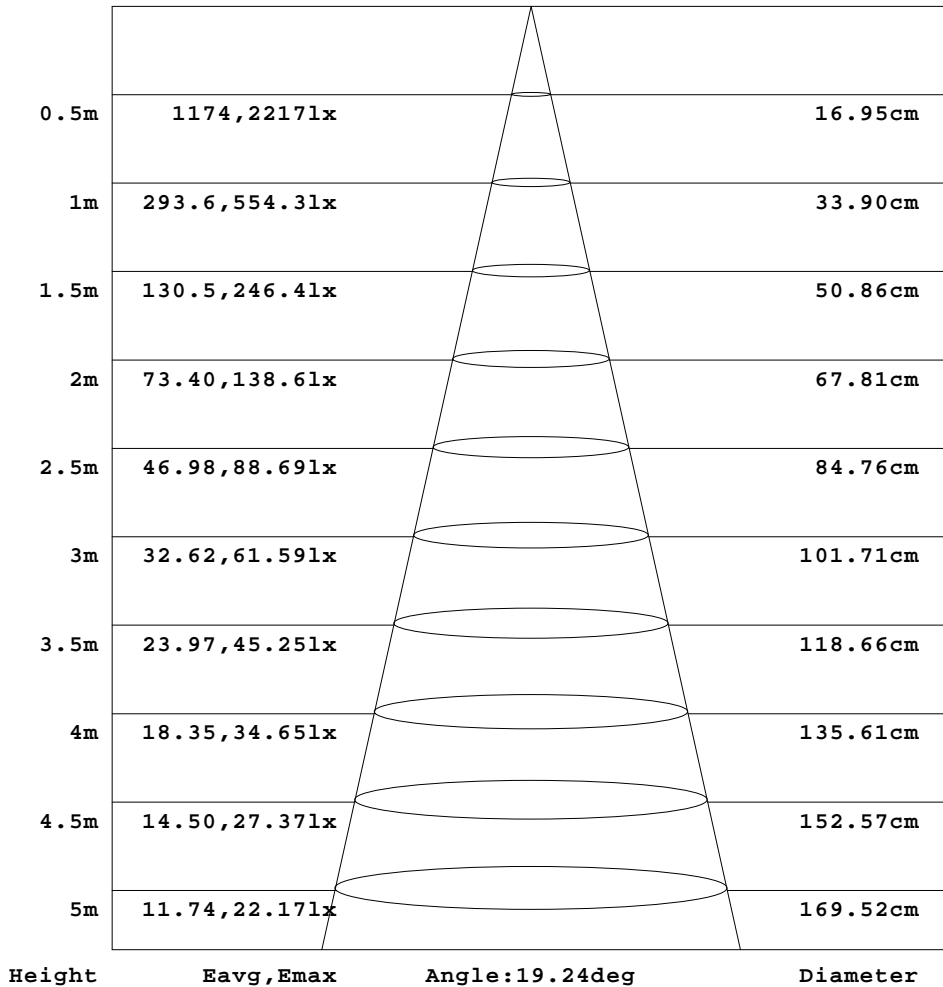

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-10-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.35V I:0.0223A P:2.3786W PF:0.4840 Freq:50.00Hz Lamp Flux:83.1591x1 lm		
NAME: 6780	TYPE:	WEIGHT:94g
SPEC.:2W	DIM.: 4.6*4.6*5.2CM	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

Table--1

UNIT: cd

H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.52	0.53	0.53	0.54	0.51	0.48	0.49	0.54	0.51	0.51	0.54	0.50	0.53	0.52	0.54	0.53	0.52	0.52	0.52
-75	0.51	0.54	0.54	0.54	0.54	0.52	0.52	0.54	0.54	0.55	0.54	0.55	0.55	0.54	0.57	0.56	0.58	0.57	0.58
-70	0.54	0.55	0.56	0.55	0.56	0.56	0.56	0.56	0.57	0.57	0.57	0.58	0.59	0.59	0.60	0.61	0.62	0.63	0.64
-65	0.55	0.55	0.56	0.55	0.56	0.56	0.56	0.57	0.57	0.57	0.58	0.59	0.59	0.61	0.61	0.63	0.64	0.67	0.68
-60	0.56	0.56	0.56	0.56	0.56	0.56	0.56	0.58	0.57	0.58	0.58	0.59	0.61	0.62	0.64	0.67	0.70	0.72	0.74
-55	0.56	0.55	0.55	0.55	0.56	0.55	0.56	0.56	0.56	0.57	0.57	0.58	0.59	0.62	0.62	0.65	0.69	0.73	0.77
-50	0.54	0.55	0.55	0.54	0.54	0.55	0.55	0.56	0.56	0.56	0.56	0.58	0.59	0.61	0.63	0.69	0.73	0.78	0.83
-45	0.54	0.55	0.55	0.55	0.56	0.55	0.55	0.56	0.55	0.56	0.56	0.55	0.57	0.58	0.62	0.67	0.74	0.82	0.92
-40	0.55	0.54	0.55	0.55	0.56	0.56	0.56	0.56	0.56	0.55	0.54	0.55	0.56	0.60	0.65	0.74	0.84	0.98	1.14
-35	0.54	0.55	0.56	0.56	0.57	0.56	0.57	0.58	0.58	0.58	0.58	0.58	0.59	0.63	0.74	1.02	1.33	1.84	2.49
-30	0.56	0.55	0.56	0.57	0.57	0.58	0.59	0.60	0.61	0.60	0.60	0.62	0.66	0.76	1.18	1.65	2.39	3.50	4.53
-25	0.55	0.55	0.56	0.57	0.57	0.58	0.60	0.62	0.63	0.65	0.66	0.69	0.76	1.03	1.46	2.49	4.45	10.1	20.3
-20	0.55	0.56	0.57	0.58	0.58	0.61	0.63	0.65	0.68	0.69	0.75	0.84	1.09	1.73	2.84	5.19	12.1	28.2	48.9
-15	0.55	0.55	0.56	0.57	0.58	0.60	0.62	0.65	0.67	0.71	0.79	0.88	1.16	1.84	3.22	6.82	20.2	60.4	128
-10	0.54	0.56	0.56	0.57	0.59	0.62	0.64	0.67	0.72	0.80	0.94	1.14	1.91	3.39	6.78	20.4	68.8	170	292
-5	0.54	0.56	0.57	0.57	0.59	0.61	0.63	0.66	0.70	0.75	0.90	1.03	1.56	2.60	4.98	12.3	44.4	133	288
0	0.55	0.56	0.57	0.59	0.61	0.63	0.65	0.69	0.73	0.86	1.00	1.34	2.28	4.25	9.32	32.6	110	264	459
5	0.55	0.56	0.56	0.57	0.59	0.60	0.63	0.66	0.70	0.74	0.87	1.01	1.52	2.54	4.86	11.8	41.0	120	255
10	0.55	0.55	0.56	0.57	0.58	0.61	0.64	0.66	0.70	0.75	0.88	1.10	1.81	3.14	6.37	16.1	52.8	122	196
15	0.55	0.55	0.56	0.56	0.58	0.59	0.62	0.64	0.66	0.68	0.74	0.83	1.09	1.72	2.99	6.04	16.1	44.1	84.1
20	0.54	0.56	0.56	0.57	0.58	0.60	0.62	0.63	0.65	0.66	0.70	0.78	1.02	1.58	2.54	4.58	8.08	12.6	19.8
25	0.55	0.54	0.55	0.56	0.57	0.57	0.59	0.60	0.61	0.61	0.62	0.65	0.72	0.95	1.34	2.21	3.70	6.07	9.01
30	0.54	0.55	0.55	0.56	0.56	0.56	0.57	0.58	0.58	0.57	0.56	0.59	0.61	0.74	1.03	1.45	1.97	2.63	3.31
35	0.49	0.53	0.54	0.54	0.55	0.54	0.56	0.56	0.56	0.55	0.55	0.55	0.56	0.60	0.70	0.92	1.16	1.49	1.89
40	0.52	0.52	0.53	0.54	0.53	0.54	0.54	0.54	0.54	0.53	0.53	0.53	0.54	0.57	0.61	0.66	0.75	0.82	0.89
45	0.48	0.52	0.53	0.52	0.53	0.52	0.53	0.53	0.53	0.53	0.53	0.54	0.54	0.55	0.58	0.60	0.65	0.69	0.74
50	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.53	0.53	0.54	0.54	0.55	0.55	0.57	0.58	0.60	0.61	0.62	0.64
55	0.47	0.52	0.53	0.53	0.52	0.52	0.52	0.53	0.53	0.54	0.54	0.55	0.55	0.56	0.57	0.58	0.59	0.60	0.62
60	0.53	0.52	0.52	0.52	0.52	0.52	0.54	0.54	0.54	0.54	0.56	0.56	0.56	0.57	0.58	0.58	0.59	0.60	0.60
65	0.43	0.53	0.53	0.53	0.53	0.53	0.53	0.54	0.54	0.54	0.55	0.55	0.56	0.56	0.57	0.57	0.58	0.58	0.59
70	0.53	0.54	0.53	0.54	0.54	0.54	0.55	0.54	0.55	0.55	0.55	0.56	0.56	0.57	0.57	0.57	0.57	0.58	0.58
75	0.47	0.53	0.53	0.53	0.53	0.53	0.53	0.54	0.54	0.54	0.54	0.54	0.55	0.55	0.55	0.56	0.56	0.56	0.57
80	0.52	0.53	0.52	0.53	0.52	0.52	0.53	0.53	0.53	0.53	0.54	0.54	0.54	0.54	0.54	0.55	0.56	0.56	0.56
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-10-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.35V I:0.0223A P:2.3786W PF:0.4840 Freq:50.00Hz Lamp Flux:83.1591x1 lm		
NAME: 6780	TYPE:	WEIGHT:94g
SPEC.:2W	DIM.: 4.6*4.6*5.2CM	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

Table--2

UNIT: cd

H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.54	0.57	0.57	0.57	0.56	0.57	0.56	0.57	0.56	0.56	0.55	0.55	0.55	0.55	0.54	0.54	0.53	0.52
-75	0.58	0.61	0.61	0.61	0.61	0.60	0.60	0.59	0.59	0.58	0.58	0.56	0.56	0.55	0.55	0.55	0.54	0.54
-70	0.64	0.65	0.66	0.65	0.64	0.64	0.62	0.61	0.60	0.60	0.58	0.58	0.57	0.56	0.56	0.56	0.55	0.54
-65	0.69	0.70	0.71	0.70	0.68	0.67	0.65	0.63	0.61	0.60	0.59	0.57	0.56	0.56	0.56	0.55	0.54	0.54
-60	0.75	0.76	0.75	0.73	0.71	0.68	0.65	0.62	0.61	0.59	0.57	0.55	0.55	0.54	0.55	0.54	0.54	0.54
-55	0.79	0.80	0.80	0.78	0.73	0.69	0.65	0.62	0.59	0.57	0.56	0.54	0.54	0.54	0.54	0.54	0.51	0.53
-50	0.86	0.85	0.82	0.77	0.70	0.65	0.61	0.58	0.56	0.54	0.54	0.52	0.52	0.52	0.51	0.52	0.48	0.38
-45	1.03	1.06	1.00	0.91	0.81	0.71	0.64	0.59	0.55	0.53	0.52	0.52	0.52	0.52	0.53	0.53	0.51	0.53
-40	1.25	1.22	1.06	0.93	0.80	0.68	0.61	0.56	0.51	0.51	0.51	0.52	0.52	0.52	0.52	0.53	0.53	0.52
-35	3.03	3.19	2.84	2.22	1.58	1.18	0.84	0.65	0.57	0.53	0.53	0.53	0.53	0.54	0.54	0.54	0.54	0.52
-30	5.12	4.88	3.92	2.66	1.85	1.26	0.79	0.64	0.58	0.54	0.55	0.55	0.56	0.56	0.56	0.55	0.54	0.52
-25	30.1	32.5	25.7	14.9	6.91	3.24	1.69	1.05	0.71	0.63	0.58	0.57	0.57	0.57	0.57	0.56	0.55	0.53
-20	60.3	53.8	34.6	16.4	6.71	3.09	1.67	0.95	0.74	0.66	0.60	0.59	0.58	0.58	0.58	0.57	0.57	0.54
-15	193	204	149	77.1	28.5	9.18	3.52	1.78	1.02	0.78	0.70	0.62	0.61	0.60	0.59	0.58	0.57	0.58
-10	327	299	174	71.8	21.9	6.78	2.88	1.54	0.91	0.80	0.66	0.63	0.62	0.61	0.60	0.59	0.59	0.62
-5	455	446	321	159	56.3	15.9	5.18	2.37	1.31	0.87	0.80	0.65	0.63	0.61	0.59	0.59	0.59	0.60
0	561	467	266	107	30.7	8.54	3.53	1.74	0.98	0.84	0.70	0.64	0.62	0.60	0.59	0.58	0.59	0.60
5	369	385	276	136	47.5	13.6	4.81	2.25	1.26	0.85	0.78	0.65	0.63	0.61	0.59	0.59	0.58	0.59
10	232	193	113	44.3	13.8	5.31	2.53	1.43	0.88	0.77	0.64	0.62	0.61	0.60	0.59	0.58	0.58	0.59
15	120	124	89.6	45.8	17.0	6.21	2.96	1.59	0.94	0.73	0.66	0.61	0.60	0.59	0.58	0.57	0.57	0.57
20	23.3	19.3	12.2	7.47	4.38	2.42	1.46	0.85	0.67	0.60	0.58	0.57	0.57	0.57	0.56	0.56	0.55	0.56
25	12.9	13.0	9.66	6.26	3.96	2.40	1.41	0.93	0.66	0.58	0.55	0.55	0.55	0.55	0.55	0.55	0.55	0.55
30	3.59	3.37	2.73	2.07	1.50	1.03	0.71	0.59	0.54	0.52	0.52	0.53	0.54	0.54	0.54	0.53	0.54	0.53
35	2.20	2.24	2.01	1.63	1.26	0.97	0.71	0.60	0.54	0.51	0.50	0.51	0.51	0.52	0.52	0.52	0.52	0.52
40	0.92	0.90	0.82	0.74	0.67	0.61	0.56	0.52	0.52	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.50	0.53
45	0.77	0.78	0.75	0.71	0.65	0.61	0.57	0.55	0.52	0.51	0.51	0.50	0.51	0.50	0.50	0.50	0.50	0.51
50	0.64	0.64	0.62	0.61	0.59	0.57	0.56	0.54	0.53	0.52	0.51	0.51	0.51	0.50	0.50	0.50	0.50	0.32
55	0.62	0.62	0.62	0.61	0.60	0.58	0.58	0.56	0.55	0.54	0.53	0.52	0.52	0.52	0.51	0.51	0.51	0.51
60	0.60	0.61	0.60	0.60	0.59	0.58	0.57	0.57	0.56	0.55	0.55	0.54	0.53	0.53	0.52	0.51	0.51	0.51
65	0.59	0.59	0.59	0.59	0.59	0.58	0.58	0.57	0.57	0.56	0.55	0.54	0.54	0.54	0.53	0.53	0.53	0.52
70	0.58	0.58	0.58	0.58	0.58	0.56	0.57	0.56	0.56	0.56	0.55	0.55	0.54	0.54	0.54	0.54	0.54	0.52
75	0.56	0.57	0.56	0.57	0.57	0.57	0.56	0.56	0.56	0.55	0.56	0.55	0.55	0.55	0.52	0.52	0.52	0.53
80	0.56	0.56	0.56	0.56	0.56	0.55	0.56	0.56	0.56	0.56	0.56	0.56	0.55	0.53	0.50	0.51	0.52	0.49
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-10-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks: