

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2459.6 cd per klm. 0.0 degrees vertical -4.0 degrees horizontal
Beam Spread	At 10% of Imax	64.7V x 60.6H
	At 50% of Imax	35.5V x 34.6H
	At 90% of Imax	11.8V x 14.9H
Beam Flux	Total	998.3 lumens per klm.
	To 10% of Imax	899.5 lumens per klm.
	To 50% of Imax	502.9 lumens per klm.
	To 90% of Imax	74.8 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	99.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-10-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.35V I:0.1938A P:19.900W PF:0.4661 Freq:50.00Hz Lamp Flux:1182.55x1 lm		
NAME: 6796	TYPE:	WEIGHT:550g
SPEC.:20W	DIM.: 28.5*4.6*5.2cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:38°

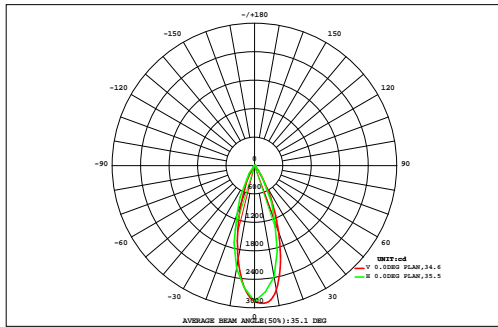

DATA OF LAMP		Eff:59.43lm/W	
MODEL		Imax(cd)	2909
NOMINAL POWER(W)		AVAILABILITY(%)	90.9
RATED VOLTAGE(V)		Avai. FLUX(lm)	1075
NOMINAL FLUX(lm)	1182.55	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1183
TEST VOLTAGE(V)	0	q @50%(H,V)	35,36DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	90	80	70	60	50	40	30	20	10	0	10	20	30	40	50	60	70	80	90	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.01	0.03	0.05	0.07	0.10	0.12	0.13	0.14	0.13	0.13	0.12	0.11	0.10	0.08	0.06	0.05	0.02	0.01	1.47	0.00
70	0.01	0.02	0.04	0.07	0.09	0.11	0.13	0.13	0.13	0.13	0.12	0.10	0.09	0.07	0.05	0.04	0.02	0.01	1.35	0.00
60	0.01	0.02	0.05	0.07	0.10	0.12	0.13	0.14	0.15	0.14	0.12	0.11	0.08	0.06	0.05	0.03	0.02	0.00	1.41	0.00
50	0.01	0.03	0.06	0.08	0.10	0.13	0.20	0.54	0.77	0.73	0.45	0.13	0.09	0.07	0.05	0.03	0.02	0.01	3.48	0.00
40	0.01	0.03	0.07	0.10	0.13	0.29	1.26	3.30	5.03	4.73	2.65	0.80	0.17	0.08	0.06	0.04	0.02	0.01	18.8	2.07
30	0.01	0.04	0.08	0.13	0.20	1.14	5.45	13.2	19.5	18.1	10.5	3.47	0.53	0.13	0.08	0.05	0.03	0.01	72.7	58.7
20	0.01	0.05	0.10	0.17	0.37	2.76	14.0	33.3	48.1	44.1	25.5	8.19	1.27	0.20	0.11	0.07	0.03	0.01	178	169
10	0.01	0.05	0.11	0.20	0.56	4.37	22.2	52.8	77.5	70.8	39.9	13.0	2.03	0.26	0.13	0.08	0.04	0.01	284	276
0	0.01	0.05	0.11	0.21	0.57	4.47	22.7	56.1	82.9	75.7	42.5	13.7	2.14	0.27	0.13	0.08	0.04	0.01	302	294
-10	0.01	0.05	0.10	0.18	0.45	3.12	15.8	38.4	57.0	51.0	28.5	8.96	1.31	0.20	0.11	0.07	0.03	0.01	205	197
-20	0.01	0.04	0.09	0.14	0.26	1.36	6.56	15.7	23.7	21.6	12.2	3.65	0.55	0.14	0.09	0.06	0.03	0.01	86.2	75.2
-30	0.01	0.03	0.07	0.11	0.15	0.38	1.31	3.42	5.42	4.86	2.65	0.85	0.16	0.10	0.07	0.04	0.02	0.01	19.7	2.85
-40	0.01	0.03	0.06	0.09	0.12	0.14	0.18	0.44	0.59	0.61	0.46	0.16	0.10	0.08	0.06	0.04	0.02	0.01	3.19	0.00
-50	0.01	0.02	0.05	0.08	0.11	0.15	0.17	0.14	0.14	0.13	0.12	0.13	0.11	0.08	0.06	0.04	0.02	0.01	1.57	0.00
-60	0.01	0.02	0.04	0.07	0.10	0.13	0.16	0.18	0.19	0.18	0.16	0.13	0.10	0.08	0.06	0.04	0.02	0.01	1.67	0.00
-70	0.01	0.02	0.03	0.06	0.08	0.10	0.11	0.12	0.12	0.12	0.11	0.10	0.08	0.07	0.05	0.04	0.02	0.01	1.23	0.00
-80	0.00	0.01	0.01	0.02	0.03	0.03	0.04	0.04	0.04	0.04	0.04	0.03	0.03	0.03	0.02	0.02	0.01	0.00	0.44	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
F t	0.12	0.52	1.14	1.87	3.53	18.9	90.6	218	321	293	166	53.6	8.96	1.99	1.23	0.79	0.42	0.12	1183	---
F a	0.00	0.00	0.00	0.00	0.00	4.13	77.7	207	312	282	155	37.6	0.08	0.00	0.00	0.00	0.00	0.00	---	1075


one-half-peak spread: U:18.6,D:17.2 , L:16.4,R:18.5 NEMA Beam Type: Type 4

H(B) Range:-90 - 90DEG
H(B) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-10-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.35V I:0.1938A P:19.900W PF:0.4661 Freq:50.00Hz Lamp Flux:1182.55x1 lm		
NAME: 6796	TYPE:	WEIGHT:550g
SPEC.:20W	DIM.: 28.5*4.6*5.2cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:38°

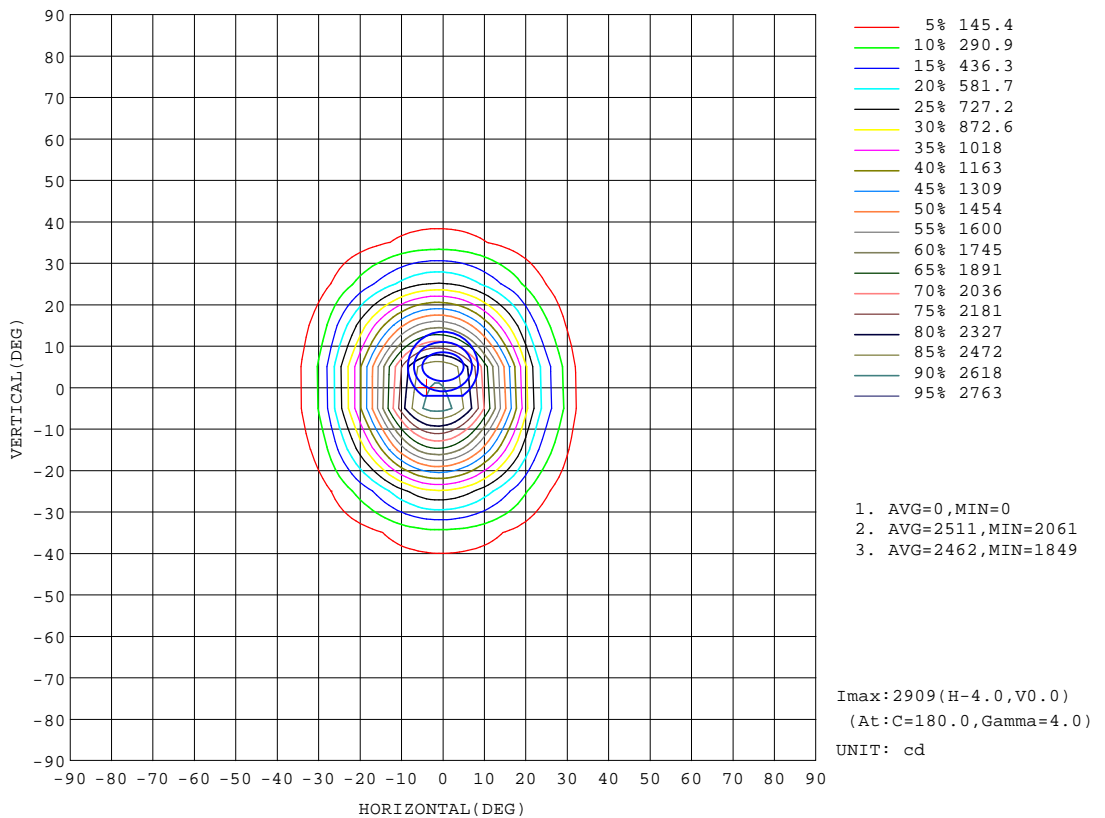


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:NORDECOR
 Test Date:2024-10-10

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:220.35V I:0.1938A P:19.900W PF:0.4661 Freq:50.00Hz Lamp Flux:1182.55x1 lm		
NAME: 6796	TYPE:	WEIGHT:550g
SPEC.:20W	DIM.: 28.5*4.6*5.2cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:38°

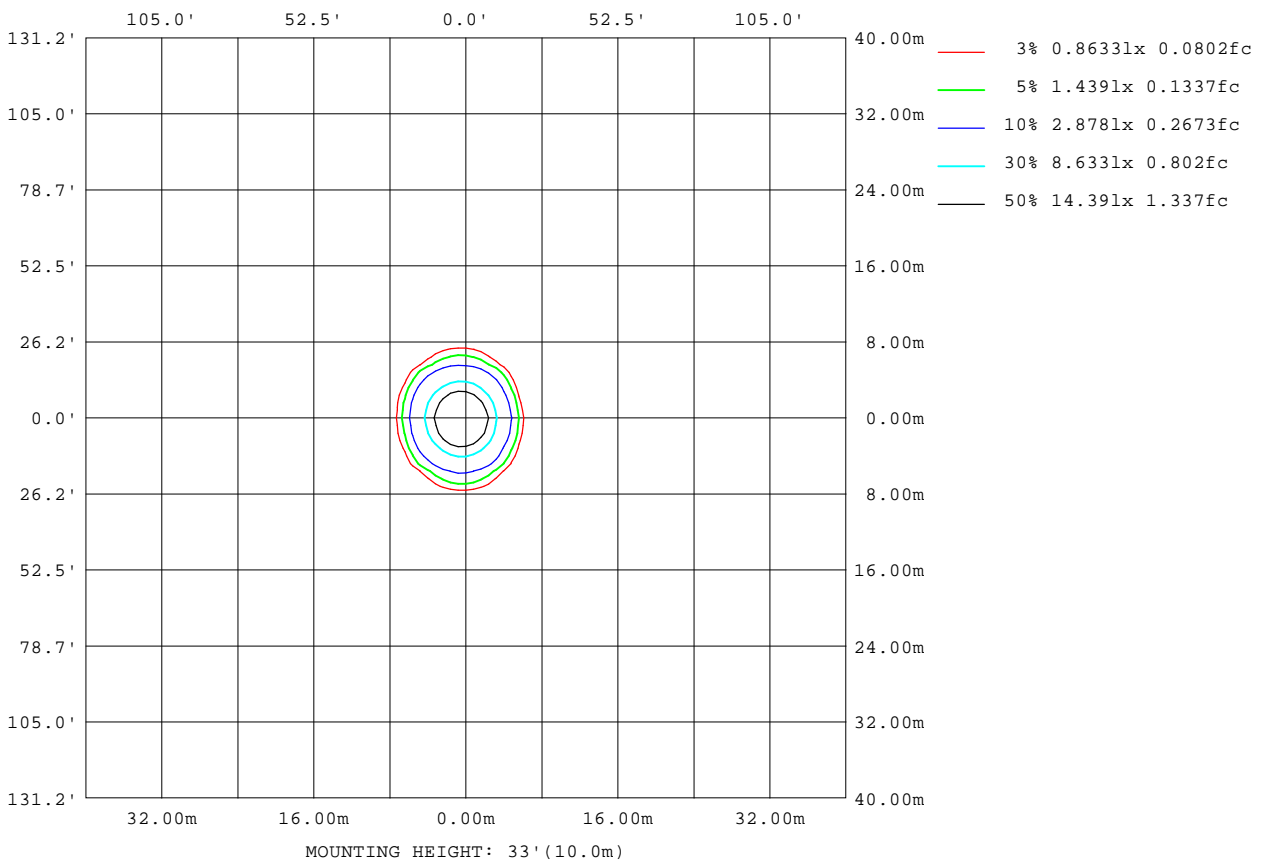

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-10-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

Planar Illuminance Curve

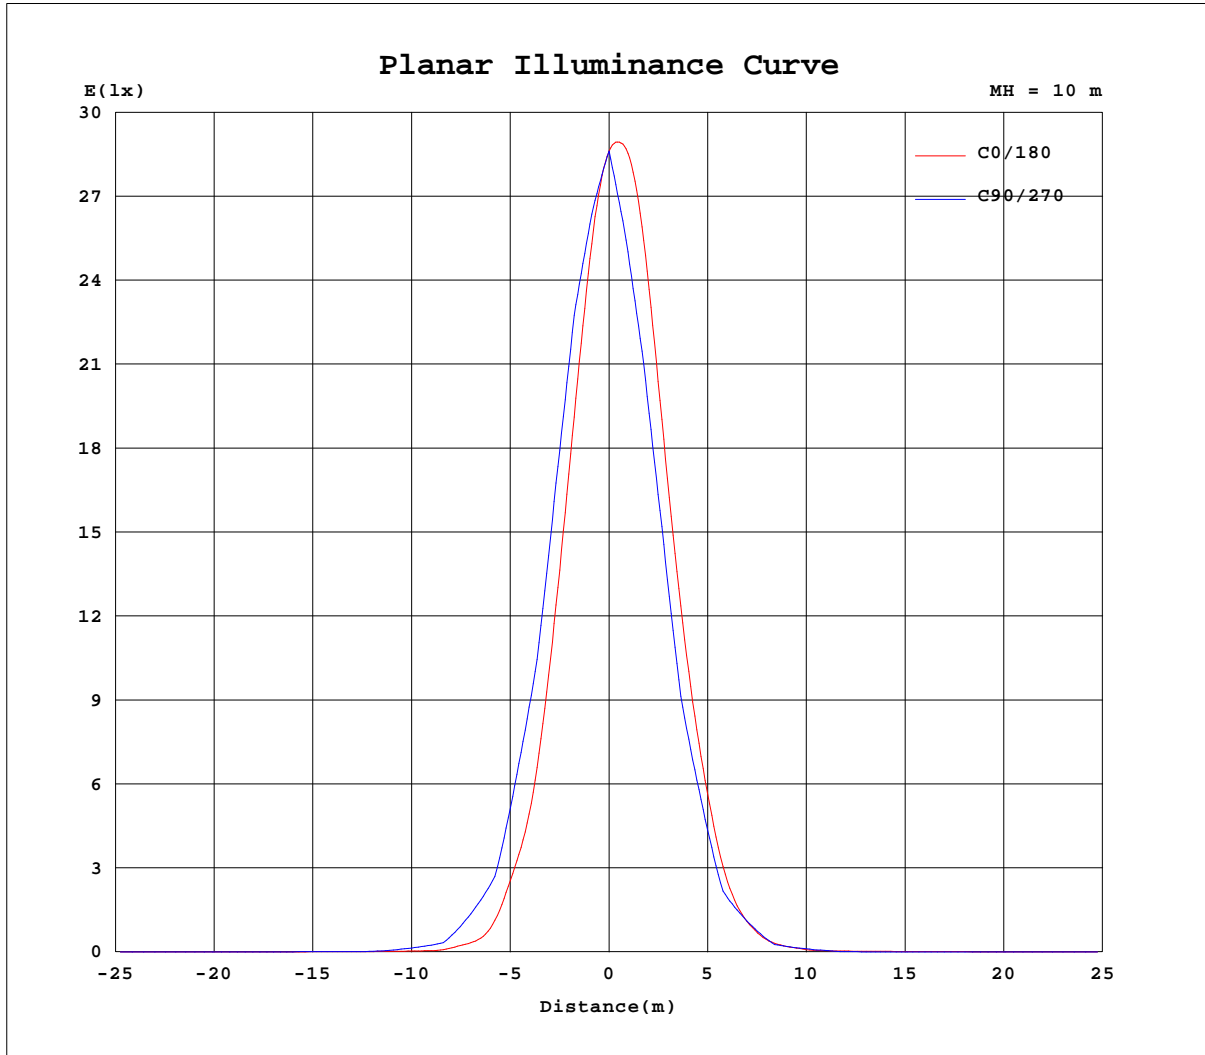


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:NORDECOR
 Test Date:2024-10-10

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.35V I:0.1938A P:19.900W PF:0.4661 Freq:50.00Hz Lamp Flux:1182.55x1 lm		
NAME: 6796	TYPE:	WEIGHT:550g
SPEC.:20W	DIM.: 28.5*4.6*5.2cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:38°

Flux out:595.6 lm

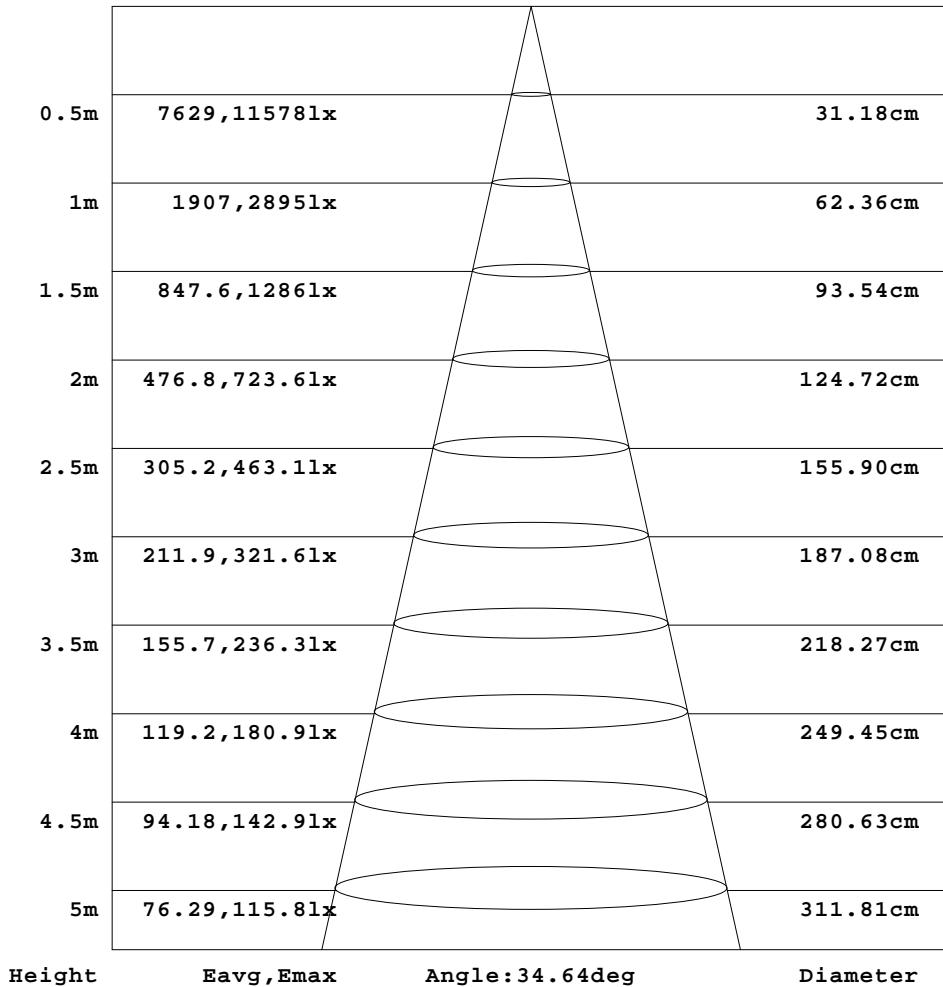

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-10-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.35V I:0.1938A P:19.900W PF:0.4661 Freq:50.00Hz Lamp Flux:1182.55x1 lm		
NAME: 6796	TYPE:	WEIGHT:550g
SPEC.:20W	DIM.: 28.5*4.6*5.2cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:38°

Table--1

UNIT: cd

H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	1.61	1.74	1.90	2.01	2.13	2.26	2.39	2.53	2.64	2.81	2.97	3.15	3.27	3.27	3.23	3.17	3.09	3.02	2.94
-75	1.69	1.81	2.00	2.16	2.32	2.50	2.74	3.04	3.29	3.54	3.72	3.87	4.04	4.12	4.15	4.16	4.12	4.06	3.99
-70	1.79	2.06	2.22	2.42	2.64	2.92	3.32	3.78	4.15	4.40	4.57	4.74	4.88	5.01	5.09	5.12	5.11	5.06	4.96
-65	1.82	2.03	2.24	2.45	2.71	3.11	3.63	4.07	4.39	4.70	4.97	5.22	5.49	5.72	5.91	6.07	6.15	6.16	6.08
-60	1.93	2.20	2.40	2.66	3.06	3.74	4.33	4.63	4.89	5.21	5.57	5.91	6.27	6.60	6.87	7.08	7.23	7.25	7.12
-55	1.92	2.16	2.36	2.64	3.12	3.84	4.38	4.68	4.93	5.26	5.64	6.09	6.55	7.00	7.44	7.87	8.17	8.34	8.28
-50	2.01	2.27	2.50	2.90	3.74	4.46	4.71	4.89	5.20	5.60	6.09	6.62	7.17	7.78	8.36	8.90	9.30	9.45	9.29
-45	1.99	2.24	2.52	2.95	3.83	4.59	4.93	5.14	5.39	5.78	6.26	6.90	7.71	10.7	18.4	27.5	34.9	39.9	41.8
-40	2.13	2.41	2.79	3.57	4.65	5.03	5.35	5.55	5.85	6.30	6.91	7.78	9.32	19.0	35.7	52.6	65.1	72.5	74.1
-35	2.12	2.44	2.89	3.67	4.85	5.43	5.84	6.19	6.58	7.18	8.15	11.8	28.2	52.1	89.0	140	197	237	249
-30	2.33	2.80	3.44	4.80	5.64	6.15	6.64	7.11	7.74	8.67	10.7	25.3	64.1	111	179	274	364	420	417
-25	2.31	2.77	3.43	4.68	5.88	6.57	7.26	7.99	8.82	10.1	15.8	36.3	91.5	198	345	504	682	819	854
-20	2.59	3.23	4.11	5.78	6.69	7.53	8.46	9.47	10.8	13.3	31.6	84.8	183	399	628	883	1118	1274	1260
-15	2.47	3.06	3.90	5.52	6.75	7.69	8.78	9.99	11.4	13.9	31.5	84.3	199	461	785	1145	1533	1803	1859
-10	2.75	3.53	4.66	6.44	7.54	8.68	10.0	11.6	13.6	21.5	59.2	162	381	769	1217	1734	2202	2430	2382
-5	2.55	3.19	4.15	5.94	7.21	8.36	9.70	11.2	12.9	16.1	45.3	123	301	683	1145	1688	2248	2611	2667
0	2.81	3.63	4.83	6.64	7.81	9.08	10.5	12.1	14.3	25.6	70.1	198	472	940	1491	2113	2662	2903	2863
5	2.56	3.20	4.18	5.96	7.18	8.32	9.63	11.1	12.7	15.7	47.1	125	309	692	1145	1666	2182	2519	2574
10	2.74	3.57	4.78	6.41	7.47	8.60	9.84	11.2	12.9	20.9	62.3	171	398	790	1205	1653	2041	2241	2201
15	2.49	3.05	3.95	5.57	6.64	7.56	8.57	9.60	10.7	12.7	33.7	87.1	209	468	784	1114	1427	1641	1687
20	2.55	3.25	4.24	5.70	6.54	7.34	8.13	8.87	9.79	11.5	35.1	87.1	186	393	627	839	1019	1121	1102
25	2.31	2.73	3.44	4.74	5.71	6.35	6.95	7.51	8.07	8.88	15.4	37.8	94.4	197	340	482	617	712	733
30	2.27	2.73	3.48	4.73	5.40	5.84	6.24	6.57	6.90	7.37	8.93	27.1	67.0	113	168	240	305	339	335
35	2.10	2.39	2.86	3.76	4.71	5.15	5.46	5.71	5.92	6.17	6.60	11.4	27.8	51.4	84.1	126	168	195	201
40	2.04	2.32	2.78	3.68	4.43	4.72	4.88	5.02	5.11	5.24	5.38	5.54	6.04	14.0	31.8	47.1	56.7	60.9	60.0
45	1.94	2.17	2.46	2.98	3.83	4.34	4.51	4.64	4.74	4.86	4.97	5.11	5.26	6.95	14.7	23.3	29.2	32.4	32.9
50	1.92	2.16	2.45	2.95	3.81	4.14	4.25	4.35	4.46	4.59	4.68	4.76	4.84	4.89	4.97	5.01	5.02	4.96	4.84
55	1.97	2.11	2.31	2.65	3.21	3.85	4.14	4.25	4.34	4.45	4.55	4.67	4.74	4.81	4.85	4.87	4.85	4.81	4.71
60	2.04	2.15	2.47	2.74	3.23	3.87	4.11	4.24	4.33	4.43	4.54	4.64	4.71	4.76	4.76	4.73	4.68	4.59	4.51
65	2.14	2.18	2.33	2.65	2.95	3.40	3.80	4.05	4.20	4.30	4.36	4.45	4.49	4.53	4.53	4.49	4.42	4.36	4.26
70	2.24	2.30	2.44	2.78	3.00	3.31	3.67	4.02	4.16	4.23	4.27	4.30	4.32	4.31	4.27	4.20	4.13	4.04	3.95
75	2.34	2.36	2.44	2.62	2.87	3.05	3.27	3.51	3.70	3.82	3.90	3.98	4.01	3.99	3.95	3.86	3.78	3.69	3.59
80	2.44	2.48	2.54	2.61	2.86	2.95	3.06	3.18	3.32	3.48	3.62	3.68	3.67	3.62	3.57	3.47	3.36	3.26	3.21
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(h) Range:-90 - 90DEG
H(h) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-10-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.35V I:0.1938A P:19.900W PF:0.4661 Freq:50.00Hz Lamp Flux:1182.55x1 lm		
NAME: 6796	TYPE:	WEIGHT:550g
SPEC.:20W	DIM.: 28.5*4.6*5.2cm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:38°

Table--2

UNIT: cd

H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	2.91	2.92	2.90	2.90	2.89	2.84	2.78	2.73	2.69	2.68	2.64	2.58	2.52	2.42	2.30	2.01	1.59	1.40
-75	3.89	3.81	3.75	3.67	3.57	3.45	3.33	3.20	3.05	2.95	2.88	2.79	2.72	2.61	2.49	2.34	1.95	1.49
-70	4.81	4.67	4.52	4.35	4.16	3.98	3.76	3.52	3.34	3.18	3.07	2.95	2.84	2.71	2.56	2.36	1.86	1.51
-65	5.91	5.66	5.42	5.13	4.83	4.50	4.18	3.88	3.60	3.36	3.19	3.02	2.89	2.78	2.66	2.48	2.20	1.58
-60	6.82	6.46	6.10	5.68	5.21	4.79	4.35	3.98	3.69	3.41	3.17	2.99	2.87	2.74	2.61	2.42	2.06	1.50
-55	7.99	7.49	6.93	6.31	5.73	5.17	4.65	4.18	3.80	3.50	3.24	3.01	2.85	2.74	2.66	2.53	2.27	1.66
-50	8.78	8.05	7.26	6.50	5.78	5.12	4.54	4.05	3.66	3.37	3.15	2.89	2.75	2.67	2.59	2.45	2.09	1.52
-45	40.4	36.1	29.3	19.6	8.69	5.92	5.11	4.44	3.97	3.61	3.33	3.10	2.91	2.78	2.71	2.62	2.36	1.72
-40	69.3	59.4	44.3	23.3	7.78	6.03	5.11	4.43	3.97	3.61	3.35	3.14	2.95	2.83	2.74	2.64	2.18	1.59
-35	232	193	140	88.4	47.8	19.6	8.92	5.65	4.78	4.26	3.92	3.64	3.41	3.18	3.06	2.93	2.58	1.85
-30	368	286	192	118	60.6	23.2	8.35	6.05	5.13	4.61	4.25	3.95	3.68	3.43	3.29	3.05	2.39	1.70
-25	788	651	479	304	164	66.9	26.3	10.6	6.74	5.72	5.14	4.70	4.33	3.96	3.70	3.49	3.02	2.08
-20	1111	884	625	361	181	64.8	29.6	9.62	7.37	6.29	5.65	5.13	4.69	4.26	3.97	3.65	2.77	1.94
-15	1706	1398	1027	647	348	158	54.0	22.0	9.34	7.48	6.53	5.86	5.29	4.80	4.38	4.07	3.52	2.36
-10	2082	1627	1123	651	356	130	50.4	15.4	9.49	7.79	6.84	6.11	5.50	4.97	4.56	4.14	3.15	2.15
-5	2472	2028	1476	921	502	246	76.0	33.4	11.2	8.62	7.41	6.59	5.92	5.33	4.83	4.43	3.81	2.55
0	2560	2001	1376	795	438	175	60.8	19.8	10.4	8.36	7.28	6.50	5.84	5.27	4.76	4.35	3.24	2.25
5	2389	1958	1421	889	487	233	73.4	32.3	10.9	8.49	7.34	6.56	5.91	5.33	4.83	4.43	3.73	2.52
10	1927	1498	1030	606	330	114	47.2	13.5	9.08	7.56	6.73	6.06	5.50	4.97	4.56	4.12	3.00	2.23
15	1547	1262	924	588	320	134	49.6	19.7	8.69	7.13	6.31	5.74	5.23	4.78	4.37	4.06	3.31	2.28
20	967	764	547	322	157	54.6	26.9	8.50	6.81	5.97	5.41	4.99	4.62	4.22	3.93	3.59	2.58	1.93
25	673	550	407	264	141	52.9	23.0	8.76	6.04	5.27	4.83	4.49	4.20	3.89	3.65	3.43	2.65	1.95
30	292	224	155	98.7	43.7	18.4	6.36	5.09	4.56	4.20	3.96	3.75	3.55	3.34	3.19	2.94	2.14	1.76
35	185	151	108	67.6	35.6	15.1	6.57	4.52	4.05	3.74	3.53	3.37	3.21	3.05	2.95	2.81	2.10	1.65
40	54.5	43.7	26.7	9.06	4.56	4.11	3.78	3.49	3.26	3.08	2.95	2.87	2.74	2.69	2.64	2.43	1.86	1.53
45	31.0	26.6	19.3	9.59	4.51	3.92	3.65	3.39	3.15	2.97	2.84	2.75	2.65	2.59	2.56	2.45	1.87	1.49
50	4.65	4.41	4.19	3.94	3.75	3.52	3.29	3.08	2.89	2.73	2.63	2.54	2.49	2.49	2.44	2.13	1.77	1.43
55	4.58	4.42	4.24	4.04	3.83	3.62	3.42	3.20	3.01	2.85	2.74	2.64	2.59	2.57	2.53	2.32	1.74	1.53
60	4.40	4.27	4.12	3.96	3.77	3.56	3.37	3.17	3.00	2.85	2.75	2.68	2.65	2.65	2.54	1.92	1.76	1.59
65	4.17	4.10	4.00	3.88	3.74	3.58	3.42	3.26	3.11	2.98	2.89	2.82	2.79	2.75	2.62	2.21	1.77	1.73
70	3.90	3.84	3.77	3.68	3.58	3.47	3.35	3.23	3.11	3.03	2.97	2.94	2.90	2.81	2.35	2.03	1.91	1.85
75	3.55	3.54	3.51	3.47	3.41	3.34	3.26	3.18	3.10	3.03	2.97	2.92	2.87	2.80	2.64	2.15	2.02	1.99
80	3.21	3.21	3.23	3.21	3.18	3.15	3.11	3.07	3.02	2.98	2.93	2.87	2.82	2.73	2.32	2.16	2.15	2.12
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-10-10

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks: