

Report No.:

Test Time: 2025-07-16 17:25

Luminaire Property


Luminaire Manufacturer: NORDECOR
Luminaire Description: 6754
Luminous Width (mm): 50
Current: 0.213 A
Power Factor: 1.000

Luminous Length (mm): 50
Voltage: 48.0 V
Power: 10.21 W


Photometric Results

CIE Class: Direct	Total Rated Lamp Lumens: 1049.8 lm
Measurement Flux: 1049.8 lm	Efficiency: 100%
Downward Ratio: 96%	Upward Ratio: 4%
Horizontal Diffuse Angle(10%,50%,80%,100%): H44.1,H26.1,H16.7,H1	
Vertical Diffuse Angle(10%,50%,80%,100%): V44.6,V26.3,V16.8,V1	
Luminaire Efficacy Rating (LER): 102.87	Central Intensity: 3351.26 cd
Max. Intensity: 3359.53 cd	Pos of Max. Intensity: H0 V1
S/MH(C0/C180): 0.44	S/MH(C90/C270): 0.45

Picture Of Luminaire



Luminous Intensity Distribution Curve

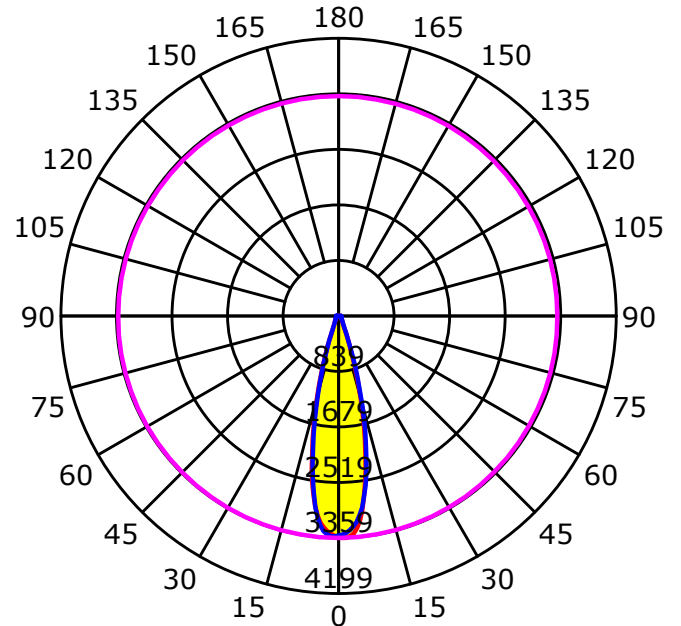

Unit: cd

Average Diffuse Angle(50%): 26.2°

— C0-C180 — C90-C270 — G1

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0



Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

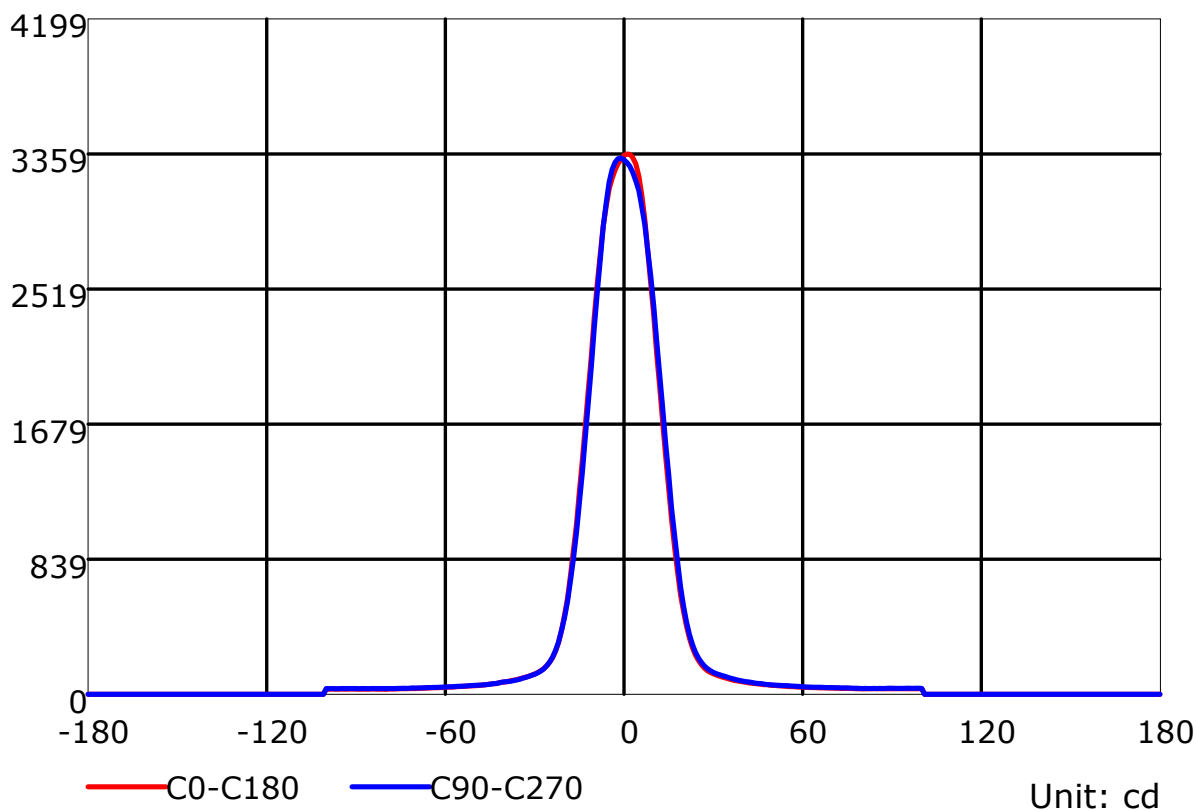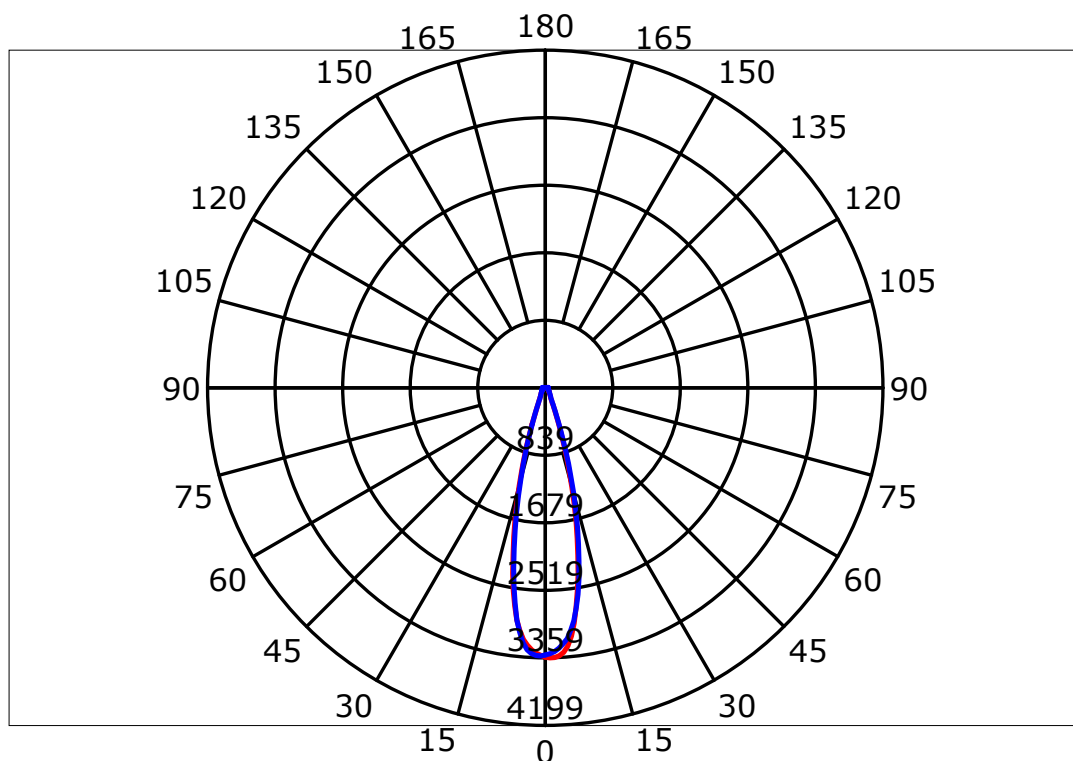

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Luminous Intensity Distribution Curve(cd/klm)

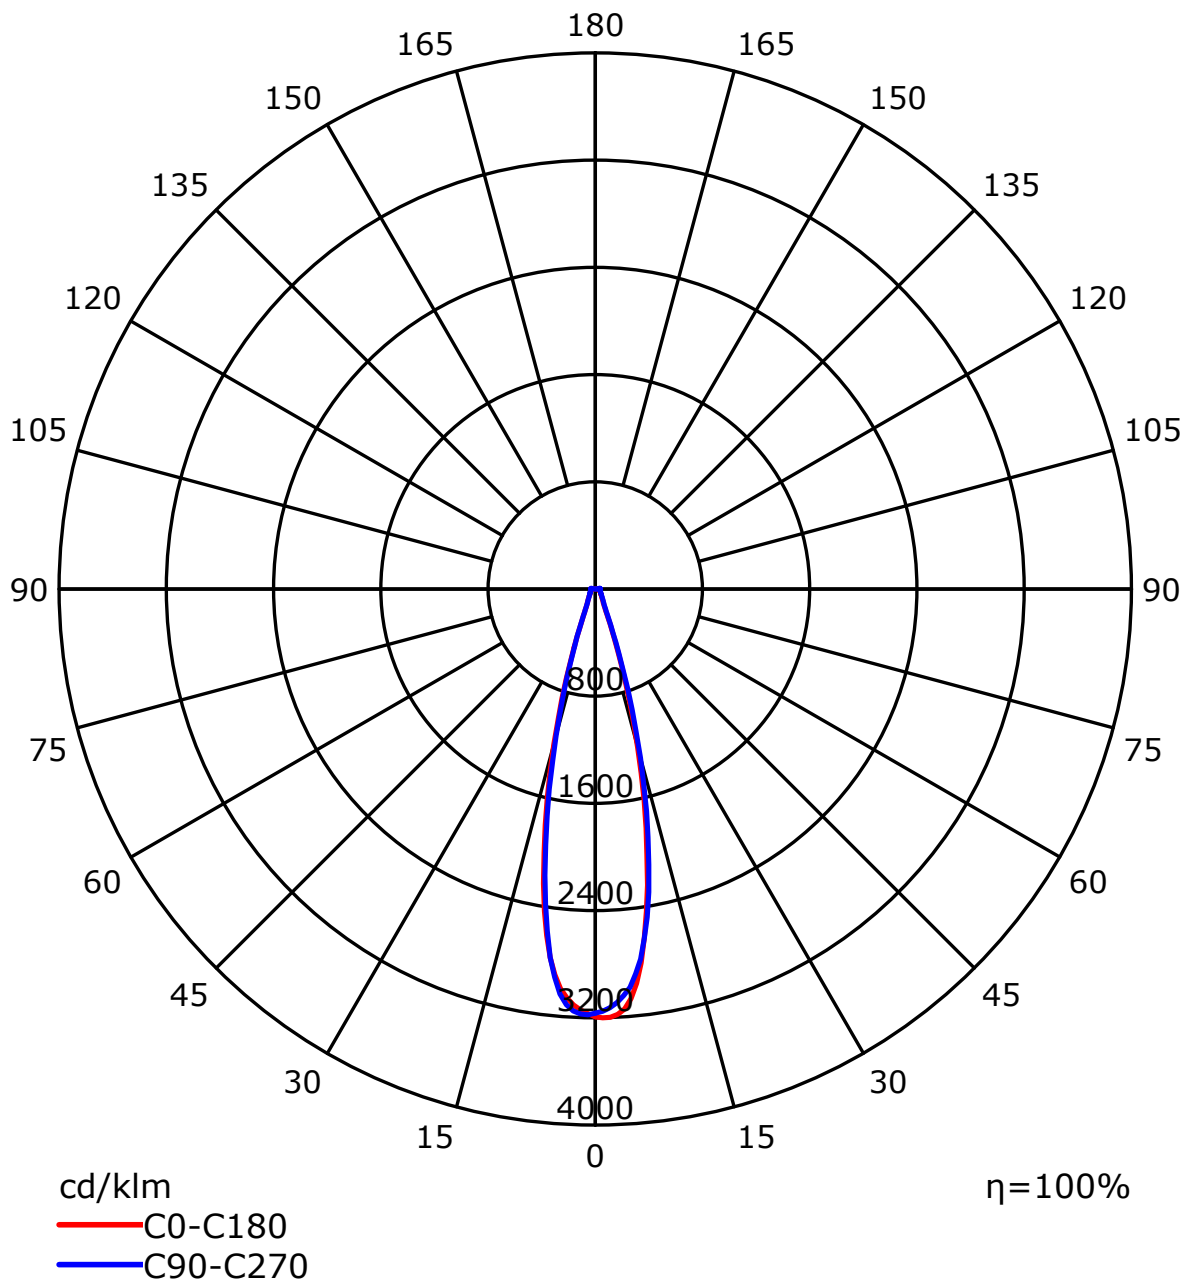


C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	118	118	118	118	115	115	115	115	109	109	109	104	104	104	98	98	98	96
1	111	107	104	101	108	104	102	99	100	97	95	95	93	92	91	90	88	86
2	105	99	94	90	102	97	93	89	93	89	86	89	86	84	86	84	82	80
3	100	92	87	83	97	91	86	82	87	83	80	84	81	78	82	79	76	75
4	95	87	81	77	93	86	80	76	83	78	75	80	77	73	78	75	72	71
5	91	82	77	72	89	81	76	72	79	74	71	77	73	70	75	72	69	67
6	87	79	73	68	86	78	72	68	76	71	67	74	70	66	72	69	66	64
7	84	75	69	65	82	74	69	65	73	68	64	71	67	64	70	66	63	62
8	81	72	66	63	80	71	66	62	70	65	62	69	64	61	67	64	61	60
9	78	69	64	60	77	69	64	60	68	63	60	66	62	59	65	62	59	58
10	76	67	62	58	75	66	61	58	65	61	58	64	60	57	63	60	57	56


Spacing Criteria (0-180): 0.44
Spacing Criteria (90-270): 0.45
Spacing Criteria (Diagonal): 0.43

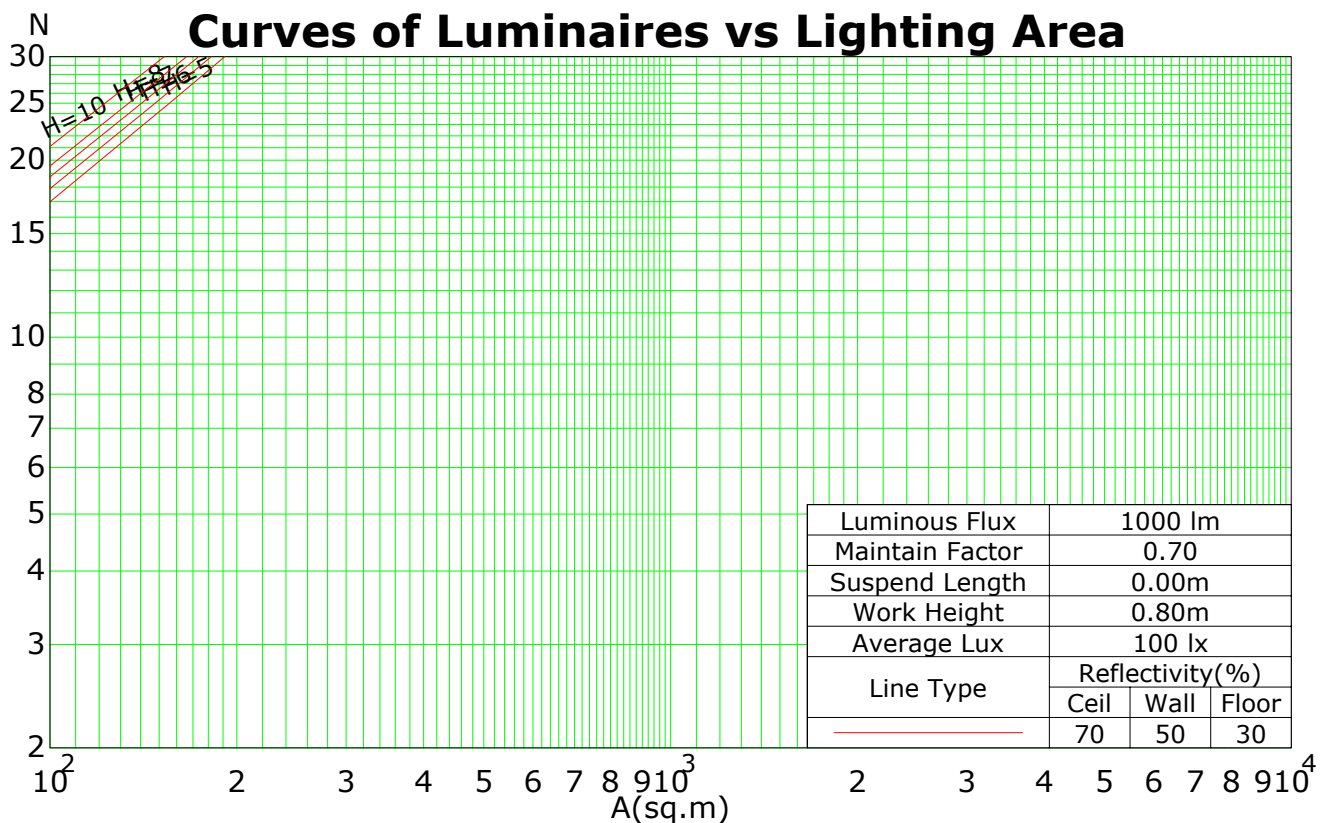

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Isocandela (rectangle)

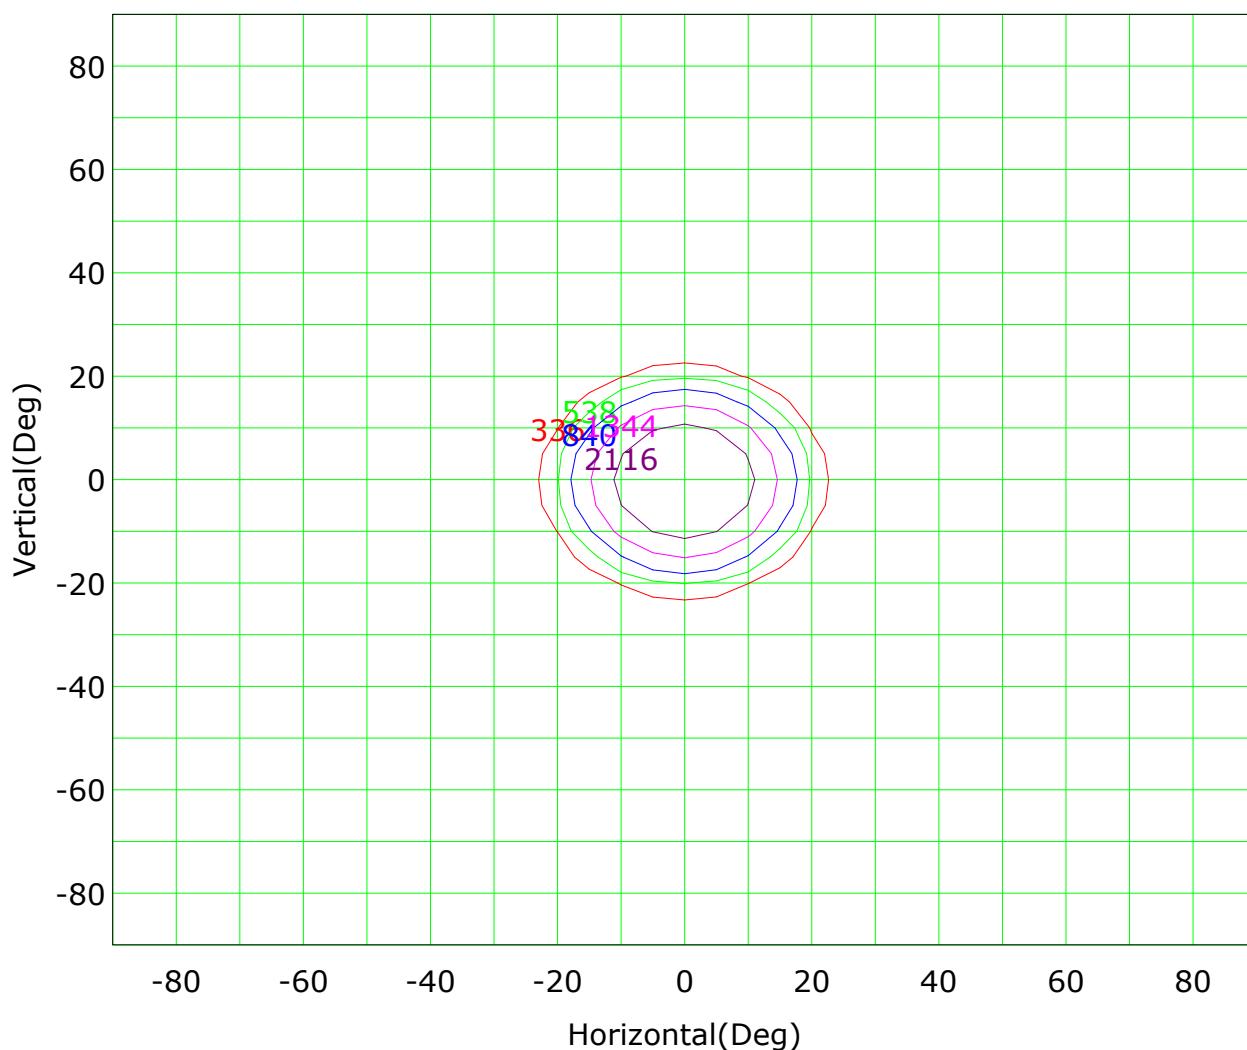


Imax (100%): 3360 cd

(10%): 336 cd	(16%): 538 cd
(25%): 840 cd	(40%): 1344 cd
(63%): 2116 cd	(100%): 3360 cd

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Isocandela (sphere)

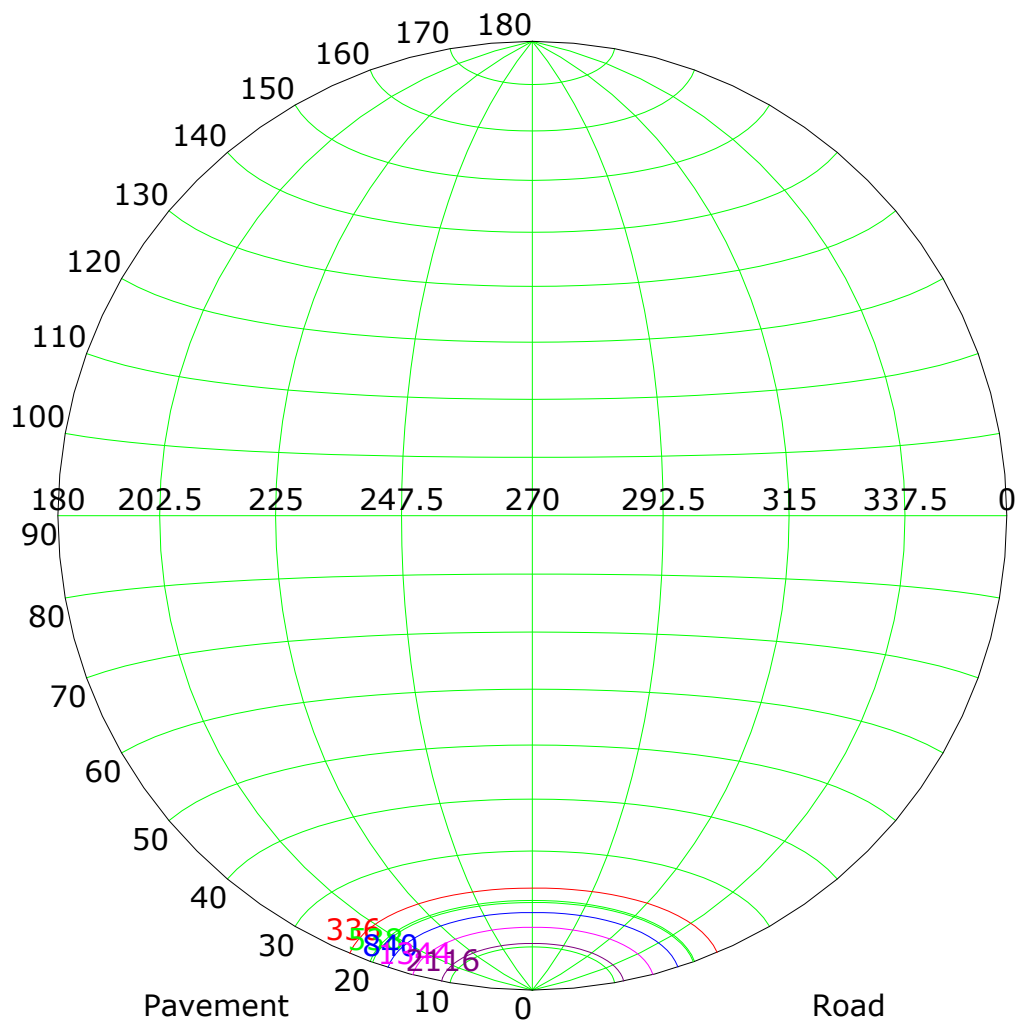

Imax (100%): 3360 cd


(10%): 336 cd
(25%): 840 cd
(63%): 2116 cd

(16%): 538 cd
(40%): 1344 cd
(100%): 3360 cd

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

IsoLux Plot

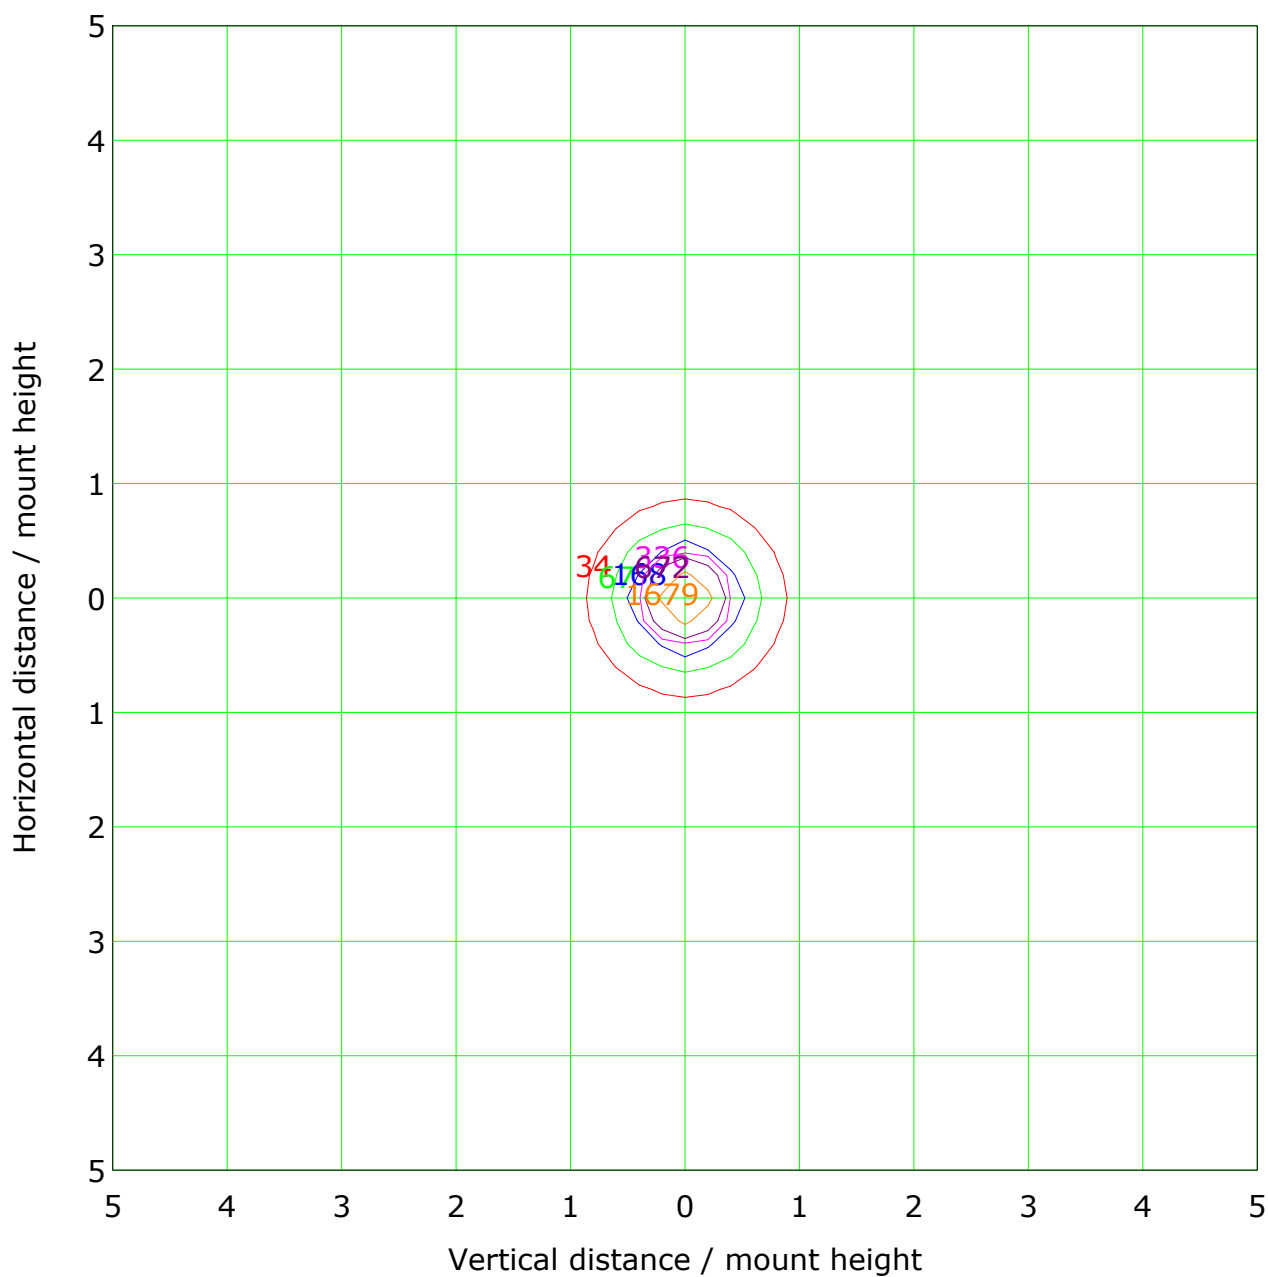

Mounting Height: 1.0m Max Lux(100%): 3358.0 lx


(1%): 33.6 lx	(2%): 67.2 lx
(5%): 167.9 lx	(10%): 335.8 lx
(20%): 671.6 lx	(50%): 1679.0 lx
(100%): 3358.0 lx	

C Plane (°): 0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-180.0: 1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Roadway CU Curve

Efficiency(%)


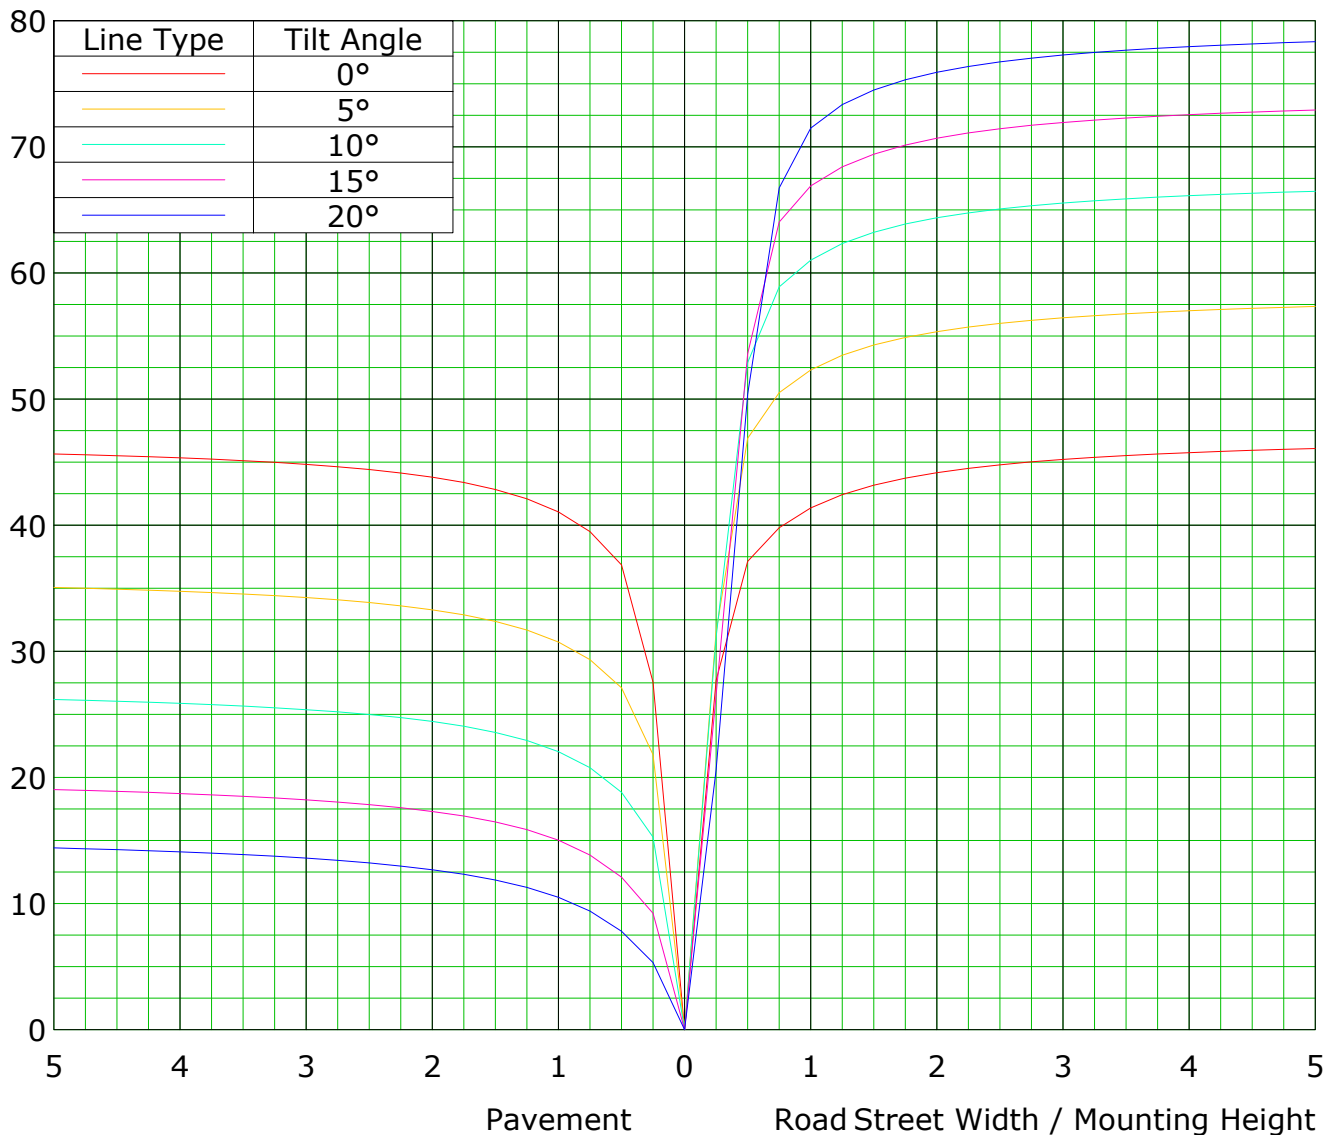


C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

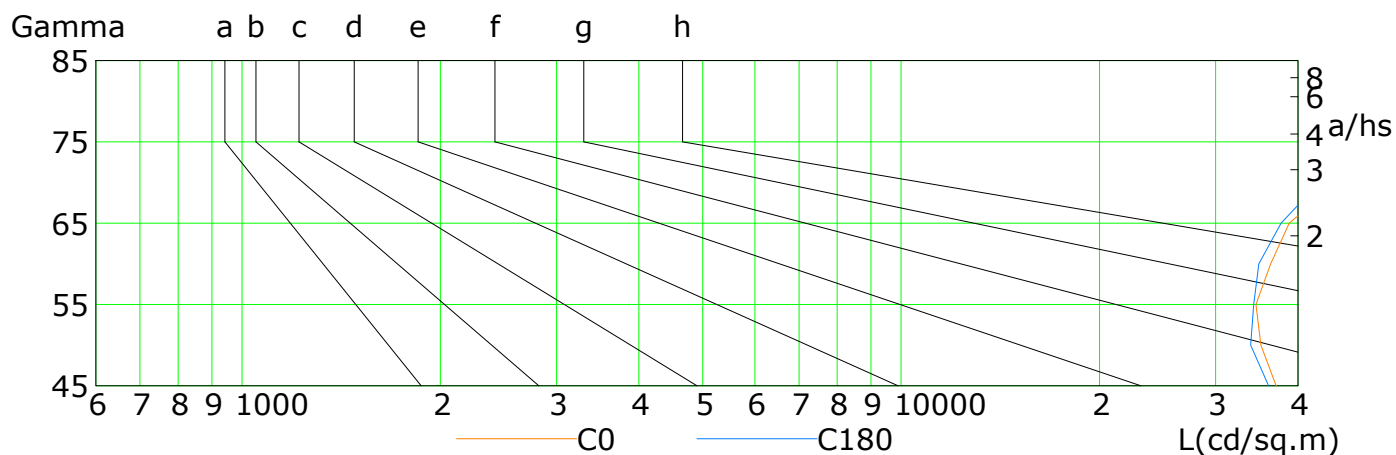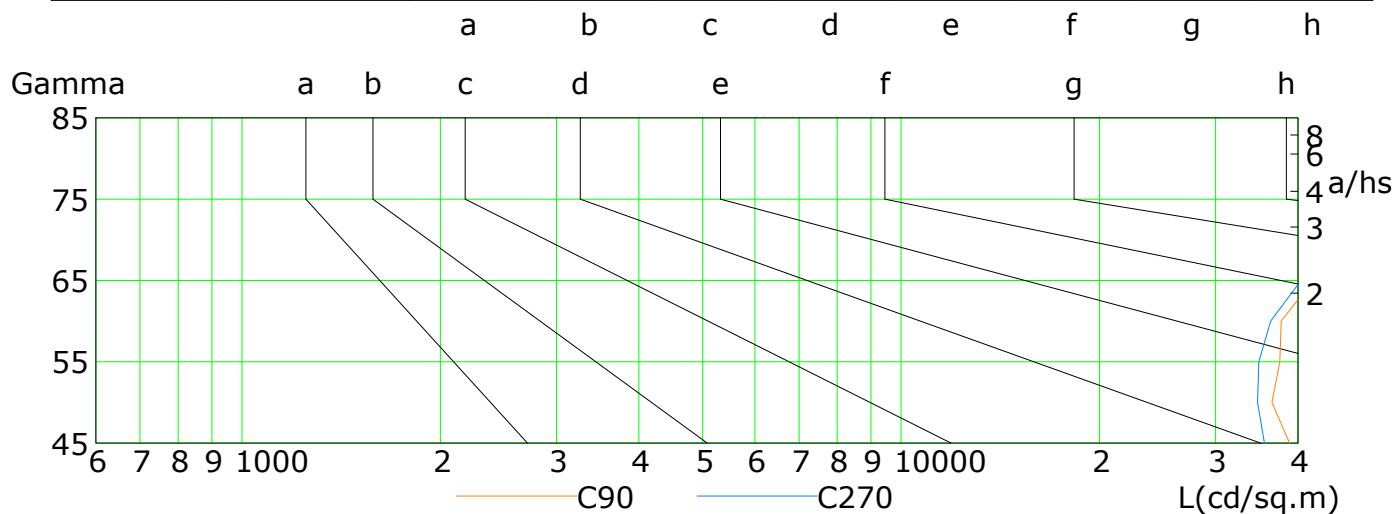

L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	37052	35134	34534	36368	38806	45962	57291	79678	159944
C90	38834	36522	37547	37728	42156	49178	62561	83295	168939
C180	36091	33915	34262	34896	37698	43050	53860	72722	151499
C270	35570	34730	34897	36368	40424	45658	57090	83594	164763

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-1600L

Distance: 8.443 m


Humidity:

Inspector:

Illuminance at a Distance

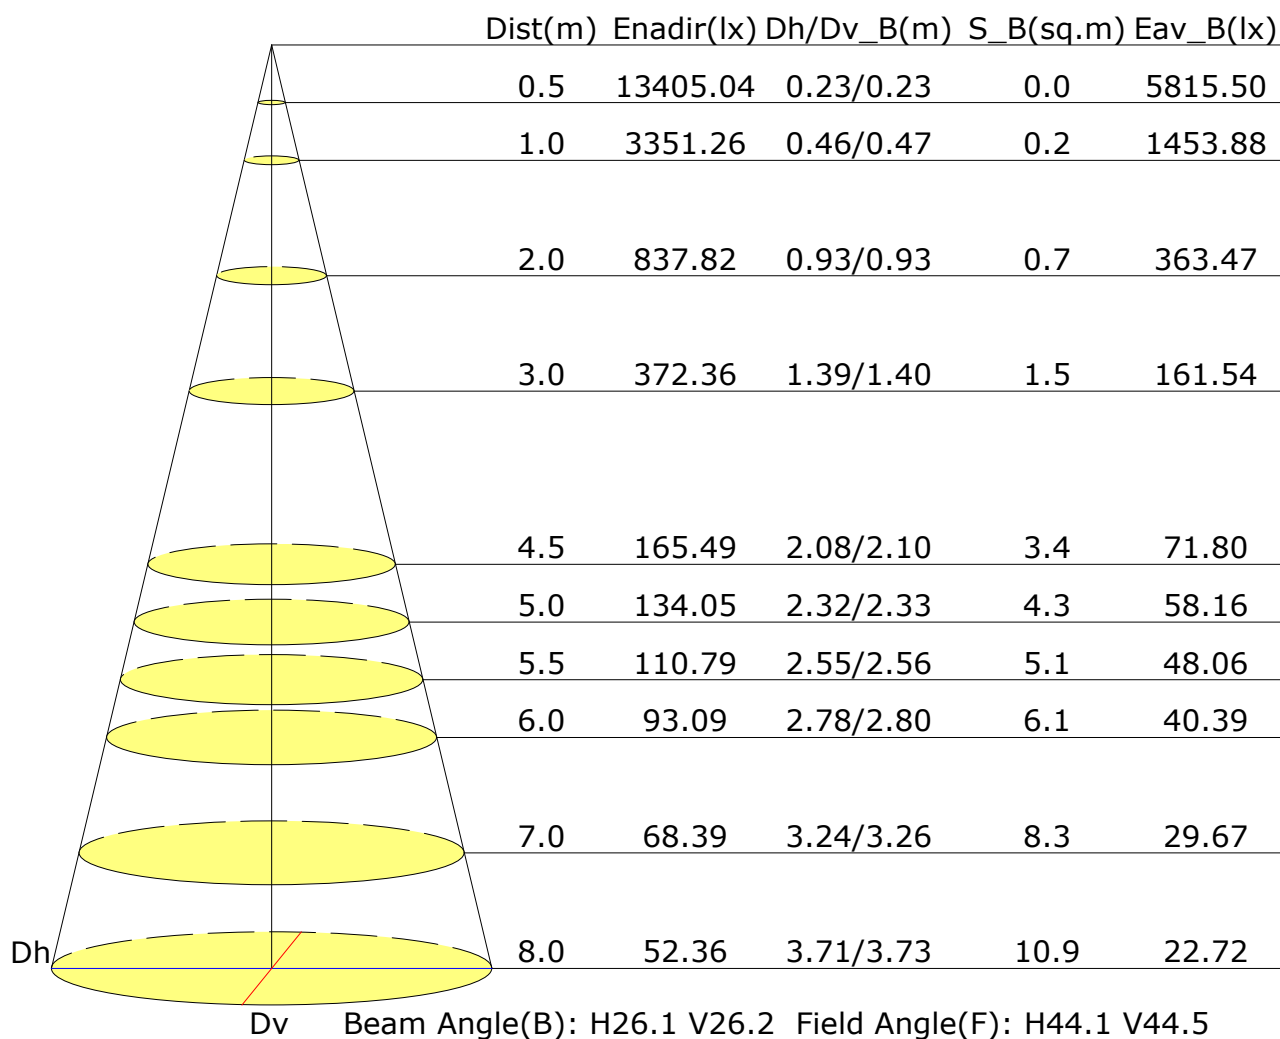

Vertical IsoLux Plot

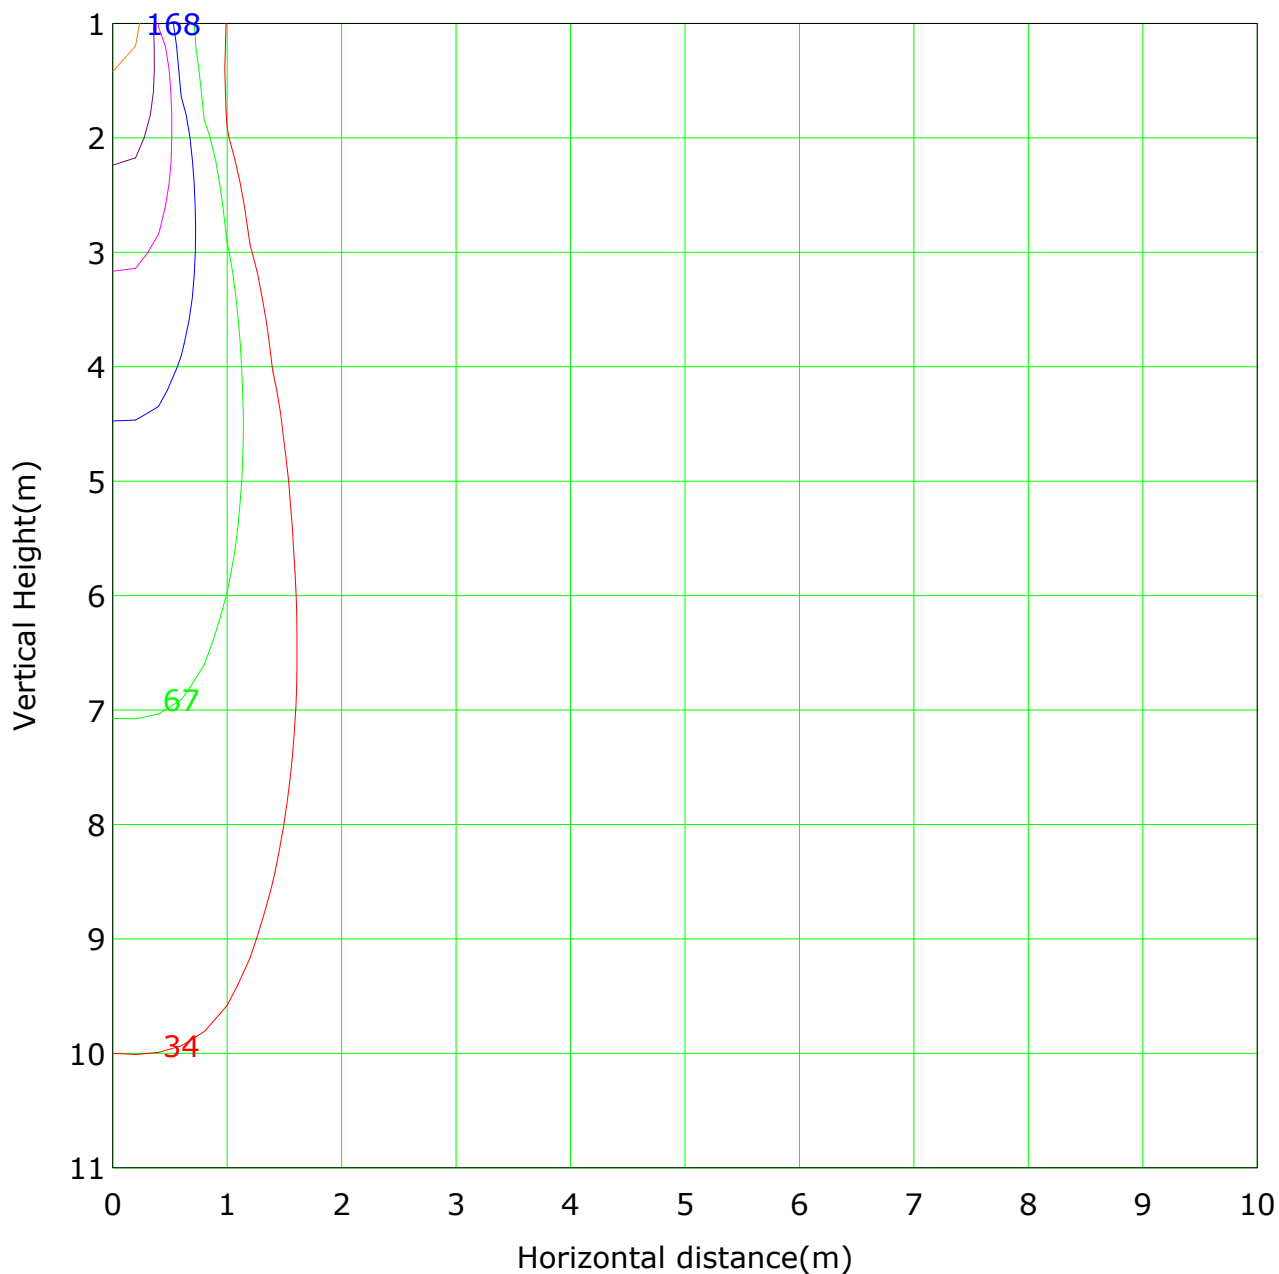

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 3351.3 lx
— (1%): 33.5 lx — (2%): 67.0 lx
— (5%): 167.6 lx — (10%): 335.1 lx
— (20%): 670.3 lx — (50%): 1675.6 lx
— (100%): 3351.3 lx

Area Flux Table

Unit: lm

		Vertical plane																		Horizontal plane									
		-90	-80	-70	-60	-50	-40	-30	-20	-10	0	10	20	30	40	50	60	70	80	90	Flux(TT)	Flux(E)							
Vertical plane	-90	0.1	0.3	0.4	0.6	0.7	0.9	1.0	1.0	1.1	1.1	1.1	1.1	1.0	0.9	0.8	0.6	0.5	0.3	0.1	12.3	0.0							
	-80	0.1	0.3	0.4	0.6	0.7	0.9	1.0	1.0	1.1	1.1	1.1	1.1	1.0	0.9	0.8	0.6	0.5	0.3	0.1	12.6	0.0							
	-70	0.1	0.3	0.4	0.6	0.8	1.0	1.1	1.1	1.2	1.3	1.3	1.2	1.1	1.0	0.8	0.6	0.5	0.3	0.1	13.7	0.0							
	-60	0.1	0.3	0.4	0.7	0.9	1.1	1.3	1.4	1.5	1.5	1.4	1.3	1.3	1.1	0.9	0.7	0.5	0.3	0.1	15.4	0.0							
	-50	0.1	0.3	0.5	0.7	1.0	1.2	1.5	1.8	1.9	1.9	1.8	1.5	1.3	1.1	1.0	0.7	0.5	0.3	0.1	18.1	0.0							
	-40	0.1	0.3	0.5	0.7	1.1	1.2	1.5	2.0	2.5	2.9	2.9	2.5	2.0	1.5	1.3	1.0	0.7	0.5	0.3	0.1	23.1	0.0						
	-30	0.1	0.3	0.5	0.7	1.1	1.5	1.8	2.7	4.2	6.5	6.5	4.3	2.7	1.8	1.2	0.8	0.5	0.3	0.1	36.3	2.9							
	-20	0.1	0.3	0.5	0.8	1.2	2.2	4.0	13.1	32.8	81.4	82.0	33.4	6.2	2.4	1.4	0.9	0.5	0.3	0.1	110.8	86.1							
	-10	0.1	0.3	0.5	0.8	1.3	2.2	4.0	13.1	32.8	81.4	82.0	33.4	6.2	2.4	1.4	0.9	0.5	0.3	0.1	252.9	232.6							
	0	0.1	0.3	0.5	0.9	1.4	2.4	6.0	32.8	81.4	82.0	33.4	6.2	2.4	1.4	0.9	0.5	0.3	0.1	0.1	256.4	235.9							
Horizontal plane	10	0.1	0.3	0.5	0.8	1.3	2.2	4.1	14.1	36.1	36.3	14.4	4.2	2.2	1.3	0.9	0.5	0.3	0.1	119.8	95.2								
	20	0.1	0.3	0.5	0.8	1.2	1.8	2.8	4.5	7.2	7.3	4.6	2.8	1.8	1.2	0.8	0.5	0.3	0.1	38.8	4.5								
	30	0.1	0.3	0.5	0.8	1.1	1.5	2.1	2.7	3.1	3.1	2.7	2.1	1.5	1.1	0.8	0.5	0.3	0.1	24.3	0.0								
	40	0.1	0.3	0.5	0.8	1.1	1.5	1.6	1.9	2.1	2.1	1.9	1.6	1.3	1.0	0.7	0.5	0.3	0.1	18.8	0.0								
	50	0.1	0.3	0.5	0.7	1.0	1.3	1.3	1.5	1.6	1.6	1.5	1.3	1.1	0.9	0.7	0.5	0.3	0.1	15.9	0.0								
	60	0.1	0.3	0.5	0.7	0.9	1.1	1.3	1.5	1.6	1.6	1.5	1.3	1.1	0.9	0.7	0.5	0.3	0.1	14.1	0.0								
	70	0.1	0.3	0.4	0.6	0.8	1.0	1.1	1.3	1.3	1.3	1.3	1.2	1.0	0.8	0.7	0.5	0.3	0.1	13.0	0.0								
	80	0.1	0.3	0.4	0.6	0.8	0.9	1.0	1.1	1.2	1.2	1.1	1.1	0.9	0.8	0.6	0.5	0.3	0.1	12.6	0.0								
	90	0.1	0.3	0.4	0.6	0.8	0.9	1.0	1.1	1.1	1.1	1.1	1.0	0.9	0.8	0.6	0.5	0.3	0.1	12.6	0.0								
	Flux(TT)	1.6	4.8	8.5	12.8	18.2	26.0	41.7	121.0	266.6	268.1	123.0	42.6	26.3	18.6	13.2	8.9	5.1	1.7	1009									
Flux(E)	0.0	0.0	0.0	0.0	0.0	0.0	2.8	87.5	236.2	2237.8	89.6	3.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0		657								

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

The Average Illuminance Effective Figure

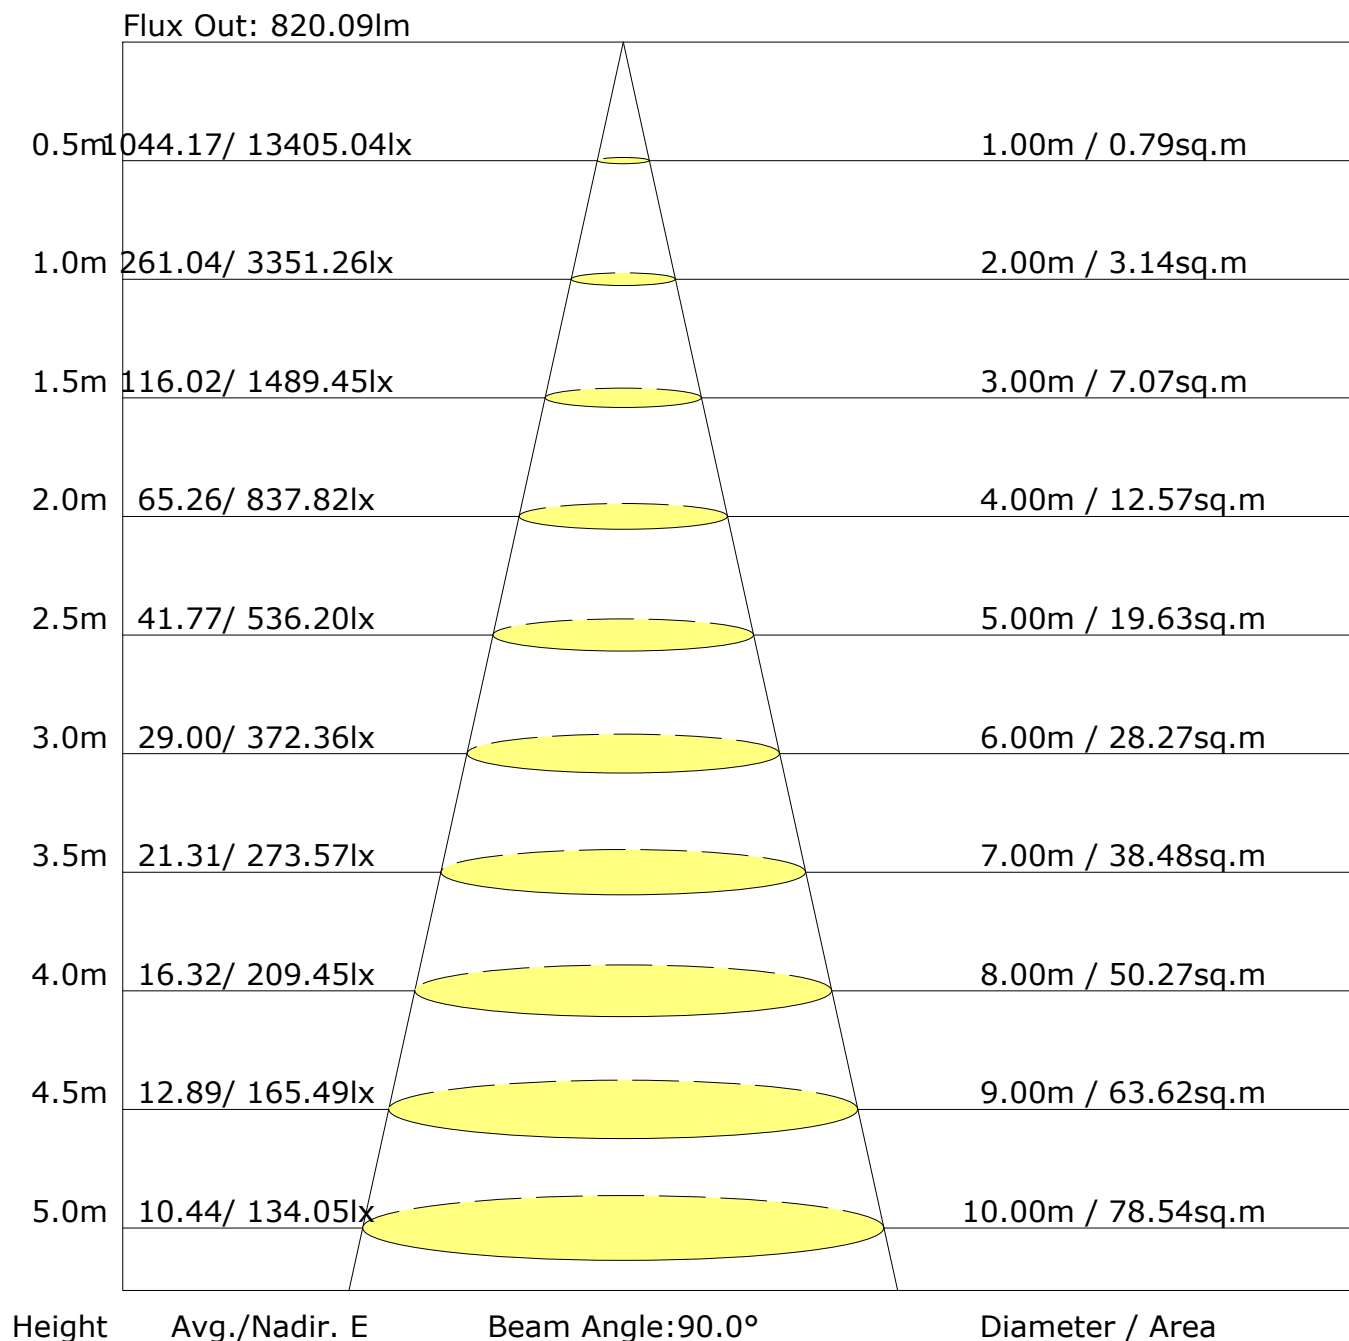

C Plane (°): 0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-180.0: 1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

UGR Table

Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	20.8	21.6	21.1	21.9	22.2	21.0	21.8	21.3	22.1	22.4
3H	23.2	24.0	23.6	24.3	24.6	23.4	24.2	23.8	24.5	24.8
4H	24.7	25.4	25.0	25.7	26.1	24.9	25.7	25.3	26.0	26.3
6H	26.3	27.0	26.7	27.4	27.8	26.6	27.3	27.0	27.7	28.0
8H	27.3	28.0	27.7	28.4	28.8	27.6	28.3	28.0	28.7	29.0
12H	28.5	29.2	29.0	29.6	30.0	28.8	29.5	29.2	29.8	30.2
X=4H Y=2H	21.7	22.5	22.1	22.8	23.1	21.8	22.6	22.2	22.9	23.3
3H	24.4	25.1	24.8	25.4	25.8	24.6	25.2	25.0	25.6	26.0
4H	26.0	26.6	26.5	27.0	27.5	26.2	26.8	26.7	27.2	27.7
6H	27.9	28.4	28.4	28.9	29.4	28.1	28.7	28.6	29.1	29.6
8H	29.0	29.5	29.5	30.0	30.5	29.2	29.7	29.7	30.2	30.7
12H	30.3	30.8	30.8	31.2	31.8	30.6	31.0	31.1	31.5	32.0
X=8H Y=4H	26.8	27.3	27.3	27.7	28.2	26.9	27.4	27.4	27.9	28.4
6H	28.9	29.3	29.4	29.8	30.4	29.1	29.5	29.6	30.0	30.5
8H	30.2	30.6	30.7	31.1	31.7	30.4	30.8	30.9	31.3	31.8
12H	31.8	32.1	32.3	32.6	33.2	32.0	32.3	32.5	32.8	33.4
X=12H Y=4H	27.0	27.4	27.5	27.9	28.4	27.1	27.5	27.6	28.0	28.5
6H	29.2	29.6	29.8	30.1	30.7	29.4	29.8	29.9	30.3	30.8
8H	30.7	31.0	31.2	31.5	32.1	30.8	31.2	31.4	31.7	32.3
Variations with the observer position at spacings:										
S=1.0H	+0.4/-0.4					+0.4/-0.4				
S=1.5H	+0.6/-0.7					+0.6/-0.7				
S=2.0H	+0.8/-1.0					+0.8/-1.1				

Calculate in accordance with CIE Pub.117. The table is revised with 1050lm ($8\log(F/F_0) = 0.2$).

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM


	ZONE	LUMENS	% LAMP LUMENS
	FORWARD LIGHT	508	48.4
	FL (0°-30°)	368	35.0
	FM (30°-60°)	80	7.6
	FH (60°-80°)	41	3.9
	FVH (80°-90°)	20	1.9
	BACK LIGHT	501	47.8
	BL (0°-30°)	364	34.6
	BM (30°-60°)	79	7.5
	BH (60°-80°)	40	3.8
	BVH (80°-90°)	19	1.8
	UP LIGHT	41	3.9
	UL (90°-100°)	39	3.7
	UH (100°-180°)	2	0.2
	TRAPPED LIGHT	NA	NA

BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B1 U2 G1
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B1 U2 G1

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

LCS Graph

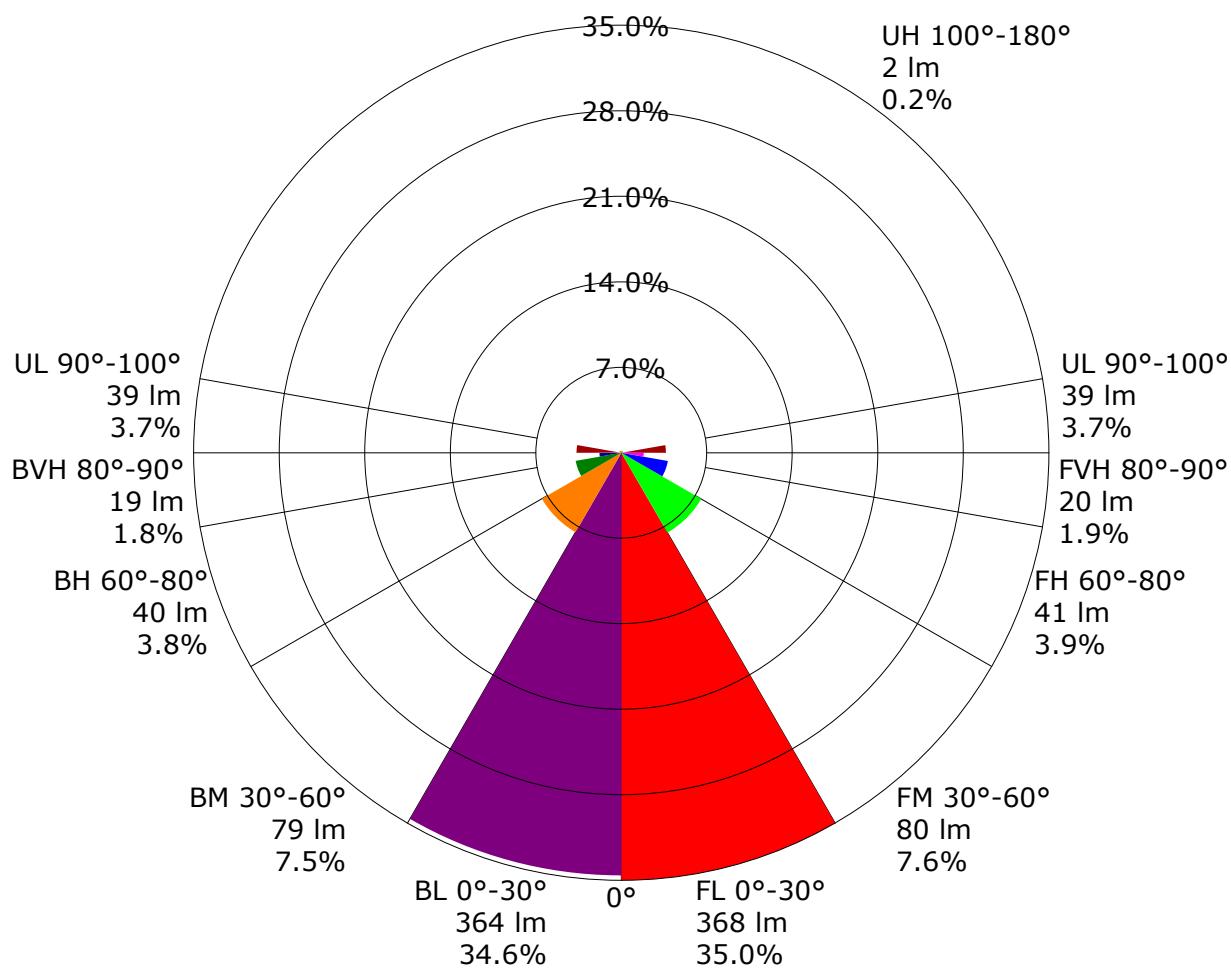

Back Light

Forward Light

Scale= MAX LCS%

Trapped Light:NA,NA

Utilisation Factor Table(Floor cavity)

Utilisation Factors UF(F)			SHR NOM = 0.50									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.80	0.86	0.90	0.93	0.98	1.01	1.03	1.06	1.08	
	0.30		0.75	0.81	0.85	0.88	0.93	0.97	0.99	1.03	1.05	
	0.20		0.71	0.77	0.81	0.84	0.89	0.93	0.96	1.00	1.02	
0.50	0.50	0.20	0.78	0.84	0.87	0.90	0.94	0.97	0.99	1.01	1.03	
	0.30		0.74	0.79	0.83	0.86	0.90	0.93	0.96	0.99	1.01	
	0.20		0.70	0.76	0.80	0.83	0.87	0.90	0.93	0.96	0.99	
0.30	0.50	0.20	0.77	0.82	0.85	0.87	0.91	0.93	0.95	0.97	0.98	
	0.30		0.73	0.78	0.81	0.84	0.88	0.90	0.92	0.95	0.97	
	0.20		0.70	0.75	0.78	0.81	0.85	0.88	0.90	0.93	0.95	
0.00	0.00	0.00	0.67	0.72	0.75	0.78	0.81	0.84	0.85	0.88	0.89	
Rating:10W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

Utilisation Factor Table(Wall)

Utilisation Factors UF(W)			SHR NOM = 0.50									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.67	0.56	0.49	0.43	0.35	0.30	0.26	0.21	0.17	
	0.30		0.56	0.48	0.42	0.38	0.32	0.27	0.24	0.19	0.16	
	0.20		0.48	0.42	0.38	0.34	0.29	0.25	0.22	0.18	0.16	
0.50	0.50	0.20	0.63	0.53	0.45	0.40	0.33	0.31	0.24	0.19	0.16	
	0.30		0.53	0.46	0.40	0.36	0.30	0.26	0.23	0.18	0.15	
	0.20		0.46	0.40	0.36	0.33	0.27	0.24	0.21	0.17	0.15	
0.30	0.50	0.20	0.60	0.49	0.43	0.38	0.30	0.26	0.22	0.18	0.15	
	0.30		0.51	0.44	0.38	0.34	0.28	0.24	0.21	0.17	0.14	
	0.20		0.45	0.39	0.35	0.31	0.26	0.23	0.20	0.16	0.14	
0.00	0.00	0.00	0.31	0.27	0.23	0.21	0.17	0.15	0.13	0.11	0.09	
Rating:10W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

Utilisation Factor Table(Ceiling cavity)

Utilisation Factors UF(C)			SHR NOM = 0.50									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.17	0.19	0.20	0.21	0.23	0.23	0.24	0.25	0.25	
	0.30		0.13	0.15	0.16	0.17	0.19	0.20	0.21	0.22	0.23	
	0.20		0.09	0.11	0.13	0.14	0.16	0.18	0.19	0.20	0.21	
0.50	0.50	0.20	0.17	0.18	0.20	0.20	0.22	0.22	0.23	0.24	0.24	
	0.30		0.13	0.14	0.16	0.17	0.18	0.20	0.20	0.22	0.22	
	0.20		0.09	0.11	0.13	0.14	0.16	0.17	0.18	0.20	0.21	
0.30	0.50	0.20	0.16	0.18	0.19	0.20	0.21	0.22	0.22	0.23	0.23	
	0.30		0.12	0.14	0.15	0.16	0.18	0.19	0.20	0.21	0.22	
	0.20		0.09	0.11	0.12	0.14	0.15	0.17	0.18	0.19	0.20	
0.00	0.00	0.00	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	
Rating:10W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	3334.8	3.2	3.2	0.30	0.30
1.0-2.0	3325.0	9.5	12.7	0.91	1.21
2.0-3.0	3302.9	15.8	28.5	1.50	2.72
3.0-4.0	3264.6	21.9	50.4	2.08	4.80
4.0-5.0	3205.2	27.6	78.0	2.63	7.43
5.0-6.0	3113.6	32.7	110.7	3.12	10.54
6.0-7.0	2990.0	37.1	147.8	3.54	14.08
7.0-8.0	2832.1	40.5	188.3	3.86	17.94
8.0-9.0	2647.5	42.9	231.3	4.09	22.03
9.0-10.0	2449.9	44.3	275.6	4.22	26.25
10.0-11.0	2230.9	44.6	320.2	4.25	30.50
11.0-12.0	2008.7	43.9	364.1	4.18	34.68
12.0-13.0	1797.8	42.7	406.8	4.06	38.75
13.0-14.0	1582.4	40.5	447.3	3.86	42.61
14.0-15.0	1373.3	37.7	485.0	3.59	46.20
15.0-16.0	1175.9	34.5	519.4	3.28	49.48
16.0-17.0	993.7	30.9	550.4	2.95	52.43
17.0-18.0	836.2	27.6	578.0	2.63	55.06
18.0-19.0	688.8	24.0	601.9	2.28	57.34
19.0-20.0	561.4	20.6	622.5	1.96	59.30
20.0-21.0	463.0	17.8	640.3	1.69	60.99
21.0-22.0	380.7	15.3	655.6	1.46	62.45
22.0-23.0	314.8	13.2	668.8	1.26	63.71
23.0-24.0	264.6	11.6	680.4	1.10	64.81
24.0-25.0	225.8	10.3	690.6	0.98	65.79
25.0-26.0	197.4	9.3	699.9	0.89	66.68
26.0-27.0	174.7	8.5	708.5	0.81	67.49
27.0-28.0	157.1	8.0	716.4	0.76	68.25
28.0-29.0	144.3	7.5	724.0	0.72	68.97
29.0-30.0	133.9	7.2	731.2	0.69	69.66
30.0-31.0	125.5	7.0	738.2	0.67	70.32
31.0-32.0	118.7	6.8	745.0	0.65	70.97
32.0-33.0	112.5	6.6	751.6	0.63	71.60
33.0-34.0	107.0	6.5	758.1	0.62	72.22
34.0-35.0	101.3	6.3	764.4	0.60	72.82
35.0-36.0	95.8	6.1	770.5	0.58	73.40

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	91.2	6.0	776.5	0.57	73.96
37.0-38.0	87.2	5.8	782.3	0.55	74.52
38.0-39.0	83.6	5.7	788.0	0.54	75.06
39.0-40.0	80.2	5.6	793.6	0.53	75.60
40.0-41.0	77.5	5.5	799.1	0.53	76.12
41.0-42.0	74.6	5.4	804.5	0.52	76.64
42.0-43.0	71.4	5.3	809.8	0.50	77.14
43.0-44.0	68.7	5.2	815.0	0.49	77.63
44.0-45.0	66.4	5.1	820.1	0.49	78.12
45.0-46.0	64.2	5.0	825.1	0.48	78.60
46.0-47.0	62.0	4.9	830.0	0.47	79.07
47.0-48.0	60.1	4.9	834.9	0.46	79.53
48.0-49.0	58.4	4.8	839.7	0.46	79.99
49.0-50.0	56.9	4.7	844.4	0.45	80.44
50.0-51.0	55.7	4.7	849.1	0.45	80.89
51.0-52.0	54.4	4.7	853.8	0.44	81.33
52.0-53.0	53.3	4.6	858.4	0.44	81.77
53.0-54.0	52.2	4.6	863.0	0.44	82.21
54.0-55.0	51.1	4.6	867.6	0.43	82.65
55.0-56.0	50.2	4.5	872.1	0.43	83.08
56.0-57.0	49.1	4.5	876.6	0.43	83.51
57.0-58.0	48.0	4.4	881.1	0.42	83.93
58.0-59.0	47.0	4.4	885.5	0.42	84.35
59.0-60.0	45.9	4.3	889.8	0.41	84.76
60.0-61.0	44.8	4.3	894.1	0.41	85.17
61.0-62.0	44.1	4.2	898.3	0.40	85.57
62.0-63.0	43.6	4.2	902.6	0.40	85.98
63.0-64.0	43.0	4.2	906.8	0.40	86.38
64.0-65.0	42.3	4.2	911.0	0.40	86.78
65.0-66.0	41.7	4.2	915.1	0.40	87.17
66.0-67.0	41.0	4.1	919.2	0.39	87.57
67.0-68.0	40.4	4.1	923.3	0.39	87.96
68.0-69.0	40.1	4.1	927.4	0.39	88.35
69.0-70.0	39.6	4.1	931.5	0.39	88.73
70.0-71.0	39.1	4.0	935.5	0.39	89.12
71.0-72.0	38.7	4.0	939.6	0.38	89.50

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Zonal Lumen (Continue 2)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	38.1	4.0	943.5	0.38	89.88
73.0-74.0	37.5	3.9	947.5	0.38	90.26
74.0-75.0	37.4	3.9	951.4	0.38	90.63
75.0-76.0	37.1	3.9	955.4	0.38	91.01
76.0-77.0	36.6	3.9	959.3	0.37	91.38
77.0-78.0	36.1	3.9	963.1	0.37	91.75
78.0-79.0	35.8	3.8	967.0	0.37	92.11
79.0-80.0	35.1	3.8	970.8	0.36	92.48
80.0-81.0	34.9	3.8	974.6	0.36	92.83
81.0-82.0	35.2	3.8	978.4	0.36	93.20
82.0-83.0	35.2	3.8	982.2	0.36	93.56
83.0-84.0	35.3	3.8	986.0	0.37	93.93
84.0-85.0	35.3	3.9	989.9	0.37	94.30
85.0-86.0	35.1	3.8	993.7	0.37	94.66
86.0-87.0	35.0	3.8	997.6	0.37	95.03
87.0-88.0	35.2	3.9	1001.4	0.37	95.39
88.0-89.0	35.4	3.9	1005.3	0.37	95.76
89.0-90.0	35.4	3.9	1009.2	0.37	96.14
90.0-91.0	35.4	3.9	1013.1	0.37	96.50
91.0-92.0	35.5	3.9	1017.0	0.37	96.88
92.0-93.0	35.4	3.9	1020.8	0.37	97.25
93.0-94.0	35.4	3.9	1024.7	0.37	97.61
94.0-95.0	35.6	3.9	1028.6	0.37	97.98
95.0-96.0	35.5	3.9	1032.5	0.37	98.35
96.0-97.0	35.2	3.8	1036.3	0.37	98.72
97.0-98.0	35.4	3.9	1040.2	0.37	99.09
98.0-99.0	35.6	3.9	1044.0	0.37	99.45
99.0-100.0	35.4	3.8	1047.9	0.36	99.82
100.0-101.0	17.7	1.9	1049.8	0.18	100.00
101.0-102.0	0.0	0.0	1049.8	0.00	100.00
102.0-103.0	0.0	0.0	1049.8	0.00	100.00
103.0-104.0	0.0	0.0	1049.8	0.00	100.00
104.0-105.0	0.0	0.0	1049.8	0.00	100.00
105.0-106.0	0.0	0.0	1049.8	0.00	100.00
106.0-107.0	0.0	0.0	1049.8	0.00	100.00
107.0-108.0	0.0	0.0	1049.8	0.00	100.00

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Zonal Lumen (Continue 3)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
108.0-109.0	0.0	0.0	1049.8	0.00	100.00
109.0-110.0	0.0	0.0	1049.8	0.00	100.00
110.0-111.0	0.0	0.0	1049.8	0.00	100.00
111.0-112.0	0.0	0.0	1049.8	0.00	100.00
112.0-113.0	0.0	0.0	1049.8	0.00	100.00
113.0-114.0	0.0	0.0	1049.8	0.00	100.00
114.0-115.0	0.0	0.0	1049.8	0.00	100.00
115.0-116.0	0.0	0.0	1049.8	0.00	100.00
116.0-117.0	0.0	0.0	1049.8	0.00	100.00
117.0-118.0	0.0	0.0	1049.8	0.00	100.00
118.0-119.0	0.0	0.0	1049.8	0.00	100.00
119.0-120.0	0.0	0.0	1049.8	0.00	100.00
120.0-121.0	0.0	0.0	1049.8	0.00	100.00
121.0-122.0	0.0	0.0	1049.8	0.00	100.00
122.0-123.0	0.0	0.0	1049.8	0.00	100.00
123.0-124.0	0.0	0.0	1049.8	0.00	100.00
124.0-125.0	0.0	0.0	1049.8	0.00	100.00
125.0-126.0	0.0	0.0	1049.8	0.00	100.00
126.0-127.0	0.0	0.0	1049.8	0.00	100.00
127.0-128.0	0.0	0.0	1049.8	0.00	100.00
128.0-129.0	0.0	0.0	1049.8	0.00	100.00
129.0-130.0	0.0	0.0	1049.8	0.00	100.00
130.0-131.0	0.0	0.0	1049.8	0.00	100.00
131.0-132.0	0.0	0.0	1049.8	0.00	100.00
132.0-133.0	0.0	0.0	1049.8	0.00	100.00
133.0-134.0	0.0	0.0	1049.8	0.00	100.00
134.0-135.0	0.0	0.0	1049.8	0.00	100.00
135.0-136.0	0.0	0.0	1049.8	0.00	100.00
136.0-137.0	0.0	0.0	1049.8	0.00	100.00
137.0-138.0	0.0	0.0	1049.8	0.00	100.00
138.0-139.0	0.0	0.0	1049.8	0.00	100.00
139.0-140.0	0.0	0.0	1049.8	0.00	100.00
140.0-141.0	0.0	0.0	1049.8	0.00	100.00
141.0-142.0	0.0	0.0	1049.8	0.00	100.00
142.0-143.0	0.0	0.0	1049.8	0.00	100.00
143.0-144.0	0.0	0.0	1049.8	0.00	100.00

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Zonal Lumen (Continue 4)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
144.0-145.0	0.0	0.0	1049.8	0.00	100.00
145.0-146.0	0.0	0.0	1049.8	0.00	100.00
146.0-147.0	0.0	0.0	1049.8	0.00	100.00
147.0-148.0	0.0	0.0	1049.8	0.00	100.00
148.0-149.0	0.0	0.0	1049.8	0.00	100.00
149.0-150.0	0.0	0.0	1049.8	0.00	100.00
150.0-151.0	0.0	0.0	1049.8	0.00	100.00
151.0-152.0	0.0	0.0	1049.8	0.00	100.00
152.0-153.0	0.0	0.0	1049.8	0.00	100.00
153.0-154.0	0.0	0.0	1049.8	0.00	100.00
154.0-155.0	0.0	0.0	1049.8	0.00	100.00
155.0-156.0	0.0	0.0	1049.8	0.00	100.00
156.0-157.0	0.0	0.0	1049.8	0.00	100.00
157.0-158.0	0.0	0.0	1049.8	0.00	100.00
158.0-159.0	0.0	0.0	1049.8	0.00	100.00
159.0-160.0	0.0	0.0	1049.8	0.00	100.00
160.0-161.0	0.0	0.0	1049.8	0.00	100.00
161.0-162.0	0.0	0.0	1049.8	0.00	100.00
162.0-163.0	0.0	0.0	1049.8	0.00	100.00
163.0-164.0	0.0	0.0	1049.8	0.00	100.00
164.0-165.0	0.0	0.0	1049.8	0.00	100.00
165.0-166.0	0.0	0.0	1049.8	0.00	100.00
166.0-167.0	0.0	0.0	1049.8	0.00	100.00
167.0-168.0	0.0	0.0	1049.8	0.00	100.00
168.0-169.0	0.0	0.0	1049.8	0.00	100.00
169.0-170.0	0.0	0.0	1049.8	0.00	100.00
170.0-171.0	0.0	0.0	1049.8	0.00	100.00
171.0-172.0	0.0	0.0	1049.8	0.00	100.00
172.0-173.0	0.0	0.0	1049.8	0.00	100.00
173.0-174.0	0.0	0.0	1049.8	0.00	100.00
174.0-175.0	0.0	0.0	1049.8	0.00	100.00
175.0-176.0	0.0	0.0	1049.8	0.00	100.00
176.0-177.0	0.0	0.0	1049.8	0.00	100.00
177.0-178.0	0.0	0.0	1049.8	0.00	100.00
178.0-179.0	0.0	0.0	1049.8	0.00	100.00
179.0-180.0	0.0	0.0	1049.8	0.00	100.00

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G0.0	3351.3	3323.0	3351.3	3323.0	3351.3					
G1.0	3359.5	3307.8	3327.4	3335.1	3359.5					
G2.0	3357.2	3282.1	3300.3	3331.0	3357.2					
G3.0	3337.0	3244.1	3262.7	3309.1	3337.0					
G4.0	3297.7	3191.8	3209.8	3264.4	3297.7					
G5.0	3221.0	3131.2	3141.9	3184.0	3221.0					
G6.0	3104.7	3031.4	3037.6	3057.0	3104.7					
G7.0	2951.6	2920.0	2909.8	2907.9	2951.6					
G8.0	2758.7	2762.5	2739.7	2706.7	2758.7					
G9.0	2556.3	2601.9	2554.1	2499.9	2556.3					
G10.0	2355.6	2411.4	2342.5	2277.3	2355.6					
G11.0	2119.4	2197.8	2103.3	2039.6	2119.4					
G12.0	1914.1	1987.0	1891.9	1816.5	1914.1					
G13.0	1700.1	1786.9	1676.9	1608.9	1700.1					
G14.0	1483.5	1562.3	1457.6	1383.2	1483.5					
G15.0	1283.5	1368.9	1257.9	1189.7	1283.5					
G16.0	1089.3	1158.9	1054.9	1004.2	1089.3					
G17.0	915.2	988.4	893.8	844.7	915.2					
G18.0	766.3	830.5	741.0	709.5	766.3					
G19.0	620.4	670.0	596.0	577.0	620.4					
G20.0	515.5	547.5	489.2	475.9	515.5					
G21.0	426.0	452.2	399.2	398.8	426.0					
G22.0	349.8	371.0	322.0	326.2	349.8					
G23.0	292.1	311.5	271.6	274.2	292.1					
G24.0	245.5	262.4	228.2	231.5	245.5					
G25.0	211.7	226.8	199.5	201.0	211.7					
G26.0	185.5	199.6	177.8	177.5	185.5					
G27.0	163.4	176.9	159.3	157.7	163.4					
G28.0	147.6	160.6	146.7	144.4	147.6					
G29.0	137.2	147.4	136.1	134.1	137.2					
G30.0	127.6	137.2	126.9	124.6	127.6					
G31.0	120.7	129.0	119.7	118.4	120.7					
G32.0	113.7	122.9	113.1	111.9	113.7					
G33.0	107.6	117.3	107.6	106.0	107.6					
G34.0	103.0	111.9	101.9	100.6	103.0					
G35.0	96.6	105.1	96.9	94.3	96.6					
G36.0	91.6	99.8	92.1	90.3	91.6					

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G37.0	87.1	95.1	87.9	86.1	87.1					
G38.0	83.8	90.5	84.6	82.4	83.8					
G39.0	81.5	85.7	80.2	79.8	81.5					
G40.0	77.8	81.9	76.8	77.7	77.8					
G41.0	75.2	79.4	75.1	76.0	75.2					
G42.0	71.5	77.2	71.8	70.9	71.5					
G43.0	69.3	74.3	67.6	68.4	69.3					
G44.0	67.3	70.6	65.9	66.2	67.3					
G45.0	65.5	68.7	63.8	62.9	65.5					
G46.0	62.8	66.7	61.4	61.6	62.8					
G47.0	60.3	63.8	59.6	59.6	60.3					
G48.0	60.9	61.6	57.0	57.9	60.9					
G49.0	57.6	59.7	55.4	56.7	57.6					
G50.0	56.5	58.7	54.5	55.8	56.5					
G51.0	54.8	57.3	52.9	55.2	54.8					
G52.0	53.1	56.2	52.0	54.0	53.1					
G53.0	52.0	55.3	51.2	52.5	52.0					
G54.0	50.8	54.5	49.9	51.0	50.8					
G55.0	49.5	53.8	49.1	50.0	49.5					
G56.0	48.5	52.5	48.0	49.9	48.5					
G57.0	47.8	51.1	46.4	48.5	47.8					
G58.0	46.8	50.3	45.3	47.6	46.8					
G59.0	44.8	49.0	44.8	47.2	44.8					
G60.0	45.5	47.2	43.6	45.5	45.5					
G61.0	43.2	46.3	42.5	45.1	43.2					
G62.0	43.2	45.7	42.0	44.4	43.2					
G63.0	42.6	45.7	41.3	43.5	42.6					
G64.0	42.0	44.5	40.9	43.1	42.0					
G65.0	41.0	44.5	39.8	42.7	41.0					
G66.0	40.5	43.9	39.2	42.0	40.5					
G67.0	40.1	42.8	38.7	40.9	40.1					
G68.0	40.2	42.6	37.9	40.3	40.2					
G69.0	39.4	42.3	37.5	40.2	39.4					
G70.0	39.3	42.0	36.8	39.0	39.3					
G71.0	37.9	41.4	36.4	40.2	37.9					
G72.0	38.0	40.9	36.5	38.5	38.0					
G73.0	36.9	40.6	35.2	37.7	36.9					

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G74.0	36.9	39.8	34.8	38.0	36.9					
G75.0	37.1	40.5	34.8	36.9	37.1					
G76.0	37.2	39.3	34.3	36.9	37.2					
G77.0	36.2	38.8	32.9	36.8	36.2					
G78.0	35.1	38.8	33.1	36.8	35.1					
G79.0	35.5	37.3	33.1	36.5	35.5					
G80.0	34.6	36.2	31.6	36.3	34.6					
G81.0	34.5	37.3	32.8	35.9	34.5					
G82.0	35.4	36.5	32.8	36.2	35.4					
G83.0	34.8	36.5	32.4	36.8	34.8					
G84.0	35.1	37.7	33.1	36.0	35.1					
G85.0	34.8	36.8	33.0	35.9	34.8					
G86.0	35.1	36.9	32.8	35.5	35.1					
G87.0	35.2	36.8	32.1	35.9	35.2					
G88.0	35.0	37.3	32.5	36.8	35.0					
G89.0	35.5	38.1	32.5	35.8	35.5					
G90.0	35.4	38.0	32.4	35.9	35.4					
G91.0	35.0	37.1	32.9	36.7	35.0					
G92.0	35.1	37.5	33.3	36.3	35.1					
G93.0	35.6	37.3	32.1	36.3	35.6					
G94.0	35.5	37.6	32.6	36.2	35.5					
G95.0	35.2	38.5	32.9	36.0	35.2					
G96.0	35.5	38.0	32.1	35.5	35.5					
G97.0	34.8	37.7	32.4	35.6	34.8					
G98.0	35.5	37.9	33.0	36.4	35.5					
G99.0	35.2	38.1	32.6	35.8	35.2					
G100.0	35.0	37.5	32.9	36.3	35.0					
G101.0	0.0	0.0	0.0	0.0	0.0					
G102.0	0.0	0.0	0.0	0.0	0.0					
G103.0	0.0	0.0	0.0	0.0	0.0					
G104.0	0.0	0.0	0.0	0.0	0.0					
G105.0	0.0	0.0	0.0	0.0	0.0					
G106.0	0.0	0.0	0.0	0.0	0.0					
G107.0	0.0	0.0	0.0	0.0	0.0					
G108.0	0.0	0.0	0.0	0.0	0.0					
G109.0	0.0	0.0	0.0	0.0	0.0					
G110.0	0.0	0.0	0.0	0.0	0.0					

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Candlepower Table (Continue 3)

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G111.0	0.0	0.0	0.0	0.0	0.0					
G112.0	0.0	0.0	0.0	0.0	0.0					
G113.0	0.0	0.0	0.0	0.0	0.0					
G114.0	0.0	0.0	0.0	0.0	0.0					
G115.0	0.0	0.0	0.0	0.0	0.0					
G116.0	0.0	0.0	0.0	0.0	0.0					
G117.0	0.0	0.0	0.0	0.0	0.0					
G118.0	0.0	0.0	0.0	0.0	0.0					
G119.0	0.0	0.0	0.0	0.0	0.0					
G120.0	0.0	0.0	0.0	0.0	0.0					
G121.0	0.0	0.0	0.0	0.0	0.0					
G122.0	0.0	0.0	0.0	0.0	0.0					
G123.0	0.0	0.0	0.0	0.0	0.0					
G124.0	0.0	0.0	0.0	0.0	0.0					
G125.0	0.0	0.0	0.0	0.0	0.0					
G126.0	0.0	0.0	0.0	0.0	0.0					
G127.0	0.0	0.0	0.0	0.0	0.0					
G128.0	0.0	0.0	0.0	0.0	0.0					
G129.0	0.0	0.0	0.0	0.0	0.0					
G130.0	0.0	0.0	0.0	0.0	0.0					
G131.0	0.0	0.0	0.0	0.0	0.0					
G132.0	0.0	0.0	0.0	0.0	0.0					
G133.0	0.0	0.0	0.0	0.0	0.0					
G134.0	0.0	0.0	0.0	0.0	0.0					
G135.0	0.0	0.0	0.0	0.0	0.0					
G136.0	0.0	0.0	0.0	0.0	0.0					
G137.0	0.0	0.0	0.0	0.0	0.0					
G138.0	0.0	0.0	0.0	0.0	0.0					
G139.0	0.0	0.0	0.0	0.0	0.0					
G140.0	0.0	0.0	0.0	0.0	0.0					
G141.0	0.0	0.0	0.0	0.0	0.0					
G142.0	0.0	0.0	0.0	0.0	0.0					
G143.0	0.0	0.0	0.0	0.0	0.0					
G144.0	0.0	0.0	0.0	0.0	0.0					
G145.0	0.0	0.0	0.0	0.0	0.0					
G146.0	0.0	0.0	0.0	0.0	0.0					
G147.0	0.0	0.0	0.0	0.0	0.0					

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Candlepower Table (Continue 4)

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G148.0	0.0	0.0	0.0	0.0	0.0					
G149.0	0.0	0.0	0.0	0.0	0.0					
G150.0	0.0	0.0	0.0	0.0	0.0					
G151.0	0.0	0.0	0.0	0.0	0.0					
G152.0	0.0	0.0	0.0	0.0	0.0					
G153.0	0.0	0.0	0.0	0.0	0.0					
G154.0	0.0	0.0	0.0	0.0	0.0					
G155.0	0.0	0.0	0.0	0.0	0.0					
G156.0	0.0	0.0	0.0	0.0	0.0					
G157.0	0.0	0.0	0.0	0.0	0.0					
G158.0	0.0	0.0	0.0	0.0	0.0					
G159.0	0.0	0.0	0.0	0.0	0.0					
G160.0	0.0	0.0	0.0	0.0	0.0					
G161.0	0.0	0.0	0.0	0.0	0.0					
G162.0	0.0	0.0	0.0	0.0	0.0					
G163.0	0.0	0.0	0.0	0.0	0.0					
G164.0	0.0	0.0	0.0	0.0	0.0					
G165.0	0.0	0.0	0.0	0.0	0.0					
G166.0	0.0	0.0	0.0	0.0	0.0					
G167.0	0.0	0.0	0.0	0.0	0.0					
G168.0	0.0	0.0	0.0	0.0	0.0					
G169.0	0.0	0.0	0.0	0.0	0.0					
G170.0	0.0	0.0	0.0	0.0	0.0					
G171.0	0.0	0.0	0.0	0.0	0.0					
G172.0	0.0	0.0	0.0	0.0	0.0					
G173.0	0.0	0.0	0.0	0.0	0.0					
G174.0	0.0	0.0	0.0	0.0	0.0					
G175.0	0.0	0.0	0.0	0.0	0.0					
G176.0	0.0	0.0	0.0	0.0	0.0					
G177.0	0.0	0.0	0.0	0.0	0.0					
G178.0	0.0	0.0	0.0	0.0	0.0					
G179.0	0.0	0.0	0.0	0.0	0.0					
G180.0	0.0	0.0	0.0	0.0	0.0					

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector: