


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.24V I:0.0969A P:10.076W PF:0.4721 Freq:50.00Hz Lamp Flux:791.139x1 lm		
NAME: 6375-10W-3000K	TYPE:室内	WEIGHT:
SPEC.:	DIM.: 65*60*163mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:35°

DATA OF LAMP		PHOTOMETRIC DATA Eff: 78.52 lm/W			
MODEL		I _{max} (cd)	1713	S/MH(C0/180)	0.72
NOMINAL POWER(W)	10	LOR(%)	100.0	S/MH(C90/270)	0.54
RATED VOLTAGE(V)	85-265V	TOTAL FLUX(lm)	791.14	h UP, DN(C0-180)	0.0,53.6
NOMINAL FLUX(lm)	791.139	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.0,46.4
LAMPS INSIDE	1	h up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	220	h down(%)	100.0	CIBSE SHR MAX	0.65

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

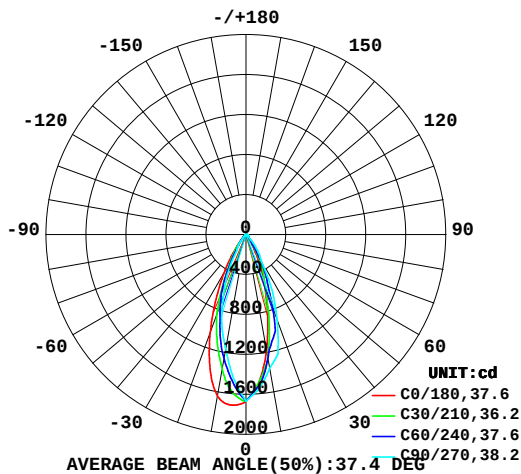

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

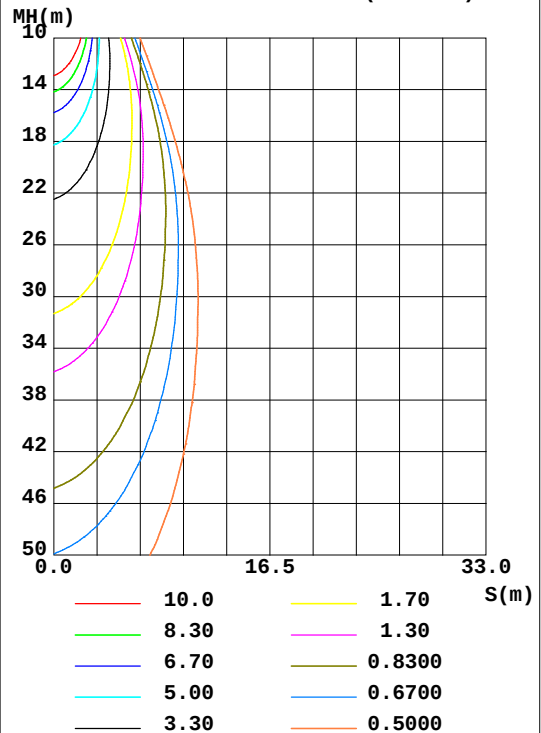

H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-08-10

V(B) Range: -75 - 75DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.300m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum, lamp
10	1181	1245	1363	1451	1642	1319	1165	1128	0- 10	138.5	138.5	17.5, 17.5
20	552.3	747.8	908.7	935.5	1049	759.3	671.1	582.2	10- 20	286.1	424.6	53.7, 53.7
30	143.6	242.4	306.3	408.1	433.3	333.0	186.0	191.9	20- 30	226.3	650.9	82.3, 82.3
40	29.67	41.36	118.2	78.93	96.63	66.54	74.23	35.03	30- 40	91.69	742.6	93.9, 93.9
50	12.49	12.20	19.66	25.02	19.51	23.10	15.67	11.46	40- 50	25.93	768.5	97.1, 97.1
60	8.930	7.830	10.87	10.62	13.49	10.42	10.29	8.088	50- 60	10.80	779.3	98.5, 98.5
70	4.261	4.824	6.687	6.940	7.277	6.608	6.494	4.969	60- 70	7.753	787.1	99.5, 99.5
80	1.438	1.504	0	1.793	1.895	1.659	0	1.593	70- 80	3.687	790.7	100, 100
90	1.183	0	0	0	1.402	0	0	0	80- 90	0.3897	791.1	100, 100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 760.24 lm

%lum = 96.1%

%lamp = 96.1%

Conical surface Flux(120deg): 779.31 lm

%lum = 98.5%

%lamp = 98.5%

H_(b) Range:-90 - 90DEG
 H_(b) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-08-10

V(B) Range:-75 - 75DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.300m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.24V I:0.0969A P:10.076W PF:0.4721 Freq:50.00Hz Lamp Flux:791.139x1 lm		
NAME: 6375-10W-3000K	TYPE:室内	WEIGHT:
SPEC.:	DIM.: 65*60*163mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:35°



LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	151	0
80	83	0
75	83	180
70	125	196
65	162	209
60	179	217
55	188	272
50	194	306
45	197	352


H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-08-10

V(B) Range: -75 - 75DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.300m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.24V I:0.0969A P:10.076W PF:0.4721 Freq:50.00Hz Lamp Flux:791.139x1 lm		
NAME: 6375-10W-3000K	TYPE:室内	WEIGHT:
SPEC.:	DIM.: 65*60*163mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:35°

r CC	80%			70%			50%			30%			10%			0
r W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	1.00	.99	.98	.97	.96	.94
2.0	1.04	1.01	.97	1.03	.99	.96	.99	.97	.94	.97	.94	.92	.94	.92	.90	.89
3.0	.98	.94	.90	.97	.93	.89	.94	.91	.88	.92	.89	.86	.90	.87	.85	.84
4.0	.93	.88	.84	.92	.87	.83	.89	.85	.82	.87	.84	.81	.86	.83	.80	.79
5.0	.88	.82	.79	.87	.82	.78	.85	.81	.78	.83	.80	.77	.82	.79	.76	.75
6.0	.83	.78	.74	.82	.77	.74	.81	.77	.73	.80	.76	.73	.78	.75	.72	.71
7.0	.79	.74	.70	.79	.73	.70	.77	.73	.69	.76	.72	.69	.75	.71	.69	.67
8.0	.75	.70	.66	.75	.70	.66	.74	.69	.66	.73	.69	.66	.72	.68	.65	.64
9.0	.72	.67	.63	.72	.67	.63	.71	.66	.63	.70	.66	.63	.69	.65	.63	.61
10.0	.69	.64	.60	.69	.64	.60	.68	.63	.60	.67	.63	.60	.66	.63	.60	.59

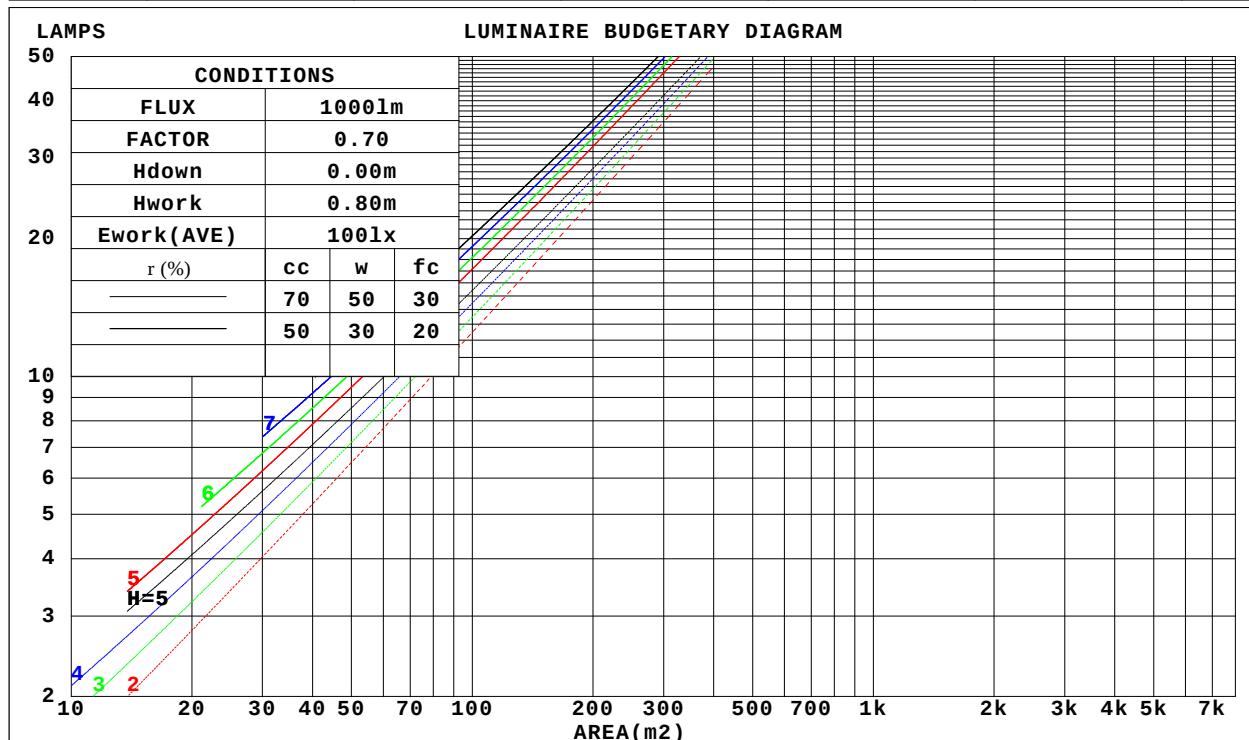

H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-08-10

V(B) Range: -75 - 75DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.300m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:220.24V I:0.0969A P:10.076W PF:0.4721 Freq:50.00Hz Lamp Flux:791.139x1 lm		
NAME: 6375-10W-3000K	TYPE:室内	WEIGHT:
SPEC.:	DIM.: 65*60*163mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:35°

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Wall Exitance Coefficients(WEC)												
0.0																
1.0	.167	.095	.030	.160	.092	.029	.148	.085	.027	.136	.079	.025	.126	.073	.024	
2.0	.158	.087	.027	.153	.084	.026	.142	.079	.025	.133	.074	.023	.124	.070	.022	
3.0	.149	.080	.024	.145	.078	.023	.136	.074	.022	.128	.070	.021	.120	.066	.021	
4.0	.141	.073	.022	.137	.072	.021	.130	.069	.021	.123	.066	.020	.116	.063	.019	
5.0	.134	.068	.020	.131	.067	.020	.124	.065	.019	.118	.062	.018	.112	.060	.018	
6.0	.127	.064	.018	.124	.063	.018	.119	.061	.018	.113	.059	.017	.108	.057	.017	
7.0	.121	.060	.017	.119	.059	.017	.114	.058	.017	.109	.056	.016	.105	.054	.016	
8.0	.116	.057	.016	.114	.056	.016	.109	.055	.016	.105	.053	.015	.101	.052	.015	
9.0	.111	.054	.015	.109	.053	.015	.105	.052	.015	.101	.051	.015	.098	.050	.014	
10.0	.107	.051	.014	.105	.051	.014	.101	.049	.014	.098	.048	.014	.094	.047	.014	

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.170	.157	.146	.146	.135	.125	.100	.093	.087	.057	.054	.050	.018	.017	.016	
2.0	.154	.133	.114	.132	.114	.099	.091	.079	.069	.052	.046	.040	.017	.015	.013	
3.0	.141	.113	.091	.121	.098	.079	.083	.068	.056	.048	.040	.033	.015	.013	.011	
4.0	.130	.099	.074	.112	.085	.065	.077	.059	.045	.044	.035	.027	.014	.011	.009	
5.0	.121	.087	.061	.104	.075	.053	.072	.052	.038	.041	.031	.022	.013	.010	.007	
6.0	.113	.077	.052	.097	.067	.045	.067	.047	.032	.039	.028	.019	.013	.009	.006	
7.0	.106	.069	.044	.091	.060	.038	.063	.042	.027	.037	.025	.016	.012	.008	.005	
8.0	.100	.063	.038	.086	.055	.033	.060	.038	.023	.035	.023	.014	.011	.007	.005	
9.0	.095	.058	.033	.082	.050	.028	.057	.035	.020	.033	.021	.012	.011	.007	.004	
10.0	.090	.053	.029	.078	.046	.025	.054	.033	.018	.031	.019	.011	.010	.006	.004	

H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-08-10

V(B) Range: -75 - 75DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.300m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.24V I:0.0969A P:10.076W PF:0.4721 Freq:50.00Hz Lamp Flux:791.139x1 lm											
NAME: 6375-10W-3000K						TYPE:室内			WEIGHT:		
SPEC.:						DIM.: 65*60*163mm			SERIAL No.:01		
MFR.: NORDECOR						SUR.:			Shielding Angle:35°		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	1.7	2.5	1.9	2.7	2.9	5.5	6.4	5.8	6.6	6.7	
	3H	2.1	2.9	2.4	3.1	3.3	5.8	6.6	6.0	6.8	7.0
	4H	2.2	2.9	2.5	3.2	3.4	5.9	6.7	6.2	6.9	7.1
	6H	2.2	2.9	2.5	3.1	3.4	5.9	6.6	6.2	6.8	7.1
	8H	2.2	2.9	2.5	3.2	3.4	5.8	6.5	6.1	6.8	7.0
	12H	2.3	2.9	2.6	3.2	3.5	5.8	6.4	6.1	6.7	7.0
4H	2H	1.8	2.5	2.1	2.8	3.0	5.4	6.2	5.7	6.4	6.6
	3H	2.3	3.0	2.7	3.3	3.5	5.8	6.4	6.1	6.7	7.0
	4H	2.5	3.1	2.8	3.4	3.7	6.0	6.6	6.3	6.9	7.2
	6H	2.5	3.0	2.9	3.4	3.7	6.0	6.5	6.3	6.8	7.1
	8H	2.5	3.0	2.9	3.4	3.7	5.9	6.4	6.3	6.7	7.1
	12H	2.6	3.1	3.0	3.4	3.8	5.8	6.3	6.3	6.7	7.0
8H	4H	2.6	3.1	3.0	3.4	3.8	5.9	6.4	6.3	6.7	7.1
	6H	2.7	3.1	3.1	3.5	3.9	5.9	6.3	6.3	6.7	7.1
	8H	2.7	3.1	3.2	3.5	3.9	5.8	6.2	6.3	6.6	7.1
	12H	2.9	3.2	3.3	3.6	4.1	5.8	6.1	6.3	6.5	7.0
12H	4H	2.5	3.0	2.9	3.3	3.7	5.9	6.3	6.3	6.7	7.1
	6H	2.6	3.0	3.1	3.4	3.8	5.9	6.2	6.3	6.6	7.1
	8H	2.7	3.0	3.2	3.4	3.9	5.8	6.1	6.3	6.5	7.0
Variations with the observer position at spacings:											
S = 1.0H	+ 1.5 / - 1.7					+ 3.6 / - 3.8					
1.5H	+ 2.8 / - 1.4					+ 6.1 / - 3.9					
2.0H	+ 0.8 / - 0.8					+ 1.5 / - 1.0					

CIE Pub.117, 791.1 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.8)
Area: 0.1 m2

H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-08-10

V(B) Range: -75 - 75DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.300m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.24V I:0.0969A P:10.076W PF:0.4721 Freq:50.00Hz Lamp Flux:791.139x1 lm		
NAME: 6375-10W-3000K	TYPE:室内	WEIGHT:
SPEC.:	DIM.: 65*60*163mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:35°


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	88	81	78	87	81	78	86	81	78	74
0.80	95	89	86	94	89	85	93	88	85	81
1.00	99	94	90	99	93	90	97	93	89	86
1.25	103	98	95	102	98	94	100	96	93	89
1.50	106	101	98	105	101	97	103	99	96	92
2.00	109	104	101	107	103	100	104	101	99	94
2.50	110	106	103	109	105	103	106	103	101	95
3.00	112	108	106	110	107	105	107	104	102	96
4.00	114	111	109	112	109	108	108	106	105	98
5.00	115	113	111	113	111	109	109	108	106	99
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

H_(b) Range:-90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-08-10

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.24V I:0.0969A P:10.076W PF:0.4721 Freq:50.00Hz Lamp Flux:791.139x1 lm		
NAME: 6375-10W-3000K	TYPE:室内	WEIGHT:
SPEC.:	DIM.: 65*60*163mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:35°

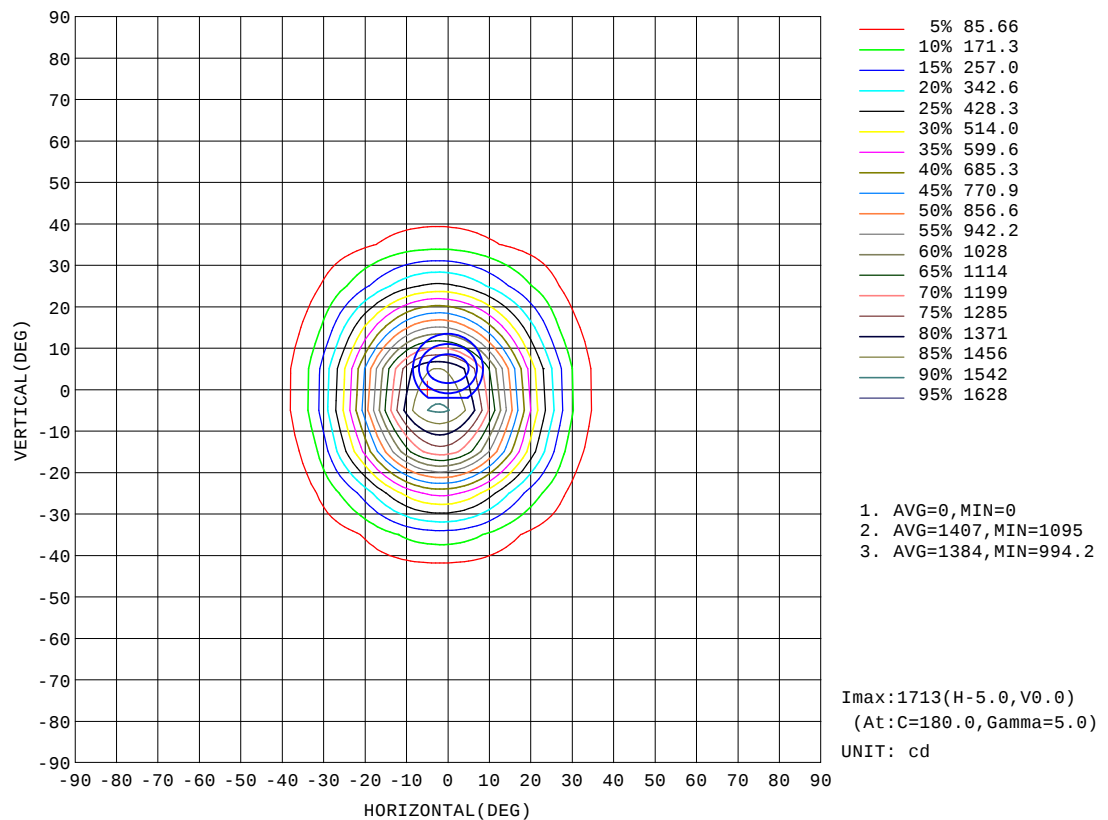


H_(b) Range:-90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-08-10

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.24V I:0.0969A P:10.076W PF:0.4721 Freq:50.00Hz Lamp Flux:791.139x1 lm		
NAME: 6375-10W-3000K	TYPE:室内	WEIGHT:
SPEC.:	DIM.: 65*60*163mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:35°

Flux out:395.7 lm

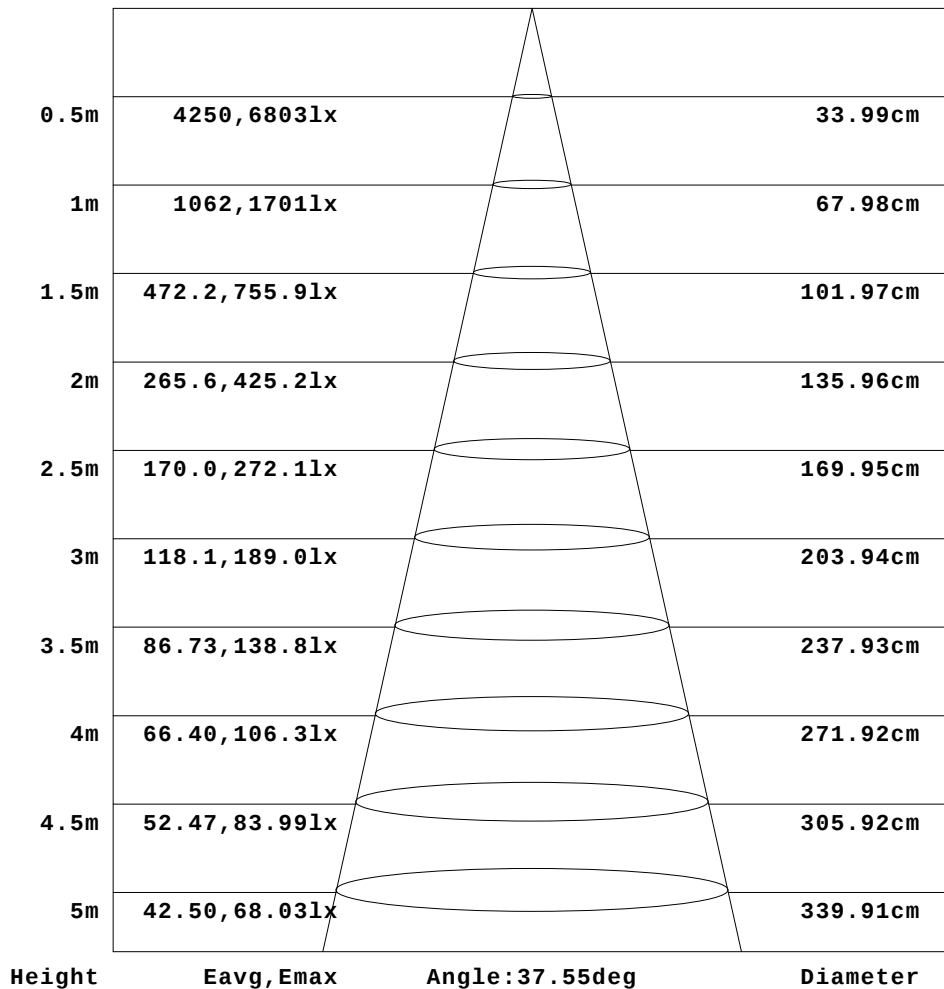


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-08-10

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.24V I:0.0969A P:10.076W PF:0.4721 Freq:50.00Hz Lamp Flux:791.139x1 lm		
NAME: 6375-10W-3000K	TYPE:室内	WEIGHT:
SPEC.:	DIM.: 65*60*163mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:35°

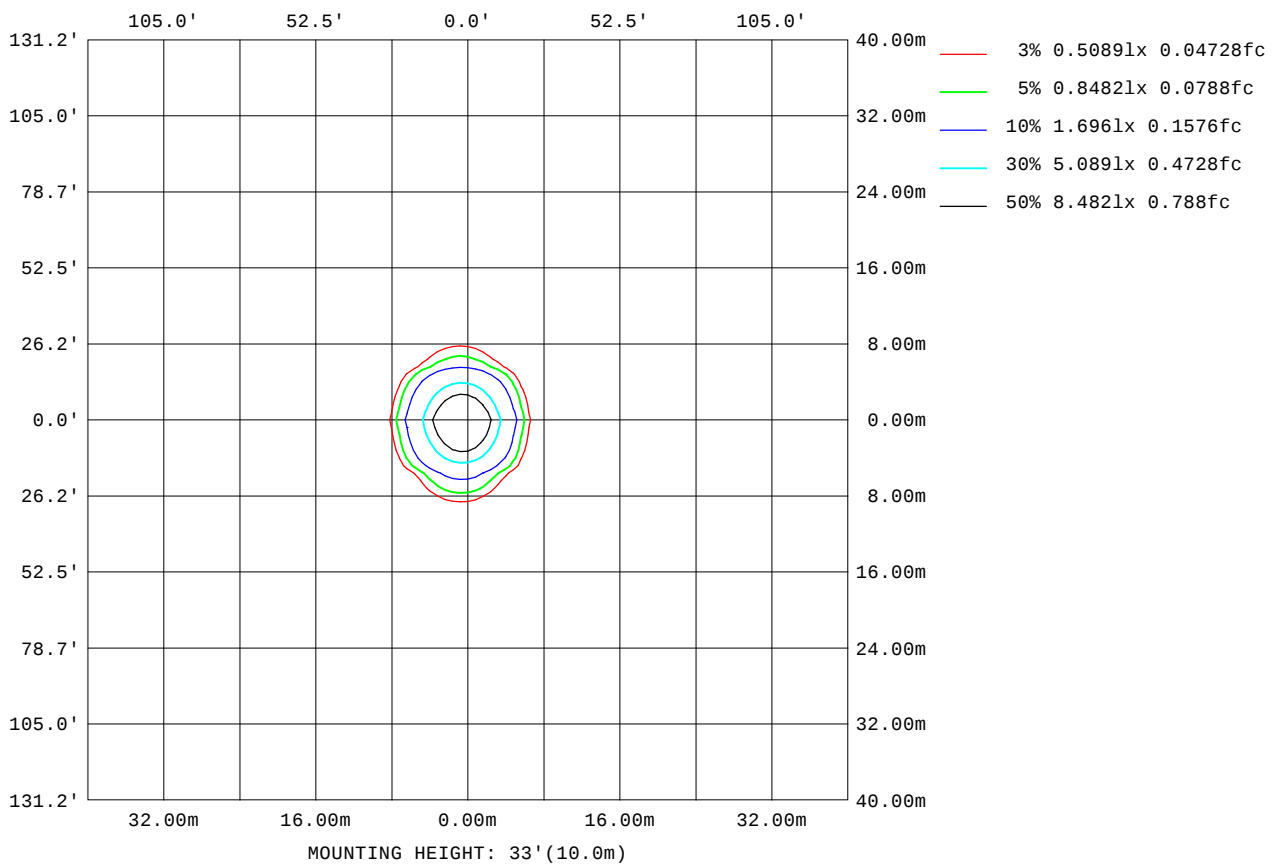

H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-08-10

V(B) Range: -75 - 75DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.300m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.24V I:0.0969A P:10.076W PF:0.4721 Freq:50.00Hz Lamp Flux:791.139x1 lm		
NAME: 6375-10W-3000K	TYPE:室内	WEIGHT:
SPEC.:	DIM.: 65*60*163mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:35°


AvgL	cd/m2
L_0~180(65)av	208
L_0~180(75)av	117
L_0~180(85)av	166
L_90~270(65)av	205
L_90~270(75)av	181
L_90~270(85)av	0
L_45(65)av	181
L_45(75)av	146
L_45(85)av	0

Standard: GB/T 29293-2012

H_(b) Range:-90 - 90DEG
 H_(b) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-08-10

V(B) Range:-75 - 75DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.300m [K=1.0000]
 Remarks:

Planar Illuminance Curve

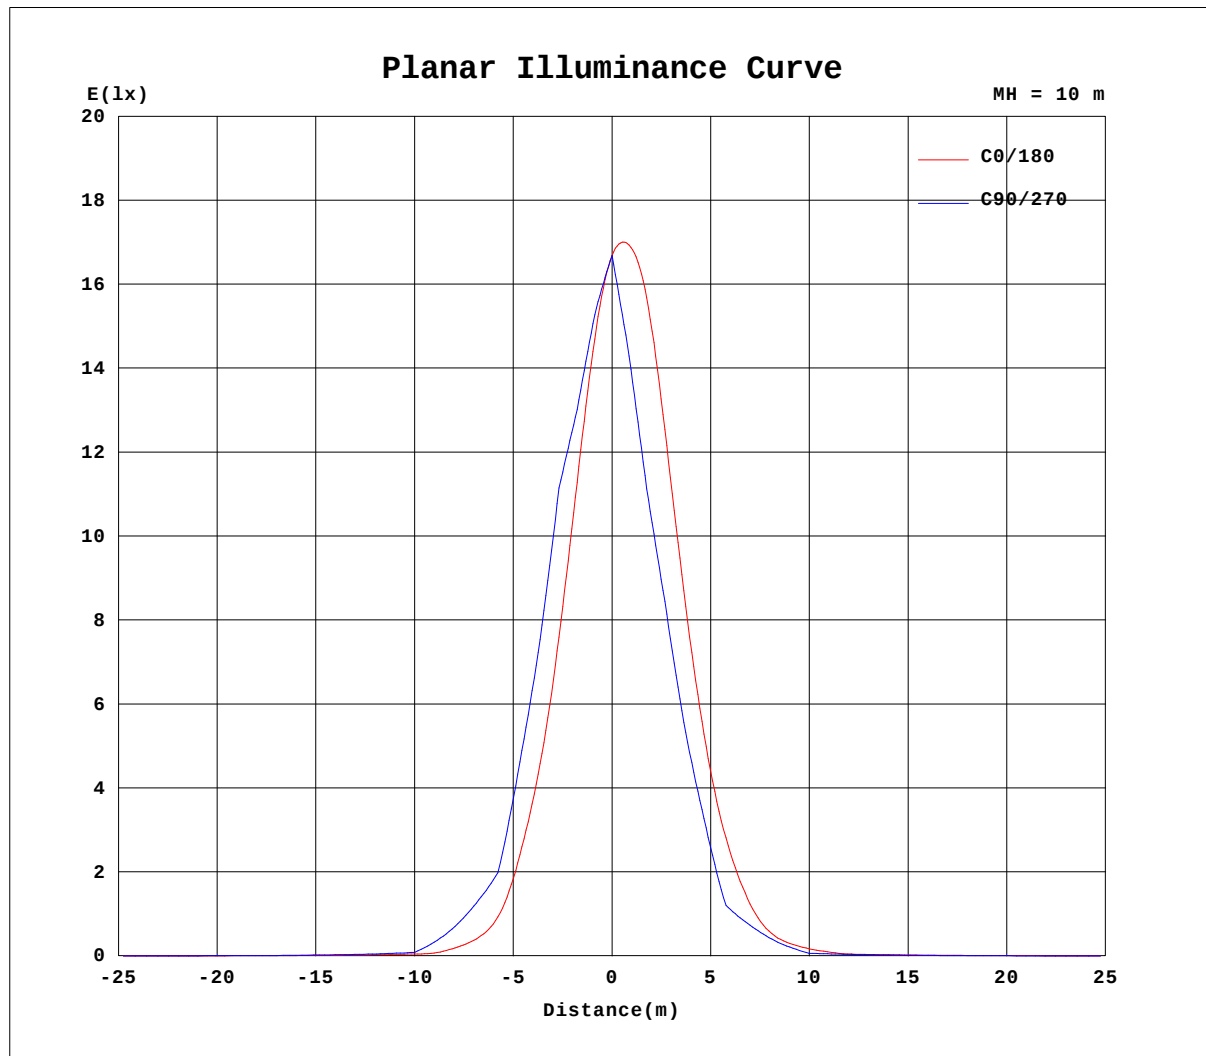

H_b Range: -90 - 90DEG
H_b Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-08-10

V(B) Range: -75 - 75DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.24V I:0.0969A P:10.076W PF:0.4721 Freq:50.00Hz Lamp Flux:791.139x1 lm		
NAME: 6375-10W-3000K	TYPE:室内	WEIGHT:
SPEC.:	DIM.: 65*60*163mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:35°

Table- -1

UNIT: cd

[illegible]

H(_b) Range:-90 - 90DEG
H(_b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-08-10

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.300m [K=1.0000]
Remarks:

