

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		10100.3 cd per klm. 0.0 degrees vertical -2.0 degrees horizontal
Beam Spread	At 10% of Imax	28.6V x 22.0H
	At 50% of Imax	16.5V x 12.1H
	At 90% of Imax	5.4V x 5.9H
Beam Flux	Total	961.4 lumens per klm.
	To 10% of Imax	605.4 lumens per klm.
	To 50% of Imax	317.0 lumens per klm.
	To 90% of Imax	37.8 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	96.1 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2025-02-25

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.18V I:0.1510A P:14.758W PF:0.4438 Freq:50.00Hz Lamp Flux:724.649x1 lm		
NAME: 6620	TYPE:	WEIGHT:
SPEC.:15W	DIM.:	SERIAL No.:
MFR.: NORDECOR	SUR.:	Shielding Angle:

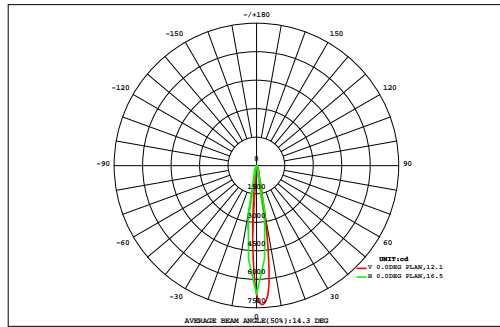

DATA OF LAMP		Eff:49.10lm/W	
MODEL		Imax(cd)	7319
NOMINAL POWER(W)		AVAILABILITY(%)	66.1
RATED VOLTAGE(V)		Avai. FLUX(lm)	478.7
NOMINAL FLUX(lm)	724.649	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	724.6
TEST VOLTAGE(V)	0	q @50%(H,V)	12,16DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM															UNIT:lm		F t	F a	
	90	80	70	60	50	40	30	20	10	0	10	20	30	40	50	60	70			80
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.01	0.02	0.02	0.03	0.04	0.04	0.05	0.05	0.05	0.05	0.04	0.04	0.03	0.02	0.02	0.01	0.00	0.51	0.00
70	0.00	0.01	0.02	0.03	0.05	0.06	0.08	0.11	0.12	0.12	0.11	0.07	0.05	0.04	0.03	0.02	0.01	0.00	0.95	0.00
60	0.00	0.01	0.02	0.03	0.06	0.11	0.20	0.30	0.39	0.37	0.28	0.17	0.10	0.05	0.03	0.02	0.01	0.00	2.16	0.00
50	0.00	0.01	0.02	0.04	0.08	0.24	0.53	0.83	1.06	0.98	0.68	0.42	0.19	0.06	0.03	0.02	0.01	0.00	5.21	0.00
40	0.00	0.01	0.03	0.07	0.23	0.62	1.29	2.19	2.86	2.59	1.79	1.01	0.49	0.19	0.05	0.02	0.01	0.00	13.5	0.00
30	0.00	0.02	0.04	0.11	0.41	1.04	2.26	4.36	6.69	6.48	4.11	1.87	0.88	0.32	0.08	0.03	0.01	0.00	28.7	0.00
20	0.00	0.02	0.05	0.16	0.61	1.56	3.83	8.63	15.1	14.5	8.23	3.22	1.32	0.50	0.13	0.04	0.02	0.00	57.9	0.00
10	0.00	0.02	0.05	0.20	0.75	1.91	5.11	14.0	32.1	32.2	12.2	3.97	1.31	0.51	0.14	0.04	0.02	0.01	232	193
0	0.00	0.02	0.05	0.23	0.75	2.05	5.60	18.1	43.8	43.1	11.6	3.76	1.23	0.46	0.13	0.04	0.02	0.01	281	247
-10	0.00	0.02	0.05	0.18	0.57	1.50	3.82	8.81	15.1	14.5	7.47	5.12	2.36	0.88	0.36	0.10	0.03	0.01	64.4	38.4
-20	0.00	0.02	0.04	0.12	0.38	0.93	2.27	3.96	5.66	5.08	2.86	1.46	0.60	0.21	0.06	0.03	0.01	0.00	23.7	0.00
-30	0.00	0.01	0.03	0.07	0.18	0.49	1.02	1.41	1.46	1.38	1.02	0.72	0.34	0.10	0.04	0.02	0.01	0.00	8.32	0.00
-40	0.00	0.01	0.02	0.04	0.10	0.24	0.47	0.65	0.72	0.62	0.44	0.30	0.13	0.05	0.02	0.02	0.01	0.00	3.85	0.00
-50	0.00	0.01	0.02	0.04	0.07	0.13	0.23	0.30	0.34	0.31	0.23	0.16	0.08	0.04	0.03	0.02	0.01	0.00	2.03	0.00
-60	0.00	0.01	0.02	0.03	0.05	0.06	0.07	0.08	0.09	0.08	0.07	0.05	0.04	0.04	0.03	0.02	0.01	0.00	0.77	0.00
-70	0.00	0.01	0.02	0.03	0.04	0.04	0.05	0.06	0.06	0.06	0.05	0.05	0.04	0.03	0.03	0.02	0.01	0.00	0.60	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
F t	0.07	0.24	0.50	1.39	4.33	11.0	26.9	63.9	298	237	48.9	19.6	7.74	3.01	0.94	0.38	0.19	0.06	725	---
F a	0.00	0.00	0.00	0.00	0.00	0.00	0.00	18.1	260	196	3.86	0.00	0.00	0.00	0.00	0.00	0.00	0.00	---	479


one-half-peak spread: U:8.2,D:8.4 , L:6.8,R:5.4 NEMA Beam Type: Type 2

H(h) Range:-90 - 90DEG
H(h) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2025-02-25

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.18V I:0.1510A P:14.758W PF:0.4438 Freq:50.00Hz Lamp Flux:724.649x1 lm		
NAME: 6620	TYPE:	WEIGHT:
SPEC.:15W	DIM.:	SERIAL No.:
MFR.: NORDECOR	SUR.:	Shielding Angle:

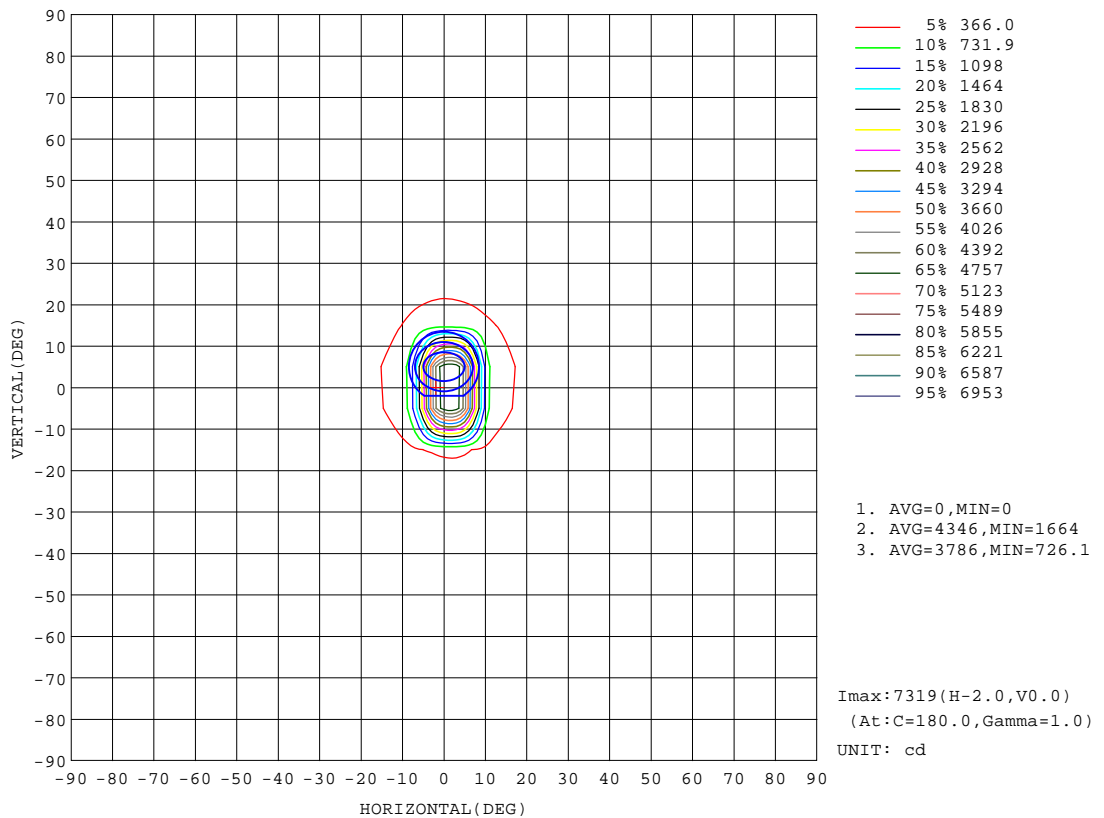


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:NORDECOR
 Test Date:2025-02-25

V(B) Range:-75 - 75DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:220.18V I:0.1510A P:14.758W PF:0.4438 Freq:50.00Hz Lamp Flux:724.649x1 lm		
NAME: 6620	TYPE:	WEIGHT:
SPEC.:15W	DIM.:	SERIAL No.:
MFR.: NORDECOR	SUR.:	Shielding Angle:

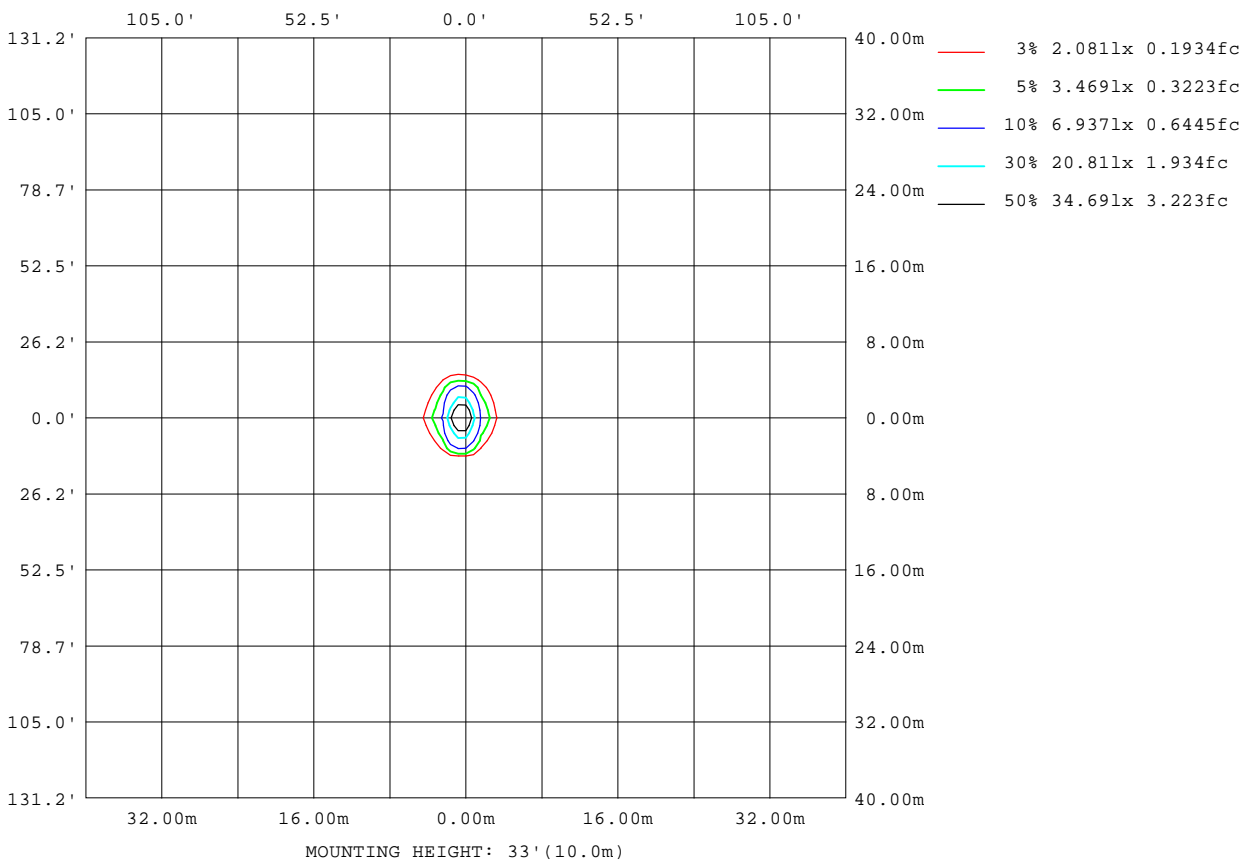

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2025-02-25

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

Planar Illuminance Curve

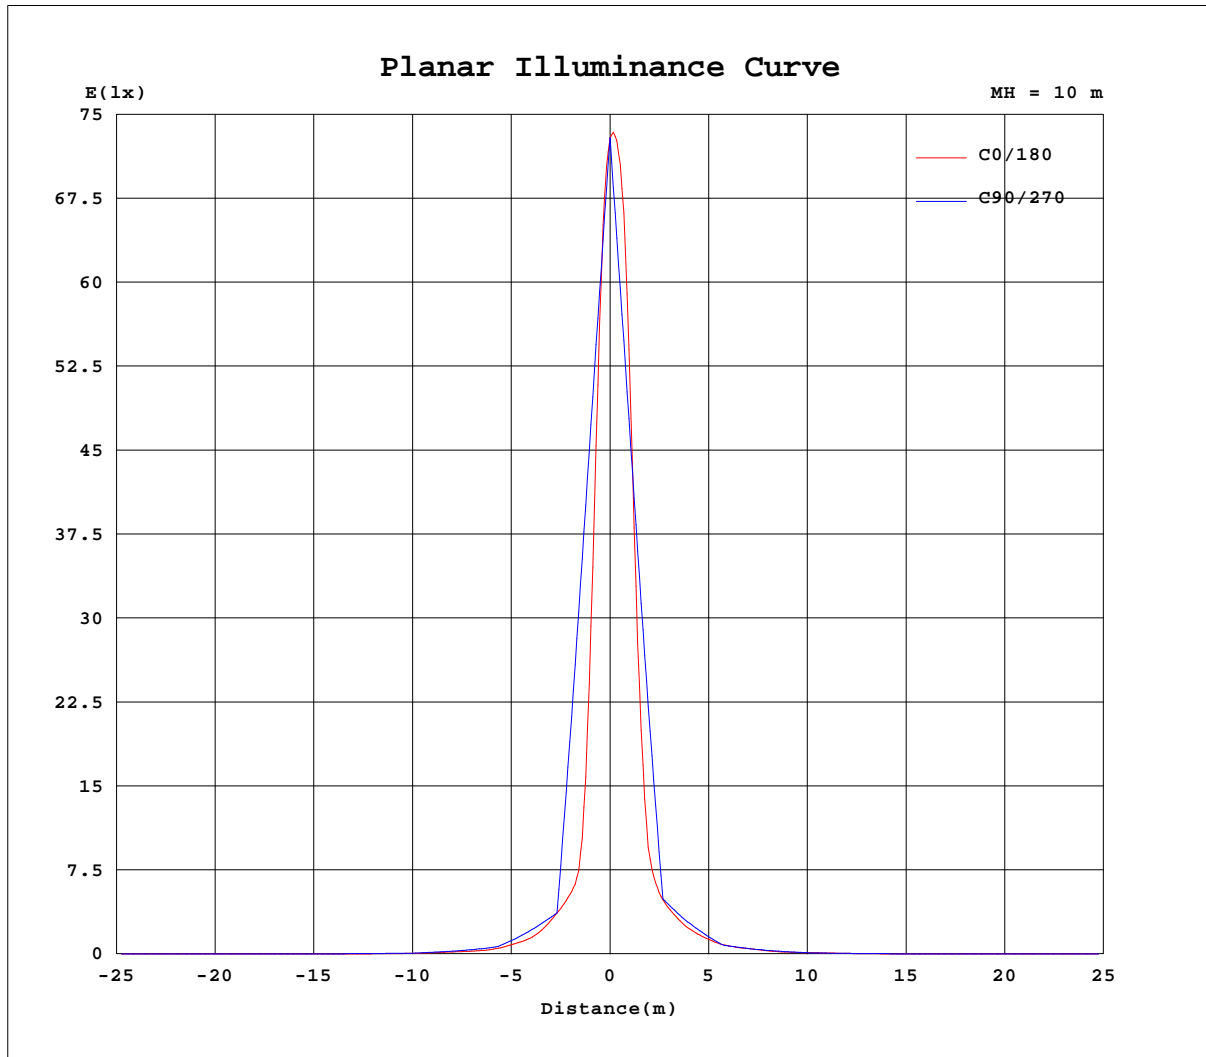


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:NORDECOR
 Test Date:2025-02-25

V(B) Range:-75 - 75DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.18V I:0.1510A P:14.758W PF:0.4438 Freq:50.00Hz Lamp Flux:724.649x1 lm		
NAME: 6620	TYPE:	WEIGHT:
SPEC.:15W	DIM.:	SERIAL No.:
MFR.: NORDECOR	SUR.:	Shielding Angle:

Flux out:208.3 lm

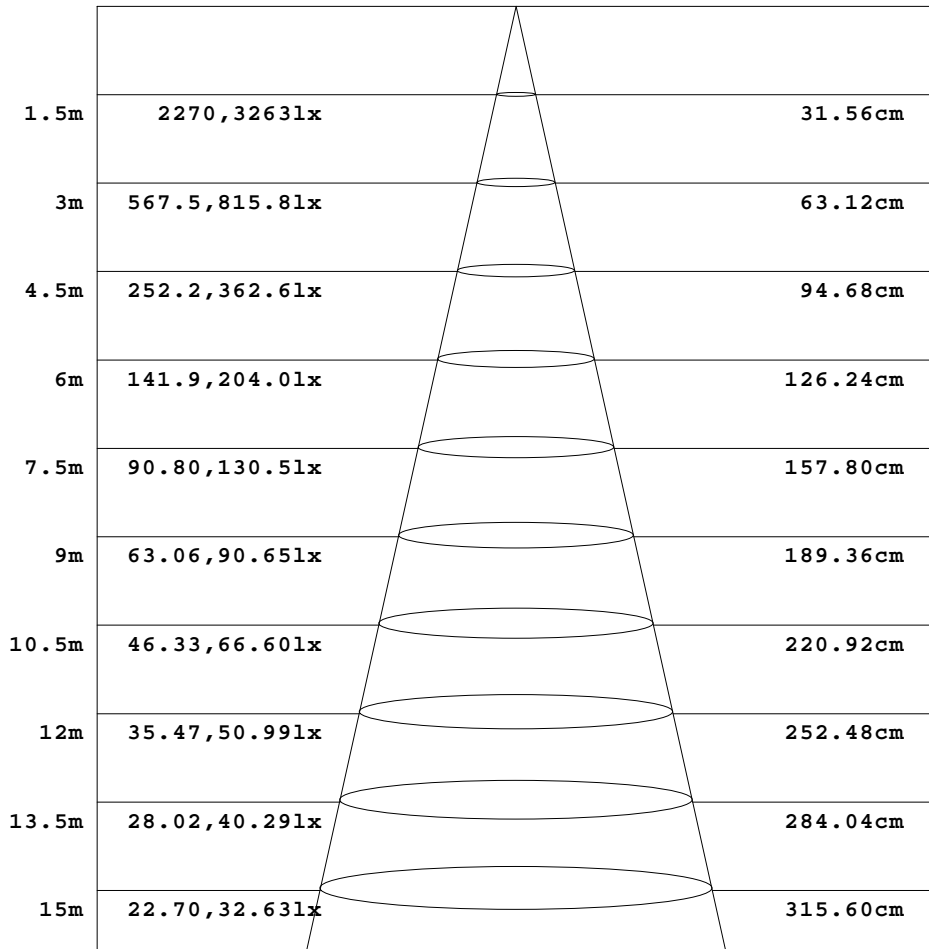

Height Eavg, Emax Angle:12.01deg Diameter

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2025-02-25

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.18V I:0.1510A P:14.758W PF:0.4438 Freq:50.00Hz Lamp Flux:724.649x1 lm		
NAME: 6620	TYPE:	WEIGHT:
SPEC.:15W	DIM.:	SERIAL No.:
MFR.: NORDECOR	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	1.18	1.27	1.36	1.40	1.40	1.41	1.44	1.49	1.52	1.58	1.65	1.72	1.73	1.78	1.85	1.91	1.95	2.00	2.03
-70	1.40	1.47	1.53	1.56	1.57	1.61	1.67	1.72	1.81	1.92	2.04	2.17	2.33	2.50	2.73	2.92	3.07	3.16	3.11
-65	1.46	1.53	1.62	1.68	1.72	1.76	1.81	1.87	1.95	2.08	2.24	2.44	2.67	2.94	3.25	3.63	3.96	4.19	4.29
-60	1.66	1.75	1.81	1.87	1.92	1.98	2.05	2.14	2.29	2.48	2.74	3.07	3.44	3.86	4.38	4.88	5.22	5.42	5.28
-55	1.52	1.56	1.63	1.69	1.76	1.83	1.91	2.03	2.20	2.67	3.49	4.19	5.35	6.93	8.88	10.2	10.5	10.8	11.6
-50	1.44	1.50	1.55	1.65	1.71	1.80	1.96	2.17	2.81	4.18	5.30	7.14	9.67	13.2	15.8	16.3	16.1	17.6	17.9
-45	1.34	1.35	1.38	1.44	1.53	1.62	1.75	1.97	2.26	3.35	5.39	6.97	9.75	13.8	18.7	21.7	21.7	21.7	24.0
-40	1.39	1.48	1.56	1.69	1.82	2.01	2.34	3.42	4.73	7.36	10.2	16.0	23.3	29.9	37.0	39.7	40.6	46.1	47.5
-35	1.43	1.47	1.60	1.72	1.88	2.08	2.38	2.94	5.02	6.89	10.5	15.1	25.2	35.4	44.2	53.9	56.9	61.0	70.3
-30	1.50	1.67	1.83	2.00	2.26	2.61	3.18	5.90	8.03	12.0	17.5	29.7	44.3	53.9	68.0	75.0	78.8	91.1	94.2
-25	1.50	1.58	1.77	1.95	2.21	2.57	3.11	4.68	8.22	12.5	20.0	30.2	43.0	68.3	91.2	115	142	176	197
-20	1.59	1.79	2.00	2.28	2.72	3.34	5.22	9.25	14.6	23.5	39.4	48.9	82.1	119	151	200	259	296	299
-15	1.55	1.68	1.89	2.14	2.51	3.08	3.93	7.20	11.9	20.1	33.9	52.3	63.2	112	160	205	278	368	404
-10	1.64	1.86	2.12	2.50	3.08	3.93	6.84	12.1	22.3	32.5	54.7	71.7	117	183	260	390	1054	2557	2528
-5	1.56	1.70	1.93	2.24	2.69	3.35	4.50	8.48	15.3	29.2	38.7	64.7	90.8	148	232	356	592	2372	4920
0	1.67	1.90	2.20	2.66	3.32	4.37	8.04	14.5	31.0	39.0	63.3	98.1	149	246	393	646	2464	6875	6783
5	1.57	1.71	1.93	2.26	2.72	3.39	4.58	8.43	15.2	30.3	39.1	66.7	93.4	150	240	371	624	2412	4969
10	1.66	1.88	2.15	2.56	3.15	4.06	6.92	11.8	24.1	34.3	57.4	77.5	118	195	288	446	1134	2656	2610
15	1.59	1.70	1.90	2.19	2.60	3.20	4.19	7.05	11.7	23.4	35.0	58.1	71.1	116	182	253	373	489	552
20	1.61	1.81	2.05	2.36	2.83	3.54	5.45	8.83	16.9	27.6	45.3	57.1	86.2	137	186	267	356	405	389
25	1.52	1.61	1.79	2.01	2.27	2.69	3.33	4.99	8.00	15.0	25.4	38.2	50.4	75.7	110	144	202	248	264
30	1.52	1.69	1.88	2.07	2.36	2.80	3.63	5.64	9.33	18.7	26.9	36.8	51.7	70.2	85.0	110	128	122	120
35	1.42	1.49	1.62	1.76	1.92	2.15	2.51	3.26	4.83	8.24	15.4	21.4	31.1	43.2	55.9	68.1	88.5	96.9	91.7
40	1.38	1.50	1.59	1.70	1.84	2.06	2.44	3.29	5.12	9.30	13.7	20.2	29.3	37.4	44.9	58.1	66.8	63.4	62.4
45	1.28	1.33	1.41	1.46	1.52	1.60	1.71	1.88	2.22	3.25	5.04	7.77	13.1	18.8	21.2	26.1	33.6	36.0	33.8
50	1.33	1.42	1.46	1.53	1.59	1.69	1.83	2.05	2.71	3.85	5.58	8.85	13.1	15.2	18.0	23.0	25.8	24.4	24.0
55	1.31	1.36	1.44	1.48	1.55	1.62	1.72	1.84	2.05	2.52	3.26	4.34	6.31	8.46	9.65	11.7	14.4	15.4	14.8
60	1.37	1.44	1.48	1.55	1.61	1.70	1.79	1.93	2.11	2.32	2.57	2.86	3.20	3.71	4.40	4.71	5.04	5.26	5.27
65	1.38	1.42	1.50	1.54	1.60	1.65	1.73	1.81	1.92	2.07	2.23	2.41	2.63	2.88	3.28	3.70	3.90	4.11	4.24
70	1.47	1.54	1.57	1.62	1.67	1.72	1.78	1.87	1.95	2.06	2.17	2.31	2.45	2.65	2.90	3.00	3.12	3.19	3.18
75	1.49	1.52	1.59	1.62	1.66	1.71	1.74	1.79	1.84	1.89	1.93	1.98	2.05	2.08	2.12	2.15	2.16	2.16	2.15
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(h) Range:-90 - 90DEG
H(h) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2025-02-25

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.18V I:0.1510A P:14.758W PF:0.4438 Freq:50.00Hz Lamp Flux:724.649x1 lm		
NAME: 6620	TYPE:	WEIGHT:
SPEC.:15W	DIM.:	SERIAL No.:
MFR.: NORDECOR	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	2.01	1.96	1.91	1.86	1.79	1.74	1.69	1.62	1.58	1.53	1.49	1.45	1.41	1.38	1.32	1.27	1.27	1.17
-70	2.91	2.70	2.49	2.30	2.14	1.97	1.86	1.75	1.65	1.58	1.53	1.47	1.43	1.38	1.31	1.29	1.23	1.12
-65	4.14	3.78	3.41	3.06	2.74	2.47	2.21	2.04	1.87	1.74	1.66	1.58	1.51	1.47	1.41	1.35	1.33	1.26
-60	4.80	4.26	3.75	3.31	2.91	2.54	2.30	2.06	1.86	1.75	1.66	1.57	1.53	1.45	1.40	1.35	1.31	1.27
-55	11.4	9.56	8.21	7.61	6.40	5.29	4.02	3.04	2.30	1.88	1.70	1.58	1.48	1.44	1.38	1.33	1.30	1.25
-50	15.1	12.6	11.7	10.0	8.10	5.99	4.15	2.81	1.99	1.69	1.53	1.43	1.37	1.31	1.28	1.24	1.20	1.18
-45	23.9	19.3	16.3	15.5	12.8	10.2	7.12	4.65	2.87	1.94	1.60	1.44	1.33	1.28	1.23	1.21	1.18	1.14
-40	40.3	32.3	29.4	24.1	18.2	14.0	7.88	4.96	3.41	2.29	1.70	1.53	1.44	1.36	1.32	1.28	1.22	1.20
-35	69.0	58.0	46.4	42.2	32.7	24.5	18.6	9.56	6.24	4.33	2.63	1.86	1.67	1.56	1.47	1.42	1.36	1.29
-30	80.2	63.5	57.1	45.6	33.2	26.7	13.5	8.48	6.12	3.55	2.17	1.88	1.72	1.61	1.53	1.46	1.37	1.32
-25	192	155	117	86.3	62.9	44.3	28.6	17.5	12.1	7.29	4.43	2.64	2.09	1.86	1.70	1.59	1.51	1.41
-20	246	184	126	89.0	62.3	37.3	23.5	18.4	10.2	6.34	3.57	2.43	2.07	1.84	1.69	1.59	1.48	1.40
-15	392	312	228	148	104	69.6	37.4	28.3	20.4	10.8	7.02	3.77	2.60	2.18	1.92	1.75	1.64	1.50
-10	898	352	223	137	90.0	49.2	34.2	25.7	13.8	8.52	4.86	2.88	2.36	2.03	1.83	1.86	1.97	1.78
-5	4188	998	419	256	148	92.1	50.2	38.6	24.4	13.9	8.67	4.69	2.90	2.37	2.05	1.88	2.17	2.37
0	2037	565	348	190	116	62.5	45.5	30.3	17.1	10.1	6.04	3.22	2.57	2.17	1.96	2.27	2.84	2.46
5	4228	1034	446	273	155	98.6	57.5	40.0	27.4	15.3	9.15	4.82	2.97	2.42	2.08	1.90	2.18	2.38
10	973	411	264	152	102	65.1	38.9	30.3	17.7	9.66	5.20	3.02	2.45	2.09	1.87	1.89	1.98	1.79
15	510	419	310	200	122	89.2	59.1	32.5	29.5	15.0	8.47	4.15	2.80	2.31	2.00	1.79	1.67	1.52
20	329	251	172	107	75.2	53.2	32.2	25.2	14.3	7.65	3.97	2.62	2.19	1.91	1.72	1.61	1.49	1.41
25	250	206	158	114	74.9	52.4	37.2	26.7	18.3	9.12	5.18	2.89	2.25	1.95	1.74	1.60	1.51	1.39
30	105	84.4	75.0	55.3	37.1	26.8	25.3	15.0	6.97	4.04	2.35	2.02	1.80	1.63	1.53	1.45	1.35	1.31
35	90.7	76.8	62.5	54.3	39.7	26.6	20.3	17.6	9.50	4.79	2.89	1.98	1.76	1.59	1.47	1.40	1.34	1.25
40	56.0	45.0	38.8	30.0	20.6	15.1	12.2	7.24	3.77	2.45	1.76	1.57	1.44	1.35	1.29	1.25	1.19	1.18
45	33.4	30.6	23.9	20.2	16.4	11.7	8.51	5.12	3.03	2.03	1.62	1.44	1.33	1.24	1.20	1.17	1.15	1.10
50	22.8	18.4	15.2	12.7	9.17	6.94	4.51	2.89	2.05	1.65	1.48	1.37	1.29	1.24	1.21	1.18	1.13	1.14
55	14.6	13.5	10.9	9.39	7.51	5.63	4.40	3.13	2.30	1.85	1.62	1.48	1.39	1.32	1.26	1.24	1.21	1.15
60	4.96	4.57	4.14	3.27	2.67	2.40	2.18	1.97	1.79	1.65	1.52	1.43	1.37	1.31	1.28	1.24	1.19	1.18
65	4.19	3.96	3.67	3.32	2.72	2.38	2.19	2.03	1.88	1.74	1.64	1.55	1.47	1.42	1.38	1.34	1.31	1.25
70	3.06	2.91	2.74	2.42	2.18	2.06	1.94	1.84	1.75	1.67	1.60	1.54	1.50	1.46	1.43	1.39	1.34	1.34
75	2.14	2.11	2.07	2.03	1.99	1.93	1.88	1.82	1.76	1.72	1.68	1.63	1.59	1.56	1.53	1.49	1.45	1.41
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(h) Range:-90 - 90DEG
H(h) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2025-02-25

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks: