



LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.08V I:0.2039A P:18.500W PF:0.9123 Freq:50.00Hz Lamp Flux:1202.51x1 lm		
NAME: 6702	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: NORDECOR	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 65.60 lm/W			
MODEL		Imax (cd)	3325	S/MH (C0/180)	0.48
NOMINAL POWER(W)	--	LOR (%)	100.0	S/MH (C90/270)	0.50
RATED VOLTAGE (V)	--	TOTAL FLUX(lm)	1065.5	η UP,DN (C0-180)	0.0,50.2
NOMINAL FLUX(lm)	1202.51	CIE CLASS	DIRECT	η UP,DN (C180-360)	0.0,49.8
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	--	η down (%)	100.0	CIBSE SHR MAX	0.50

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

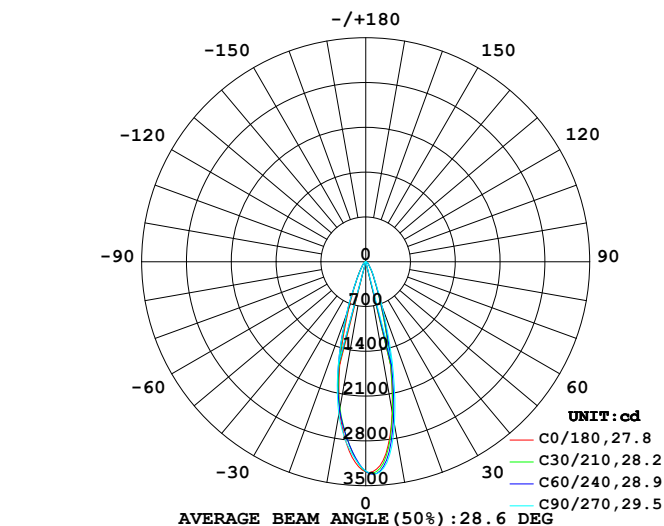

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

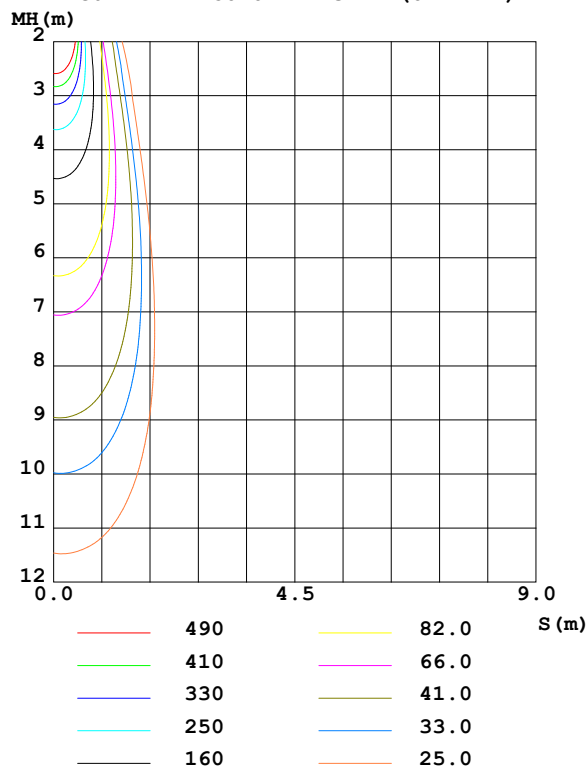

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: 10.0deg/s
Temperature:25.3°C
Operators:
Test Date:2024-08-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.463
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2383	2462	2585	2550	2350	2329	2421	2440	0~ 10	272.2	272.2	25.6, 25.6
20	659.7	705.1	769.2	810.9	775.5	864.2	888.7	757.2	10~ 20	416.8	689.1	64.7, 64.7
30	213.7	221.7	229.9	241.2	228.5	210.2	214.6	204.7	20~ 30	188.4	877.5	82.4, 82.4
40	91.20	89.83	93.96	93.38	92.13	85.10	90.34	85.46	30~ 40	87.00	964.5	90.5, 90.5
50	52.25	48.16	51.10	51.28	51.35	46.52	48.56	46.33	40~ 50	51.48	1016	95.3, 95.3
60	26.24	23.98	24.61	26.34	27.16	23.50	20.88	21.27	50~ 60	32.24	1048	98.4, 98.4
70	7.993	5.832	6.365	6.620	8.820	6.955	6.982	5.893	60~ 70	14.18	1062	99.7, 99.7
80	0.0984	0.0942	0.1064	0.1023	0.1444	0.1365	0.1273	0.1275	70~ 80	3.031	1065	100, 100
90	0.0883	0.0883	0.0883	0.0853	0.0742	0.0803	0.0773	0.0833	80~ 90	0.1023	1066	100, 100
100									90~100			
110									100~110			
120									110~120			
130									120~130			
140									130~140			
150									140~150			
160									150~160			
170									160~170			
180									170~180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 992.94 lm

%lum = 93.2%

%lamp = 93.2%

Conical surface Flux(120deg): 1048.2 lm


%lum = 98.4%

%lamp = 98.4%

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: 10.0deg/s
Temperature:25.3℃
Operators:
Test Date:2024-08-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 γ Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.463
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

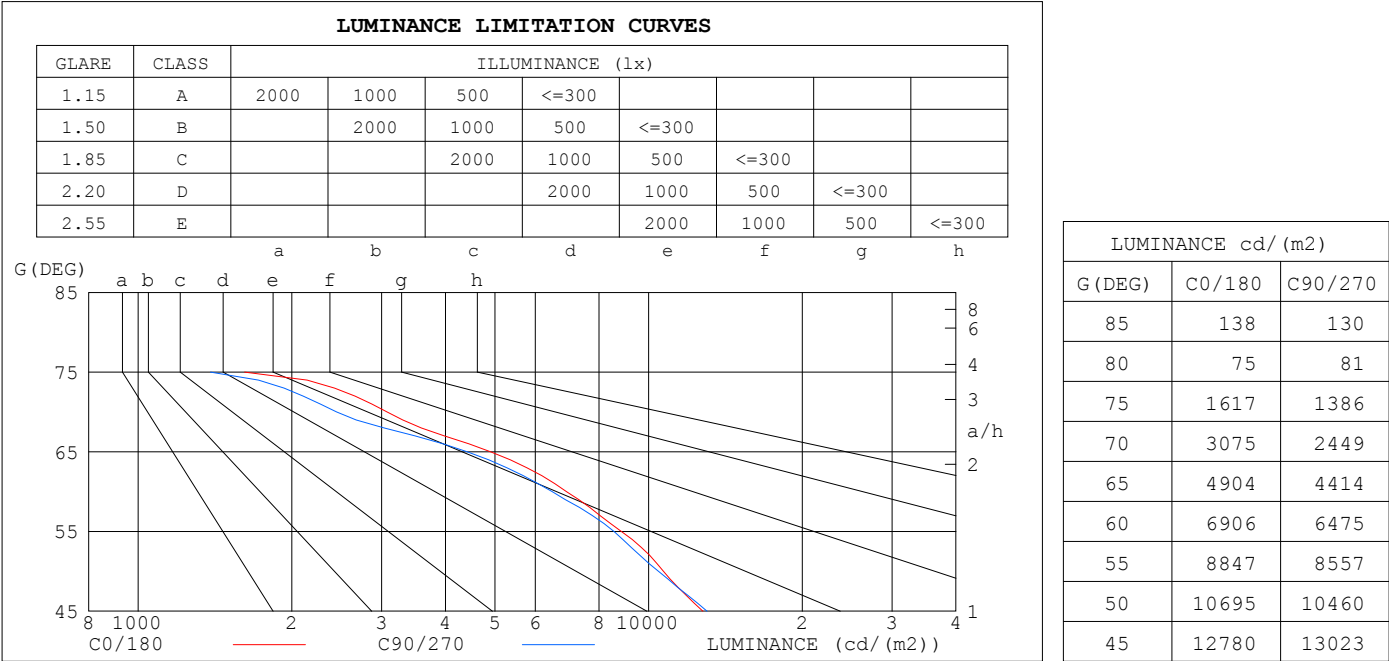


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: 10.0deg/s
Temperature:25.3℃
Operators:
Test Date:2024-08-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.463
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.12	1.09	1.07	1.10	1.08	1.06	1.05	1.04	1.02	1.02	1.01	.99	.98	.97	.97	.95
2.0	1.05	1.01	.98	1.03	1.00	.97	1.00	.97	.95	.97	.95	.93	.94	.93	.91	.90
3.0	.99	.95	.91	.98	.94	.91	.95	.92	.89	.93	.90	.88	.91	.88	.86	.85
4.0	.94	.89	.86	.93	.88	.85	.91	.87	.84	.89	.86	.83	.87	.84	.82	.81
5.0	.89	.84	.81	.89	.84	.80	.87	.83	.80	.85	.82	.79	.84	.81	.78	.77
6.0	.85	.80	.77	.85	.80	.76	.83	.79	.76	.82	.78	.75	.81	.77	.75	.74
7.0	.82	.77	.73	.81	.76	.73	.80	.76	.73	.79	.75	.72	.78	.74	.72	.71
8.0	.78	.73	.70	.78	.73	.70	.77	.73	.70	.76	.72	.69	.75	.72	.69	.68
9.0	.75	.71	.67	.75	.70	.67	.74	.70	.67	.73	.69	.67	.73	.69	.66	.65
10.0	.73	.68	.65	.72	.68	.65	.72	.67	.64	.71	.67	.64	.70	.67	.64	.63

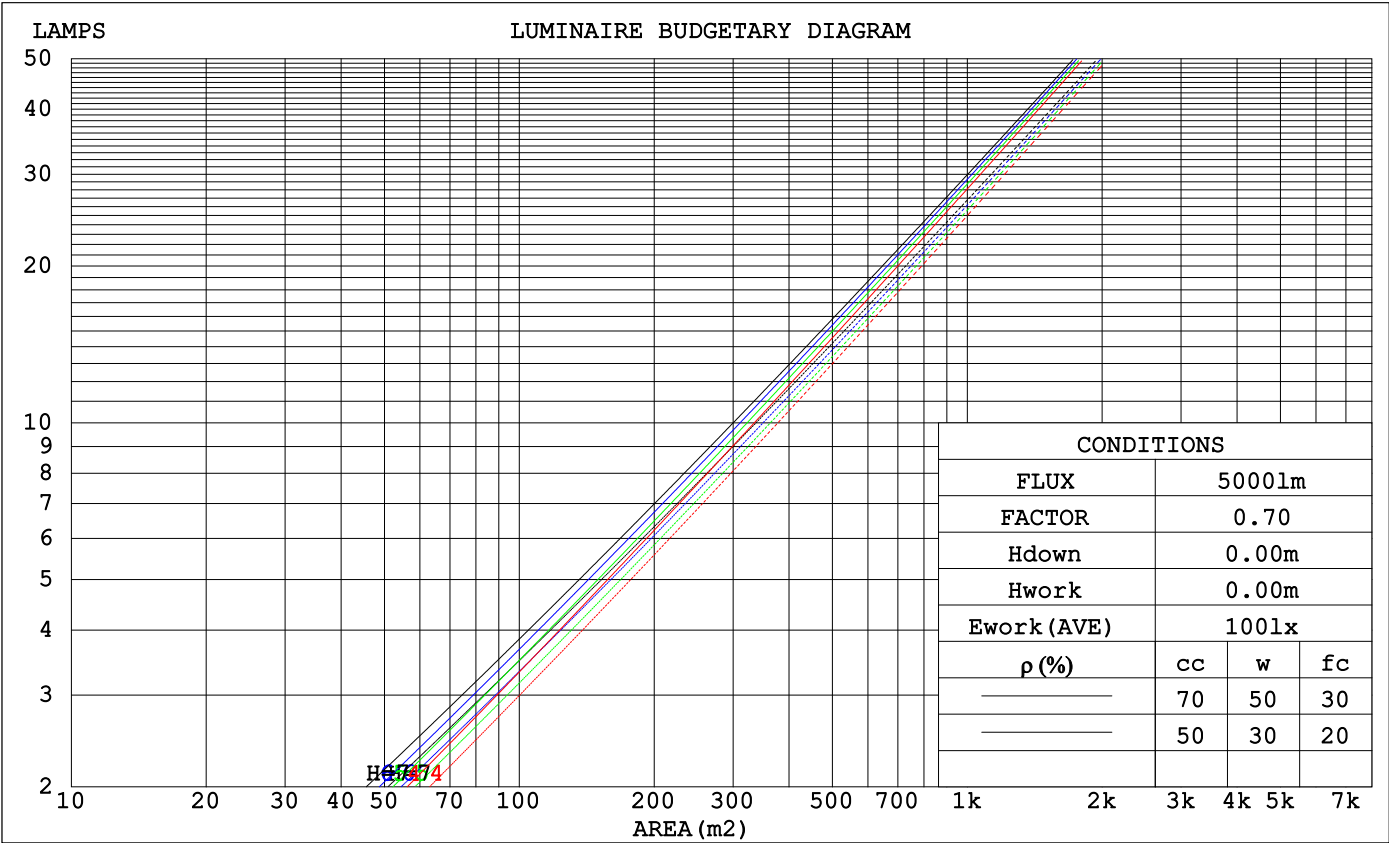

C Range: 0 - 360DEG

C Interval: 15.0DEG

Test Speed: 10.0deg/s

Temperature:25.3℃

Operators:

Test Date:2024-08-12

γ Range: 0 - 90DEG

γ Interval: 1.0DEG

Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.463

Humidity:65.0%

Test Distance:9.000m [K=1.0000]

Remarks:

WEC AND CCEC

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.161	.091	.029	.154	.088	.028	.141	.081	.026	.130	.075	.024	.119	.069	.022															
2.0	.152	.083	.026	.147	.081	.025	.136	.076	.024	.126	.071	.022	.118	.066	.021															
3.0	.143	.076	.023	.139	.074	.022	.130	.070	.021	.122	.067	.020	.114	.063	.020															
4.0	.135	.070	.021	.131	.069	.020	.123	.065	.020	.116	.063	.019	.110	.060	.018															
5.0	.127	.065	.019	.124	.064	.019	.117	.061	.018	.111	.059	.017	.106	.057	.017															
6.0	.121	.060	.017	.118	.059	.017	.112	.057	.017	.107	.055	.016	.102	.054	.016															
7.0	.114	.057	.016	.112	.056	.016	.107	.054	.016	.102	.052	.015	.098	.051	.015															
8.0	.109	.053	.015	.107	.052	.015	.102	.051	.015	.098	.050	.014	.094	.048	.014															
9.0	.104	.050	.014	.102	.050	.014	.098	.048	.014	.094	.047	.014	.091	.046	.013															
10.0	.099	.048	.013	.097	.047	.013	.094	.046	.013	.091	.045	.013	.087	.044	.013															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients (CCEC)															
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.170	.157	.146	.145	.135	.126	.099	.093	.087	.057	.054	.051	.018	.017	.016	
2.0	.154	.133	.115	.132	.114	.099	.090	.079	.069	.052	.046	.041	.017	.015	.013	
3.0	.140	.113	.092	.120	.098	.080	.082	.068	.056	.048	.040	.033	.015	.013	.011	
4.0	.129	.098	.075	.110	.085	.065	.076	.059	.046	.044	.035	.027	.014	.011	.009	
5.0	.119	.086	.062	.102	.075	.054	.070	.052	.038	.041	.031	.023	.013	.010	.008	
6.0	.111	.077	.053	.095	.067	.046	.066	.047	.032	.038	.027	.019	.012	.009	.006	
7.0	.104	.069	.045	.089	.060	.039	.062	.042	.028	.036	.025	.016	.012	.008	.005	
8.0	.097	.062	.038	.084	.054	.034	.058	.038	.024	.034	.022	.014	.011	.007	.005	
9.0	.092	.057	.033	.079	.049	.029	.055	.035	.021	.032	.021	.012	.010	.007	.004	
10.0	.087	.052	.029	.075	.045	.026	.052	.032	.018	.030	.019	.011	.010	.006	.004	

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: 10.0deg/s
Temperature:25.3℃
Operators:
Test Date:2024-08-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.463
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.4	16.2	15.6	16.3	16.5	15.5	16.3	15.7	16.4	16.6
3H	15.6	16.3	15.8	16.5	16.7	15.6	16.3	15.8	16.5	16.7
4H	15.5	16.3	15.8	16.5	16.7	15.6	16.3	15.8	16.5	16.7
6H	15.5	16.1	15.7	16.4	16.6	15.5	16.1	15.8	16.4	16.6
8H	15.4	16.1	15.7	16.3	16.6	15.4	16.1	15.7	16.3	16.6
12H	15.4	16.0	15.7	16.2	16.5	15.4	16.0	15.7	16.3	16.5
4H 2H	15.5	16.2	15.7	16.4	16.6	15.6	16.3	15.8	16.5	16.7
3H	15.7	16.3	16.0	16.6	16.8	15.7	16.3	16.0	16.6	16.9
4H	15.7	16.2	16.0	16.5	16.8	15.7	16.2	16.0	16.5	16.8
6H	15.6	16.1	15.9	16.4	16.7	15.6	16.1	16.0	16.4	16.8
8H	15.5	16.0	15.9	16.3	16.7	15.5	16.0	15.9	16.3	16.7
12H	15.5	15.9	15.9	16.3	16.6	15.5	15.9	15.9	16.3	16.7
8H 4H	15.5	16.0	15.9	16.3	16.7	15.6	16.0	15.9	16.4	16.7
6H	15.4	15.8	15.9	16.2	16.6	15.4	15.8	15.9	16.2	16.6
8H	15.4	15.7	15.8	16.1	16.6	15.4	15.7	15.8	16.1	16.6
12H	15.3	15.6	15.8	16.0	16.5	15.3	15.6	15.8	16.1	16.5
12H 4H	15.5	15.9	15.9	16.3	16.7	15.5	15.9	15.9	16.3	16.7
6H	15.4	15.7	15.8	16.1	16.6	15.4	15.7	15.8	16.1	16.6
8H	15.3	15.6	15.8	16.0	16.5	15.3	15.6	15.8	16.1	16.5
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.0 / - 1.4					+ 1.0 / - 1.6				
1.5H	+ 1.1 / - 0.9					+ 1.2 / - 1.0				
2.0H	+ 1.8 / - 2.7					+ 2.0 / - 2.4				

CIE Pub.117, 1066 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 0.2$)
Area: 0.0076 m²

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: 10.0deg/s
Temperature:25.3°C
Operators:
Test Date:2024-08-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.463
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:


UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	86	79	75	85	79	75	84	78	75	71
0.80	93	87	83	93	87	83	91	86	83	79
1.00	98	92	88	97	92	88	95	92	87	83
1.25	102	97	93	101	96	93	99	95	92	88
1.50	105	100	97	104	99	96	102	98	95	90
2.00	108	104	100	107	103	99	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	106	104	106	104	102	95
4.00	113	111	108	111	109	107	108	106	104	97
5.00	115	112	111	113	111	109	109	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: 10.0deg/s
 Temperature: 25.3°C
 Operators:
 Test Date: 2024-08-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.463
 Humidity: 65.0%
 Test Distance: 9.000m [K=1.0000]
 Remarks:


ISOCANDELA DIAGRAM

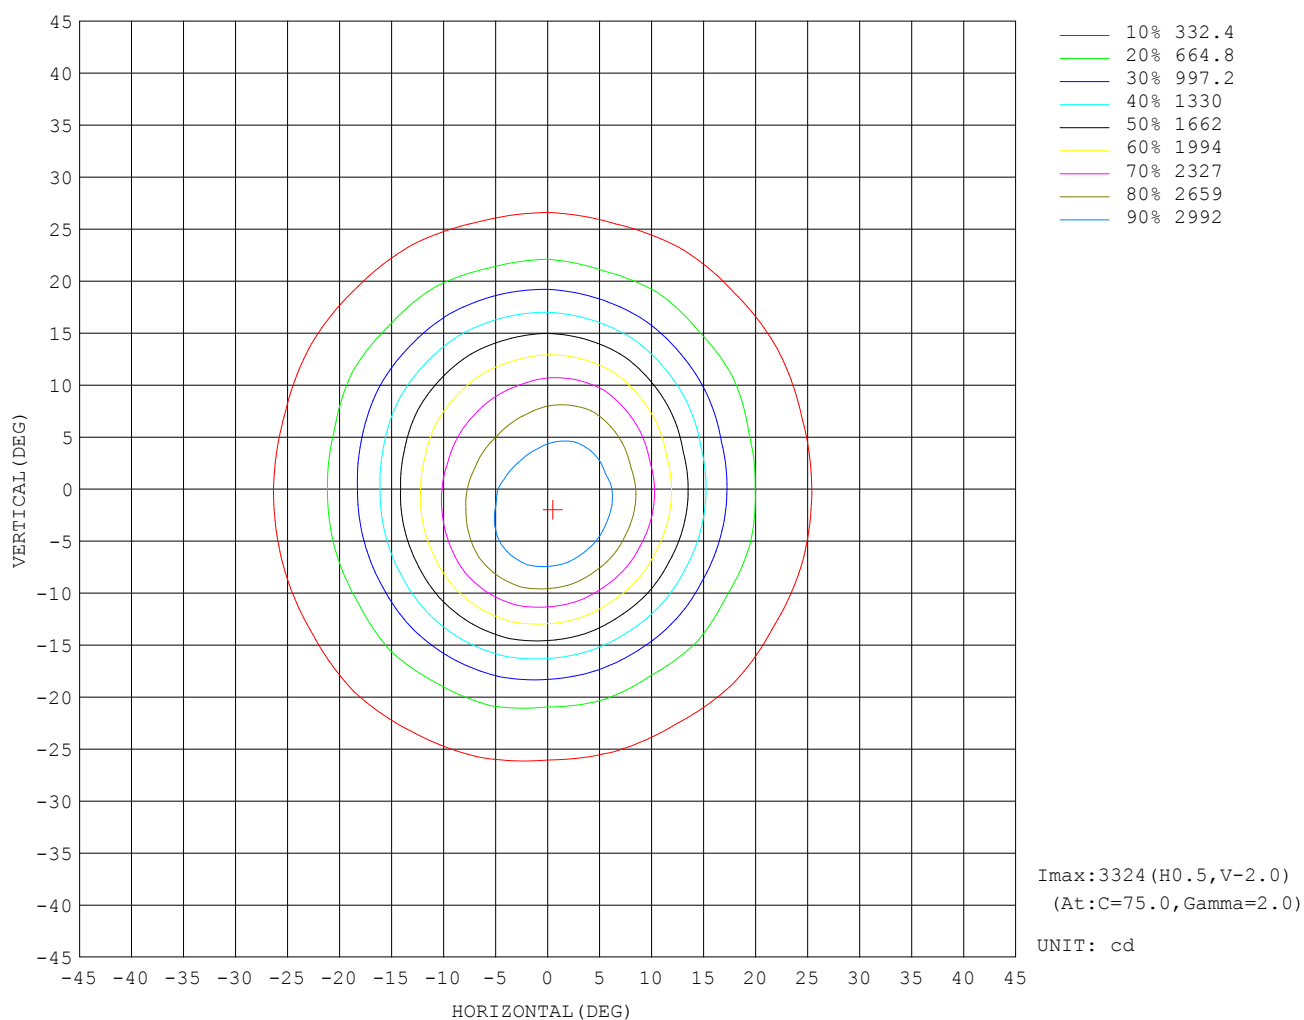

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: 10.0deg/s
Temperature: 25.3°C
Operators:
Test Date: 2024-08-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.463
Humidity: 65.0%
Test Distance: 9.000m [K=1.0000]
Remarks:

AAI Figure

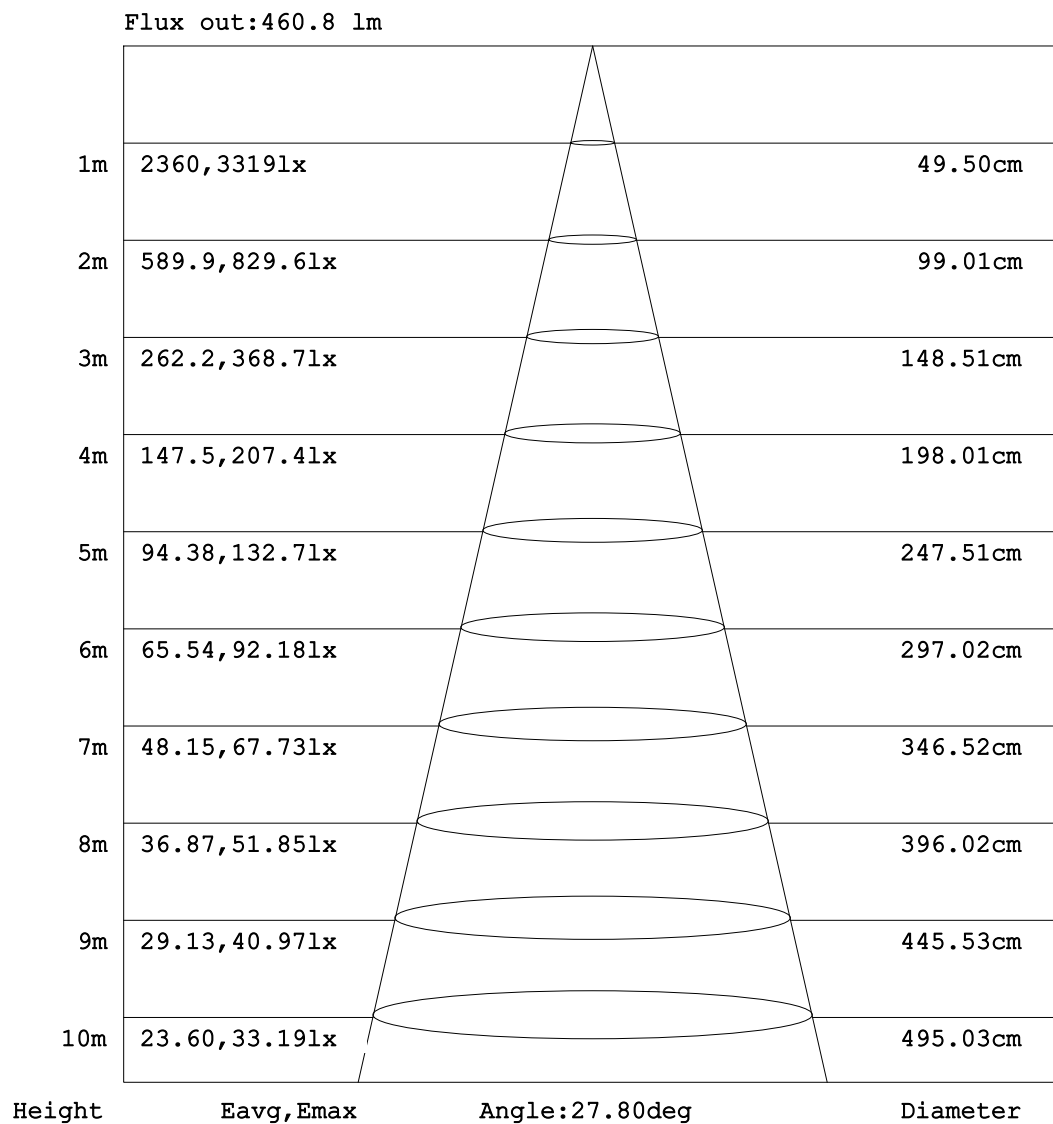


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: 10.0deg/s
Temperature:25.3℃
Operators:
Test Date:2024-08-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.463
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

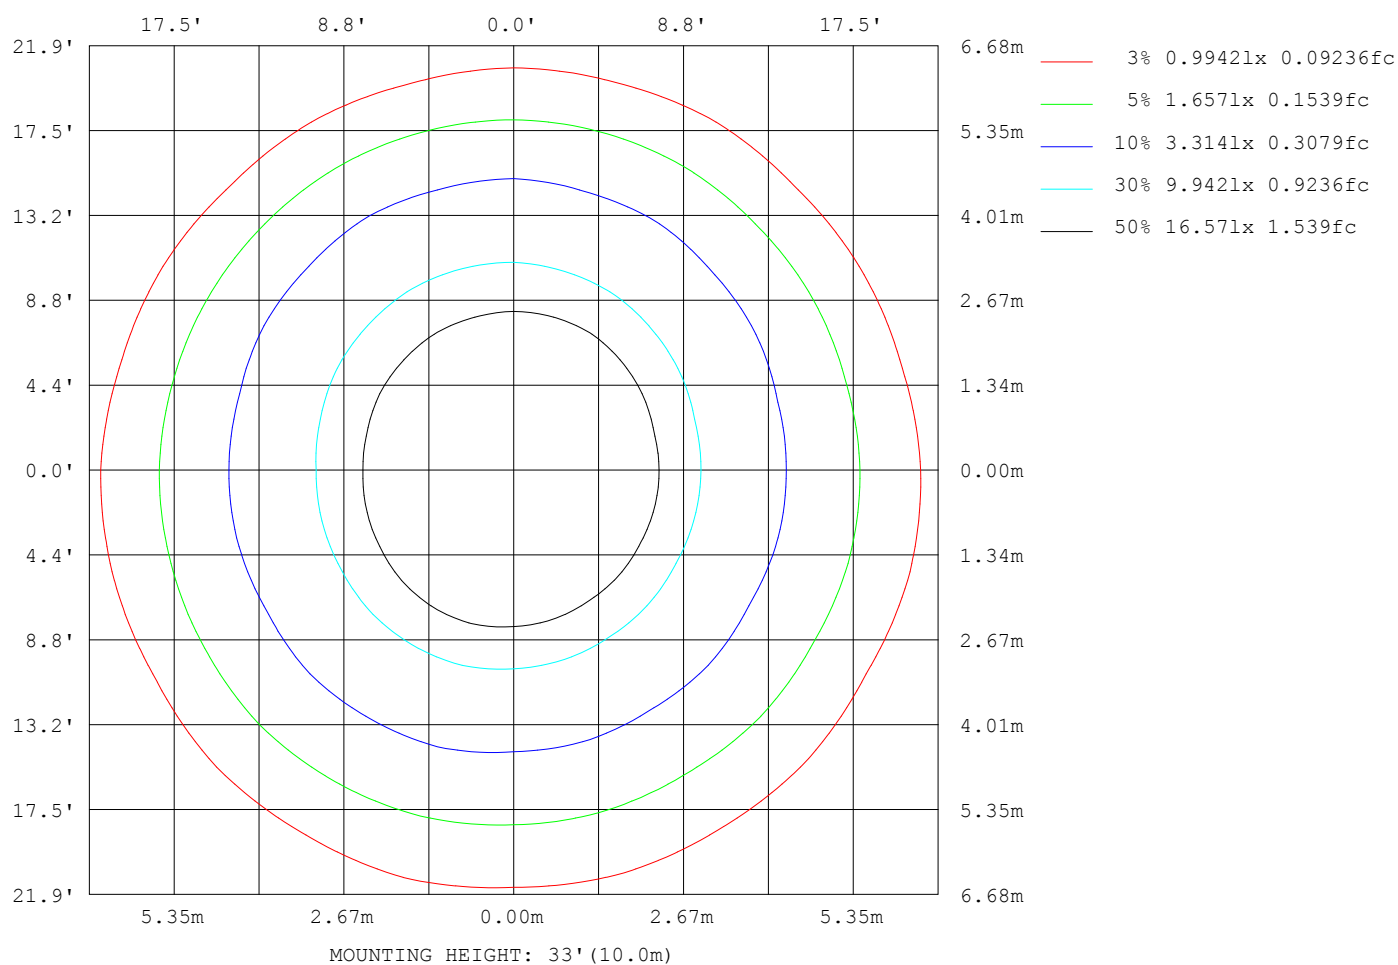

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: 10.0deg/s
Temperature: 25.3°C
Operators:
Test Date: 2024-08-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.463
Humidity: 65.0%
Test Distance: 9.000m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.08V I:0.2039A P:18.500W PF:0.4123 Freq:50.00Hz Lamp Flux:1065.51x1 lm		
NAME: MG-G18W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	5123
L_0~180 (75) av	1952
L_0~180 (85) av	145
L_90~270 (65) av	4161
L_90~270 (75) av	1604
L_90~270 (85) av	137
L_45 (65) av	4241
L_45 (75) av	1439
L_45 (85) av	140

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: 10.0deg/s
Temperature:25.3℃
Operators:
Test Date:2024-08-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.463
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

Planar Illuminance Curve

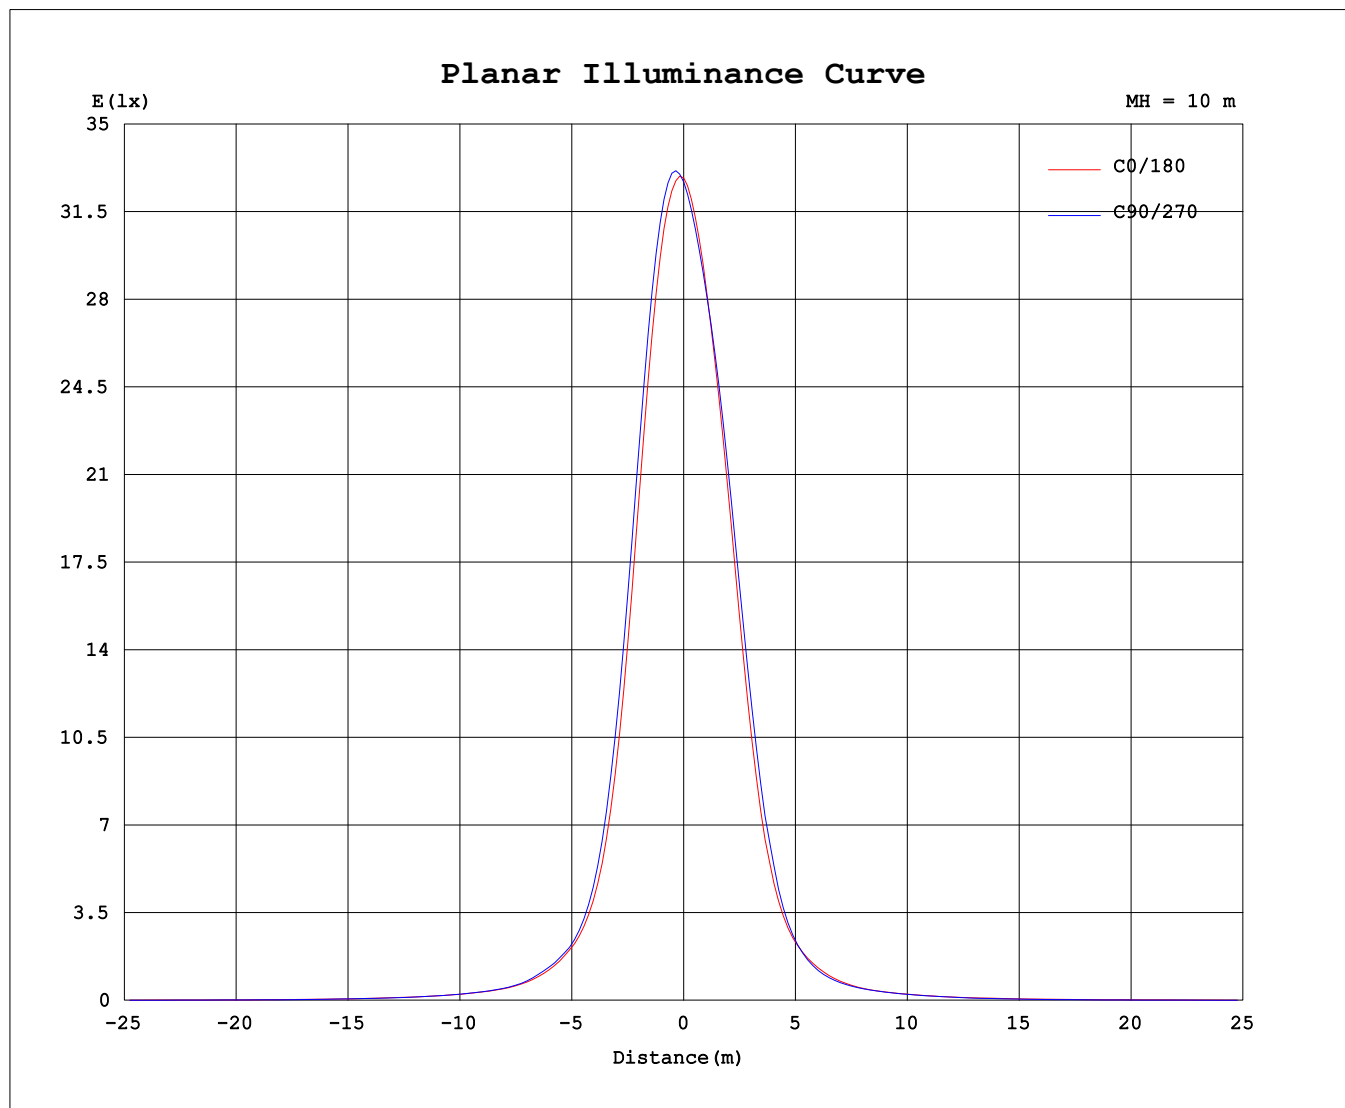

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: 10.0deg/s
Temperature: 25.3°C
Operators:
Test Date: 2024-08-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.463
Humidity: 65.0%
Test Distance: 9.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

UNIT: cd

[illegible]

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.463
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

```

LUMINOUS DISTRIBUTION INTENSITY DATA

UNIT: cd

[illegible]

```

Range: 0 - 90DEG
Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.463
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

```