
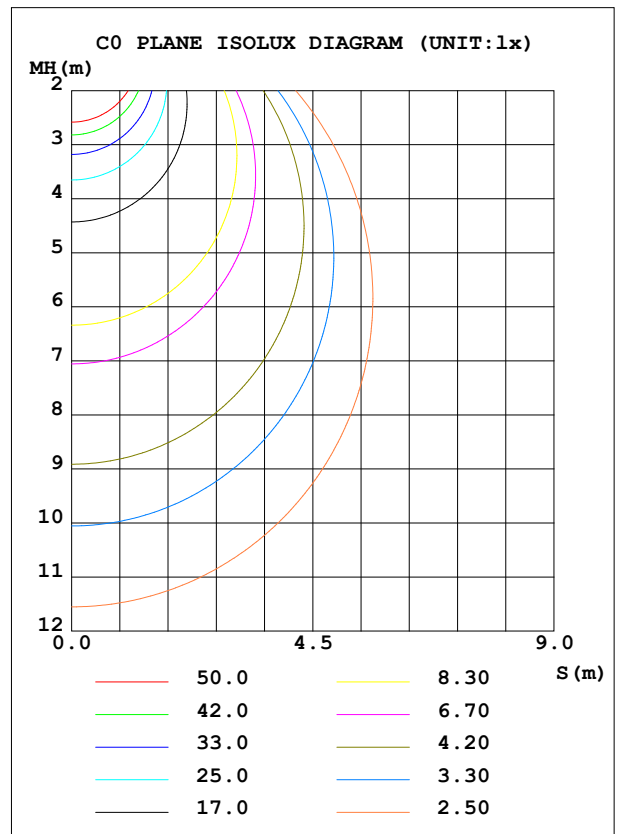


LUMINAIRE PHOTOMETRIC TEST REPORT

| | | |
|---|-------|------------------|
| Test:U:220.09V I:0.2260A P:20.728W PF:0.4168 Freq:50.00Hz Lamp Flux:969.284x1 lm | | |
| NAME: 6708 | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: NORDECOR | SUR.: | Shielding Angle: |

| DATA OF LAMP | | PHOTOMETRIC DATA | | | |
|-------------------|---------|------------------|--------|---------------------|-----------|
| MODEL | | Imax (cd) | 333.6 | S/MH (C0/180) | 1.26 |
| NOMINAL POWER (W) | -- | LOR (%) | 100.0 | S/MH (C90/270) | 1.29 |
| RATED VOLTAGE (V) | -- | TOTAL FLUX (lm) | 969.28 | η UP, DN (C0-180) | 0.0, 48.6 |
| NOMINAL FLUX (lm) | 969.284 | CIE CLASS | DIRECT | η UP, DN (C180-360) | 0.0, 51.4 |
| LAMPS INSIDE | 1 | η up (%) | 0.0 | CIBSE SHR NOM | 1.25 |
| TEST VOLTAGE (V) | -- | η down (%) | 100.0 | CIBSE SHR MAX | 1.35 |

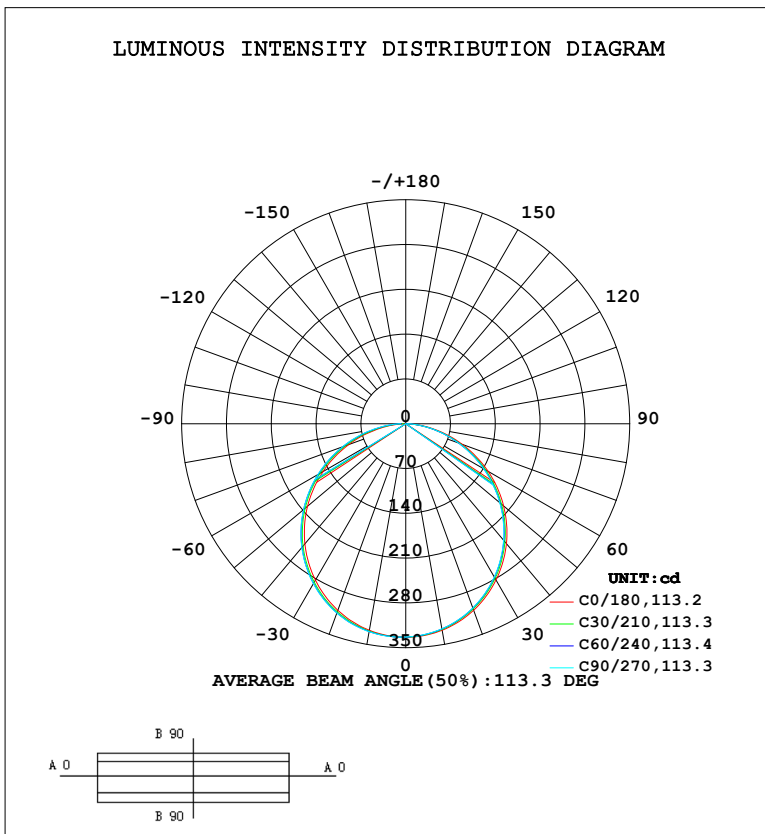

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: 10.0deg/s
 Temperature: 25.3°C
 Operators:
 Test Date: 2024-08-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.463
 Humidity: 65.0%
 Test Distance: 9.000m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

| γ | C0 | C45 | C90 | C135 | C180 | C225 | C270 | C315 | γ | Φ zone | Φ total | %lum, lamp |
|-----|-----------------------|-------|-------|-------|--------|-------|-------|-------|---------|---------|---------|------------|
| 10 | 327.6 | 326.2 | 325.5 | 326.2 | 327.7 | 329.2 | 329.9 | 328.7 | 0- 10 | 31.54 | 31.54 | 3.25,3.25 |
| 20 | 310.1 | 307.7 | 306.3 | 308.0 | 310.3 | 313.3 | 314.8 | 312.6 | 10- 20 | 90.42 | 122.0 | 12.6,12.6 |
| 30 | 282.0 | 278.7 | 276.6 | 279.2 | 282.3 | 286.7 | 288.6 | 285.7 | 20- 30 | 137.2 | 259.1 | 26.7,26.7 |
| 40 | 244.7 | 240.5 | 237.8 | 241.3 | 245.1 | 250.2 | 252.6 | 249.1 | 30- 40 | 165.7 | 424.8 | 43.8,43.8 |
| 50 | 199.6 | 194.6 | 191.7 | 195.8 | 200.2 | 206.0 | 208.5 | 204.5 | 40- 50 | 172.4 | 597.2 | 61.6,61.6 |
| 60 | 148.4 | 143.1 | 140.6 | 144.5 | 149.2 | 155.5 | 158.3 | 153.9 | 50- 60 | 156.6 | 753.8 | 77.8,77.8 |
| 70 | 93.88 | 89.12 | 87.50 | 90.71 | 94.60 | 101.6 | 105.0 | 100.0 | 60- 70 | 121.1 | 874.9 | 90.3,90.3 |
| 80 | 40.99 | 36.39 | 36.97 | 37.94 | 40.58 | 48.60 | 51.32 | 47.16 | 70- 80 | 72.29 | 947.2 | 97.7,97.7 |
| 90 | 0.5468 | 1.130 | 2.061 | 1.599 | 0.6652 | 5.079 | 7.957 | 4.372 | 80- 90 | 22.12 | 969.3 | 100,100 |
| 100 | | | | | | | | | 90-100 | | | |
| 110 | | | | | | | | | 100-110 | | | |
| 120 | | | | | | | | | 110-120 | | | |
| 130 | | | | | | | | | 120-130 | | | |
| 140 | | | | | | | | | 130-140 | | | |
| 150 | | | | | | | | | 140-150 | | | |
| 160 | | | | | | | | | 150-160 | | | |
| 170 | | | | | | | | | 160-170 | | | |
| 180 | | | | | | | | | 170-180 | | | |
| DEG | LUMINOUS INTENSITY:cd | | | | | | | | | UNIT:lm | | |

Conical surface Flux(90deg): 511.61 lm

%lum = 52.8%

%lamp = 52.8%

Conical surface Flux(120deg): 753.79 lm


%lum = 77.8%

%lamp = 77.8%

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: 10.0deg/s
 Temperature:25.3°C
 Operators:
 Test Date:2024-08-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.463
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

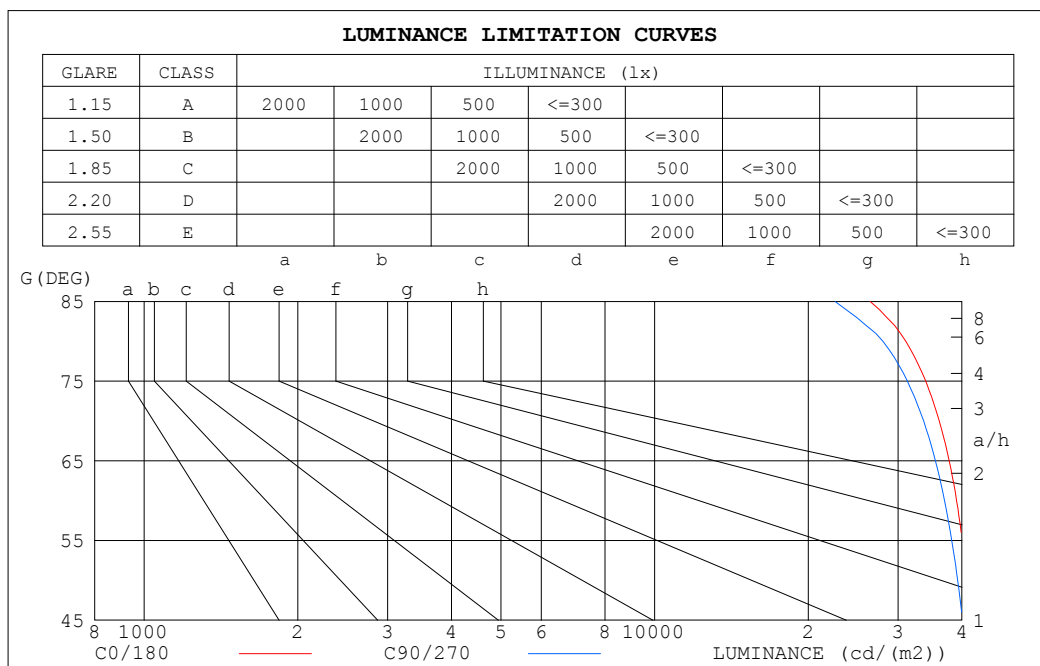


| LUMINANCE cd/(m2) | | |
|-------------------|--------|---------|
| G (DEG) | C0/180 | C90/270 |
| 85 | 26454 | 22585 |
| 80 | 31058 | 28011 |
| 75 | 33979 | 31272 |
| 70 | 36115 | 33663 |
| 65 | 37761 | 35490 |
| 60 | 39048 | 36989 |
| 55 | 40051 | 38207 |
| 50 | 40857 | 39250 |
| 45 | 41495 | 40112 |

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: 10.0deg/s
 Temperature: 25.3°C
 Operators:
 Test Date: 2024-08-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.463
 Humidity: 65.0%
 Test Distance: 9.000m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

| | | | | | | | | | | | | | | | | |
|-------------|-----------------------|------|------|------|------|------|---------------------------------|------|------|------|------|------|------|------|------|------|
| ρ_{cc} | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
| ρ_w | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| ρ_{fc} | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| RCR | RCR:Room Cavity Ratio | | | | | | Coefficients of Utilization(CU) | | | | | | | | | |
| 0.0 | 1.19 | 1.19 | 1.19 | 1.16 | 1.16 | 1.16 | 1.11 | 1.11 | 1.11 | 1.06 | 1.06 | 1.06 | 1.02 | 1.02 | 1.02 | 1.00 |
| 1.0 | 1.04 | .99 | .95 | 1.01 | .97 | .94 | .97 | .94 | .91 | .93 | .90 | .88 | .89 | .87 | .85 | .83 |
| 2.0 | .90 | .83 | .77 | .88 | .82 | .76 | .84 | .79 | .74 | .81 | .77 | .73 | .78 | .74 | .71 | .69 |
| 3.0 | .79 | .71 | .64 | .77 | .70 | .63 | .74 | .68 | .62 | .71 | .66 | .61 | .69 | .64 | .60 | .58 |
| 4.0 | .70 | .61 | .54 | .68 | .60 | .54 | .66 | .59 | .53 | .64 | .57 | .52 | .61 | .56 | .51 | .49 |
| 5.0 | .62 | .53 | .46 | .61 | .53 | .46 | .59 | .51 | .46 | .57 | .50 | .45 | .55 | .49 | .45 | .42 |
| 6.0 | .56 | .47 | .40 | .55 | .46 | .40 | .53 | .46 | .40 | .52 | .45 | .40 | .50 | .44 | .39 | .37 |
| 7.0 | .51 | .42 | .36 | .50 | .41 | .36 | .48 | .41 | .35 | .47 | .40 | .35 | .46 | .39 | .35 | .33 |
| 8.0 | .46 | .38 | .32 | .46 | .37 | .32 | .44 | .37 | .31 | .43 | .36 | .31 | .42 | .36 | .31 | .29 |
| 9.0 | .42 | .34 | .29 | .42 | .34 | .28 | .41 | .33 | .28 | .40 | .33 | .28 | .39 | .32 | .28 | .26 |
| 10.0 | .39 | .31 | .26 | .39 | .31 | .26 | .38 | .31 | .26 | .37 | .30 | .26 | .36 | .30 | .25 | .24 |

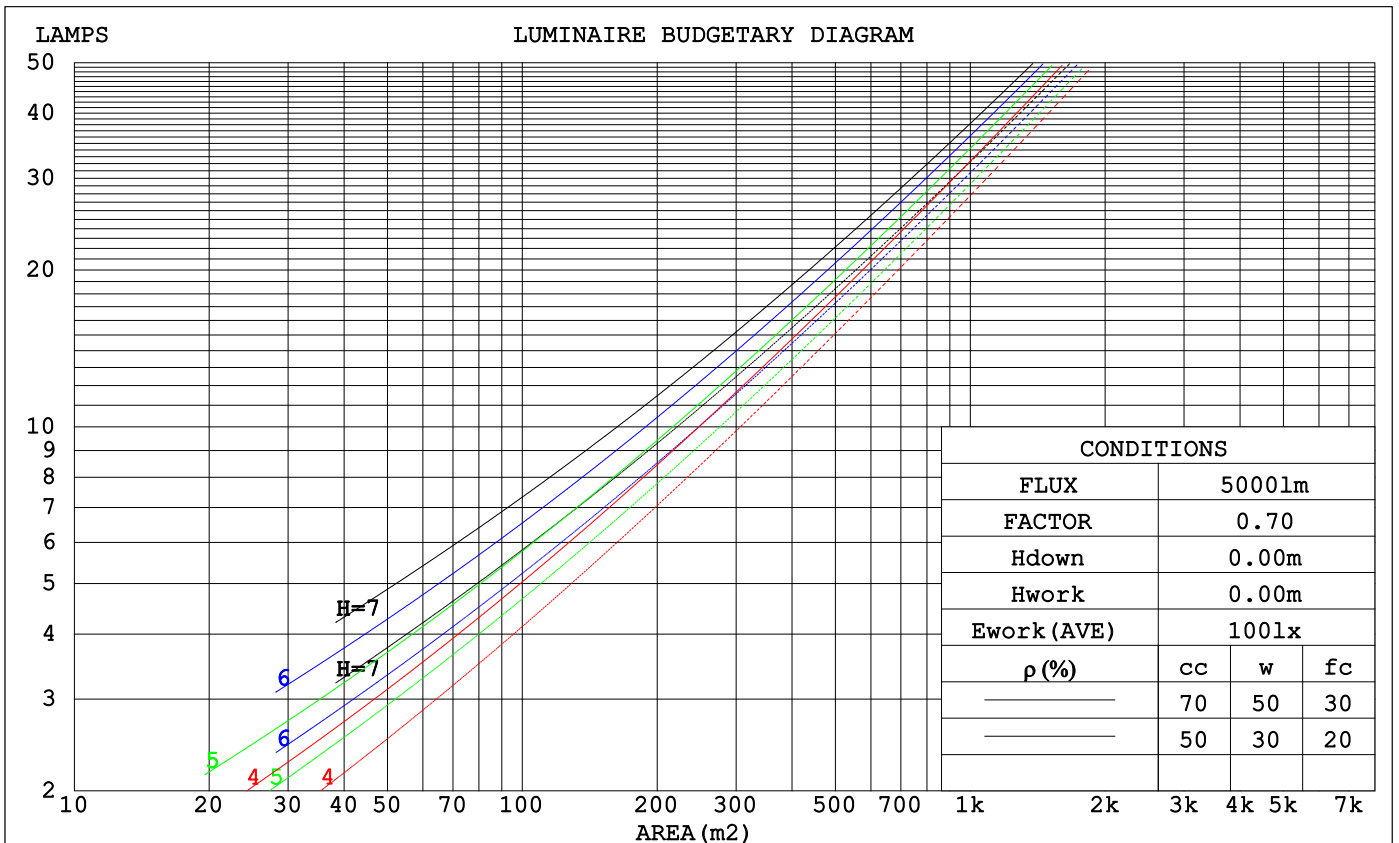

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: 10.0deg/s
 Temperature: 25.3°C
 Operators:
 Test Date: 2024-08-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.463
 Humidity: 65.0%
 Test Distance: 9.000m [K=1.0000]
 Remarks:

WEC AND CCEC

| pcc | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
|------|-----------------------|------|------|------|------|------|---------------------------------|------|------|------|------|------|------|------|------|---|
| pw | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| pfC | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| RCR | RCR:Room Cavity Ratio | | | | | | Wall Exitance Coefficients(WEC) | | | | | | | | | |
| 0.0 | | | | | | | | | | | | | | | | |
| 1.0 | .317 | .180 | .057 | .310 | .177 | .056 | .296 | .170 | .054 | .284 | .164 | .053 | .273 | .158 | .051 | |
| 2.0 | .296 | .162 | .050 | .290 | .160 | .049 | .278 | .155 | .048 | .267 | .150 | .047 | .257 | .146 | .046 | |
| 3.0 | .273 | .145 | .044 | .268 | .143 | .043 | .257 | .139 | .042 | .248 | .136 | .042 | .239 | .132 | .041 | |
| 4.0 | .252 | .131 | .038 | .247 | .129 | .038 | .238 | .126 | .038 | .229 | .123 | .037 | .221 | .120 | .037 | |
| 5.0 | .232 | .118 | .034 | .228 | .117 | .034 | .220 | .114 | .034 | .212 | .112 | .033 | .205 | .110 | .033 | |
| 6.0 | .215 | .108 | .031 | .211 | .107 | .031 | .204 | .105 | .030 | .197 | .102 | .030 | .191 | .100 | .030 | |
| 7.0 | .200 | .099 | .028 | .197 | .098 | .028 | .190 | .096 | .028 | .184 | .094 | .027 | .178 | .093 | .027 | |
| 8.0 | .187 | .091 | .026 | .184 | .090 | .026 | .178 | .089 | .025 | .172 | .087 | .025 | .167 | .086 | .025 | |
| 9.0 | .175 | .085 | .024 | .172 | .084 | .024 | .167 | .083 | .023 | .162 | .081 | .023 | .157 | .080 | .023 | |
| 10.0 | .164 | .079 | .022 | .162 | .078 | .022 | .157 | .077 | .022 | .153 | .076 | .022 | .149 | .075 | .021 | |

| pcc | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
|------|-----------------------|------|------|------|------|------|--|------|------|------|------|------|------|------|------|---|
| pw | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| pfC | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| RCR | RCR:Room Cavity Ratio | | | | | | Ceiling Cavity Exitance Coefficients(CCEC) | | | | | | | | | |
| 0.0 | .190 | .190 | .190 | .163 | .163 | .163 | .111 | .111 | .111 | .064 | .064 | .064 | .020 | .020 | .020 | |
| 1.0 | .181 | .156 | .134 | .155 | .134 | .115 | .106 | .092 | .080 | .061 | .053 | .046 | .020 | .017 | .015 | |
| 2.0 | .173 | .132 | .097 | .148 | .114 | .084 | .101 | .079 | .059 | .059 | .046 | .034 | .019 | .015 | .011 | |
| 3.0 | .165 | .114 | .074 | .142 | .099 | .064 | .097 | .069 | .045 | .056 | .040 | .026 | .018 | .013 | .009 | |
| 4.0 | .157 | .101 | .058 | .135 | .087 | .050 | .093 | .061 | .035 | .054 | .036 | .021 | .017 | .012 | .007 | |
| 5.0 | .150 | .091 | .047 | .129 | .078 | .041 | .089 | .055 | .029 | .051 | .032 | .017 | .017 | .010 | .006 | |
| 6.0 | .143 | .082 | .039 | .123 | .071 | .034 | .085 | .050 | .024 | .049 | .029 | .014 | .016 | .010 | .005 | |
| 7.0 | .136 | .075 | .033 | .117 | .065 | .029 | .081 | .046 | .020 | .047 | .027 | .012 | .015 | .009 | .004 | |
| 8.0 | .129 | .070 | .029 | .111 | .060 | .025 | .077 | .042 | .018 | .045 | .025 | .011 | .015 | .008 | .003 | |
| 9.0 | .123 | .065 | .025 | .106 | .056 | .022 | .074 | .039 | .016 | .043 | .023 | .009 | .014 | .008 | .003 | |
| 10.0 | .118 | .060 | .022 | .101 | .052 | .019 | .070 | .037 | .014 | .041 | .022 | .008 | .013 | .007 | .003 | |

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: 10.0deg/s
 Temperature:25.3°C
 Operators:
 Test Date:2024-08-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.463
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

| | | | | | | | | | | |
|-----------------|------------------|------|------|------|------|----------------|------|------|------|------|
| ceiling/cavity | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 |
| walls | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 |
| working plane | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 |
| Room dimensions | Viewed crosswise | | | | | Viewed endwise | | | | |
| x = 2H y = 2H | 25.6 | 27.1 | 25.9 | 27.3 | 27.5 | 25.4 | 26.9 | 25.7 | 27.1 | 27.3 |
| 3H | 27.1 | 28.6 | 27.4 | 28.8 | 29.0 | 26.9 | 28.3 | 27.2 | 28.5 | 28.8 |
| 4H | 27.8 | 29.1 | 28.1 | 29.4 | 29.6 | 27.5 | 28.8 | 27.8 | 29.1 | 29.3 |
| 6H | 28.2 | 29.5 | 28.6 | 29.8 | 30.1 | 27.9 | 29.2 | 28.2 | 29.4 | 29.7 |
| 8H | 28.4 | 29.6 | 28.7 | 29.9 | 30.2 | 28.0 | 29.3 | 28.4 | 29.5 | 29.8 |
| 12H | 28.5 | 29.7 | 28.8 | 30.0 | 30.3 | 28.1 | 29.3 | 28.4 | 29.6 | 29.9 |
| 4H 2H | 26.2 | 27.5 | 26.5 | 27.8 | 28.0 | 26.0 | 27.4 | 26.3 | 27.6 | 27.9 |
| 3H | 27.9 | 29.1 | 28.2 | 29.4 | 29.7 | 27.7 | 28.9 | 28.0 | 29.2 | 29.5 |
| 4H | 28.6 | 29.7 | 29.0 | 30.1 | 30.4 | 28.4 | 29.5 | 28.8 | 29.8 | 30.1 |
| 6H | 29.2 | 30.2 | 29.6 | 30.5 | 30.9 | 28.9 | 29.9 | 29.3 | 30.3 | 30.6 |
| 8H | 29.4 | 30.3 | 29.8 | 30.7 | 31.1 | 29.1 | 30.0 | 29.5 | 30.4 | 30.8 |
| 12H | 29.6 | 30.4 | 30.0 | 30.8 | 31.2 | 29.2 | 30.0 | 29.6 | 30.4 | 30.8 |
| 8H 4H | 28.9 | 29.8 | 29.3 | 30.2 | 30.5 | 28.7 | 29.6 | 29.1 | 29.9 | 30.3 |
| 6H | 29.6 | 30.4 | 30.0 | 30.8 | 31.2 | 29.3 | 30.1 | 29.8 | 30.5 | 30.9 |
| 8H | 29.9 | 30.5 | 30.3 | 31.0 | 31.4 | 29.6 | 30.3 | 30.1 | 30.7 | 31.1 |
| 12H | 30.1 | 30.7 | 30.6 | 31.1 | 31.6 | 29.8 | 30.3 | 30.2 | 30.8 | 31.3 |
| 12H 4H | 28.9 | 29.7 | 29.3 | 30.1 | 30.5 | 28.7 | 29.5 | 29.1 | 29.9 | 30.3 |
| 6H | 29.7 | 30.3 | 30.1 | 30.7 | 31.2 | 29.4 | 30.1 | 29.9 | 30.5 | 30.9 |
| 8H | 30.0 | 30.5 | 30.4 | 31.0 | 31.5 | 29.7 | 30.3 | 30.2 | 30.7 | 31.2 |

Variations with the observer position at spacings(CIE Pub.117):

| | | |
|----------|---------------|---------------|
| S = 1.0H | + 0.1 / - 0.2 | + 0.2 / - 0.2 |
| 1.5H | + 0.2 / - 0.3 | + 0.2 / - 0.3 |
| 2.0H | + 0.2 / - 0.2 | + 0.2 / - 0.3 |

CIE Pub.117, 969.3 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -0.1)
 Area: 0.0076 m2

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: 10.0deg/s
 Temperature:25.3°C
 Operators:
 Test Date:2024-08-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.463
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:


UTILIZATION FACTORS TABLE

| REFLECTANCE | | | | | | | | | | |
|----------------------------------|--|-----|-----------|-----|-----|-----|---------------|-----|-----|--------|
| Ceiling | 0.8 | 0.8 | 0.8 | 0.7 | 0.7 | 0.7 | 0.5 | 0.5 | 0.5 | 0 |
| Walls | 0.7 | 0.5 | 0.3 | 0.7 | 0.5 | 0.3 | 0.7 | 0.5 | 0.3 | 0 |
| Working plane | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0 |
| ROOM INDEX | UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$ | | | | | | | | | |
| $k = 0.60$ | 57 | 45 | 38 | 56 | 45 | 38 | 55 | 45 | 38 | 32 |
| 0.80 | 67 | 55 | 48 | 66 | 55 | 48 | 64 | 54 | 47 | 40 |
| 1.00 | 75 | 64 | 57 | 74 | 64 | 57 | 72 | 65 | 56 | 49 |
| 1.25 | 83 | 72 | 65 | 81 | 71 | 64 | 78 | 70 | 63 | 56 |
| 1.50 | 88 | 78 | 70 | 86 | 77 | 70 | 83 | 75 | 69 | 61 |
| 2.00 | 95 | 86 | 79 | 93 | 85 | 78 | 89 | 82 | 77 | 69 |
| 2.50 | 98 | 91 | 84 | 96 | 89 | 83 | 93 | 86 | 82 | 73 |
| 3.00 | 102 | 95 | 89 | 100 | 93 | 88 | 96 | 90 | 86 | 77 |
| 4.00 | 106 | 100 | 95 | 104 | 98 | 94 | 99 | 95 | 91 | 82 |
| 5.00 | 108 | 103 | 99 | 106 | 101 | 98 | 101 | 98 | 95 | 85 |
| ROOM INDEX | UF (total) | | | | | | | | | Direct |
| According to DIN EN 13032-2 2004 | | | Suspended | | | | SHRNOM = 1.25 | | | |

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: 10.0deg/s
 Temperature: 25.3°C
 Operators:
 Test Date: 2024-08-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.463
 Humidity: 65.0%
 Test Distance: 9.000m [K=1.0000]
 Remarks:


ISOCANDELA DIAGRAM

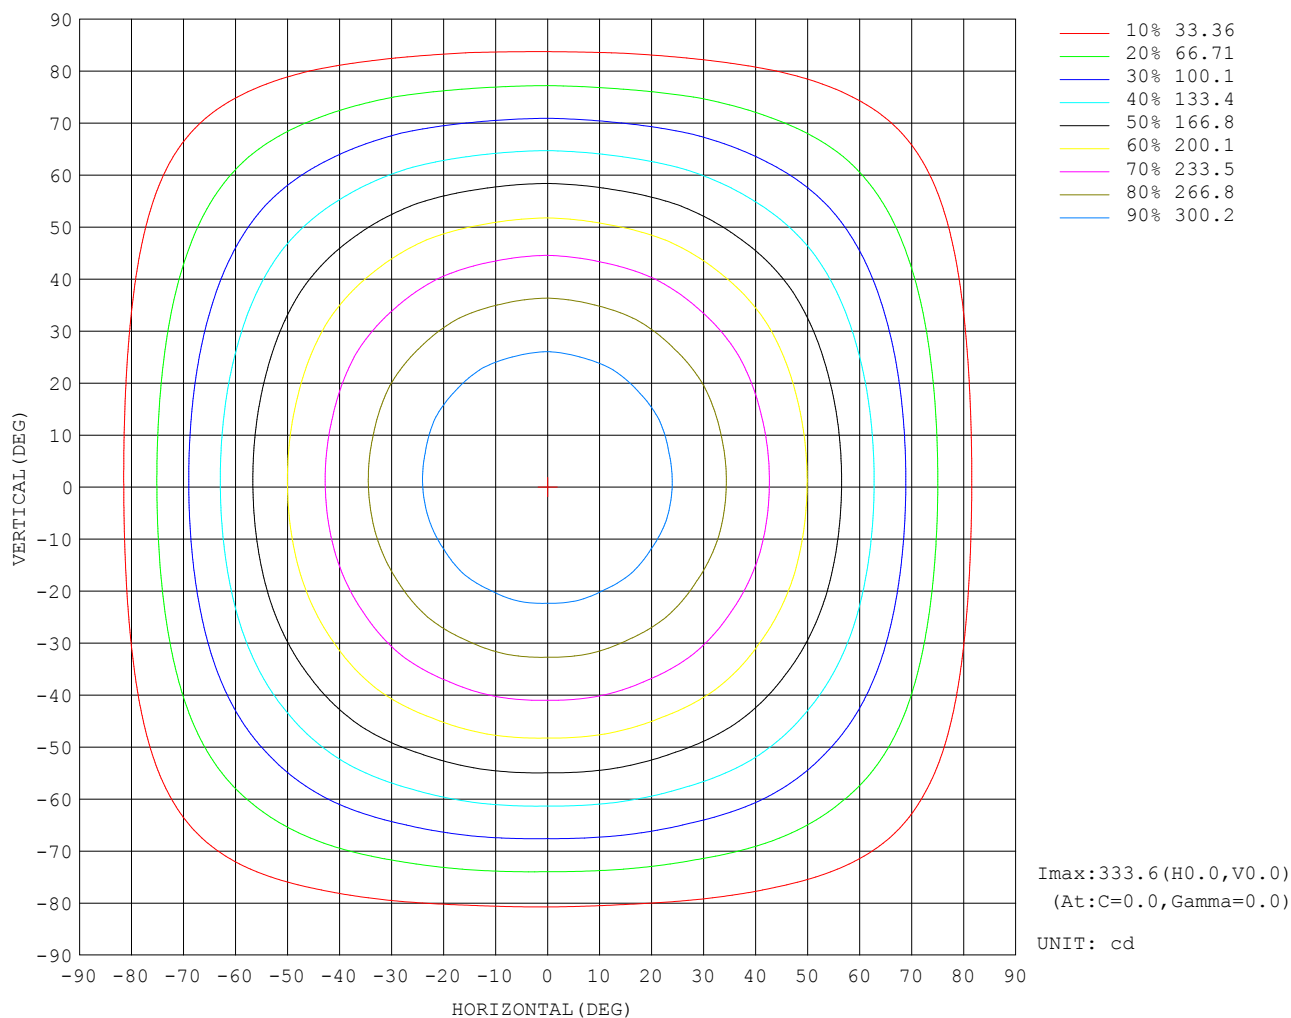

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: 10.0deg/s
 Temperature: 25.3°C
 Operators:
 Test Date: 2024-08-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.463
 Humidity: 65.0%
 Test Distance: 9.000m [K=1.0000]
 Remarks:

AAI Figure

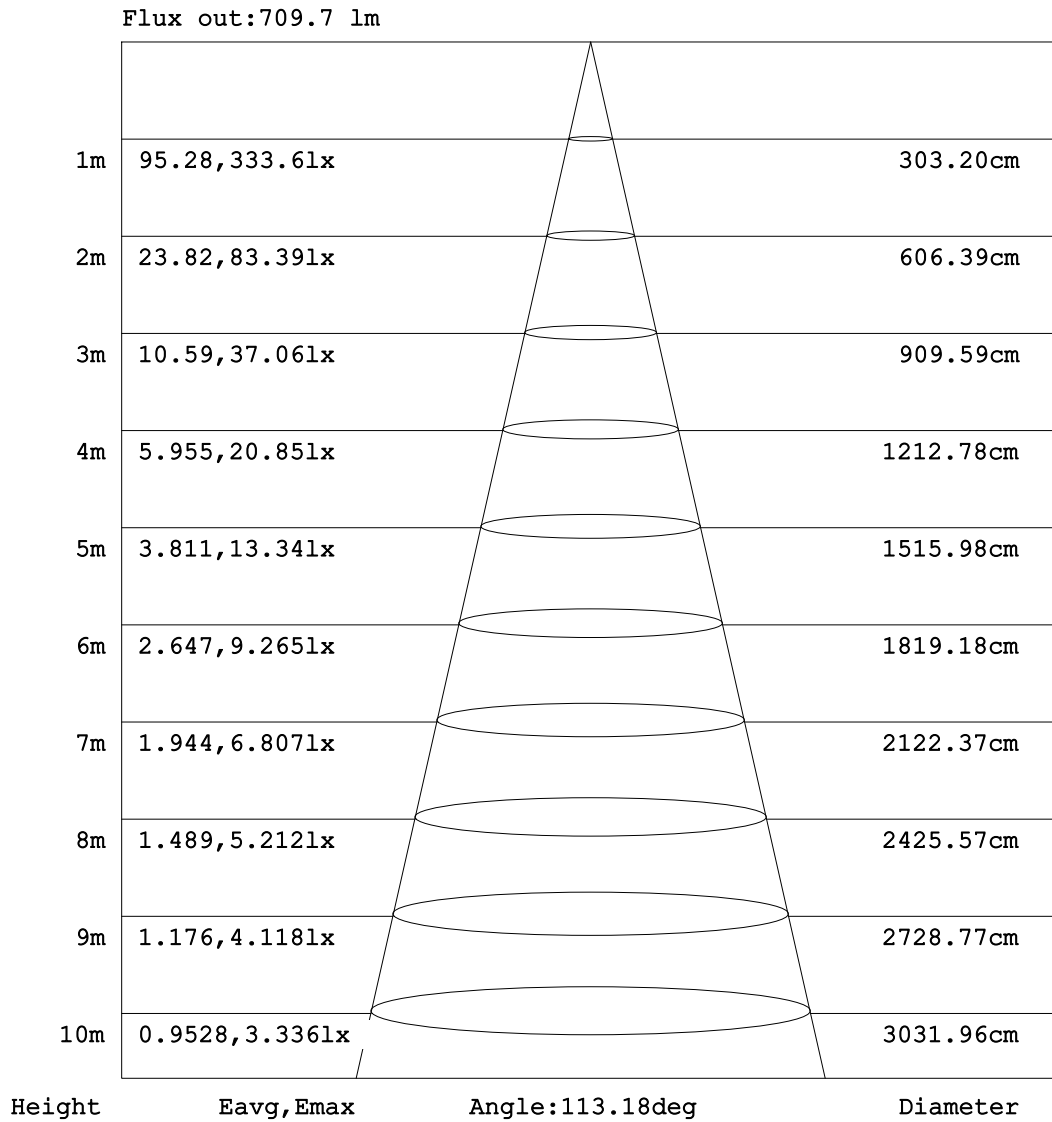


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: 10.0deg/s
 Temperature:25.3°C
 Operators:
 Test Date:2024-08-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.463
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

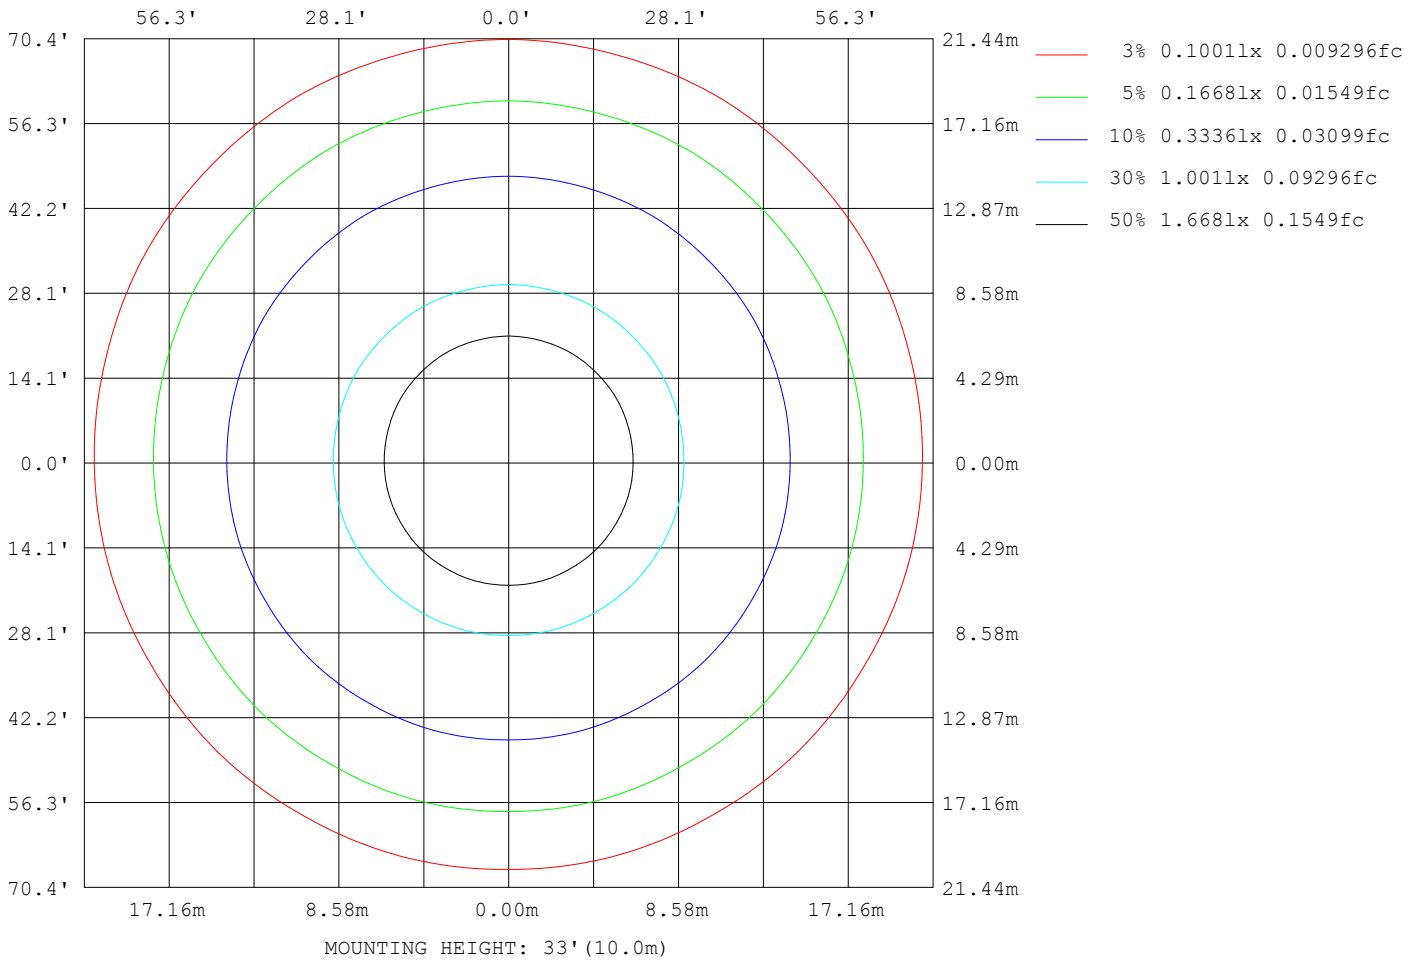

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: 10.0deg/s
 Temperature: 25.3°C
 Operators:
 Test Date: 2024-08-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.463
 Humidity: 65.0%
 Test Distance: 9.000m [K=1.0000]
 Remarks:

LED Avg.L Report

| | | |
|---|-------|------------------|
| Test:U:220.09V I:0.2260A P:20.728W PF:0.4168 Freq:50.00Hz Lamp Flux:969.284x1 lm | | |
| NAME: MG-F18W | TYPE: | WEIGHT: |
| SPEC.: | DIM.: | SERIAL No.: |
| MFR.: | SUR.: | Shielding Angle: |


| AvgL | cd/m2 |
|------------------|-------|
| L_0~180 (65) av | 37881 |
| L_0~180 (75) av | 34144 |
| L_0~180 (85) av | 26400 |
| L_90~270 (65) av | 38262 |
| L_90~270 (75) av | 35534 |
| L_90~270 (85) av | 32027 |
| L_45 (65) av | 38123 |
| L_45 (75) av | 34717 |
| L_45 (85) av | 28936 |

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: 10.0deg/s
Temperature:25.3°C
Operators:
Test Date:2024-08-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.463
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

Planar Illuminance Curve

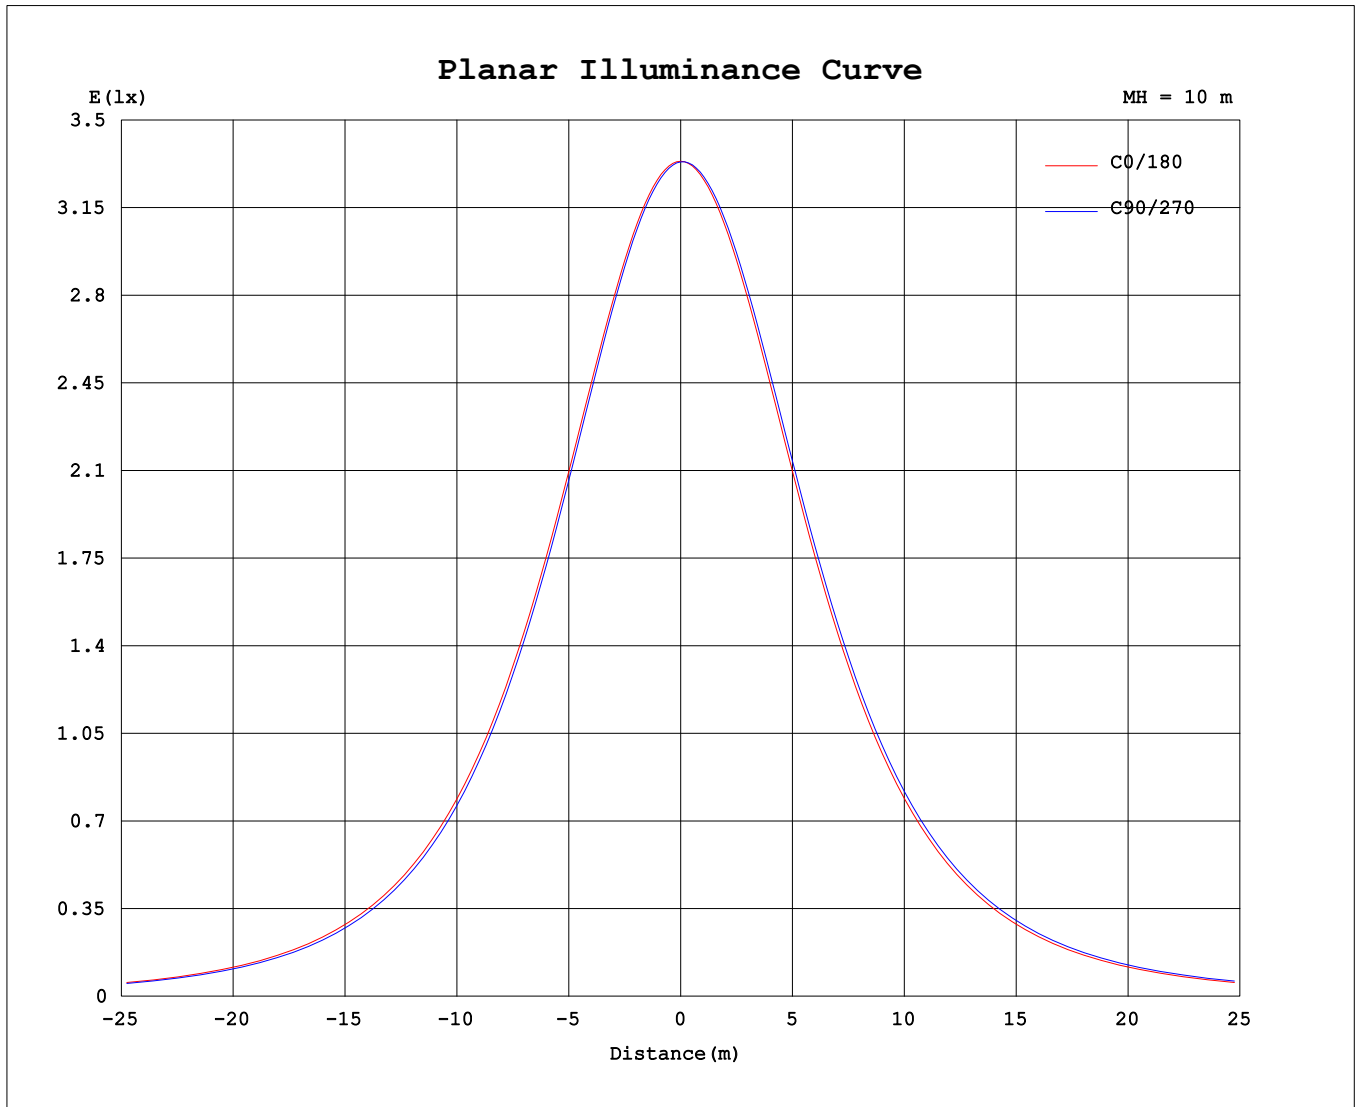

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: 10.0deg/s
Temperature: 25.3°C
Operators:
Test Date: 2024-08-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.463
Humidity: 65.0%
Test Distance: 9.000m [K=1.0000]
Remarks:

