


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.33V I:0.0228A P:2.4182W PF:0.4805 Freq:50.00Hz Lamp Flux:115.393x1 lm		
NAME: 6780-2W-4000K	TYPE:室内	WEIGHT:
SPEC.:	DIM.: 65*65*60mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

DATA OF LAMP		PHOTOMETRIC DATA Eff: 47.72 lm/W			
MODEL		I _{max} (cd)	793.4	S/MH(C0/180)	0.41
NOMINAL POWER(W)	2	LOR(%)	100.0	S/MH(C90/270)	0.28
RATED VOLTAGE(V)	85-265V	TOTAL FLUX(lm)	115.39	h UP, DN(C0-180)	0.0,60.0
NOMINAL FLUX(lm)	115.393	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.0,40.0
LAMPS INSIDE	1	h up(%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	220	h down(%)	100.0	CIBSE SHR MAX	1.00

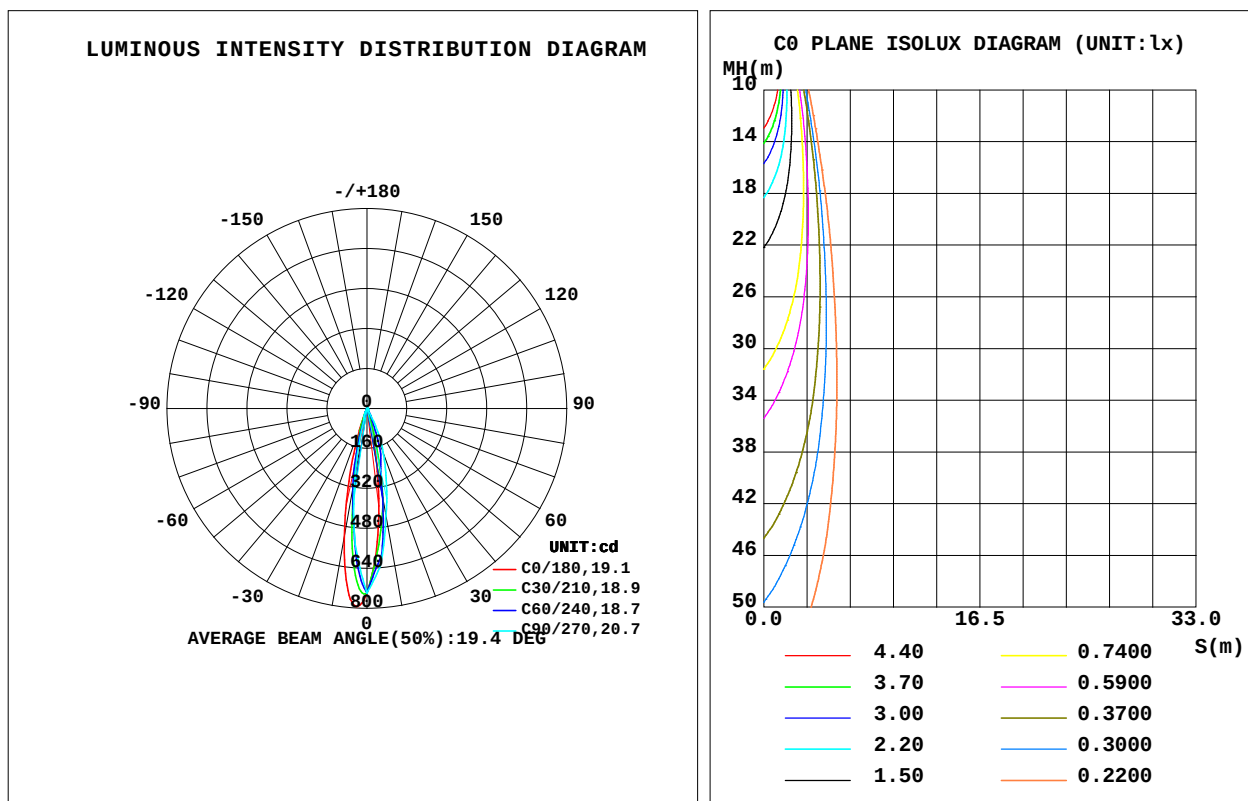

H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-08-11

V(B) Range: -75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.300m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum, lamp
10	230.3	356.2	437.2	411.5	527.9	318.6	279.2	286.6	0- 10	48.19	48.19	41.8, 41.8
20	20.25	79.58	194.3	77.51	80.51	28.20	34.30	21.35	10- 20	45.58	93.77	81.3, 81.3
30	5.345	9.620	10.47	14.31	9.441	7.249	4.526	5.179	20- 30	14.19	108.0	93.6, 93.6
40	2.255	2.938	5.328	3.720	3.243	2.617	2.995	2.083	30- 40	3.122	111.1	96.3, 96.3
50	1.150	1.454	2.308	1.970	1.707	1.604	1.823	1.243	40- 50	1.730	112.8	97.8, 97.8
60	0.6684	0.8107	1.410	1.107	0.9377	0.9404	1.010	0.7004	50- 60	1.121	113.9	98.7, 98.7
70	0.5549	0.5620	0.9159	0.7207	0.6144	0.6118	0.7157	0.5201	60- 70	0.7631	114.7	99.4, 99.4
80	0.5520	0.3823	0	0.4479	0.5517	0.4213	0	0.3787	70- 80	0.5510	115.2	99.9, 99.9
90	0.5233	0	0	0	0.4913	0	0	0	80- 90	0.1463	115.4	100, 100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT: lm		

Conical surface Flux(90deg): 112.06 lm

%lum = 97.1%

%lamp = 97.1%

Conical surface Flux(120deg): 113.93 lm

%lum = 98.7%


%lamp = 98.7%

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2026-08-11

V(B) Range: -75 - 75DEG
 V(B) Interval: 5.0DEG
 Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 7.300m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.33V I:0.0228A P:2.4182W PF:0.4805 Freq:50.00Hz Lamp Flux:115.393x1 lm		
NAME: 6780-2W-4000K	TYPE:室内	WEIGHT:
SPEC.:	DIM.: 65*65*60mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

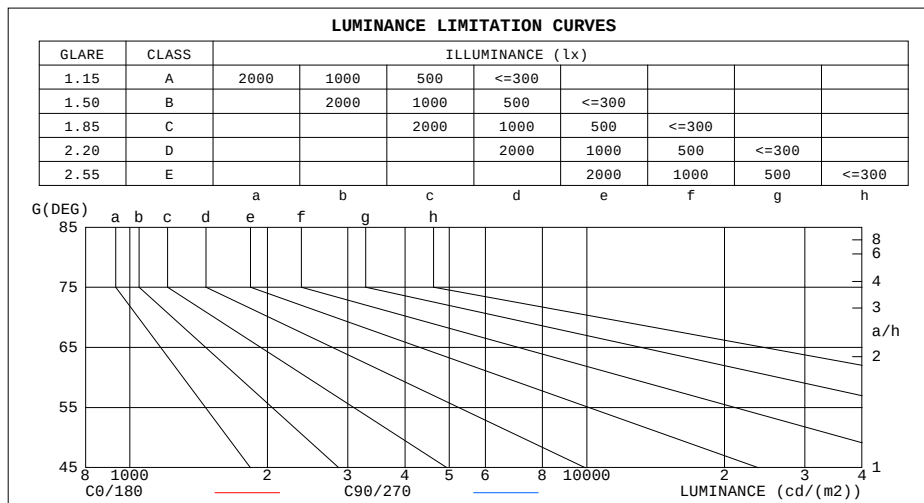

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	64	0
80	32	0
75	21	26
70	16	27
65	13	28
60	13	28
55	15	33
50	18	36
45	23	39


H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-08-11

V(B) Range: -75 - 75DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.300m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.33V I:0.0228A P:2.4182W PF:0.4805 Freq:50.00Hz Lamp Flux:115.393x1 lm		
NAME: 6780-2W-4000K	TYPE:室内	WEIGHT:
SPEC.:	DIM.: 65*65*60mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

r CC	80%			70%			50%			30%			10%			0
r W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.13	1.11	1.09	1.11	1.09	1.07	1.07	1.05	1.04	1.03	1.02	1.01	.99	.99	.98	.96
2.0	1.07	1.04	1.02	1.06	1.03	1.01	1.03	1.01	.99	.99	.98	.97	.97	.96	.95	.93
3.0	1.03	.99	.96	1.02	.98	.96	.99	.97	.94	.97	.95	.93	.95	.93	.91	.90
4.0	.99	.95	.92	.98	.94	.92	.96	.93	.91	.94	.92	.90	.93	.90	.89	.87
5.0	.96	.92	.89	.95	.91	.88	.93	.90	.87	.92	.89	.87	.90	.88	.86	.85
6.0	.93	.89	.86	.92	.88	.85	.91	.87	.85	.89	.86	.84	.88	.86	.84	.83
7.0	.90	.86	.83	.89	.85	.83	.88	.85	.82	.87	.84	.82	.86	.84	.82	.81
8.0	.87	.83	.81	.87	.83	.80	.86	.83	.80	.85	.82	.80	.84	.82	.80	.79
9.0	.85	.81	.78	.85	.81	.78	.84	.80	.78	.83	.80	.78	.82	.80	.78	.77
10.0	.83	.79	.77	.83	.79	.76	.82	.79	.76	.81	.78	.76	.81	.78	.76	.75

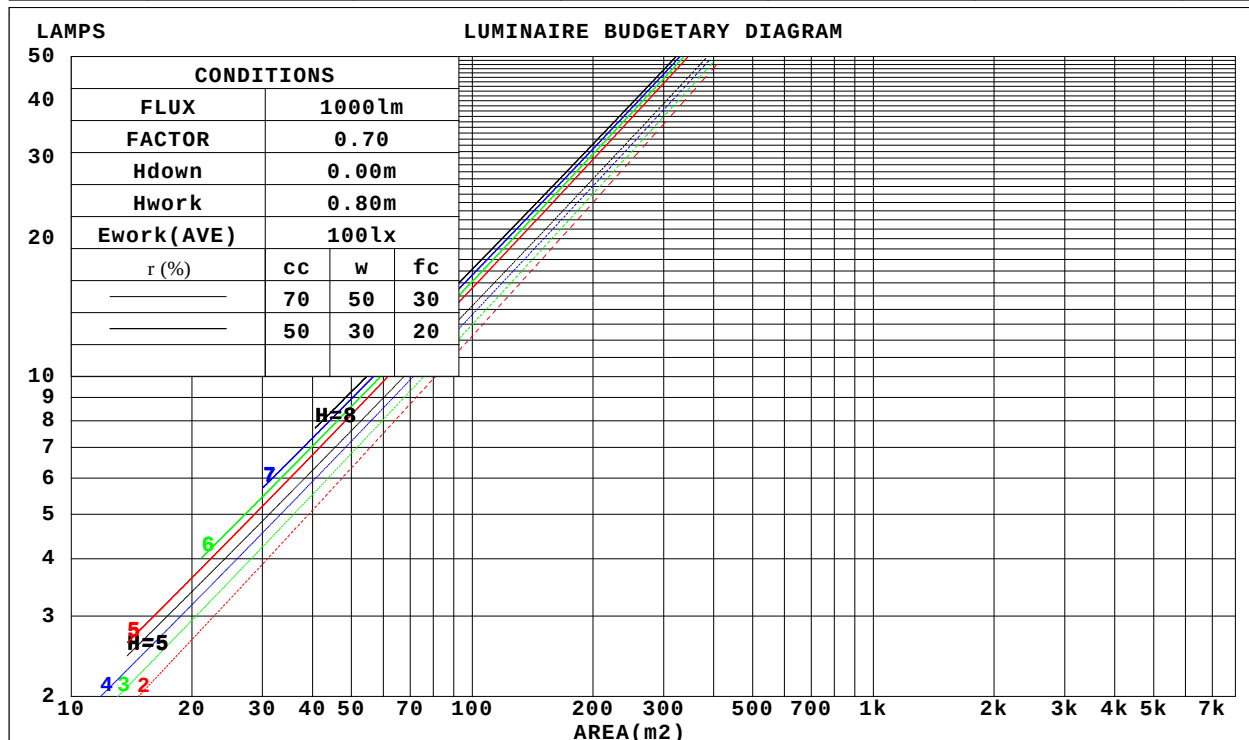

H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-08-11

V(B) Range: -75 - 75DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.300m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:220.33V I:0.0228A P:2.4182W PF:0.4805 Freq:50.00Hz Lamp Flux:115.393x1 lm		
NAME: 6780-2W-4000K	TYPE:室内	WEIGHT:
SPEC.:	DIM.: 65*65*60mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

r c c	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r f c	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)															
0.0																
1.0	.139	.079	.025	.132	.075	.024	.120	.069	.022	.109	.063	.020	.098	.057	.018	
2.0	.128	.070	.022	.123	.068	.021	.112	.062	.019	.103	.058	.018	.094	.053	.017	
3.0	.119	.063	.019	.114	.061	.018	.106	.057	.017	.098	.053	.016	.090	.050	.015	
4.0	.110	.057	.017	.107	.056	.016	.099	.053	.016	.093	.050	.015	.087	.047	.014	
5.0	.103	.053	.015	.100	.051	.015	.094	.049	.014	.088	.047	.014	.083	.044	.013	
6.0	.097	.049	.014	.095	.048	.014	.089	.046	.013	.084	.044	.013	.080	.042	.012	
7.0	.092	.045	.013	.090	.045	.013	.085	.043	.012	.081	.041	.012	.077	.040	.012	
8.0	.087	.043	.012	.085	.042	.012	.081	.041	.012	.077	.039	.011	.074	.038	.011	
9.0	.083	.040	.011	.081	.040	.011	.078	.038	.011	.074	.037	.011	.071	.036	.010	
10.0	.079	.038	.011	.078	.038	.010	.075	.037	.010	.072	.036	.010	.069	.035	.010	

r c c	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r f c	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)															
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.168	.158	.148	.144	.135	.127	.099	.093	.088	.057	.054	.051	.018	.017	.017	
2.0	.150	.133	.118	.129	.114	.102	.088	.079	.071	.051	.046	.042	.016	.015	.014	
3.0	.135	.113	.096	.116	.098	.083	.080	.068	.058	.046	.040	.034	.015	.013	.011	
4.0	.123	.098	.079	.105	.085	.069	.072	.059	.048	.042	.035	.029	.013	.011	.009	
5.0	.112	.086	.066	.096	.074	.057	.066	.052	.041	.038	.030	.024	.012	.010	.008	
6.0	.103	.076	.056	.088	.065	.049	.061	.046	.034	.035	.027	.020	.011	.009	.007	
7.0	.095	.067	.048	.082	.058	.042	.056	.041	.030	.033	.024	.018	.011	.008	.006	
8.0	.088	.060	.041	.076	.052	.036	.053	.037	.026	.031	.022	.015	.010	.007	.005	
9.0	.083	.055	.036	.071	.047	.031	.049	.033	.022	.029	.020	.013	.009	.006	.004	
10.0	.077	.050	.032	.067	.043	.028	.046	.030	.020	.027	.018	.012	.009	.006	.004	

H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-08-11

V(B) Range: -75 - 75DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.300m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.33V I:0.0228A P:2.4182W PF:0.4805 Freq:50.00Hz Lamp Flux:115.393x1 lm											
NAME: 6780-2W-4000K					TYPE:室内			WEIGHT:			
SPEC.:					DIM.: 65*65*60mm			SERIAL No.:01			
MFR.: NORDECOR					SUR.:			Shielding Angle:15°			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise				Viewed endwise					
x = 2H y = 2H	-3.2	-2.5	-3.0	-2.4	-2.3	0.3	0.9	0.5	1.1	1.2	
	3H	-2.1	-1.5	-1.9	-1.4	-1.2	1.4	2.0	1.7	2.2	2.4
	4H	-1.3	-0.7	-1.0	-0.5	-0.3	2.0	2.5	2.2	2.8	3.0
	6H	0.1	0.6	0.3	0.8	1.1	2.0	2.6	2.3	2.8	3.1
	8H	0.9	1.5	1.2	1.7	2.0	2.0	2.5	2.3	2.8	3.0
	12H	2.0	2.5	2.3	2.8	3.1	2.0	2.5	2.3	2.7	3.0
4H	2H	-2.6	-2.1	-2.4	-1.8	-1.6	0.4	0.9	0.6	1.1	1.4
	3H	-1.4	-0.9	-1.1	-0.6	-0.3	1.7	2.2	2.0	2.5	2.8
	4H	-0.3	0.2	0.0	0.5	0.8	2.5	2.9	2.8	3.2	3.5
	6H	1.2	1.6	1.6	2.0	2.3	2.6	3.0	2.9	3.3	3.7
	8H	2.2	2.6	2.6	2.9	3.3	2.5	2.9	2.9	3.3	3.6
	12H	3.4	3.8	3.8	4.1	4.5	2.5	2.8	2.9	3.2	3.6
8H	4H	0.3	0.7	0.6	1.0	1.4	2.6	3.0	3.0	3.4	3.7
	6H	2.1	2.4	2.5	2.8	3.2	2.8	3.1	3.2	3.5	3.9
	8H	3.2	3.5	3.7	3.9	4.4	2.7	3.0	3.2	3.4	3.9
	12H	4.6	4.9	5.1	5.3	5.8	2.7	2.9	3.1	3.3	3.8
12H	4H	0.3	0.6	0.7	1.0	1.4	2.7	3.0	3.1	3.4	3.8
	6H	2.1	2.4	2.5	2.8	3.2	2.8	3.1	3.3	3.5	4.0
	8H	3.3	3.5	3.7	3.9	4.4	2.8	3.0	3.2	3.5	3.9
Variations with the observer position at spacings:											
S = 1.0H	+ 0.3 / - 0.3					+ 0.8 / - 0.6					
1.5H	+ 0.1 / - 0.1					+ 1.9 / - 0.9					
2.0H	+ 0.4 / - 0.3					+ 0.8 / - 1.0					

CIE Pub.117, 115.4 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -7.5)
Area: 0.1 m2

H_(b) Range:-90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-08-11

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.300m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.33V I:0.0228A P:2.4182W PF:0.4805 Freq:50.00Hz Lamp Flux:115.393x1 lm		
NAME: 6780-2W-4000K	TYPE:室内	WEIGHT:
SPEC.:	DIM.: 65*65*60mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	89	83	80	89	83	80	88	83	79	76
0.80	96	91	87	96	91	87	95	90	87	83
1.00	100	95	92	100	95	91	98	94	91	87
1.25	104	99	96	103	99	95	101	97	95	91
1.50	107	102	99	105	101	98	103	100	97	93
2.00	109	105	102	108	104	101	105	102	100	95
2.50	111	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	105	103	97
4.00	114	111	109	112	110	108	108	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

H_b) Range:-90 - 90DEG
H_b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-08-11

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.33V I:0.0228A P:2.4182W PF:0.4805 Freq:50.00Hz Lamp Flux:115.393x1 lm		
NAME: 6780-2W-4000K	TYPE:室内	WEIGHT:
SPEC.:	DIM.: 65*65*60mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

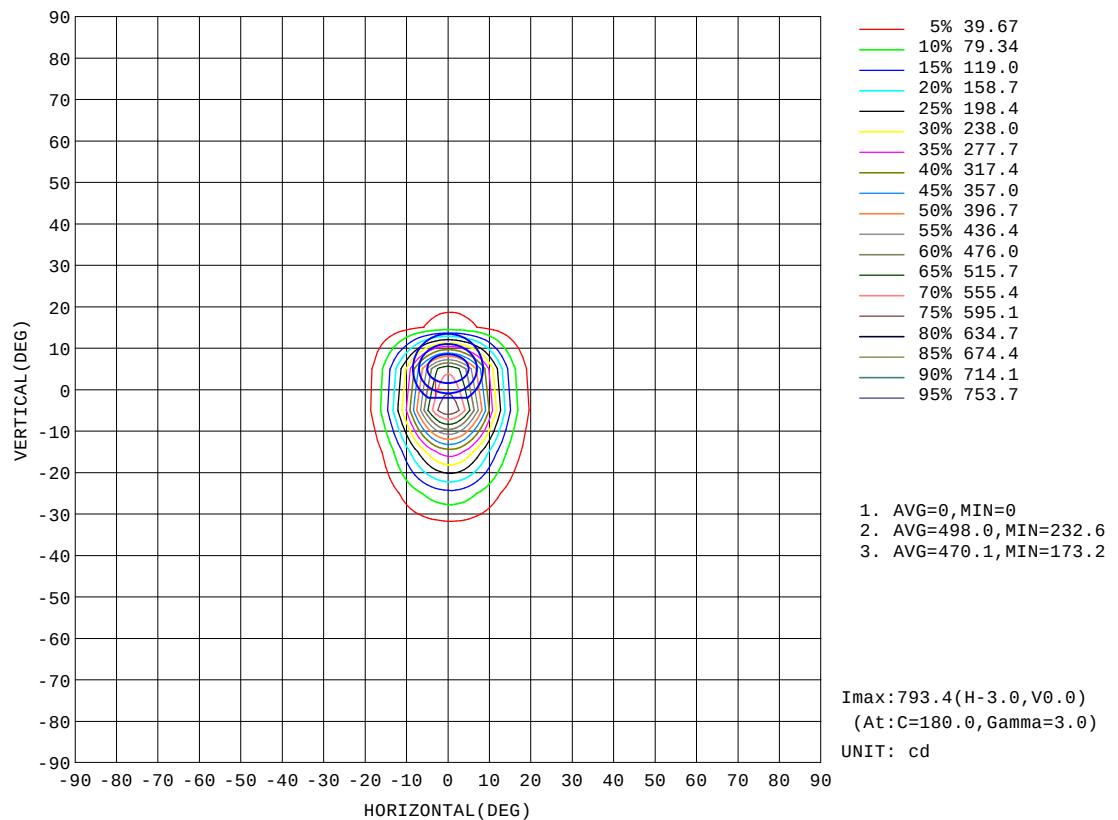


H_(b) Range:-90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-08-11

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.33V I:0.0228A P:2.4182W PF:0.4805 Freq:50.00Hz Lamp Flux:115.393x1 lm		
NAME: 6780-2W-4000K	TYPE:室内	WEIGHT:
SPEC.:	DIM.: 65*65*60mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

Flux out:48.19 lm

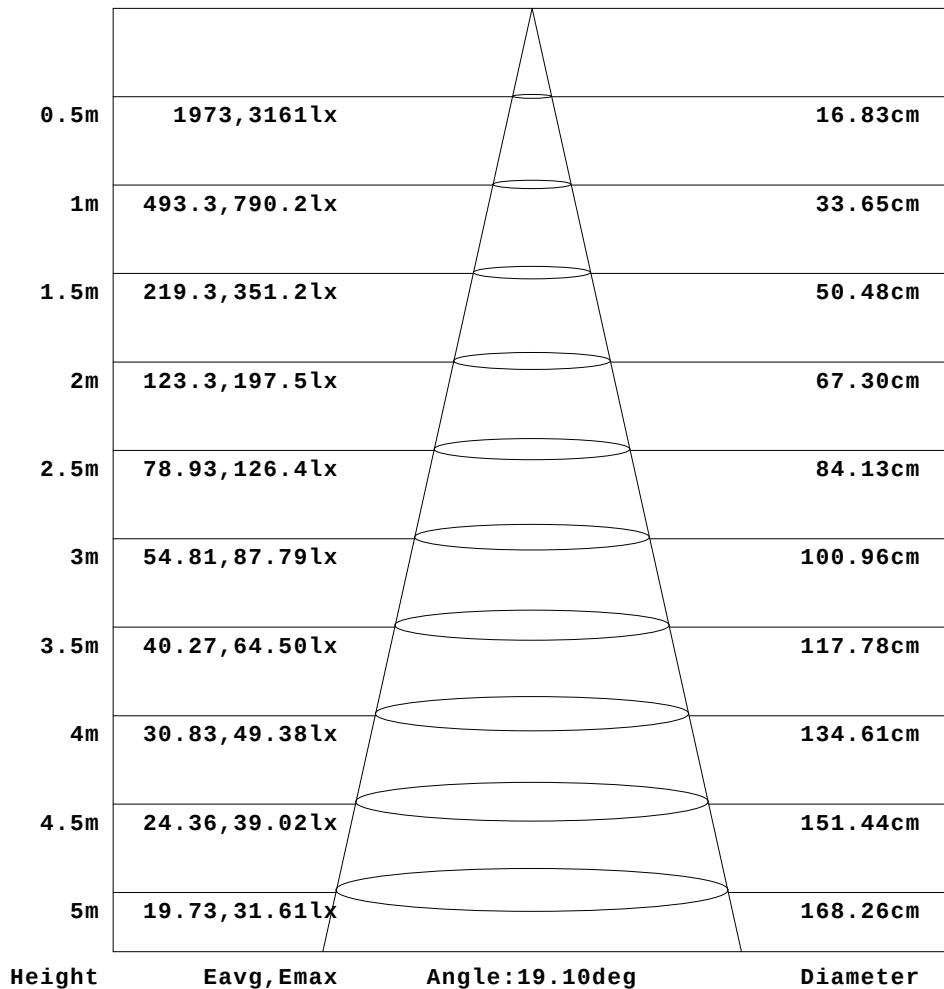


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range:-90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-08-11

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.33V I:0.0228A P:2.4182W PF:0.4805 Freq:50.00Hz Lamp Flux:115.393x1 lm		
NAME: 6780-2W-4000K	TYPE:室内	WEIGHT:
SPEC.:	DIM.: 65*65*60mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

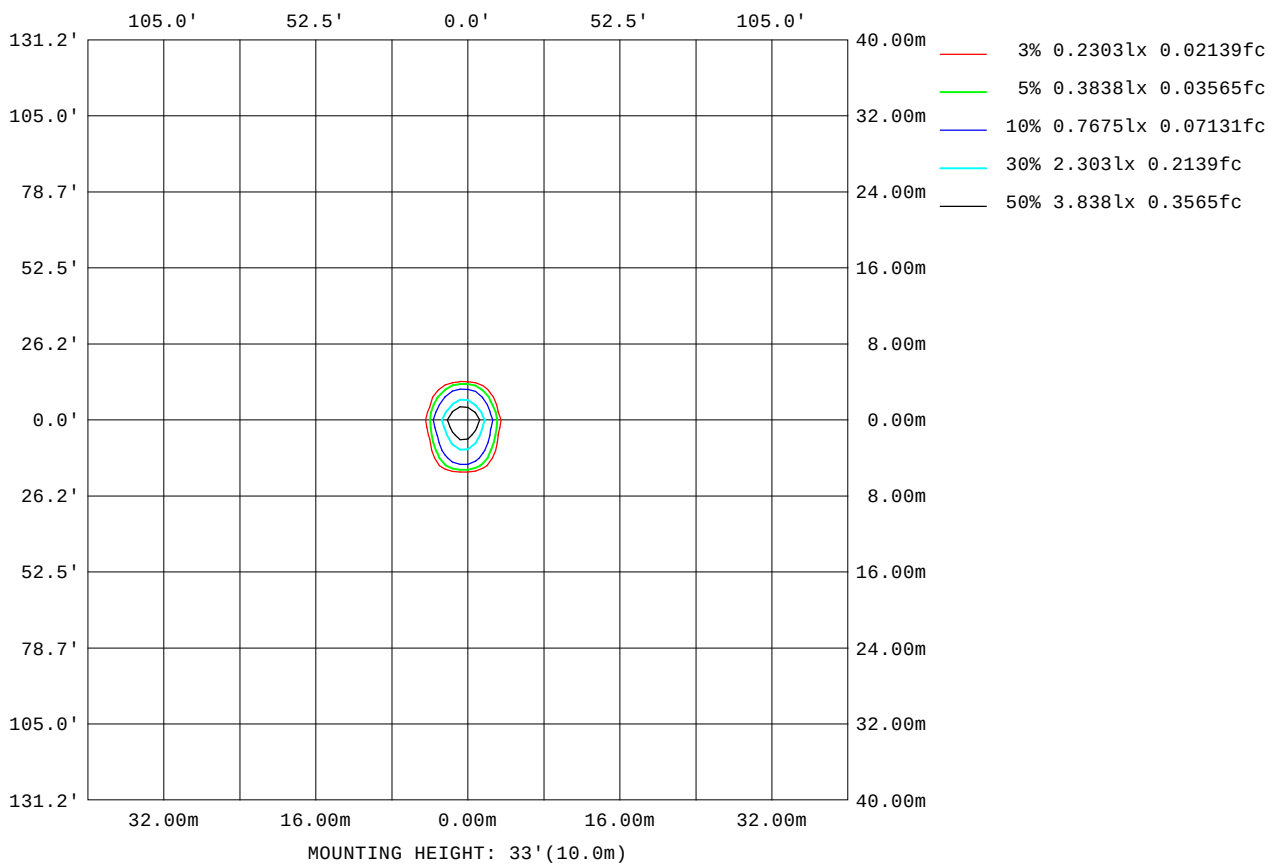

H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-08-11

V(B) Range: -75 - 75DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.300m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.33V I:0.0228A P:2.4182W PF:0.4805 Freq:50.00Hz Lamp Flux:115.393x1 lm		
NAME: 6780-2W-4000K	TYPE:室内	WEIGHT:
SPEC.:	DIM.: 65*65*60mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°


AvgL	cd/m2
L_0~180(65)av	16
L_0~180(75)av	22
L_0~180(85)av	61
L_90~270(65)av	24
L_90~270(75)av	24
L_90~270(85)av	0
L_45(65)av	17
L_45(75)av	21
L_45(85)av	0

Standard: GB/T 29293-2012

H_(b) Range:-90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-08-11

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

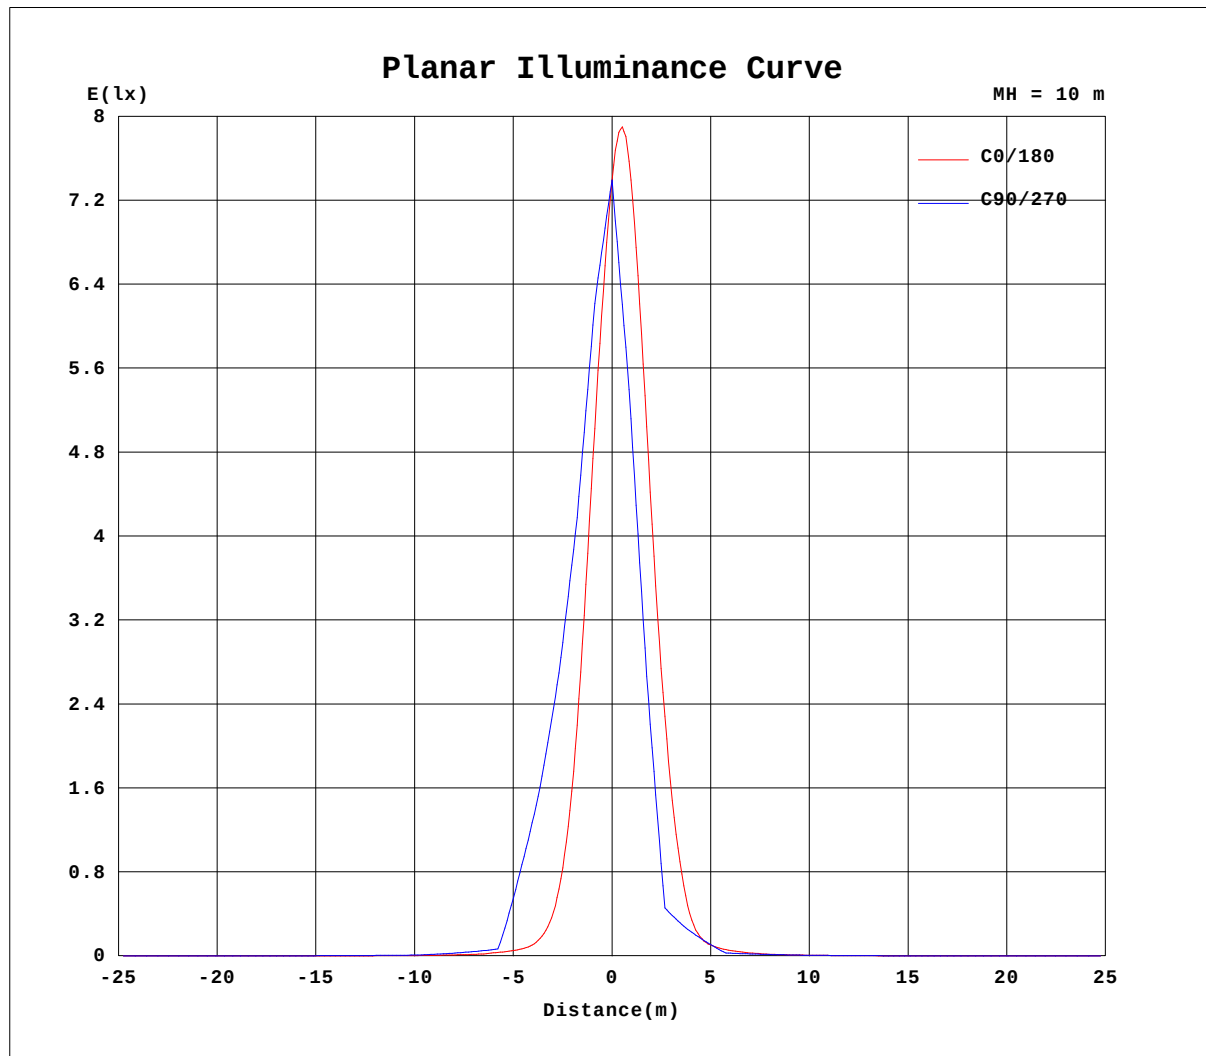

H_b Range: -90 - 90DEG
H_b Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-08-11

V(B) Range: -75 - 75DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.33V I:0.0228A P:2.4182W PF:0.4805 Freq:50.00Hz Lamp Flux:115.393x1 lm		
NAME: 6780-2W-4000K	TYPE:室内	WEIGHT:
SPEC.:	DIM.: 65*65*60mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:15°

Table - -2

UNIT: cd

[illegible]

H(_b) Range:-90 - 90DEG
H(_b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-08-11

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.300m [K=1.0000]
Remarks:

