


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.26V I:0.0940A P:10.008W PF:0.4833 Freq:50.00Hz Lamp Flux:835.086x1 lm		
NAME: 6793-10W-4000K	TYPE:室内	WEIGHT:
SPEC.:	DIM.: 65*60*163mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:35°

DATA OF LAMP		PHOTOMETRIC DATA Eff: 83.45 lm/W			
MODEL		I _{max} (cd)	1844	S/MH(C0/180)	0.62
NOMINAL POWER(W)	10	LOR(%)	100.0	S/MH(C90/270)	0.68
RATED VOLTAGE(V)	85-265V	TOTAL FLUX(lm)	835.09	h UP, DN(C0-180)	0.0,45.7
NOMINAL FLUX(lm)	835.086	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.0,54.3
LAMPS INSIDE	1	h up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	220	h down(%)	100.0	CIBSE SHR MAX	0.60

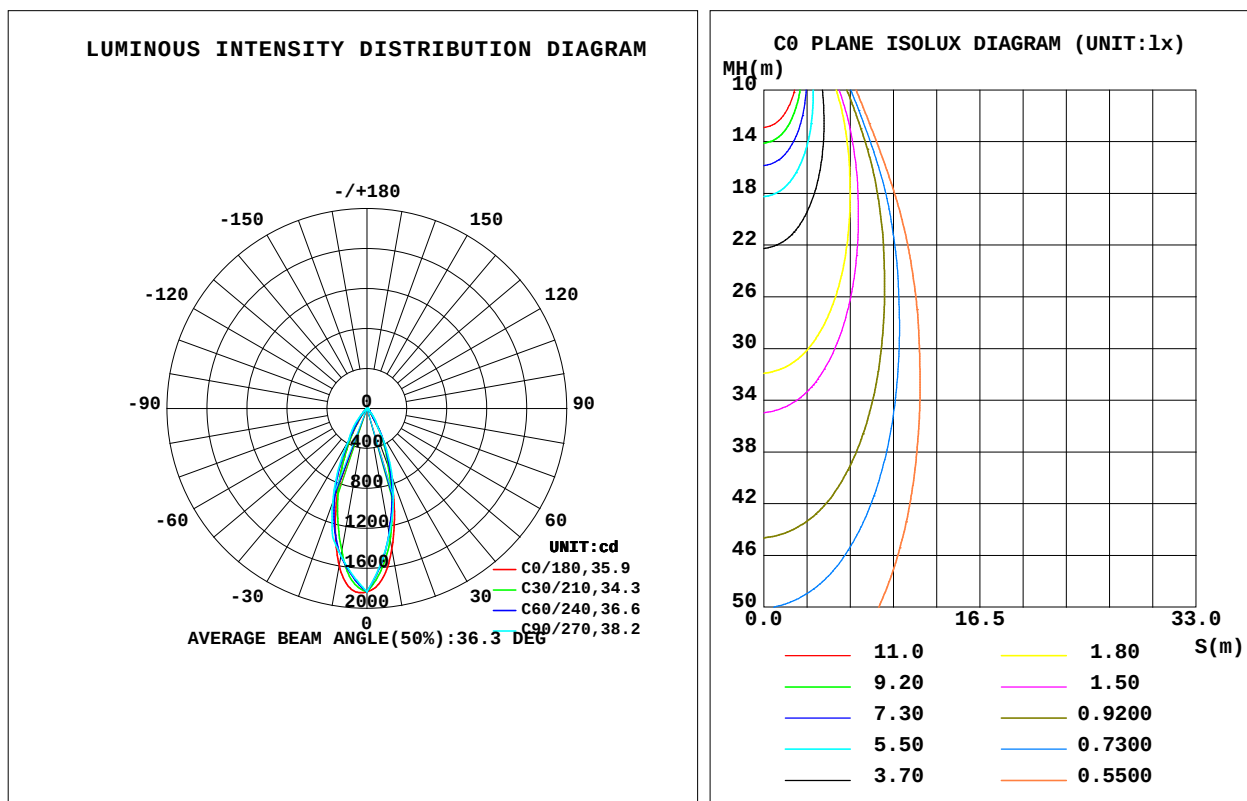

H_b Range: -90 - 90DEG
H_b Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-08-10

V(B) Range: -75 - 75DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.300m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum, lamp
10	1436	1293	1285	1345	1600	1477	1497	1428	0- 10	150.7	150.7	18,18
20	712.5	681.8	745.1	692.8	848.7	871.5	1008	871.3	10- 20	302.4	453.1	54.3, 54.3
30	226.8	250.1	216.7	279.9	303.0	352.5	367.7	316.0	20- 30	234.2	687.3	82.3, 82.3
40	51.44	53.63	85.35	58.71	63.52	70.26	142.8	62.92	30- 40	95.28	782.6	93.7, 93.7
50	14.02	17.07	17.14	20.03	16.30	21.70	23.81	18.74	40- 50	27.45	810.0	97, 97
60	10.68	9.803	12.08	10.65	12.22	9.571	10.64	9.223	50- 60	11.40	821.4	98.4, 98.4
70	6.774	6.302	7.004	6.798	7.743	6.369	7.082	6.232	60- 70	8.381	829.8	99.4, 99.4
80	3.209	2.252	0	2.316	3.611	2.746	0	2.768	70- 80	4.633	834.4	99.9, 99.9
90	1.351	0	0	0	1.406	0	0	0	80- 90	0.6522	835.1	100, 100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 801.59 lm

%lum = 96.0%

%lamp = 96.0%

Conical surface Flux(120deg): 821.42 lm

%lum = 98.4%

%lamp = 98.4%

H_(b) Range:-90 - 90DEG
 H_(b) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-08-10

V(B) Range:-75 - 75DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.300m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.26V I:0.0940A P:10.008W PF:0.4833 Freq:50.00Hz Lamp Flux:835.086x1 lm		
NAME: 6793-10W-4000K	TYPE:室内	WEIGHT:
SPEC.:	DIM.: 65*60*163mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:35°



LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	181	0
80	185	0
75	184	173
70	198	205
65	207	226
60	214	242
55	217	255
50	218	267
45	262	279


H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-08-10

V(B) Range: -75 - 75DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.300m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.26V I:0.0940A P:10.008W PF:0.4833 Freq:50.00Hz Lamp Flux:835.086x1 lm		
NAME: 6793-10W-4000K	TYPE:室内	WEIGHT:
SPEC.:	DIM.: 65*60*163mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:35°

r CC	80%			70%			50%			30%			10%			0
r W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	1.00	.99	.98	.97	.96	.94
2.0	1.04	1.01	.97	1.03	.99	.96	.99	.97	.94	.96	.94	.92	.94	.92	.90	.89
3.0	.98	.94	.90	.97	.93	.89	.94	.91	.88	.92	.89	.87	.90	.87	.85	.84
4.0	.93	.88	.84	.92	.87	.83	.89	.86	.82	.88	.84	.81	.86	.83	.81	.79
5.0	.88	.83	.79	.87	.82	.78	.85	.81	.78	.84	.80	.77	.82	.79	.76	.75
6.0	.83	.78	.74	.83	.78	.74	.81	.77	.73	.80	.76	.73	.79	.75	.72	.71
7.0	.79	.74	.70	.79	.74	.70	.77	.73	.70	.76	.72	.69	.75	.72	.69	.68
8.0	.76	.70	.67	.75	.70	.67	.74	.69	.66	.73	.69	.66	.72	.68	.66	.64
9.0	.72	.67	.63	.72	.67	.63	.71	.66	.63	.70	.66	.63	.69	.66	.63	.62
10.0	.69	.64	.61	.69	.64	.60	.68	.63	.60	.67	.63	.60	.67	.63	.60	.59

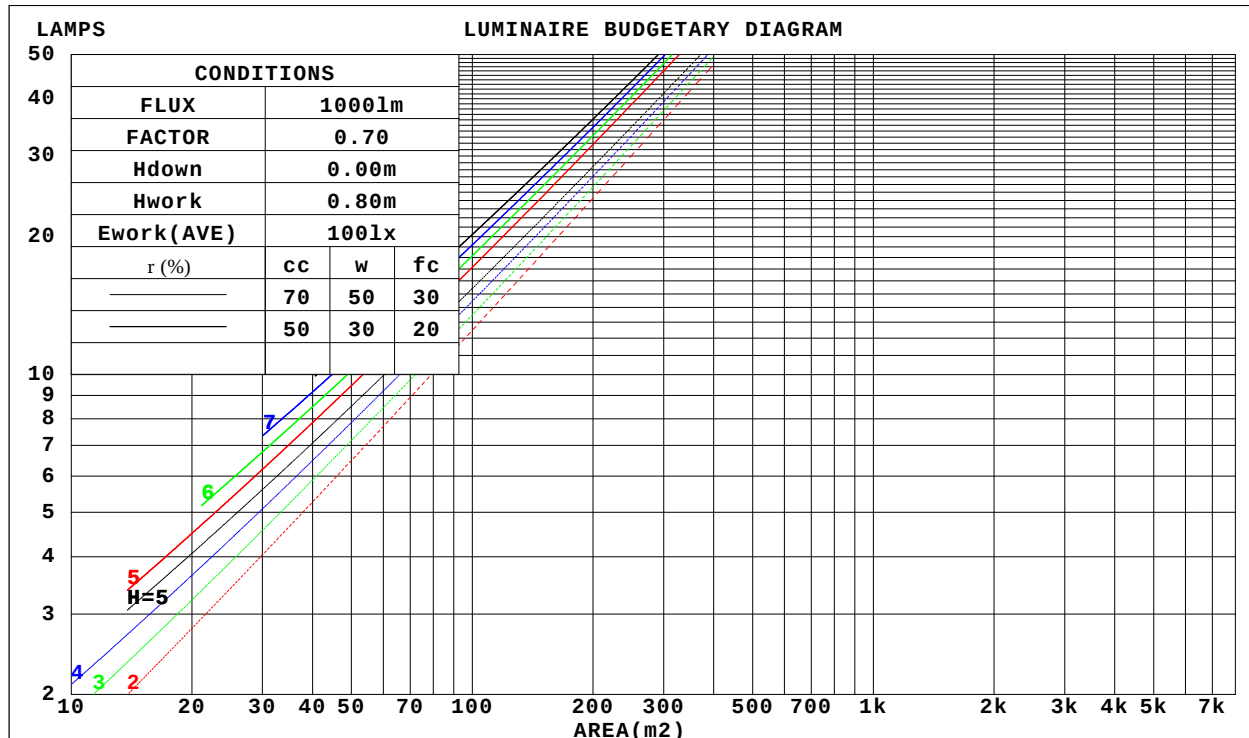

H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-08-10

V(B) Range: -75 - 75DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.300m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:220.26V I:0.0940A P:10.008W PF:0.4833 Freq:50.00Hz Lamp Flux:835.086x1 lm		
NAME: 6793-10W-4000K	TYPE:室内	WEIGHT:
SPEC.:	DIM.: 65*60*163mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:35°

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Wall Exitance Coefficients(WEC)												
0.0																
1.0	.167	.095	.030	.161	.092	.029	.148	.085	.027	.137	.079	.025	.126	.073	.024	
2.0	.158	.087	.027	.153	.084	.026	.142	.079	.025	.133	.074	.023	.124	.070	.022	
3.0	.149	.079	.024	.145	.077	.023	.136	.074	.022	.128	.070	.021	.120	.066	.021	
4.0	.141	.073	.022	.137	.072	.021	.129	.069	.021	.122	.066	.020	.116	.063	.019	
5.0	.134	.068	.020	.130	.067	.019	.124	.064	.019	.118	.062	.018	.112	.060	.018	
6.0	.127	.064	.018	.124	.063	.018	.118	.061	.018	.113	.059	.017	.108	.057	.017	
7.0	.121	.060	.017	.118	.059	.017	.113	.057	.017	.109	.056	.016	.104	.054	.016	
8.0	.116	.056	.016	.113	.056	.016	.109	.054	.016	.105	.053	.015	.101	.052	.015	
9.0	.111	.054	.015	.109	.053	.015	.105	.052	.015	.101	.050	.014	.097	.049	.014	
10.0	.106	.051	.014	.104	.050	.014	.101	.049	.014	.097	.048	.014	.094	.047	.014	

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.170	.157	.146	.146	.135	.125	.100	.093	.087	.057	.054	.050	.018	.017	.016	
2.0	.154	.133	.114	.132	.114	.099	.091	.079	.069	.052	.046	.040	.017	.015	.013	
3.0	.141	.113	.091	.121	.098	.079	.083	.068	.056	.048	.040	.033	.015	.013	.011	
4.0	.130	.099	.074	.112	.085	.065	.077	.059	.046	.044	.035	.027	.014	.011	.009	
5.0	.121	.087	.062	.104	.075	.054	.072	.052	.038	.041	.031	.022	.013	.010	.007	
6.0	.113	.077	.052	.097	.067	.045	.067	.047	.032	.039	.028	.019	.013	.009	.006	
7.0	.106	.069	.044	.091	.060	.038	.063	.042	.027	.037	.025	.016	.012	.008	.005	
8.0	.100	.063	.038	.086	.055	.033	.060	.038	.023	.035	.023	.014	.011	.007	.005	
9.0	.095	.058	.033	.082	.050	.029	.057	.035	.020	.033	.021	.012	.011	.007	.004	
10.0	.090	.053	.029	.078	.046	.025	.054	.033	.018	.031	.019	.011	.010	.006	.004	

H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-08-10

V(B) Range: -75 - 75DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.300m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.26V I:0.0940A P:10.008W PF:0.4833 Freq:50.00Hz Lamp Flux:835.086x1 lm											
NAME: 6793-10W-4000K						TYPE:室内			WEIGHT:		
SPEC.:						DIM.: 65*60*163mm			SERIAL No.:01		
MFR.: NORDECOR						SUR.:			Shielding Angle:35°		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	3.1	4.0	3.4	4.2	4.3	4.3	5.2	4.6	5.4	5.5	
	3H	3.6	4.4	3.9	4.6	4.8	5.6	5.0	5.8	6.0	
	4H	3.8	4.6	4.1	4.8	5.0	5.7	5.2	5.9	6.1	
	6H	4.0	4.7	4.3	5.0	5.2	5.6	5.2	5.9	6.1	
	8H	4.1	4.8	4.4	5.1	5.3	5.6	5.2	5.8	6.1	
	12H	4.2	4.8	4.5	5.1	5.4	5.5	5.2	5.8	6.0	
4H	2H	3.2	4.0	3.5	4.2	4.4	5.1	4.6	5.3	5.5	
	3H	3.8	4.5	4.2	4.8	5.0	5.6	5.3	5.9	6.1	
	4H	4.2	4.7	4.5	5.0	5.4	5.8	5.6	6.1	6.4	
	6H	4.5	5.0	4.8	5.3	5.6	5.7	5.6	6.1	6.4	
	8H	4.6	5.1	5.0	5.4	5.8	5.6	5.6	6.0	6.4	
	12H	4.7	5.1	5.1	5.5	5.9	5.6	5.5	5.9	6.3	
8H	4H	4.3	4.7	4.7	5.1	5.5	5.7	5.6	6.1	6.4	
	6H	4.7	5.1	5.1	5.4	5.9	5.7	5.7	6.0	6.5	
	8H	4.9	5.2	5.3	5.6	6.1	5.6	5.6	6.0	6.4	
	12H	5.0	5.3	5.5	5.8	6.3	5.4	5.6	5.9	6.4	
12H	4H	4.2	4.7	4.6	5.0	5.4	5.7	5.6	6.0	6.4	
	6H	4.6	5.0	5.1	5.4	5.8	5.6	5.7	6.0	6.4	
	8H	4.8	5.1	5.3	5.6	6.0	5.5	5.6	5.9	6.4	
Variations with the observer position at spacings:											
S = 1.0H	+ 1.2 / - 1.4					+ 2.3 / - 2.5					
1.5H	+ 2.7 / - 1.3					+ 4.4 / - 2.2					
2.0H	+ 0.5 / - 0.6					+ 0.3 / - 0.7					

CIE Pub.117, 835.1 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.6)
Area: 0.1 m2

H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-08-10

V(B) Range: -75 - 75DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.300m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.26V I:0.0940A P:10.008W PF:0.4833 Freq:50.00Hz Lamp Flux:835.086x1 lm		
NAME: 6793-10W-4000K	TYPE:室内	WEIGHT:
SPEC.:	DIM.: 65*60*163mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:35°


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	88	81	78	87	81	78	86	81	77	74
0.80	95	89	85	94	89	85	93	88	85	81
1.00	99	94	90	98	93	90	97	93	89	85
1.25	103	98	95	102	97	94	100	96	93	89
1.50	106	101	98	105	100	97	102	99	96	92
2.00	108	104	101	107	103	100	104	101	99	94
2.50	110	106	103	109	105	103	105	103	101	95
3.00	112	108	106	110	107	105	107	104	102	96
4.00	114	111	109	112	109	107	108	106	105	98
5.00	115	113	111	113	111	109	109	108	106	99
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

H_(b) Range:-90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-08-10

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.26V I:0.0940A P:10.008W PF:0.4833 Freq:50.00Hz Lamp Flux:835.086x1 lm		
NAME: 6793-10W-4000K	TYPE:室内	WEIGHT:
SPEC.:	DIM.: 65*60*163mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:35°

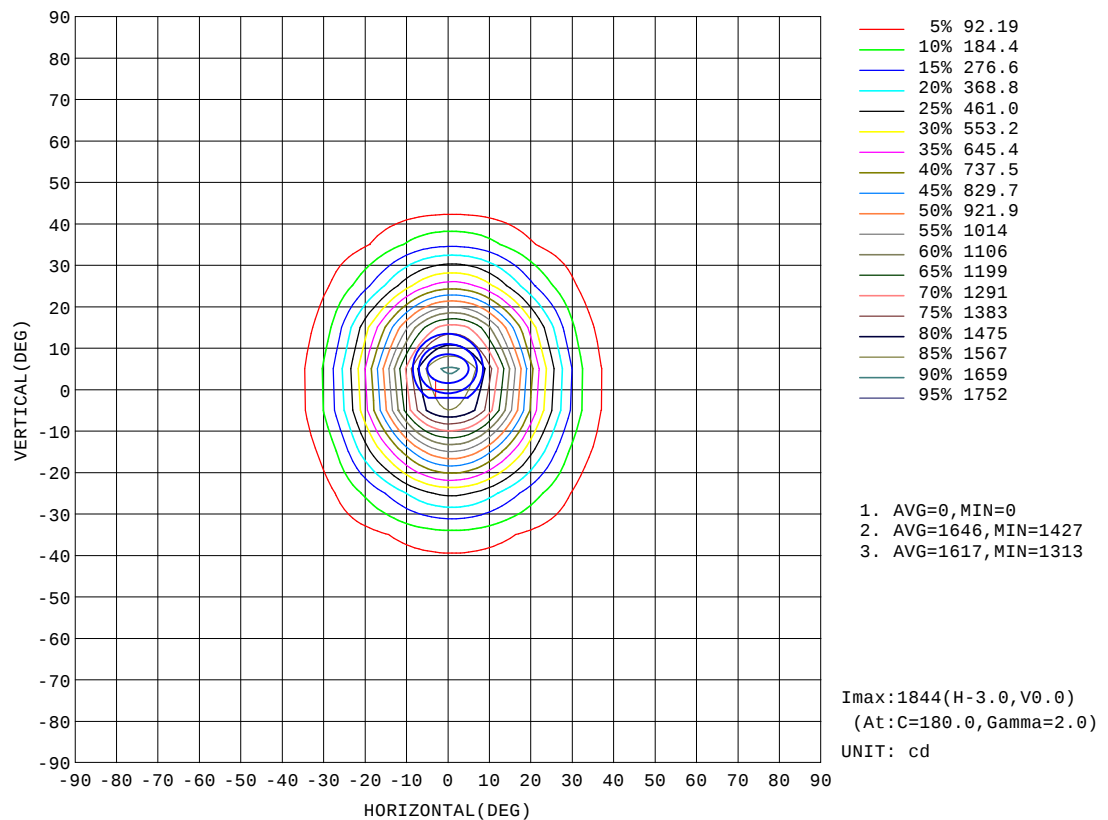


H_(b) Range:-90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-08-10

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.26V I:0.0940A P:10.008W PF:0.4833 Freq:50.00Hz Lamp Flux:835.086x1 lm		
NAME: 6793-10W-4000K	TYPE:室内	WEIGHT:
SPEC.:	DIM.: 65*60*163mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:35°

Flux out:392.4 lm

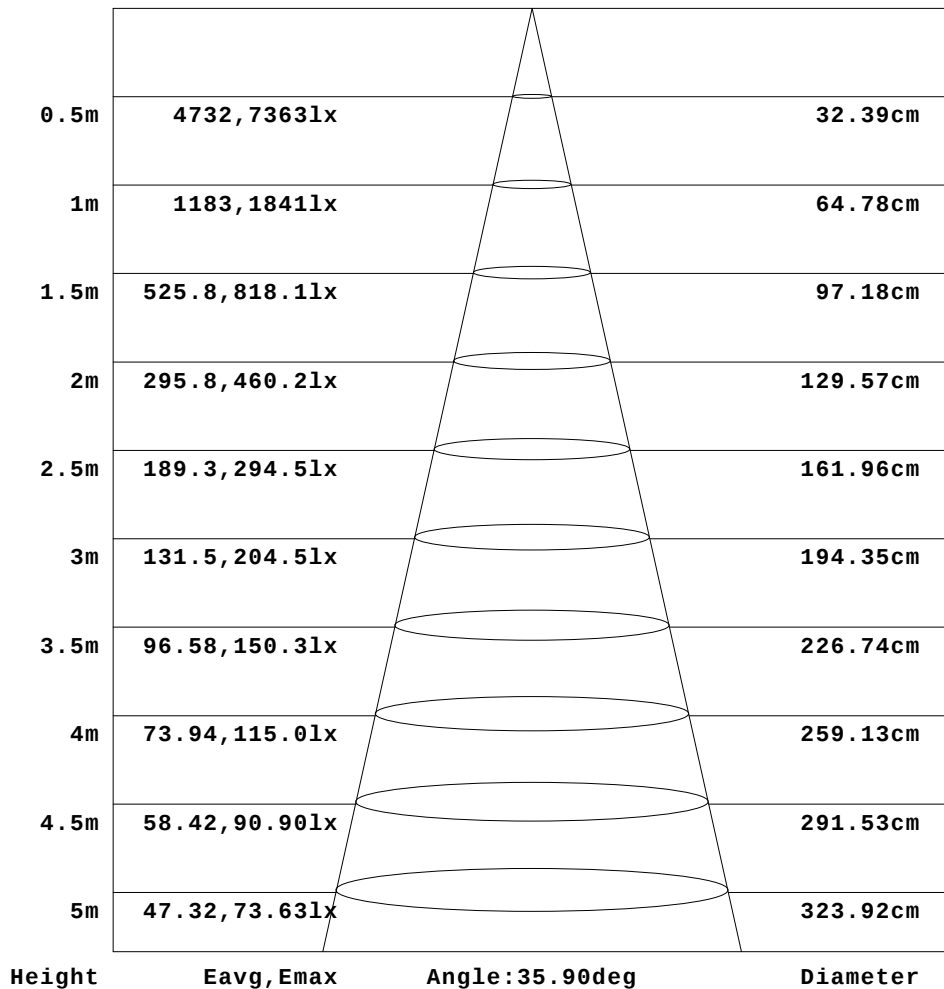


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-08-10

V(B) Range: -75 - 75DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.26V I:0.0940A P:10.008W PF:0.4833 Freq:50.00Hz Lamp Flux:835.086x1 lm		
NAME: 6793-10W-4000K	TYPE:室内	WEIGHT:
SPEC.:	DIM.: 65*60*163mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:35°

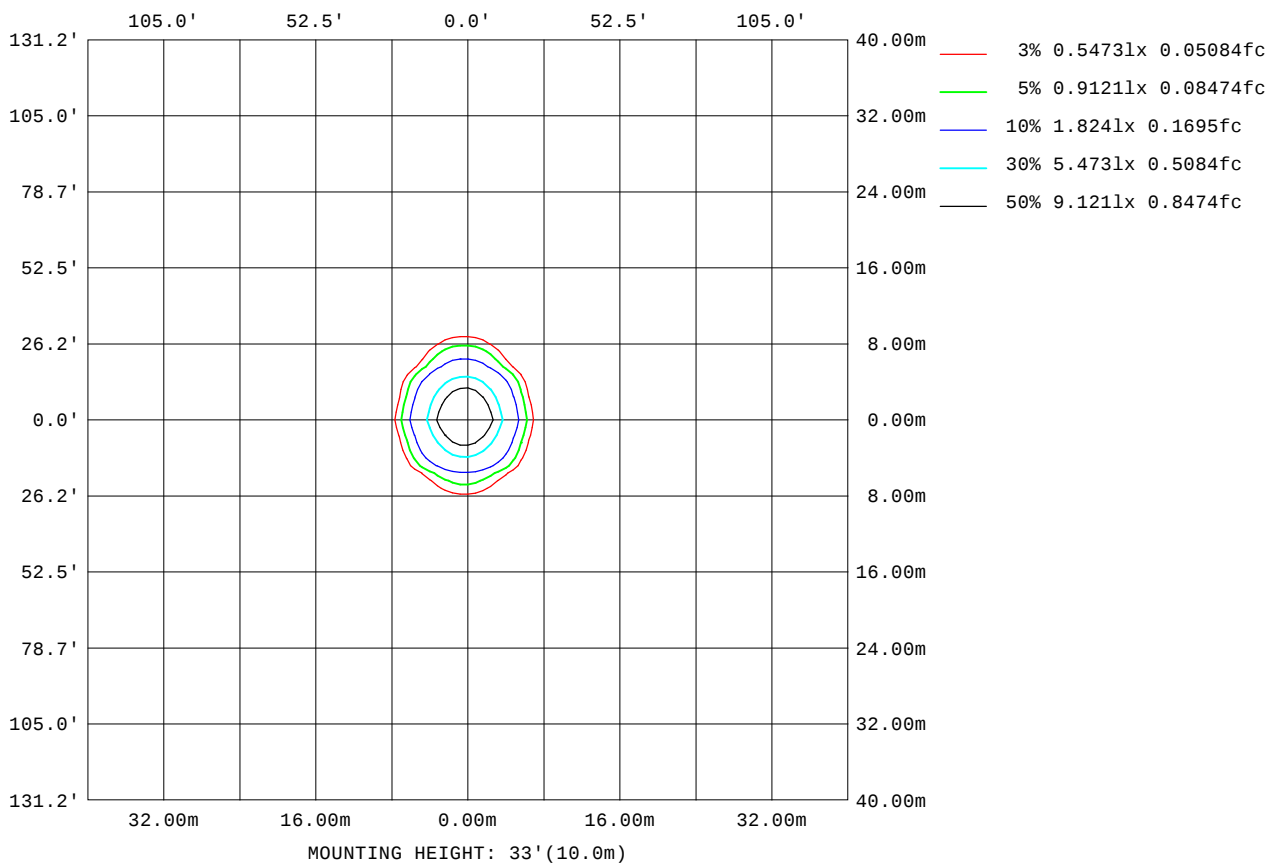

H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-08-10

V(B) Range: -75 - 75DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.300m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.26V I:0.0940A P:10.008W PF:0.4833 Freq:50.00Hz Lamp Flux:835.086x1 lm		
NAME: 6793-10W-4000K	TYPE:室内	WEIGHT:
SPEC.:	DIM.: 65*60*163mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:35°


AvgL	cd/m2
L_0~180(65)av	222
L_0~180(75)av	199
L_0~180(85)av	221
L_90~270(65)av	218
L_90~270(75)av	189
L_90~270(85)av	0
L_45(65)av	193
L_45(75)av	179
L_45(85)av	0

Standard: GB/T 29293-2012

H_(b) Range:-90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-08-10

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

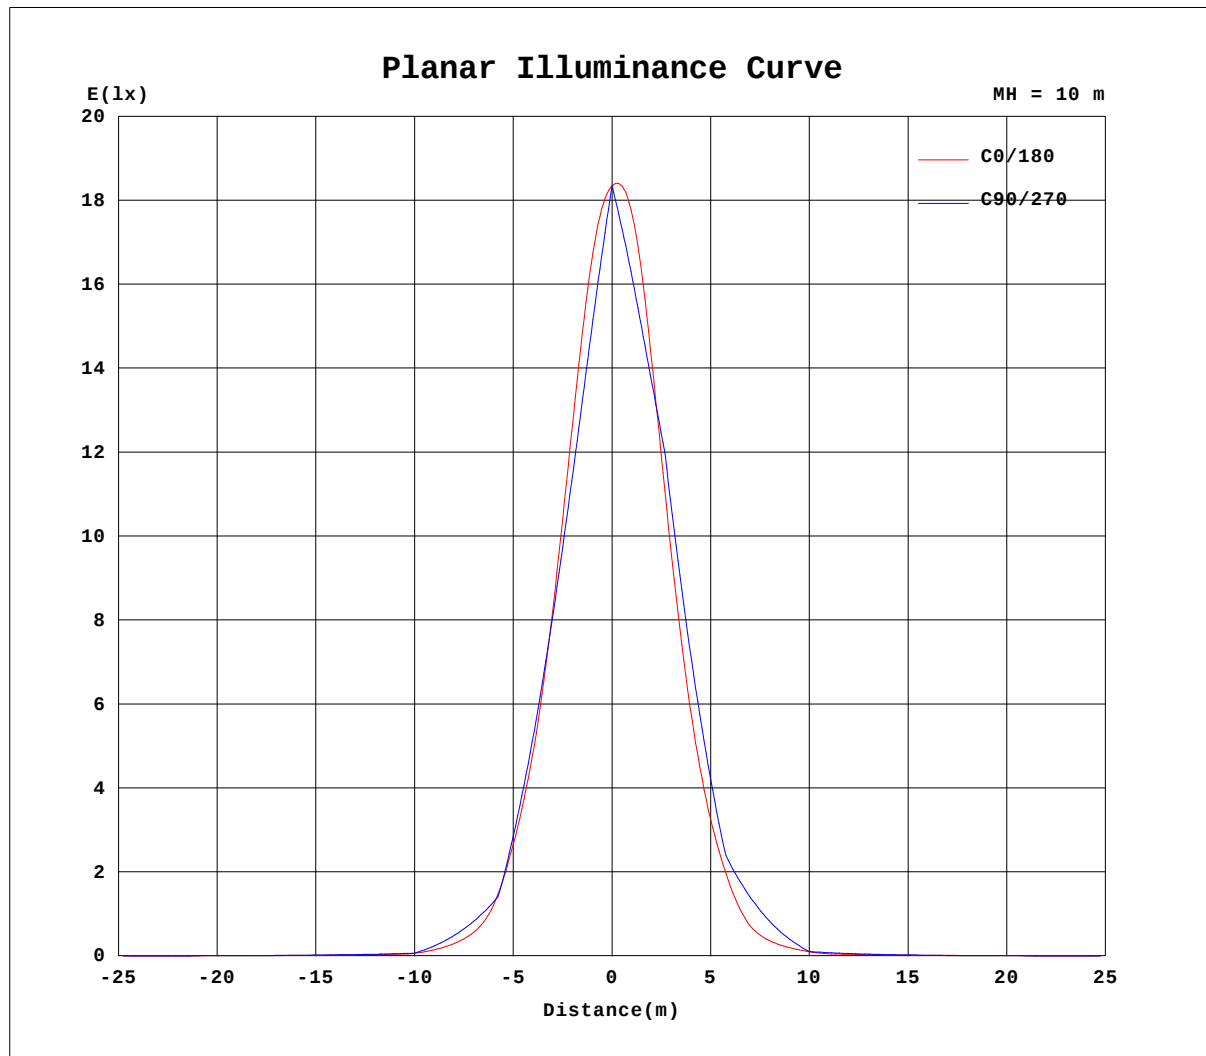

H_b Range: -90 - 90DEG
H_b Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-08-10

V(B) Range: -75 - 75DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.26V I:0.0940A P:10.008W PF:0.4833 Freq:50.00Hz Lamp Flux:835.086x1 lm		
NAME: 6793-10W-4000K	TYPE:室内	WEIGHT:
SPEC.:	DIM.: 65*60*163mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:35°

Table- -1

UNIT: cd

[illegible]

H(_b) Range:-90 - 90DEG
H(_b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-08-10

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.26V I:0.0940A P:10.008W PF:0.4833 Freq:50.00Hz Lamp Flux:835.086x1 lm		
NAME: 6793-10W-4000K	TYPE:室内	WEIGHT:
SPEC.:	DIM.: 65*60*163mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:35°

Table- -2

UNIT: cd

[illegible]

H(b) Range:-90 - 90DEG
H(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-08-10

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.300m [K=1.0000]
Remarks:

