


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.12V I:0.1923A P:19.592W PF:0.4627 Freq:50.00Hz Lamp Flux:847.994x1 lm		
NAME: POWERUS	TYPE:	WEIGHT:
SPEC.:	DIM.: 125*53*118mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

DATA OF LAMP		PHOTOMETRIC DATA Eff: 43.28 lm/W			
MODEL	6801	I _{max} (cd)	3968	S/MH(C0/180)	0.37
NOMINAL POWER(W)	18	LOR(%)	100.0	S/MH(C90/270)	0.30
RATED VOLTAGE(V)	85-265V	TOTAL FLUX(lm)	847.99	h UP, DN(C0-180)	0.0,60.1
NOMINAL FLUX(lm)	847.994	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.0,39.9
LAMPS INSIDE	1	h up(%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	220	h down(%)	100.0	CIBSE SHR MAX	1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

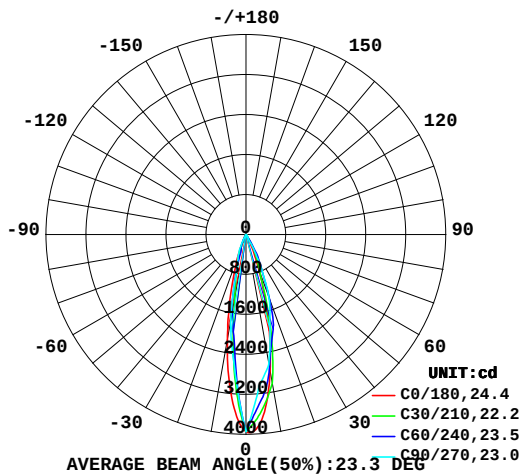

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

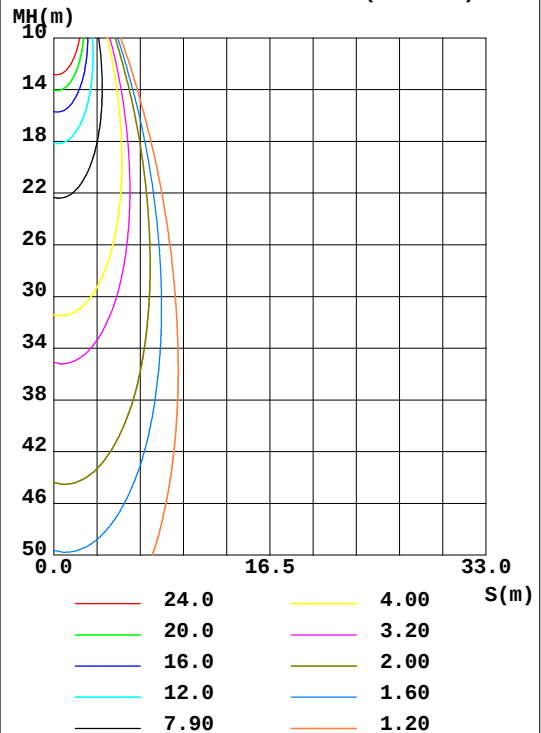

H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-07-02

V(B) Range: -75 - 75DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 5.000m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum, lamp
10	2795	2822	2643	1856	2169	1454	1776	2253	0- 10	264.3	264.3	31.2, 31.2
20	782.0	1340	1361	503.5	506.5	211.3	471.8	522.9	10- 20	359.8	624.1	73.6, 73.6
30	83.49	242.7	96.96	122.2	66.49	52.67	31.12	91.00	20- 30	157.5	781.7	92.2, 92.2
40	24.42	26.15	47.41	23.36	25.90	15.49	19.72	17.52	30- 40	29.54	811.2	95.7, 95.7
50	15.71	14.80	19.77	13.91	16.26	10.27	12.01	11.23	40- 50	14.05	825.2	97.3, 97.3
60	10.92	10.20	14.05	9.056	10.43	6.607	8.010	7.752	50- 60	10.27	835.5	98.5, 98.5
70	6.740	7.417	8.856	5.877	6.054	3.970	5.059	5.243	60- 70	7.452	843.0	99.4, 99.4
80	4.023	3.594	0	2.462	3.069	1.839	0	2.648	70- 80	4.318	847.3	99.9, 99.9
90	2.344	0	0	0	1.802	0	0	0	80- 90	0.7036	848.0	100, 100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 819.02 lm

%lum = 96.6%

%lamp = 96.6%

Conical surface Flux(120deg): 835.52 lm

%lum = 98.5%


%lamp = 98.5%

H_(b) Range:-90 - 90DEG
 H_(b) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2026-07-02

V(B) Range:-75 - 75DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.000m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.12V I:0.1923A P:19.592W PF:0.4627 Freq:50.00Hz Lamp Flux:847.994x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.: 125*53*118mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

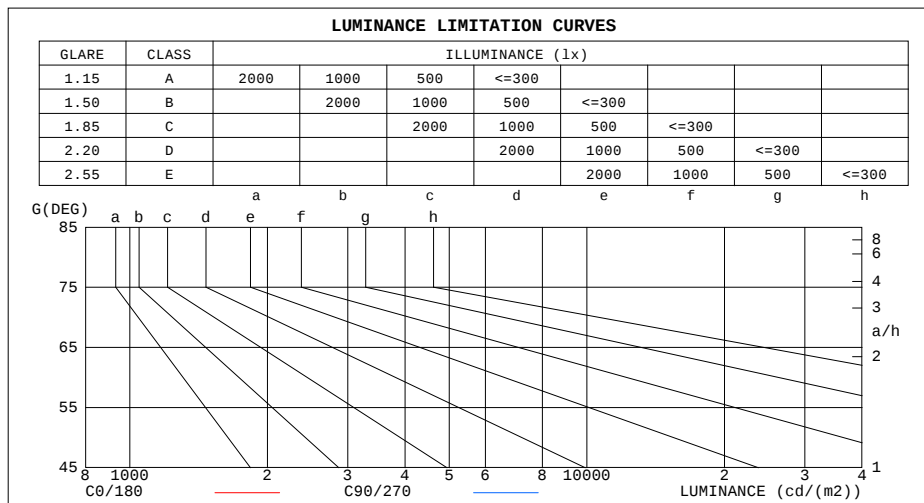

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	303	0
80	232	0
75	200	238
70	197	259
65	206	269
60	218	281
55	232	292
50	244	308
45	270	315


H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-07-02

V(B) Range: -75 - 75DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 5.000m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.12V I:0.1923A P:19.592W PF:0.4627 Freq:50.00Hz Lamp Flux:847.994x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.: 125*53*118mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

r CC	80%			70%			50%			30%			10%			0
r W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.10	1.08	1.10	1.08	1.07	1.06	1.05	1.03	1.02	1.01	1.00	.99	.98	.97	.96
2.0	1.06	1.03	1.00	1.05	1.02	.99	1.02	.99	.97	.99	.97	.95	.96	.95	.93	.92
3.0	1.01	.97	.94	1.00	.96	.94	.98	.95	.92	.95	.93	.91	.93	.91	.89	.88
4.0	.97	.93	.89	.96	.92	.89	.94	.91	.88	.92	.89	.87	.90	.88	.86	.85
5.0	.93	.89	.85	.92	.88	.85	.91	.87	.84	.89	.86	.84	.88	.85	.83	.82
6.0	.90	.85	.82	.89	.85	.81	.87	.84	.81	.86	.83	.80	.85	.82	.80	.79
7.0	.86	.82	.79	.86	.81	.78	.85	.81	.78	.84	.80	.78	.83	.80	.77	.76
8.0	.83	.79	.76	.83	.79	.76	.82	.78	.75	.81	.78	.75	.80	.77	.75	.74
9.0	.81	.76	.73	.80	.76	.73	.79	.76	.73	.79	.75	.73	.78	.75	.73	.72
10.0	.78	.74	.71	.78	.74	.71	.77	.73	.71	.77	.73	.71	.76	.73	.70	.70

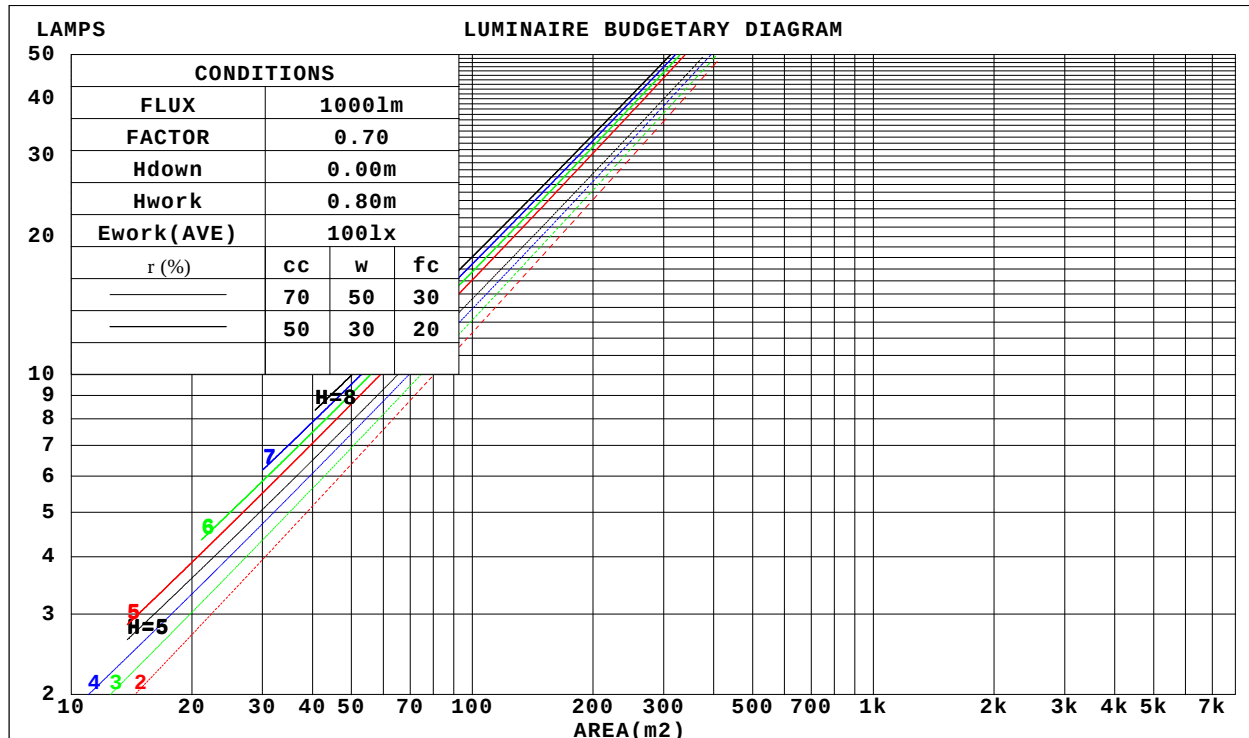

H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-07-02

V(B) Range: -75 - 75DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 5.000m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:220.12V I:0.1923A P:19.592W PF:0.4627 Freq:50.00Hz Lamp Flux:847.994x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.: 125*53*118mm		SERIAL No.:01	
MFR.: NORDECOR		SUR.:		Shielding Angle:24°	

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.148	.084	.027	.142	.081	.026	.129	.074	.024	.118	.068	.022	.107	.062	.020	
2.0	.138	.076	.023	.133	.073	.023	.122	.068	.021	.113	.063	.020	.104	.059	.019	
3.0	.129	.069	.021	.124	.066	.020	.116	.063	.019	.108	.059	.018	.100	.055	.017	
4.0	.121	.063	.018	.117	.061	.018	.109	.058	.017	.103	.055	.017	.096	.052	.016	
5.0	.113	.058	.017	.110	.057	.016	.104	.054	.016	.098	.052	.015	.093	.049	.015	
6.0	.107	.054	.015	.104	.053	.015	.099	.051	.015	.094	.049	.014	.089	.047	.014	
7.0	.102	.050	.014	.099	.049	.014	.094	.048	.014	.090	.046	.013	.086	.045	.013	
8.0	.097	.047	.013	.095	.047	.013	.090	.045	.013	.087	.044	.013	.083	.043	.012	
9.0	.092	.045	.012	.090	.044	.012	.087	.043	.012	.083	.042	.012	.080	.041	.012	
10.0	.088	.042	.012	.087	.042	.012	.083	.041	.012	.080	.040	.011	.077	.039	.011	

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.169	.158	.147	.145	.135	.127	.099	.093	.088	.057	.054	.051	.018	.017	.016	
2.0	.152	.133	.117	.130	.114	.101	.089	.079	.070	.051	.046	.041	.016	.015	.013	
3.0	.137	.113	.094	.118	.098	.082	.081	.068	.057	.047	.040	.034	.015	.013	.011	
4.0	.125	.098	.077	.107	.085	.067	.074	.059	.047	.043	.035	.028	.014	.011	.009	
5.0	.115	.086	.065	.099	.074	.056	.068	.052	.040	.039	.030	.024	.013	.010	.008	
6.0	.106	.076	.054	.091	.066	.047	.063	.046	.034	.037	.027	.020	.012	.009	.007	
7.0	.099	.068	.046	.085	.059	.040	.059	.041	.029	.034	.024	.017	.011	.008	.006	
8.0	.092	.061	.040	.079	.053	.035	.055	.037	.025	.032	.022	.015	.010	.007	.005	
9.0	.087	.056	.035	.075	.048	.030	.052	.034	.022	.030	.020	.013	.010	.007	.004	
10.0	.082	.051	.031	.070	.044	.027	.049	.031	.019	.029	.018	.011	.009	.006	.004	

H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-07-02

V(B) Range: -75 - 75DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 5.000m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.12V I:0.1923A P:19.592W PF:0.4627 Freq:50.00Hz Lamp Flux:847.994x1 lm											
NAME:			TYPE:			WEIGHT:					
SPEC.:			DIM.: 125*53*118mm			SERIAL No.:01					
MFR.: NORDECOR			SUR.:			Shielding Angle:24°					
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise				Viewed endwise					
x = 2H y = 2H	0.8	1.5	1.0	1.6	1.8	2.2	2.9	2.4	3.1	3.2	
	3H	1.9	2.5	2.1	2.7	2.9	3.6	4.2	3.8	4.4	4.6
	4H	2.4	3.1	2.7	3.3	3.5	4.1	4.8	4.4	5.0	5.2
	6H	3.0	3.5	3.2	3.8	4.0	4.2	4.8	4.5	5.0	5.3
	8H	3.2	3.8	3.5	4.0	4.3	4.2	4.8	4.5	5.0	5.2
	12H	3.5	4.0	3.8	4.3	4.6	4.1	4.7	4.4	4.9	5.2
4H	2H	1.3	1.9	1.5	2.1	2.3	2.5	3.1	2.8	3.4	3.6
	3H	2.5	3.1	2.9	3.4	3.6	4.1	4.7	4.4	4.9	5.2
	4H	3.2	3.7	3.5	4.0	4.3	4.9	5.4	5.2	5.7	6.0
	6H	3.8	4.2	4.2	4.6	4.9	5.0	5.4	5.3	5.7	6.1
	8H	4.1	4.5	4.5	4.9	5.2	4.9	5.3	5.3	5.7	6.0
	12H	4.4	4.8	4.8	5.1	5.5	4.9	5.2	5.3	5.6	6.0
8H	4H	3.6	4.0	4.0	4.4	4.7	5.1	5.5	5.4	5.8	6.2
	6H	4.4	4.7	4.8	5.1	5.5	5.2	5.5	5.6	5.9	6.3
	8H	4.8	5.1	5.2	5.5	6.0	5.1	5.4	5.6	5.9	6.3
	12H	5.2	5.5	5.7	5.9	6.4	5.1	5.3	5.5	5.8	6.2
12H	4H	3.6	3.9	4.0	4.3	4.7	5.1	5.4	5.5	5.8	6.2
	6H	4.4	4.7	4.8	5.1	5.5	5.2	5.5	5.6	5.9	6.4
	8H	4.8	5.1	5.3	5.5	6.0	5.1	5.4	5.6	5.8	6.3
Variations with the observer position at spacings:											
S = 1.0H	+ 0.4 / - 0.5					+ 0.5 / - 0.6					
1.5H	+ 0.4 / - 0.3					+ 1.4 / - 0.6					
2.0H	+ 0.7 / - 0.8					+ 0.4 / - 0.7					

CIE Pub.117, 848.0 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.6)
Area: 0.1 m2

H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-07-02

V(B) Range: -75 - 75DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 5.000m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.12V I:0.1923A P:19.592W PF:0.4627 Freq:50.00Hz Lamp Flux:847.994x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.: 125*53*118mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	89	83	79	88	83	79	88	82	79	76
0.80	96	90	87	95	90	87	94	90	86	83
1.00	100	95	91	99	94	91	98	94	90	87
1.25	104	99	96	103	98	95	101	97	94	90
1.50	106	102	99	105	101	98	103	100	97	93
2.00	109	105	102	107	104	101	105	102	99	94
2.50	111	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	105	103	96
4.00	114	111	109	112	110	108	108	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

H_b Range:-90 - 90DEG
H_b Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-07-02

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.000m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.12V I:0.1923A P:19.592W PF:0.4627 Freq:50.00Hz Lamp Flux:847.994x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.: 125*53*118mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

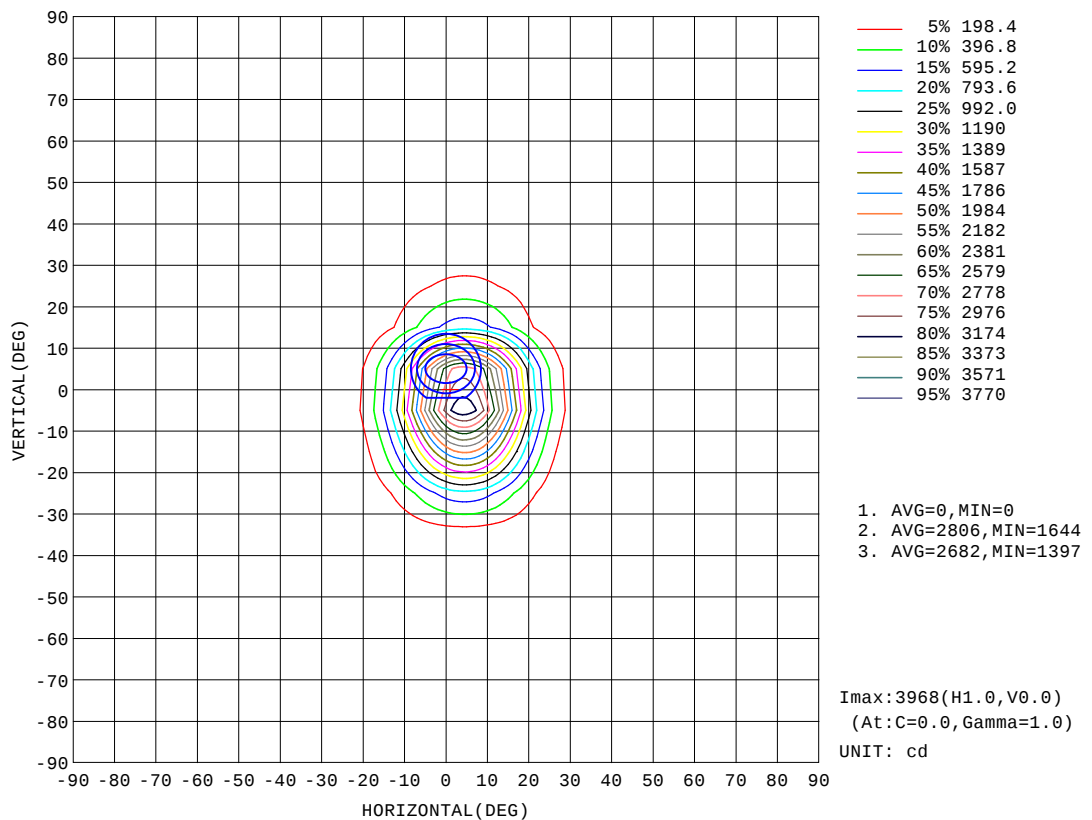


H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-07-02

V(B) Range: -75 - 75DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 5.000m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.12V I:0.1923A P:19.592W PF:0.4627 Freq:50.00Hz Lamp Flux:847.994x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.: 125*53*118mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

Flux out:327.1 lm

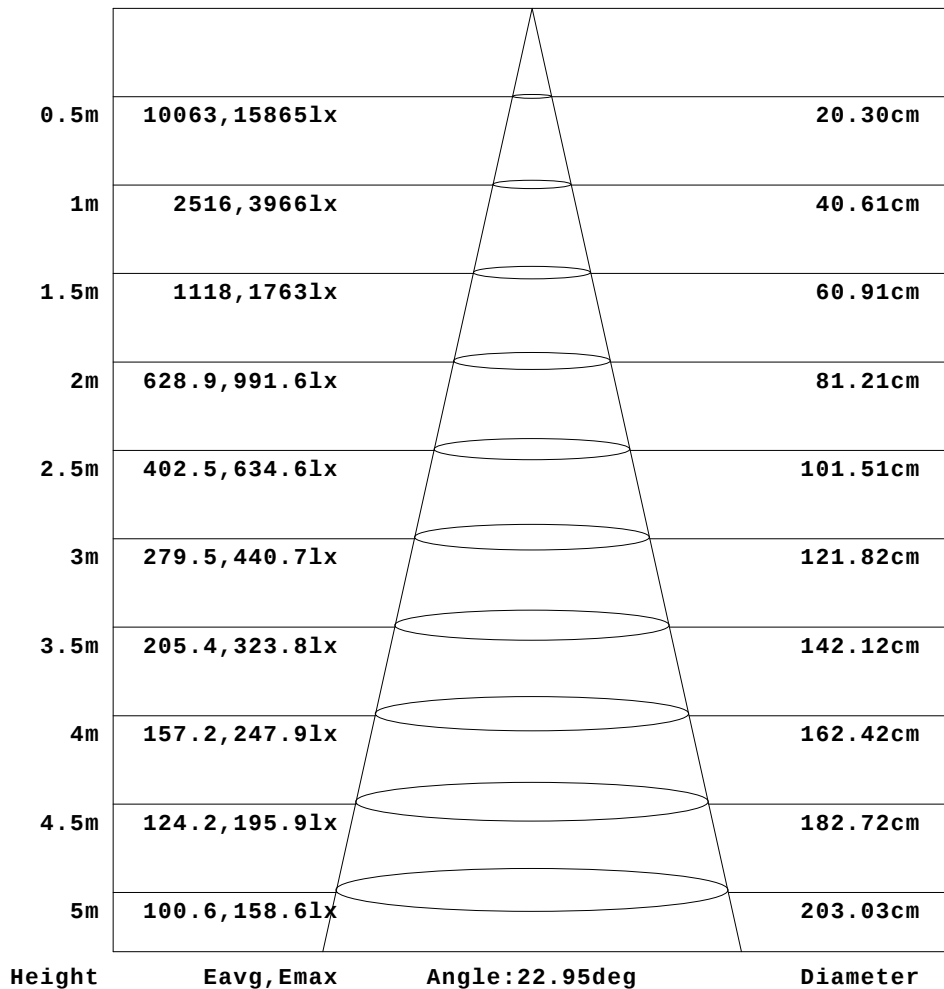


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-07-02

V(B) Range: -75 - 75DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 5.000m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.12V I:0.1923A P:19.592W PF:0.4627 Freq:50.00Hz Lamp Flux:847.994x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.: 125*53*118mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

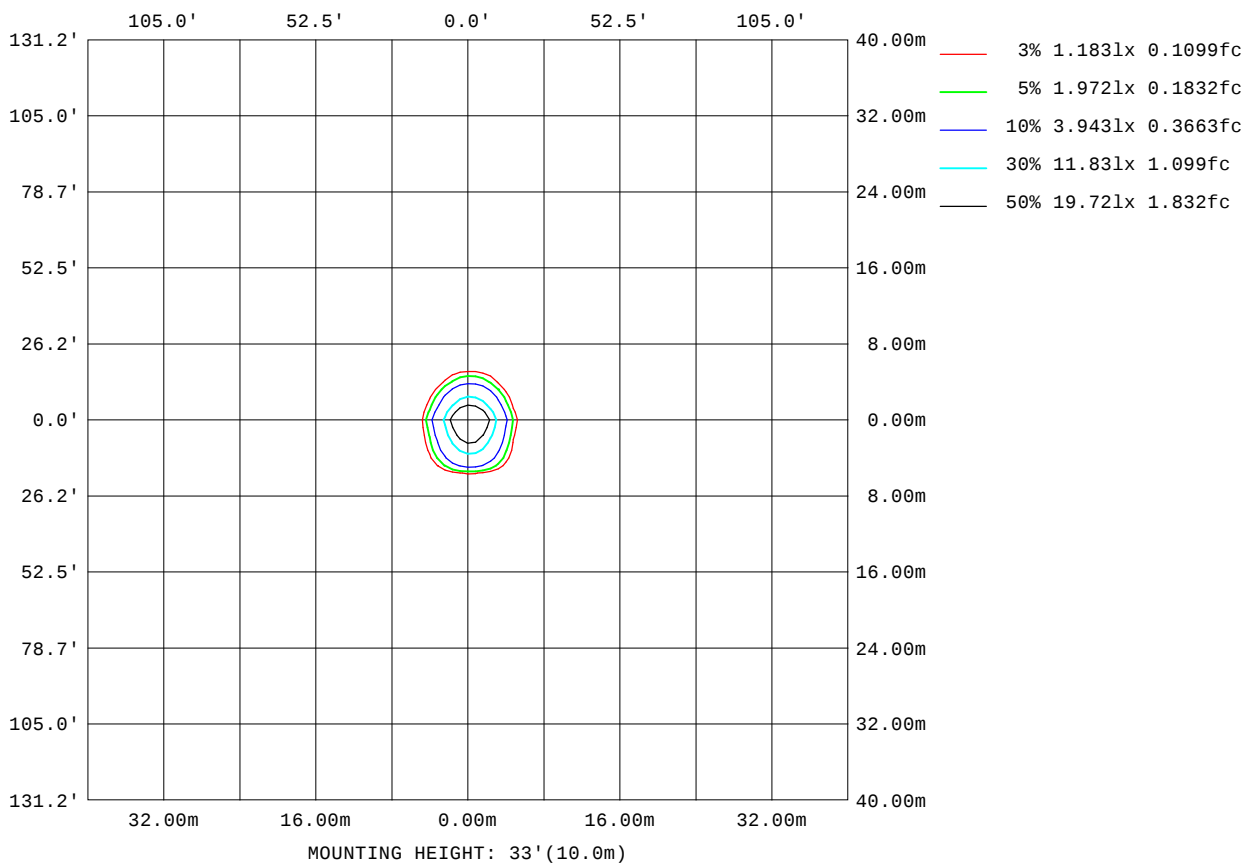

H_(b) Range: -90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-07-02

V(B) Range: -75 - 75DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 5.000m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.12V I:0.1923A P:19.592W PF:0.4627 Freq:50.00Hz Lamp Flux:847.994x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.: 125*53*118mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°


AvgL	cd/m2
L_0~180(65)av	198
L_0~180(75)av	187
L_0~180(85)av	279
L_90~270(65)av	211
L_90~270(75)av	188
L_90~270(85)av	0
L_45(65)av	165
L_45(75)av	167
L_45(85)av	0

Standard: GB/T 29293-2012

H_(b) Range:-90 - 90DEG
H_(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-07-02

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.000m [K=1.0000]
Remarks:

Planar Illuminance Curve

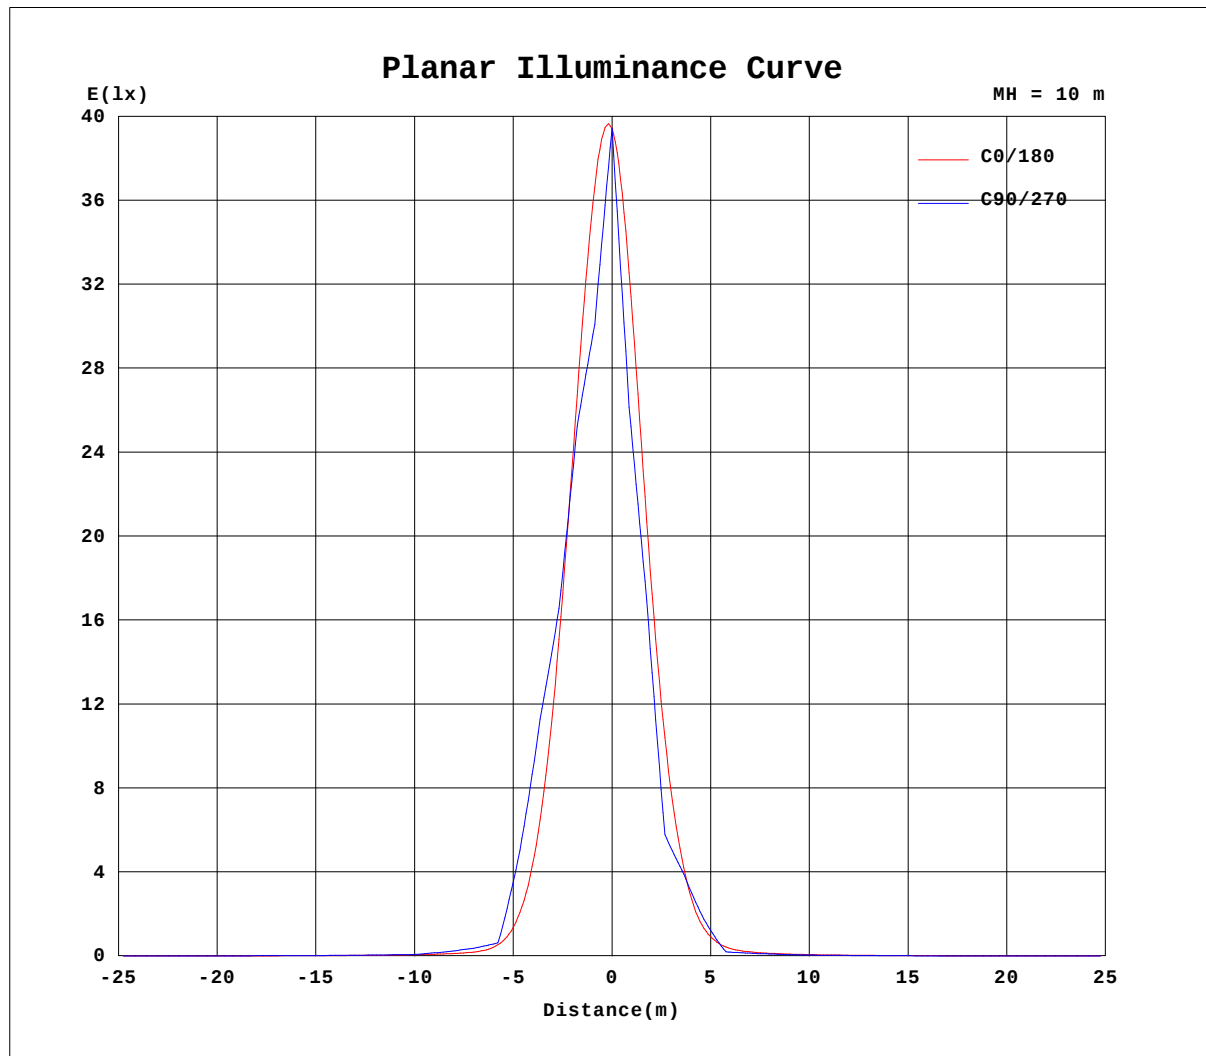

H_b Range: -90 - 90DEG
H_b Interval: 1.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2026-07-02

V(B) Range: -75 - 75DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 5.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.12V I:0.1923A P:19.592W PF:0.4627 Freq:50.00Hz Lamp Flux:847.994x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.: 125*53*118mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

Table- -1

UNIT: cd

[illegible]

H(b) Range:-90 - 90DEG
H(b) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2026-07-02

V(B) Range:-75 - 75DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.000m [K=1.0000]
Remarks:

