

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		3643.9 cd per klm. 0.0 degrees vertical -1.0 degrees horizontal
Beam Spread	At 10% of Imax	54.2V x 51.0H
	At 50% of Imax	26.8V x 25.2H
	At 90% of Imax	6.6V x 9.2H
Beam Flux	Total	999.1 lumens per klm.
	To 10% of Imax	811.9 lumens per klm.
	To 50% of Imax	374.2 lumens per klm.
	To 90% of Imax	33.5 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-11-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.30V I:0.0504A P:4.7344W PF:0.4262 Freq:50.00Hz Lamp Flux:132.402x1 lm		
NAME: 6847	TYPE:	WEIGHT:220g
SPEC.:5W	DIM.: $\phi 65 \times 75\text{mm}$	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

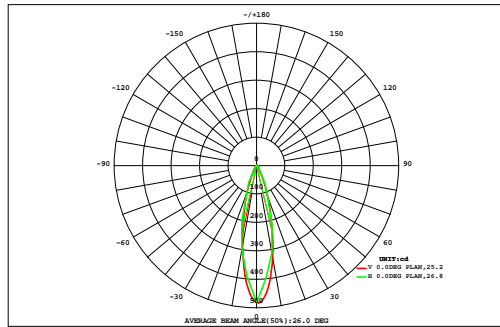

DATA OF LAMP		Eff:27.97lm/W	
MODEL		Imax(cd)	482.5
NOMINAL POWER(W)		AVAILABILITY(%)	82.1
RATED VOLTAGE(V)		Avai. FLUX(lm)	108.8
NOMINAL FLUX(lm)	132.402	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	132.4
TEST VOLTAGE(V)	0	q @50%(H,V)	25,27DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM															UNIT:lm		F t	F a	
	90	80	70	60	50	40	30	20	10	0	10	20	30	40	50	60	70			80
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.32	0.00	
70	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.00	0.33	0.00	
60	0.00	0.01	0.01	0.02	0.02	0.03	0.04	0.05	0.06	0.06	0.05	0.04	0.03	0.02	0.02	0.01	0.01	0.00	0.47	0.00
50	0.00	0.01	0.01	0.02	0.03	0.04	0.07	0.11	0.14	0.14	0.12	0.08	0.05	0.03	0.02	0.01	0.01	0.00	0.88	0.00
40	0.00	0.01	0.01	0.02	0.04	0.08	0.16	0.29	0.41	0.43	0.32	0.19	0.09	0.04	0.02	0.01	0.01	0.00	2.12	0.00
30	0.00	0.01	0.01	0.03	0.05	0.14	0.34	0.87	1.54	1.62	1.03	0.45	0.18	0.07	0.03	0.01	0.01	0.00	6.38	3.02
20	0.00	0.01	0.01	0.03	0.08	0.22	0.74	2.47	4.97	5.22	2.89	0.96	0.29	0.09	0.03	0.01	0.01	0.00	18.0	15.7
10	0.00	0.01	0.02	0.04	0.10	0.30	1.30	4.71	10.2	10.6	5.26	1.52	0.37	0.11	0.04	0.02	0.01	0.00	34.6	32.7
0	0.00	0.01	0.02	0.04	0.10	0.32	1.46	5.31	11.5	11.6	5.46	1.52	0.36	0.11	0.04	0.02	0.01	0.00	37.9	36.0
-10	0.00	0.01	0.01	0.03	0.09	0.27	1.02	3.19	5.97	5.77	2.98	0.91	0.27	0.09	0.03	0.01	0.01	0.00	20.7	18.5
-20	0.00	0.01	0.01	0.03	0.06	0.17	0.43	1.05	1.64	1.51	0.92	0.41	0.17	0.07	0.03	0.01	0.01	0.00	6.53	2.82
-30	0.00	0.01	0.01	0.02	0.04	0.09	0.18	0.27	0.32	0.33	0.26	0.18	0.09	0.04	0.02	0.01	0.01	0.00	1.88	0.00
-40	0.00	0.01	0.01	0.02	0.03	0.05	0.08	0.12	0.14	0.14	0.12	0.08	0.05	0.03	0.02	0.01	0.01	0.00	0.89	0.00
-50	0.00	0.01	0.01	0.02	0.02	0.03	0.04	0.06	0.07	0.06	0.05	0.04	0.03	0.02	0.02	0.01	0.01	0.00	0.50	0.00
-60	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.01	0.01	0.01	0.00	0.37	0.00
-70	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.33	0.00
-80	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.15	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
F t	0.03	0.10	0.20	0.36	0.75	1.83	6.00	18.6	37.1	37.7	19.6	6.50	2.09	0.81	0.36	0.19	0.09	0.03	132	---
F a	0.00	0.00	0.00	0.00	0.00	0.00	2.41	16.1	35.0	35.5	17.1	2.75	0.00	0.00	0.00	0.00	0.00	0.00	---	109


one-half-peak spread: U:13.8,D:13.2 , L:12.5,R:12.9 NEMA Beam Type: Type 4

H(h) Range:-90 - 90DEG
 H(h) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:NORDECOR
 Test Date:2024-11-06

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.30V I:0.0504A P:4.7344W PF:0.4262 Freq:50.00Hz Lamp Flux:132.402x1 lm		
NAME: 6847	TYPE:	WEIGHT:220g
SPEC.:5W	DIM.: $\phi 65 \times 75\text{mm}$	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

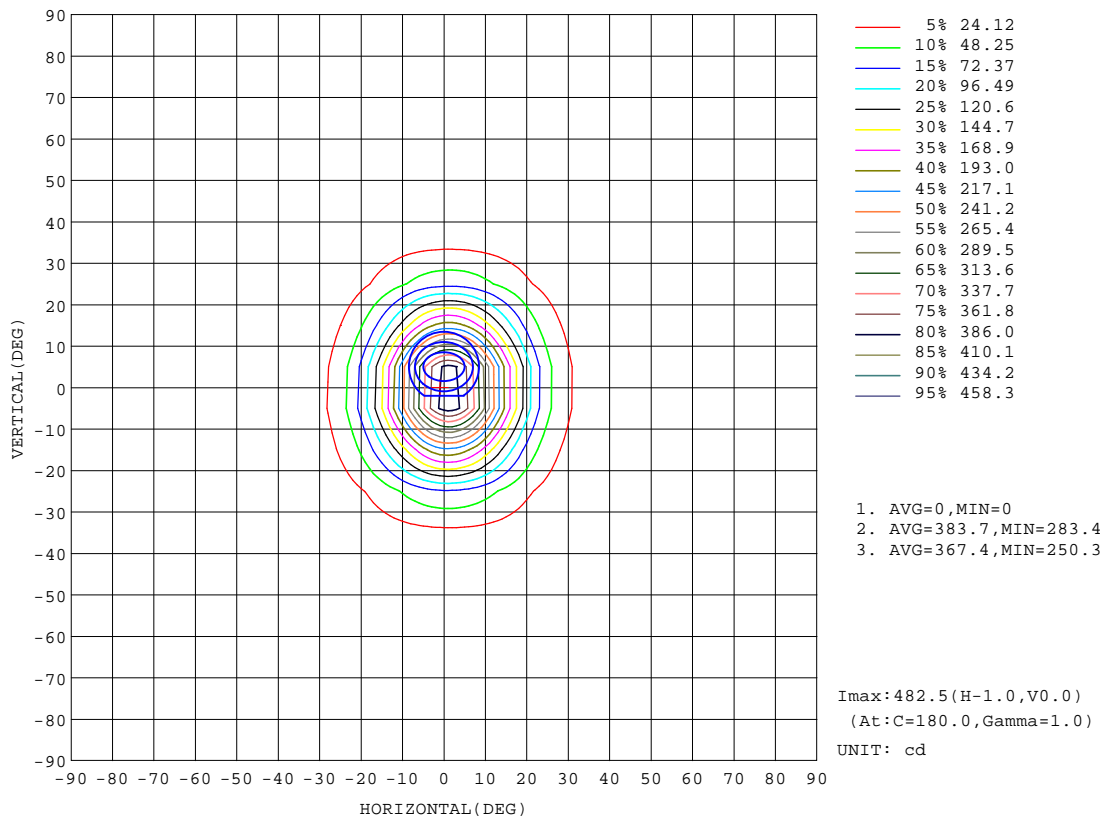


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:NORDECOR
 Test Date:2024-11-06

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:220.30V I:0.0504A P:4.7344W PF:0.4262 Freq:50.00Hz Lamp Flux:132.402x1 lm		
NAME: 6847	TYPE:	WEIGHT:220g
SPEC.:5W	DIM.: $\phi 65 \times 75\text{mm}$	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

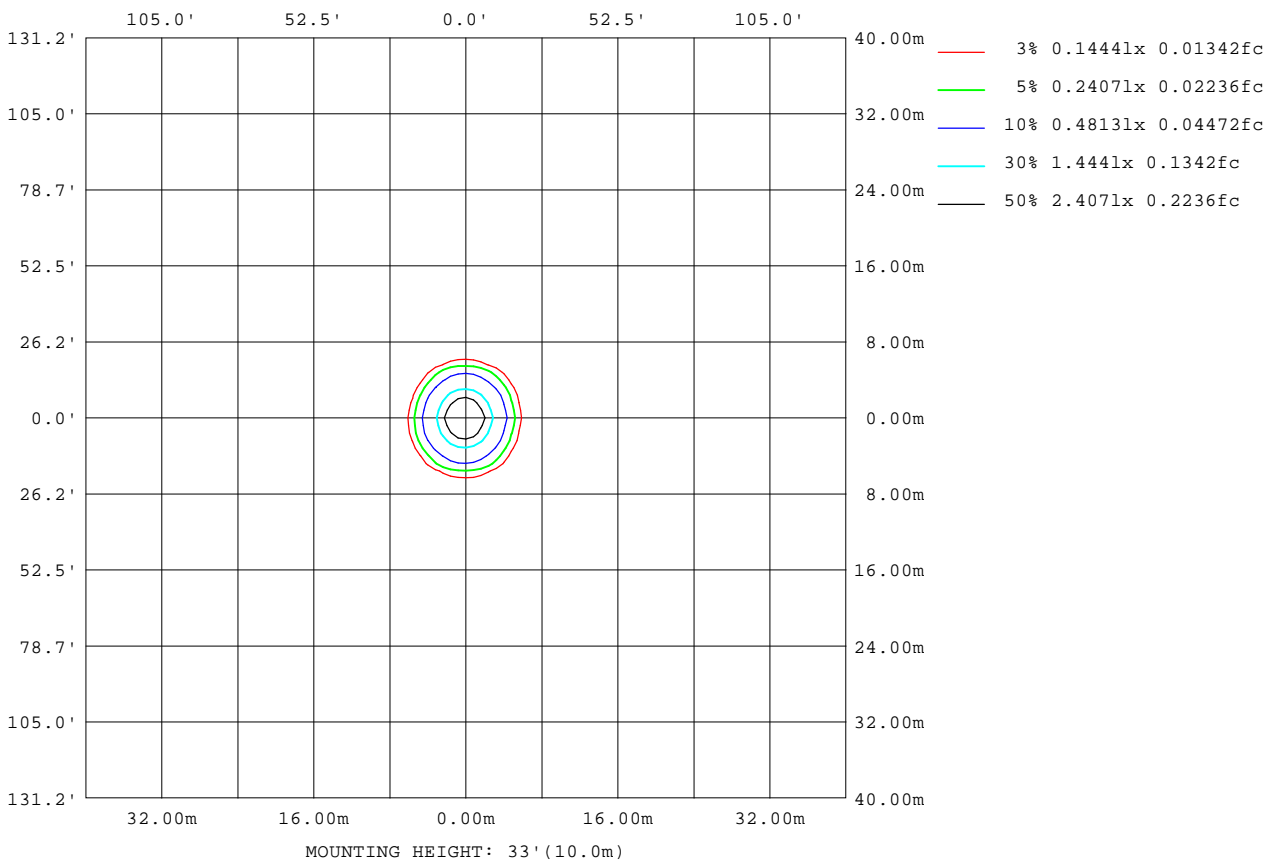

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:NORDECOR
 Test Date:2024-11-06

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

Planar Illuminance Curve

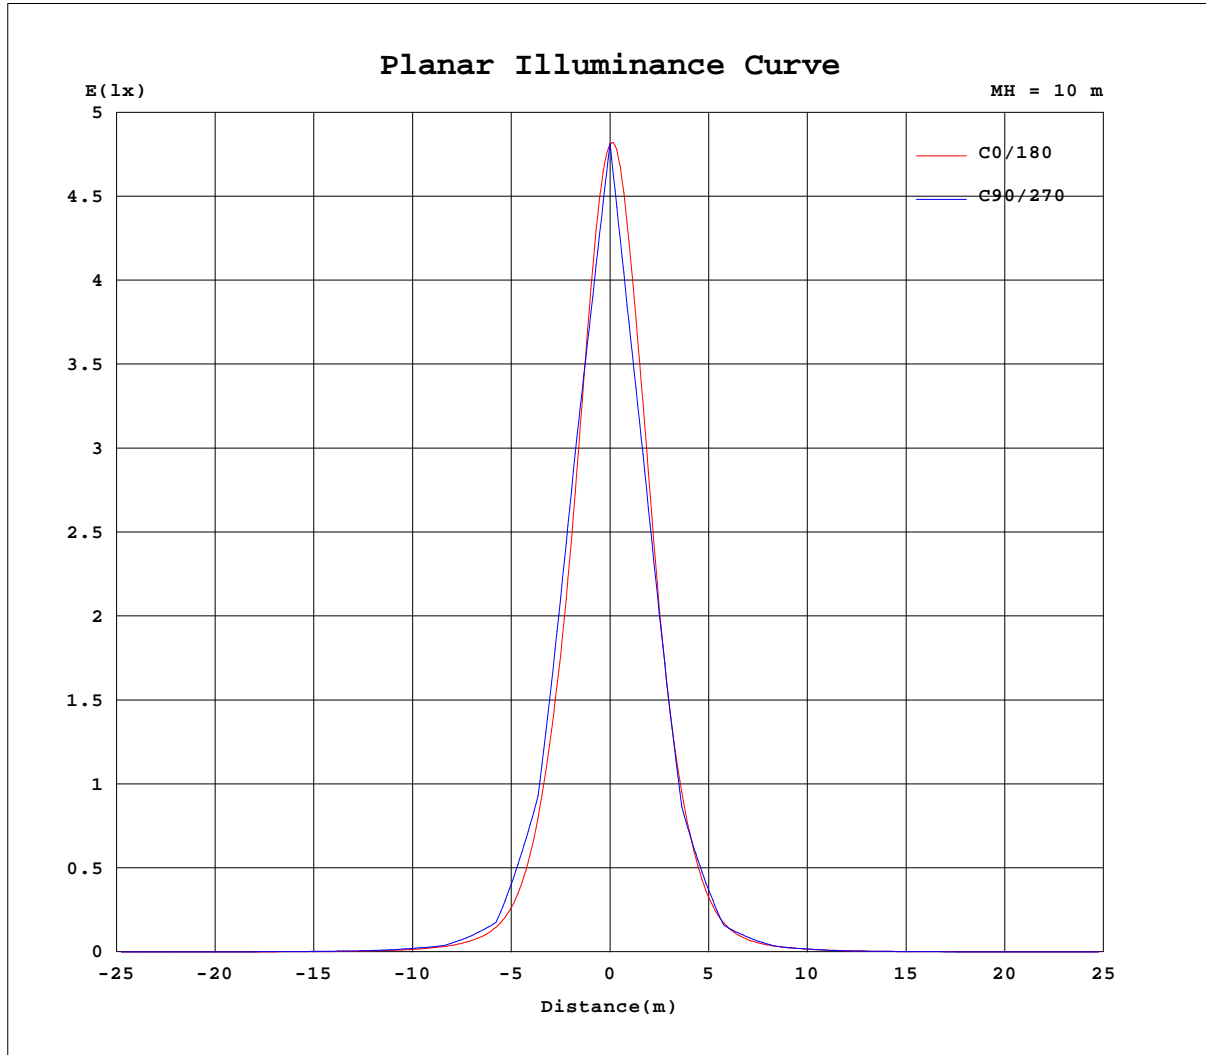


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:NORDECOR
 Test Date:2024-11-06

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.30V I:0.0504A P:4.7344W PF:0.4262 Freq:50.00Hz Lamp Flux:132.402x1 lm		
NAME: 6847	TYPE:	WEIGHT:220g
SPEC.:5W	DIM.: $\phi 65*75$ mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

Flux out:51.85 lm

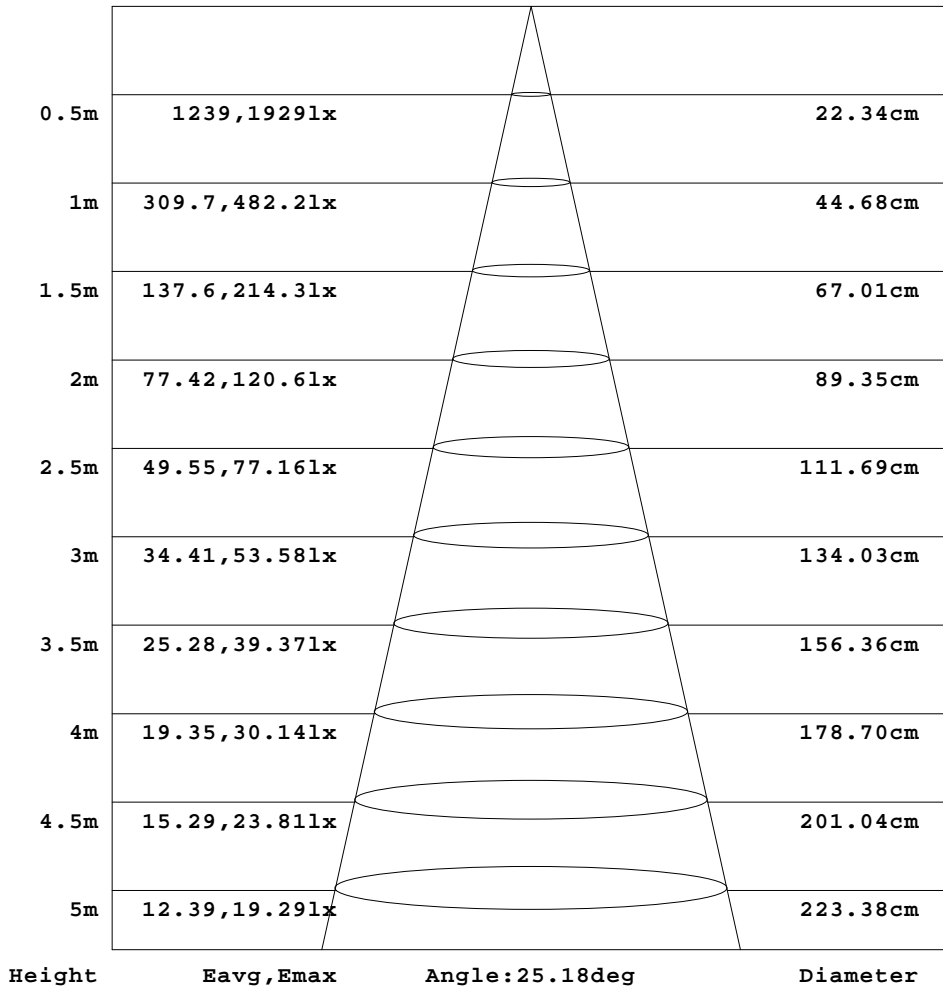

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:NORDECOR
 Test Date:2024-11-06

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.30V I:0.0504A P:4.7344W PF:0.4262 Freq:50.00Hz Lamp Flux:132.402x1 lm		
NAME: 6847	TYPE:	WEIGHT:220g
SPEC.:5W	DIM.: ϕ 65*75mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

Table--1

UNIT: cd

H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.59	0.61	0.66	0.67	0.71	0.72	0.76	0.78	0.80	0.86	0.84	0.86	0.99	0.95	0.95	1.03	1.03	1.03	1.01
-75	0.65	0.62	0.66	0.70	0.73	0.76	0.79	0.83	0.85	0.89	0.94	0.96	0.98	1.02	1.05	1.08	1.13	1.13	1.12
-70	0.63	0.66	0.70	0.73	0.76	0.80	0.84	0.90	0.94	0.98	0.98	1.03	1.07	1.11	1.16	1.20	1.21	1.24	1.24
-65	0.61	0.62	0.67	0.71	0.74	0.78	0.83	0.88	0.93	1.00	1.07	1.09	1.16	1.23	1.30	1.36	1.42	1.45	1.47
-60	0.61	0.64	0.67	0.71	0.74	0.81	0.86	0.94	0.99	1.05	1.14	1.21	1.30	1.39	1.47	1.56	1.63	1.68	1.69
-55	0.59	0.60	0.65	0.70	0.74	0.78	0.86	0.92	1.00	1.09	1.18	1.30	1.47	1.66	1.89	2.15	2.40	2.57	2.65
-50	0.60	0.63	0.66	0.71	0.75	0.82	0.91	0.99	1.08	1.18	1.31	1.52	1.79	2.11	2.49	2.93	3.31	3.55	3.60
-45	0.59	0.60	0.65	0.70	0.75	0.82	0.92	1.00	1.11	1.25	1.50	1.86	2.34	3.01	3.76	4.57	5.37	5.93	6.23
-40	0.60	0.63	0.67	0.74	0.82	0.90	1.00	1.11	1.23	1.51	1.94	2.56	3.41	4.50	5.66	6.88	7.94	8.63	8.89
-35	0.60	0.61	0.68	0.73	0.81	0.90	1.03	1.16	1.35	1.71	2.35	3.32	4.62	6.45	8.80	11.5	14.4	16.7	18.0
-30	0.61	0.65	0.72	0.79	0.90	1.00	1.14	1.32	1.71	2.36	3.43	5.03	7.18	10.2	14.1	18.5	22.9	26.2	27.3
-25	0.61	0.63	0.71	0.78	0.90	1.01	1.18	1.39	1.79	2.54	3.81	5.79	8.82	13.8	22.3	35.0	50.2	63.4	69.9
-20	0.62	0.67	0.75	0.86	0.97	1.13	1.34	1.70	2.38	3.61	5.56	8.64	13.8	23.1	39.8	63.7	89.1	108	112
-15	0.61	0.63	0.72	0.82	0.94	1.09	1.30	1.64	2.27	3.47	5.40	8.61	14.6	27.2	52.1	89.8	137	186	212
-10	0.62	0.67	0.76	0.86	1.02	1.20	1.47	1.99	2.99	4.72	7.50	12.4	23.1	47.8	92.1	152	224	293	311
-5	0.61	0.63	0.73	0.84	0.97	1.14	1.37	1.81	2.57	4.03	6.28	10.3	18.8	39.2	80.6	144	235	334	395
0	0.63	0.70	0.78	0.90	1.05	1.24	1.56	2.12	3.15	4.93	7.77	13.4	26.6	57.9	115	203	329	439	481
5	0.62	0.62	0.73	0.84	0.96	1.14	1.37	1.80	2.54	3.92	6.07	9.84	17.9	37.3	76.9	140	231	329	389
10	0.61	0.67	0.76	0.87	1.02	1.20	1.49	1.98	2.84	4.41	6.80	11.2	20.8	42.7	83.8	143	216	282	300
15	0.62	0.60	0.70	0.80	0.92	1.07	1.28	1.63	2.19	3.23	4.96	7.68	12.9	24.0	46.4	82.5	128	176	202
20	0.63	0.62	0.71	0.82	0.94	1.10	1.33	1.69	2.21	3.23	4.88	7.38	11.8	20.0	35.0	57.0	81.2	98.9	104
25	0.61	0.60	0.68	0.75	0.87	0.98	1.13	1.37	1.72	2.35	3.43	5.06	7.61	11.9	19.4	31.3	45.4	58.0	64.1
30	0.60	0.63	0.71	0.78	0.87	0.99	1.14	1.29	1.63	2.18	3.04	4.46	6.30	8.86	12.3	16.6	20.8	23.8	24.5
35	0.61	0.60	0.66	0.72	0.80	0.89	1.00	1.14	1.32	1.63	2.15	3.00	4.14	5.70	7.76	10.3	12.9	15.1	16.1
40	0.59	0.62	0.67	0.73	0.80	0.88	0.98	1.07	1.20	1.43	1.82	2.38	3.11	4.05	5.08	6.07	6.93	7.51	7.69
45	0.59	0.59	0.64	0.67	0.74	0.80	0.88	0.97	1.07	1.19	1.42	1.72	2.15	2.71	3.35	3.97	4.57	5.03	5.25
50	0.59	0.60	0.64	0.68	0.74	0.79	0.86	0.94	1.02	1.11	1.23	1.39	1.60	1.87	2.12	2.37	2.63	2.81	2.86
55	0.59	0.59	0.62	0.65	0.70	0.74	0.79	0.86	0.92	1.00	1.08	1.17	1.31	1.45	1.62	1.77	1.92	2.05	2.10
60	0.59	0.60	0.63	0.66	0.68	0.74	0.78	0.83	0.88	0.95	1.01	1.06	1.14	1.19	1.23	1.29	1.32	1.35	1.37
65	0.60	0.61	0.62	0.64	0.67	0.69	0.72	0.77	0.81	0.85	0.90	0.94	0.99	1.02	1.07	1.11	1.13	1.15	1.16
70	0.61	0.62	0.63	0.64	0.66	0.67	0.71	0.74	0.78	0.79	0.82	0.84	0.88	0.89	0.92	0.94	0.94	0.95	0.95
75	0.59	0.61	0.62	0.63	0.64	0.64	0.67	0.68	0.71	0.73	0.74	0.76	0.78	0.79	0.81	0.83	0.83	0.83	0.84
80	0.61	0.61	0.61	0.62	0.63	0.63	0.64	0.66	0.66	0.67	0.68	0.68	0.70	0.70	0.71	0.72	0.71	0.72	0.71
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(h) Range:-90 - 90DEG
H(h) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-11-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.30V I:0.0504A P:4.7344W PF:0.4262 Freq:50.00Hz Lamp Flux:132.402x1 lm		
NAME: 6847	TYPE:	WEIGHT:220g
SPEC.:5W	DIM.: ϕ 65*75mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

Table--2

UNIT: cd

H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.98	0.96	0.93	0.89	0.88	0.85	0.81	0.81	0.79	0.75	0.73	0.72	0.71	0.68	0.67	0.68	0.65	0.62
-75	1.10	1.06	1.06	0.98	0.97	0.95	0.92	0.88	0.84	0.81	0.76	0.76	0.70	0.68	0.68	0.66	0.66	0.63
-70	1.19	1.17	1.15	1.12	1.04	1.01	0.96	0.92	0.87	0.84	0.85	0.71	0.68	0.70	0.68	0.65	0.63	0.60
-65	1.45	1.39	1.36	1.26	1.21	1.15	1.09	1.04	0.96	0.91	0.83	0.81	0.73	0.69	0.67	0.64	0.62	0.60
-60	1.65	1.59	1.51	1.39	1.31	1.24	1.16	1.07	0.99	0.92	0.86	0.78	0.74	0.70	0.65	0.62	0.60	0.60
-55	2.62	2.47	2.25	2.02	1.79	1.58	1.38	1.22	1.10	1.00	0.93	0.85	0.78	0.72	0.66	0.63	0.59	0.58
-50	3.47	3.18	2.80	2.45	2.09	1.77	1.47	1.26	1.13	1.02	0.92	0.84	0.76	0.71	0.64	0.60	0.57	0.56
-45	6.17	5.77	5.12	4.37	3.63	2.91	2.25	1.75	1.40	1.16	1.02	0.92	0.83	0.75	0.68	0.64	0.58	0.57
-40	8.62	7.91	6.88	5.70	4.58	3.51	2.59	1.94	1.45	1.18	1.03	0.92	0.84	0.73	0.66	0.61	0.56	0.57
-35	17.7	15.9	13.3	10.6	8.06	5.95	4.25	3.01	2.09	1.52	1.20	1.04	0.92	0.81	0.73	0.66	0.60	0.57
-30	25.7	22.0	17.6	13.4	9.75	6.94	4.80	3.27	2.18	1.57	1.23	1.06	0.92	0.80	0.72	0.65	0.59	0.58
-25	66.7	56.3	41.9	27.8	17.8	11.4	7.51	4.97	3.23	2.12	1.51	1.21	1.04	0.90	0.78	0.70	0.62	0.58
-20	101	79.9	54.1	33.0	19.8	12.3	7.91	5.12	3.28	2.12	1.51	1.22	1.02	0.88	0.76	0.66	0.61	0.60
-15	200	160	110	65.8	35.5	19.4	11.4	7.10	4.49	2.80	1.88	1.39	1.14	0.98	0.83	0.74	0.65	0.60
-10	273	201	128	70.6	35.4	18.6	10.9	6.69	4.23	2.63	1.79	1.35	1.13	0.94	0.83	0.73	0.64	0.64
-5	372	284	185	108	54.9	27.0	14.6	8.65	5.34	3.33	2.09	1.50	1.20	1.01	0.86	0.74	0.66	0.61
0	413	286	176	96.7	46.7	22.8	12.6	7.49	4.66	2.88	1.86	1.34	1.11	0.91	0.78	0.68	0.65	0.67
5	367	280	184	108	55.5	27.4	14.7	8.72	5.34	3.33	2.07	1.49	1.20	1.01	0.86	0.74	0.66	0.62
10	263	195	127	71.7	36.3	19.3	11.1	6.79	4.23	2.61	1.76	1.35	1.12	0.95	0.82	0.72	0.64	0.64
15	192	154	108	66.0	36.2	20.0	11.7	7.17	4.49	2.78	1.82	1.36	1.11	0.96	0.81	0.70	0.63	0.62
20	95.7	75.7	52.6	33.0	20.2	12.6	8.07	5.10	3.21	2.03	1.44	1.17	0.95	0.84	0.72	0.64	0.57	0.52
25	62.3	52.9	39.7	27.2	17.6	11.4	7.44	4.87	3.17	2.07	1.46	1.19	1.00	0.88	0.75	0.66	0.59	0.60
30	23.1	20.1	16.4	12.7	9.28	6.57	4.55	3.07	2.12	1.51	1.23	1.05	0.93	0.80	0.71	0.64	0.59	0.60
35	15.7	14.2	12.1	9.76	7.45	5.48	3.93	2.80	1.98	1.47	1.19	1.04	0.92	0.80	0.71	0.65	0.59	0.57
40	7.44	6.83	5.96	4.98	3.95	3.01	2.29	1.77	1.38	1.17	1.03	0.91	0.82	0.73	0.66	0.60	0.56	0.56
45	5.21	4.91	4.40	3.79	3.14	2.53	2.00	1.62	1.32	1.14	1.00	0.91	0.81	0.73	0.66	0.61	0.58	0.55
50	2.81	2.63	2.37	2.07	1.83	1.59	1.37	1.21	1.10	0.99	0.90	0.81	0.75	0.67	0.63	0.59	0.55	0.58
55	2.10	2.02	1.89	1.73	1.57	1.42	1.27	1.15	1.04	0.96	0.88	0.82	0.74	0.69	0.64	0.60	0.57	0.56
60	1.36	1.34	1.30	1.24	1.19	1.12	1.07	1.00	0.94	0.86	0.82	0.75	0.70	0.66	0.63	0.58	0.56	0.56
65	1.16	1.15	1.13	1.10	1.06	1.01	0.98	0.93	0.88	0.82	0.78	0.74	0.70	0.66	0.62	0.60	0.58	0.57
70	0.96	0.95	0.95	0.92	0.90	0.87	0.85	0.82	0.79	0.75	0.73	0.69	0.64	0.63	0.60	0.59	0.59	0.59
75	0.84	0.83	0.82	0.81	0.81	0.78	0.77	0.76	0.73	0.70	0.69	0.66	0.65	0.62	0.61	0.60	0.60	0.60
80	0.72	0.71	0.71	0.70	0.68	0.69	0.67	0.67	0.66	0.64	0.63	0.62	0.63	0.60	0.61	0.60	0.60	0.60
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-11-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks: