

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		1883.3 cd per klm. -20.0 degrees vertical -6.0 degrees horizontal
Beam Spread	At 10% of Imax	96.0V x 91.4H
	At 50% of Imax	30.0V x 47.8H
	At 90% of Imax	8.5V x 21.4H
Beam Flux	Total	999.5 lumens per klm.
	To 10% of Imax	812.8 lumens per klm.
	To 50% of Imax	313.3 lumens per klm.
	To 90% of Imax	43.9 lumens per klm.
	Upward LOR	0.0 %
	Downward LOR	99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-11-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.18V I:0.1019A P:10.414W PF:0.4640 Freq:50.00Hz Lamp Flux:267.198x1 lm		
NAME: 6848	TYPE:	WEIGHT:370g
SPEC.:10W	DIM.: ϕ 103*85mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

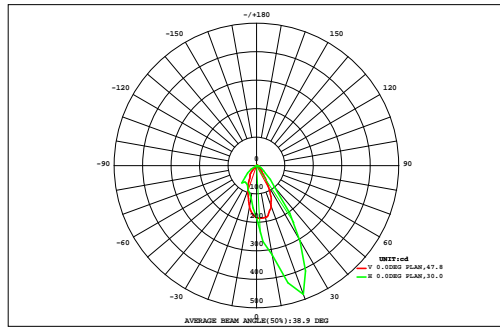

DATA OF LAMP		Eff:25.66lm/W	
MODEL		Imax(cd)	503.2
NOMINAL POWER(W)		AVAILABILITY(%)	82.2
RATED VOLTAGE(V)		Avai. FLUX(lm)	219.7
NOMINAL FLUX(lm)	267.198	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	267.2
TEST VOLTAGE(V)	0	q @50%(H,V)	48,30DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	90	80	70	60	50	40	30	20	10	0	10	20	30	40	50	60	70	80	90	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.01	0.02	0.02	0.03	0.04	0.05	0.05	0.06	0.06	0.06	0.05	0.04	0.03	0.02	0.02	0.01	0.00	0.57	0.00
70	0.00	0.01	0.02	0.02	0.04	0.06	0.09	0.12	0.13	0.13	0.13	0.11	0.09	0.05	0.03	0.02	0.01	0.00	1.05	0.00
60	0.00	0.01	0.02	0.04	0.07	0.13	0.20	0.33	0.52	0.62	0.54	0.34	0.18	0.09	0.04	0.02	0.01	0.00	3.18	0.00
50	0.00	0.01	0.03	0.06	0.13	0.28	0.55	0.97	1.53	1.79	1.63	1.15	0.74	0.23	0.06	0.03	0.01	0.00	9.19	4.57
40	0.00	0.01	0.04	0.08	0.20	0.59	1.17	1.62	2.17	2.55	2.55	2.29	1.58	0.46	0.09	0.04	0.01	0.00	15.4	12.4
30	0.00	0.01	0.04	0.11	0.29	0.70	1.23	1.68	2.16	2.36	2.24	2.04	1.61	0.53	0.11	0.04	0.01	0.00	15.2	12.7
20	0.00	0.02	0.05	0.13	0.38	0.83	1.37	2.23	2.89	3.11	2.76	2.04	1.31	0.46	0.13	0.05	0.02	0.00	17.8	15.0
10	0.00	0.02	0.06	0.16	0.43	0.92	2.08	3.58	4.31	4.32	3.40	2.15	1.16	0.45	0.15	0.06	0.02	0.00	23.3	20.6
0	0.00	0.02	0.06	0.18	0.45	1.14	3.24	6.46	8.15	7.13	4.76	2.35	1.07	0.43	0.16	0.06	0.02	0.00	35.7	32.9
-10	0.00	0.02	0.06	0.18	0.48	1.31	4.38	10.5	13.1	11.3	6.40	2.53	0.99	0.39	0.15	0.06	0.02	0.00	51.9	49.2
-20	0.00	0.02	0.06	0.17	0.46	1.22	3.99	9.50	12.9	11.8	6.01	2.29	0.86	0.34	0.14	0.06	0.02	0.00	49.9	47.1
-30	0.00	0.02	0.05	0.15	0.40	0.92	2.09	4.03	5.91	5.47	2.97	1.45	0.67	0.27	0.12	0.05	0.01	0.00	24.6	21.3
-40	0.00	0.01	0.04	0.11	0.29	0.63	1.04	1.42	1.54	1.40	1.14	0.79	0.46	0.20	0.09	0.04	0.01	0.00	9.23	4.01
-50	0.00	0.01	0.03	0.08	0.19	0.38	0.60	0.79	0.84	0.77	0.68	0.52	0.28	0.13	0.07	0.03	0.01	0.00	5.40	0.00
-60	0.00	0.01	0.02	0.05	0.10	0.20	0.30	0.40	0.45	0.46	0.40	0.28	0.16	0.08	0.04	0.02	0.01	0.00	2.99	0.00
-70	0.00	0.01	0.01	0.03	0.05	0.09	0.15	0.20	0.23	0.23	0.19	0.13	0.07	0.04	0.02	0.01	0.01	0.00	1.48	0.00
-80	0.00	0.00	0.01	0.01	0.01	0.02	0.04	0.06	0.07	0.06	0.04	0.02	0.01	0.00	0.01	0.01	0.00	0.00	0.36	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
F t	0.05	0.21	0.62	1.57	3.99	9.46	22.6	44.0	57.0	53.6	35.9	20.5	11.3	4.20	1.43	0.60	0.20	0.04	267	---
F a	0.00	0.00	0.00	0.00	3.04	16.9	39.4	53.3	50.6	32.7	17.0	5.83	0.86	0.00	0.00	0.00	0.00	0.00	---	220


one-half-peak spread: U:13.5,D:16.8 , L:24.6,R:23.5 NEMA Beam Type: Type 5

H(h) Range:-90 - 90DEG
H(h) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-11-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.18V I:0.1019A P:10.414W PF:0.4640 Freq:50.00Hz Lamp Flux:267.198x1 lm		
NAME: 6848	TYPE:	WEIGHT:370g
SPEC.:10W	DIM.: ϕ 103*85mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

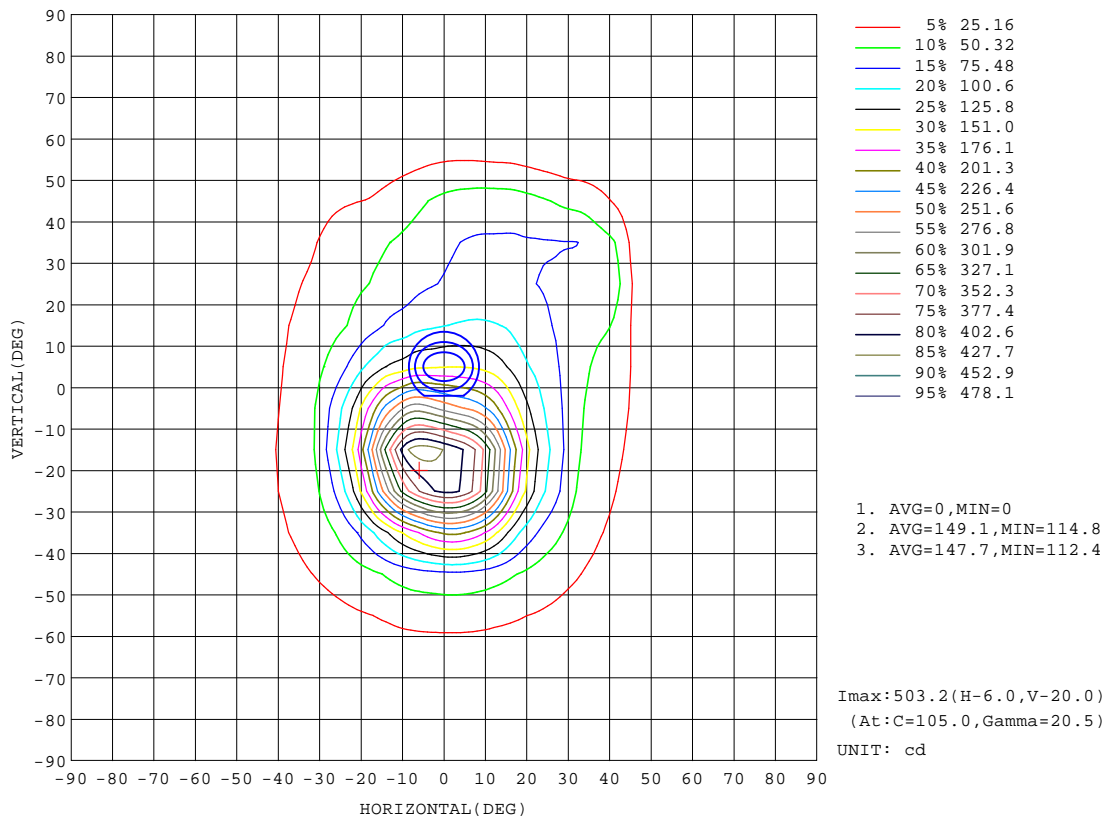


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-11-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.18V I:0.1019A P:10.414W PF:0.4640 Freq:50.00Hz Lamp Flux:267.198x1 lm		
NAME: 6848	TYPE:	WEIGHT:370g
SPEC.:10W	DIM.: $\phi 103 \times 85\text{mm}$	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

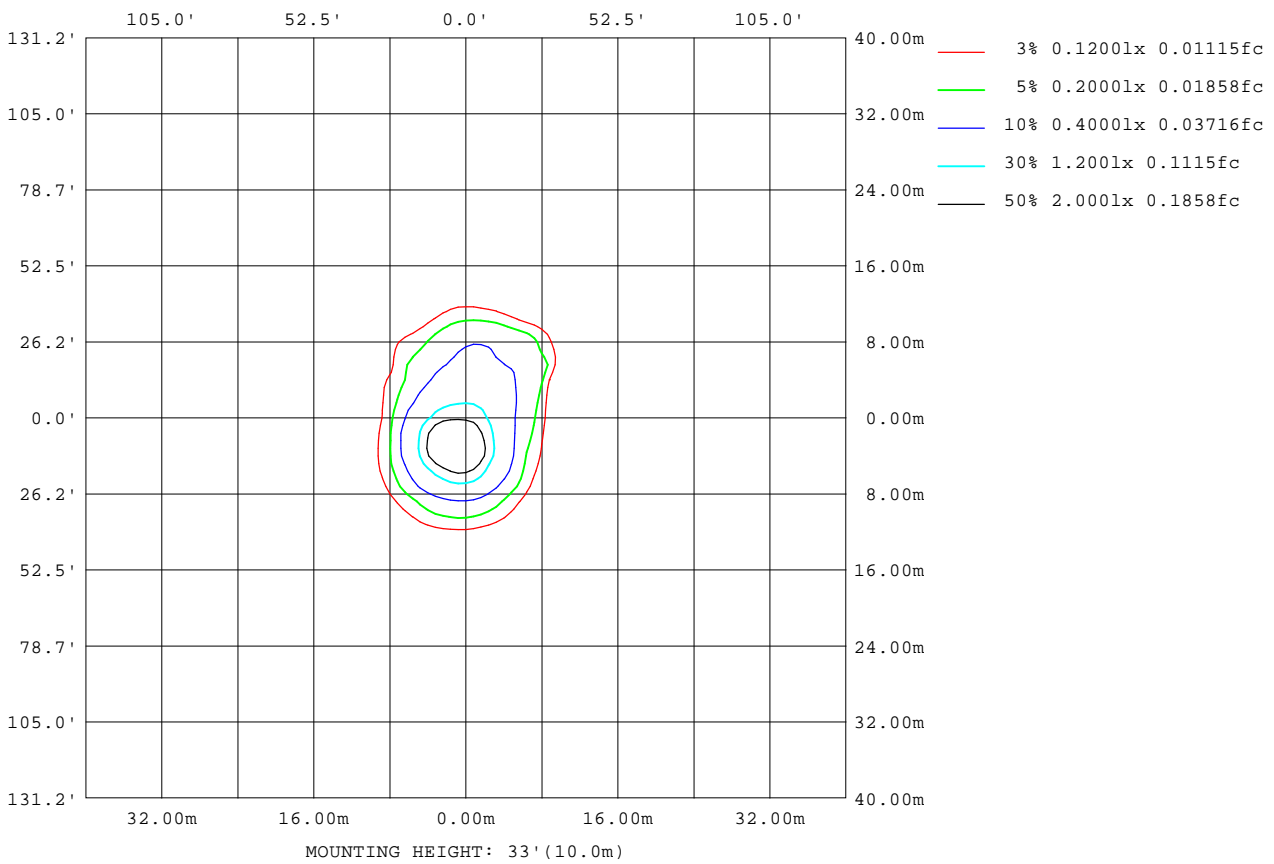

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:NORDECOR
 Test Date:2024-11-06

V(β) Range:-80 - 80DEG
 V(β) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

Planar Illuminance Curve

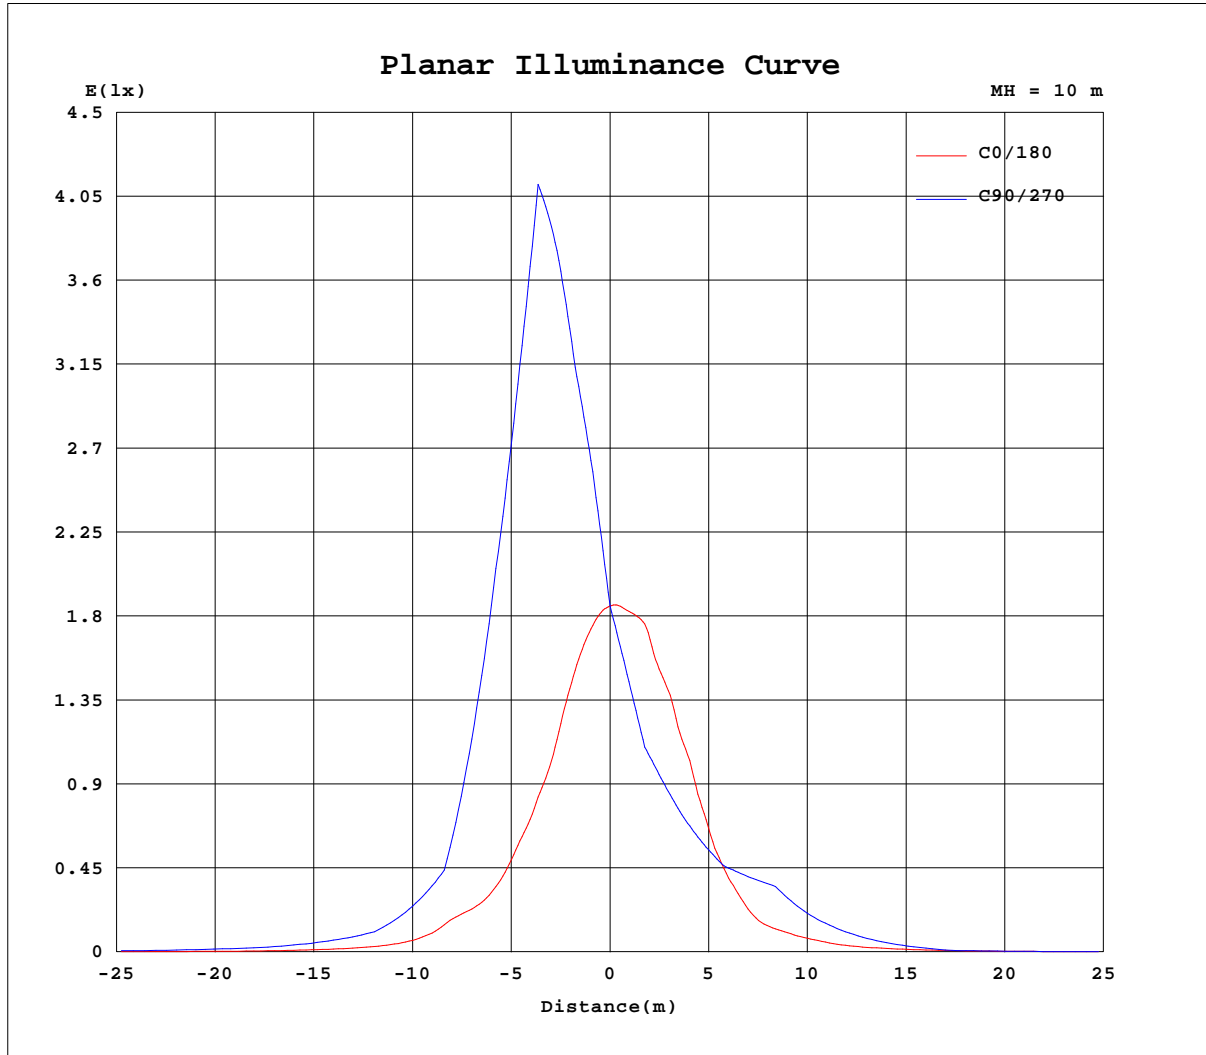


H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:NORDECOR
 Test Date:2024-11-06

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:5.780m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.18V I:0.1019A P:10.414W PF:0.4640 Freq:50.00Hz Lamp Flux:267.198x1 lm		
NAME: 6848	TYPE:	WEIGHT:370g
SPEC.:10W	DIM.: ϕ 103*85mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

Flux out:27.79 lm

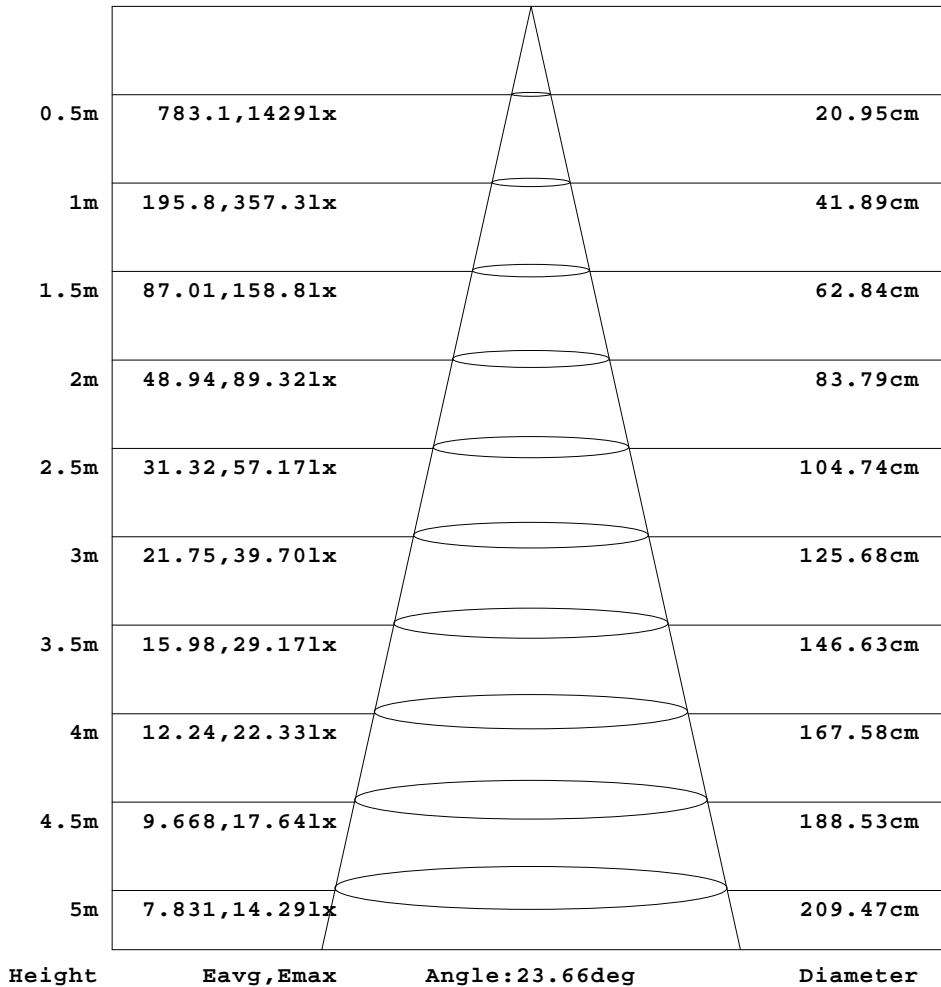

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-11-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.18V I:0.1019A P:10.414W PF:0.4640 Freq:50.00Hz Lamp Flux:267.198x1 lm		
NAME: 6848	TYPE:	WEIGHT:370g
SPEC.:10W	DIM.: ϕ 103*85mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

Table--1

UNIT: cd

H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.95	0.97	0.98	1.03	1.06	1.09	1.12	1.14	1.17	1.18	1.52	2.08	2.71	3.56	4.47	5.04	5.49	5.72	5.81
-75	0.95	0.95	0.98	1.02	1.05	1.08	1.10	1.24	1.57	1.97	2.40	3.10	4.18	5.25	6.10	6.92	7.55	8.05	8.30
-70	0.95	0.98	1.05	1.07	1.10	1.12	1.36	2.00	2.77	3.61	4.67	6.28	7.79	8.64	9.36	10.1	10.6	10.9	11.0
-65	0.98	0.93	1.01	1.07	1.10	1.16	1.52	2.09	2.87	3.84	5.26	7.17	8.93	10.7	12.2	13.8	15.1	15.9	16.3
-60	0.91	1.04	1.09	1.12	1.22	1.92	2.82	3.75	4.91	6.91	9.66	11.6	13.6	15.9	18.2	20.2	21.2	21.7	21.6
-55	0.96	0.95	1.07	1.13	1.19	1.65	2.54	3.52	4.63	6.82	9.47	12.9	16.4	19.8	23.3	26.6	29.7	31.1	31.5
-50	0.98	1.10	1.16	1.26	2.08	3.17	4.22	5.51	8.72	12.0	16.0	21.3	25.9	30.8	35.0	39.3	41.0	41.2	40.7
-45	0.97	1.01	1.14	1.20	1.51	2.53	3.66	4.83	6.85	10.4	14.6	20.8	27.3	34.0	41.6	50.1	59.2	65.3	68.8
-40	1.03	1.17	1.24	1.76	2.98	4.16	5.45	8.19	12.0	17.2	25.6	33.4	42.2	52.3	65.3	79.1	89.6	96.5	96.3
-35	1.04	1.04	1.19	1.27	2.03	3.34	4.56	6.09	9.36	13.6	20.4	29.5	39.0	55.6	81.3	115	152	183	205
-30	1.04	1.20	1.30	2.30	3.69	4.96	6.73	10.5	15.2	23.7	33.3	44.6	69.1	110	165	225	277	314	308
-25	1.04	1.06	1.22	1.36	2.48	3.86	5.17	7.28	11.1	16.0	25.1	34.3	51.4	89.3	154	246	333	385	409
-20	1.07	1.24	1.42	2.66	4.02	5.38	7.83	11.6	16.8	26.5	35.3	58.2	110	197	328	442	493	503	481
-15	1.02	1.06	1.24	1.45	2.73	4.08	5.45	8.06	11.8	17.1	26.2	34.9	60.7	111	192	311	411	443	427
-10	1.06	1.24	1.48	2.80	4.15	5.53	8.30	11.9	17.5	25.9	34.5	63.2	113	187	293	379	392	350	319
-5	1.03	1.07	1.24	1.48	2.76	4.07	5.39	8.07	11.5	17.0	24.8	32.7	58.1	97.2	153	222	274	288	268
0	1.07	1.23	1.48	2.71	4.00	5.26	7.83	11.0	16.5	23.7	30.9	53.0	81.4	120	151	170	185	186	183
5	1.01	1.05	1.21	1.44	2.60	3.84	5.03	7.37	10.4	15.7	23.2	30.0	46.4	67.1	95.3	121	135	147	150
10	1.04	1.19	1.39	2.49	3.68	4.79	6.90	9.77	14.9	22.8	29.1	39.7	52.8	70.5	90.9	101	109	113	116
15	0.99	1.00	1.16	1.31	2.31	3.41	4.48	6.28	8.94	13.2	21.1	28.9	37.2	46.5	59.4	74.1	84.3	94.7	99.8
20	0.97	1.12	1.22	2.13	3.14	4.16	5.67	8.10	11.5	19.4	28.6	34.7	40.3	48.4	57.3	67.8	80.2	86.2	90.1
25	0.98	0.97	1.11	1.18	1.95	2.89	3.85	5.07	7.22	10.0	17.2	24.2	30.8	40.9	47.8	54.5	62.1	71.2	77.1
30	0.97	1.10	1.14	1.78	2.64	3.55	4.47	6.34	8.58	15.0	19.9	26.9	41.6	47.2	51.7	56.3	62.2	68.0	72.6
35	0.98	0.98	1.11	1.14	1.60	2.38	3.18	4.02	5.46	7.45	11.6	17.8	26.4	38.3	43.6	48.1	54.3	62.8	70.7
40	1.00	1.11	1.15	1.42	2.12	2.81	3.57	4.58	6.31	8.16	15.7	26.0	34.9	39.9	44.4	52.4	63.3	73.4	80.4
45	0.99	1.00	1.10	1.15	1.30	1.85	2.46	3.10	3.89	5.16	6.84	11.2	16.8	21.8	25.1	30.6	38.8	48.1	56.5
50	1.00	1.10	1.15	1.17	1.58	2.10	2.62	3.19	4.01	5.52	6.65	7.69	8.77	10.2	16.7	25.2	32.9	39.7	41.4
55	0.96	1.00	1.08	1.13	1.15	1.38	1.73	2.16	2.62	3.20	4.13	5.11	6.04	6.99	8.06	11.6	16.0	20.0	23.4
60	0.99	1.05	1.11	1.12	1.18	1.37	1.70	2.04	2.38	2.75	3.57	4.39	5.21	5.88	6.51	6.81	6.98	7.07	7.04
65	0.98	1.00	1.05	1.11	1.12	1.15	1.25	1.42	1.63	1.87	2.13	2.62	3.10	3.59	3.99	4.35	4.53	4.65	4.70
70	1.02	1.05	1.11	1.12	1.13	1.14	1.14	1.22	1.36	1.51	1.67	1.81	1.97	2.09	2.19	2.24	2.31	2.34	2.38
75	1.00	1.01	1.02	1.06	1.08	1.09	1.10	1.10	1.14	1.21	1.28	1.37	1.44	1.53	1.59	1.65	1.69	1.73	1.74
80	0.99	0.99	1.00	1.03	1.05	1.07	1.07	1.06	1.06	1.06	1.07	1.07	1.08	1.09	1.11	1.14	1.15	1.14	1.16
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-11-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.18V I:0.1019A P:10.414W PF:0.4640 Freq:50.00Hz Lamp Flux:267.198x1 lm		
NAME: 6848	TYPE:	WEIGHT:370g
SPEC.:10W	DIM.: ϕ 103*85mm	SERIAL No.:01
MFR.: NORDECOR	SUR.:	Shielding Angle:24°

Table--2

UNIT: cd

H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	5.46	5.01	4.13	3.21	2.61	2.12	1.66	1.26	1.04	1.01	0.99	0.97	0.96	0.95	0.94	0.92	0.91	0.88
-75	8.42	8.12	7.56	6.69	5.70	4.74	3.60	2.90	2.34	1.89	1.57	1.27	1.04	0.95	0.94	0.92	0.91	0.90
-70	10.8	10.1	9.24	8.19	6.87	5.08	4.13	3.42	2.74	2.13	1.55	1.11	0.93	0.93	0.91	0.91	0.89	0.79
-65	16.3	16.1	15.3	13.9	12.2	10.0	7.61	5.98	4.49	3.59	2.86	2.22	1.62	1.19	0.95	0.93	0.92	0.90
-60	21.4	20.4	18.6	16.2	13.1	10.1	7.82	5.55	4.44	3.59	2.90	2.12	1.45	0.97	0.95	0.94	0.91	0.91
-55	31.2	29.9	27.9	25.3	22.0	18.3	13.9	10.1	7.34	5.52	4.26	3.47	2.66	1.87	1.19	0.98	0.95	0.92
-50	38.3	35.4	31.9	27.7	23.5	17.6	12.4	9.12	6.59	4.93	4.04	3.20	2.28	1.40	1.00	0.97	0.93	0.91
-45	68.5	63.1	55.0	45.6	36.4	28.9	22.6	15.4	10.9	8.02	5.85	4.54	3.63	2.66	1.68	1.06	0.99	0.94
-40	87.9	74.6	59.4	45.0	34.4	27.6	18.4	12.7	9.45	6.76	5.03	4.06	3.04	1.97	1.12	1.01	0.95	0.99
-35	202	175	130	89.2	64.0	45.2	31.0	22.3	14.6	10.6	7.69	5.46	4.34	3.29	2.19	1.24	1.04	0.98
-30	263	185	119	83.1	56.0	34.4	26.2	16.5	11.7	8.61	5.89	4.63	3.55	2.41	1.36	1.06	1.00	0.99
-25	394	333	233	146	96.8	62.3	37.5	28.7	18.3	12.6	9.18	6.33	4.81	3.70	2.54	1.45	1.06	1.00
-20	403	282	173	110	68.5	40.7	31.3	20.1	13.5	9.76	6.76	4.99	3.86	2.67	1.53	1.06	1.00	0.83
-15	400	344	247	160	105	68.1	42.7	33.7	21.4	14.0	9.90	6.93	5.00	3.88	2.70	1.58	1.06	1.00
-10	286	212	148	100	67.7	44.7	36.1	22.8	14.4	10.0	7.09	5.01	3.90	2.73	1.62	1.06	1.00	0.95
-5	251	228	179	131	95.0	67.3	46.3	37.9	24.0	14.6	9.96	7.03	4.94	3.84	2.68	1.60	1.04	0.98
0	171	147	114	89.6	66.8	47.9	39.7	25.2	14.7	9.87	6.97	4.87	3.78	2.64	1.58	1.02	0.96	1.00
5	150	142	127	103	84.4	66.7	51.1	42.7	25.5	14.1	9.46	6.66	4.67	3.62	2.54	1.54	1.01	0.96
10	114	106	92.2	79.3	66.6	54.4	45.7	25.8	13.5	9.05	6.34	4.48	3.46	2.43	1.50	1.01	0.96	0.94
15	103	103	98.7	87.4	77.2	67.1	57.6	50.8	25.5	12.5	8.49	5.93	4.24	3.27	2.30	1.42	0.99	0.94
20	92.2	91.2	82.7	75.2	67.7	60.8	55.9	25.3	11.5	7.93	5.51	3.99	3.07	2.17	1.34	0.97	0.93	0.92
25	81.4	82.5	81.8	76.4	73.6	71.7	67.2	61.3	28.9	10.3	7.21	4.94	3.69	2.82	2.02	1.26	0.96	0.93
30	72.8	72.4	70.2	72.1	75.6	73.7	66.7	32.5	9.10	6.50	4.37	3.39	2.58	1.86	1.18	0.96	0.93	0.94
35	76.5	78.9	79.5	77.9	77.1	76.2	69.7	55.2	22.2	7.99	5.62	3.91	3.07	2.35	1.71	1.11	0.96	0.90
40	85.0	86.5	85.7	82.0	76.7	65.8	43.6	12.0	6.88	4.74	3.45	2.74	2.12	1.56	1.04	0.96	0.88	0.89
45	60.9	62.3	61.7	57.8	51.3	44.2	37.7	25.9	9.17	5.68	3.91	2.99	2.42	1.90	1.41	1.03	0.98	0.92
50	39.7	36.9	29.9	20.7	11.6	9.51	8.13	6.34	4.49	3.08	2.53	2.09	1.68	1.25	1.01	0.99	0.96	0.96
55	24.2	23.4	22.0	18.3	13.7	8.96	7.74	6.58	4.77	3.45	2.57	2.15	1.80	1.45	1.12	0.99	0.98	0.96
60	7.05	7.02	6.78	6.69	6.28	5.96	5.02	3.20	2.40	2.06	1.78	1.51	1.22	0.99	0.97	0.98	0.95	0.90
65	4.71	4.76	4.77	4.61	4.55	4.26	3.99	3.39	2.39	1.93	1.70	1.50	1.29	1.12	1.00	0.99	0.99	0.97
70	2.48	2.52	2.43	2.41	2.24	2.01	1.77	1.59	1.45	1.34	1.22	1.08	1.02	1.01	1.01	1.00	0.98	0.98
75	1.77	1.82	1.84	1.79	1.76	1.67	1.54	1.41	1.31	1.23	1.17	1.12	1.04	1.02	1.01	1.00	0.99	0.98
80	1.17	1.15	1.14	1.11	1.09	1.06	1.04	1.03	1.01	1.01	1.01	1.00	1.01	1.00	0.98	0.98	0.98	0.95
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(h) Range:-90 - 90DEG
H(h) Interval: 1.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:NORDECOR
Test Date:2024-11-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:5.780m [K=1.0000]
Remarks: