

Report No.:

Test Time: 2026-05-18 11:17

Luminaire Property

Luminaire Manufacturer: NORDECOR
Luminaire Description: 80082
Luminous Width (mm): 52
Current: 0.058 A
Power Factor: 0.464


Luminous Length (mm): 52
Voltage: 220.4 V
Power: 5.92 W

Photometric Results


CIE Class: Direct
Measurement Flux: 328.8 lm
Downward Ratio: 100%
Horizontal Diffuse Angle(10%,50%,80%,100%): H32.9,H17.2,H10.1,H0
Vertical Diffuse Angle(10%,50%,80%,100%): V33,V17.5,V10.4,V2
Luminaire Efficacy Rating (LER): 55.58
Max. Intensity: 2327.87 cd
S/MH(C0/C180): 0.29

Total Rated Lamp Lumens: 328.8 lm
Efficiency: 100%
Upward Ratio: 0%
Central Intensity: 2271.98 cd
Pos of Max. Intensity: H90 V2
S/MH(C90/C270): 0.31

Picture Of Luminaire



Luminous Intensity Distribution Curve

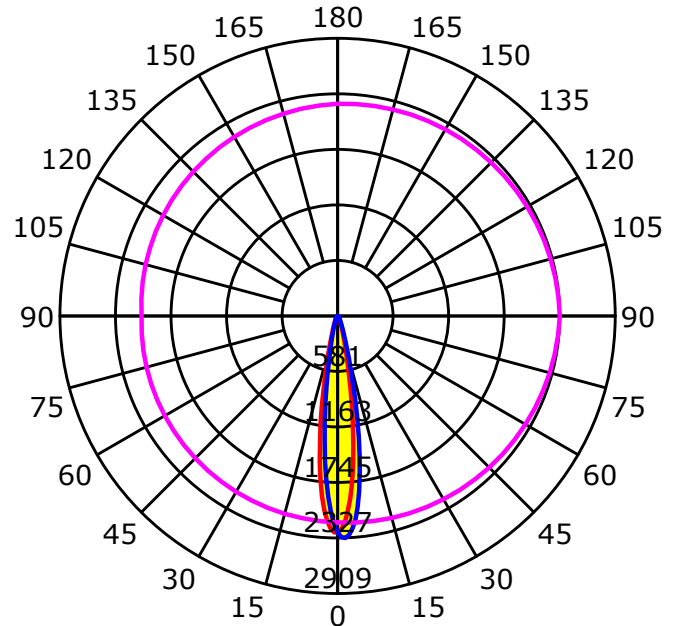

Unit: cd

Average Diffuse Angle(50%): 17.2°

— C0-C180 — C90-C270 — G2

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

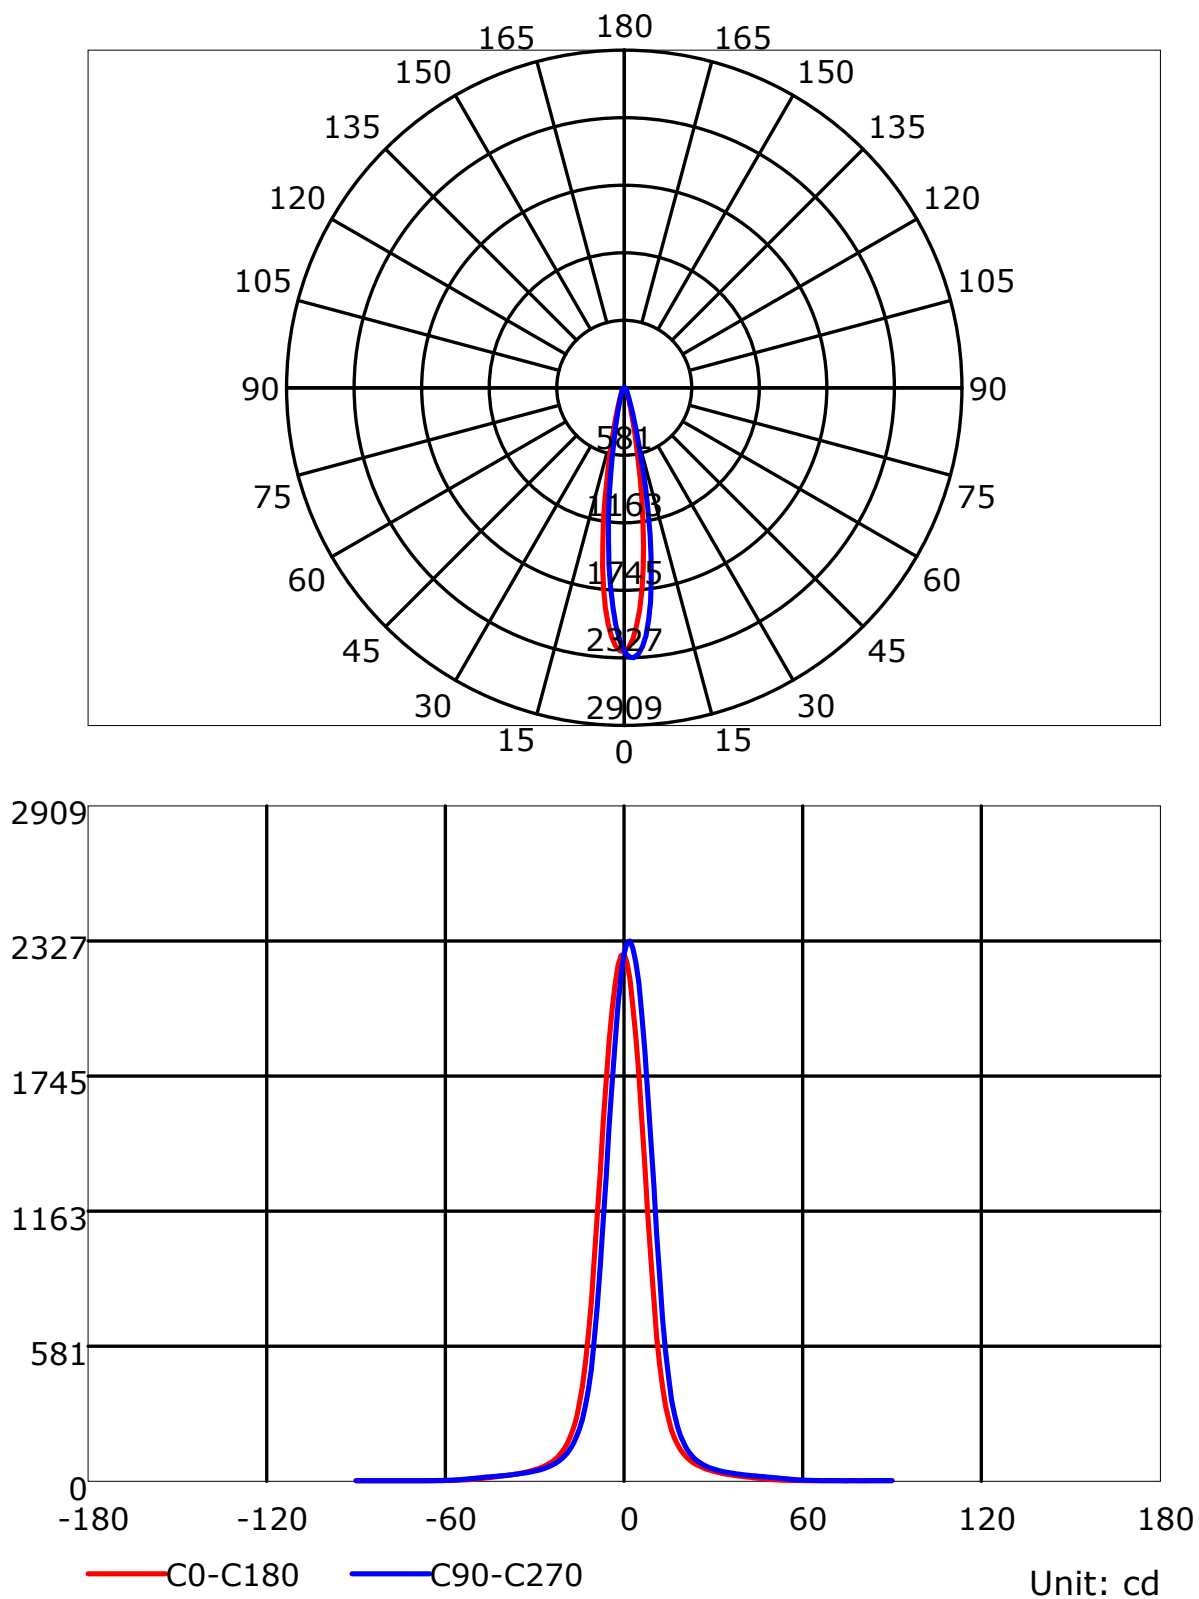

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Luminous Intensity Distribution Curve(cd/klm)

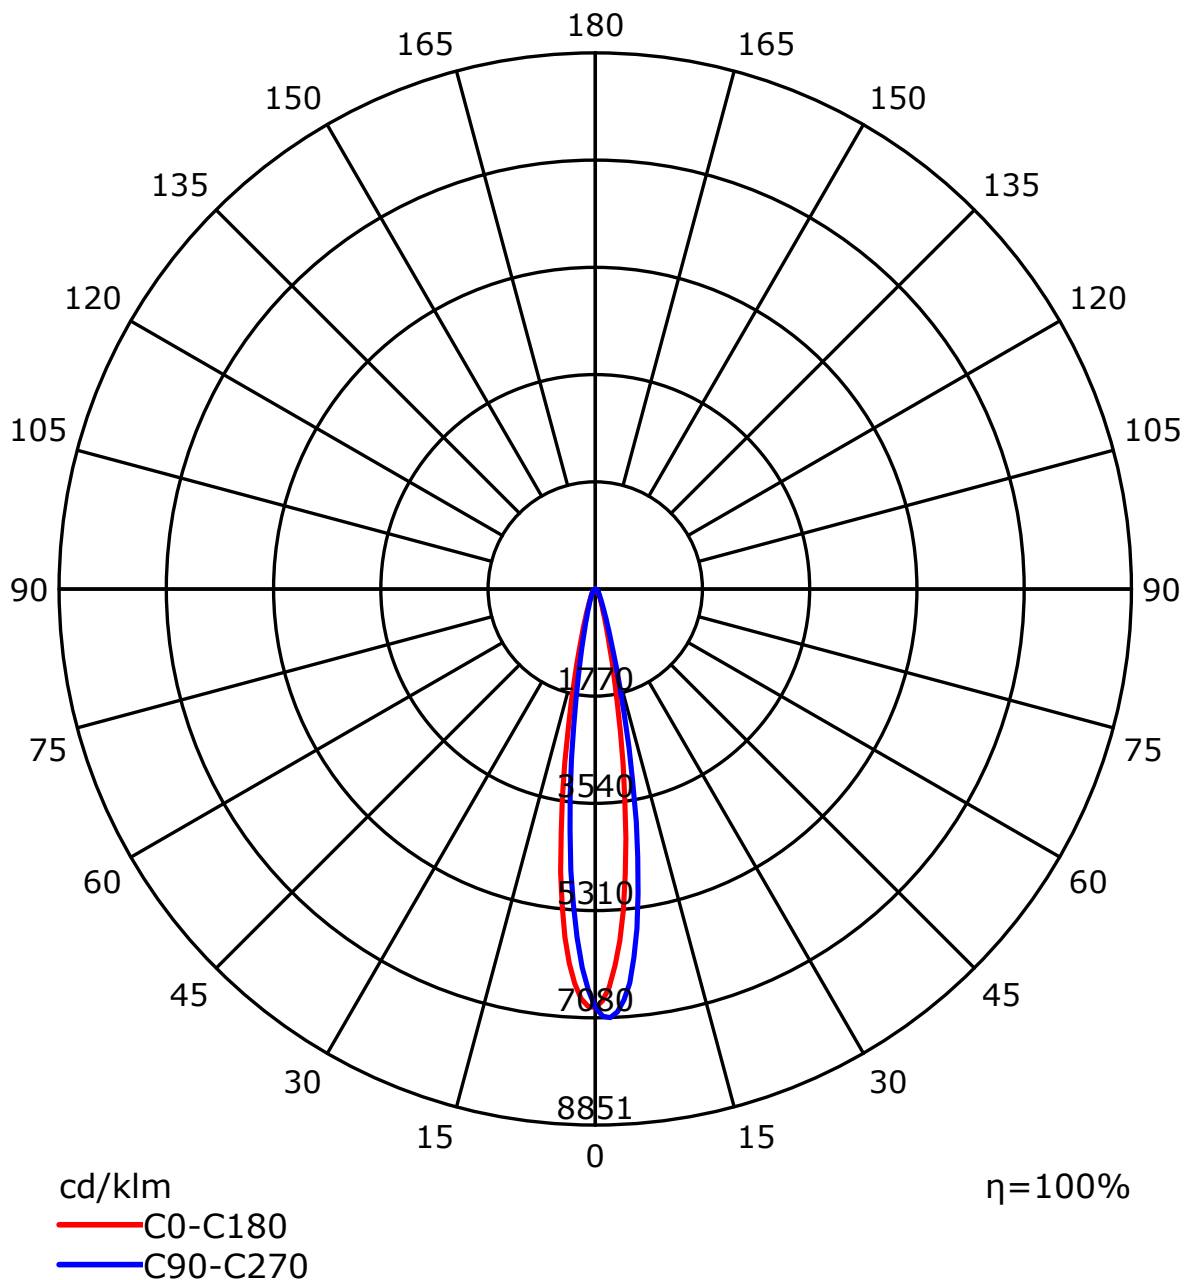


C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95
2	110	106	103	100	108	104	101	99	101	99	96	98	96	94	95	94	92	91
3	106	101	97	94	104	100	96	93	97	94	92	95	92	90	93	91	89	87
4	103	97	92	89	101	96	92	88	94	90	87	92	89	86	90	88	86	84
5	99	93	88	85	98	92	88	85	90	87	84	89	86	83	87	85	83	81
6	96	90	85	82	95	89	85	82	88	84	81	86	83	81	85	82	80	79
7	94	87	82	79	93	86	82	79	85	81	79	84	81	78	83	80	78	77
8	91	84	80	77	90	84	79	77	83	79	76	82	78	76	81	78	76	75
9	89	82	78	75	88	81	77	75	81	77	74	80	76	74	79	76	74	73
10	87	80	76	73	86	79	75	73	79	75	72	78	75	72	77	74	72	71

Spacing Criteria (0-180): 0.29
Spacing Criteria (90-270): 0.31
Spacing Criteria (Diagonal): 0.30

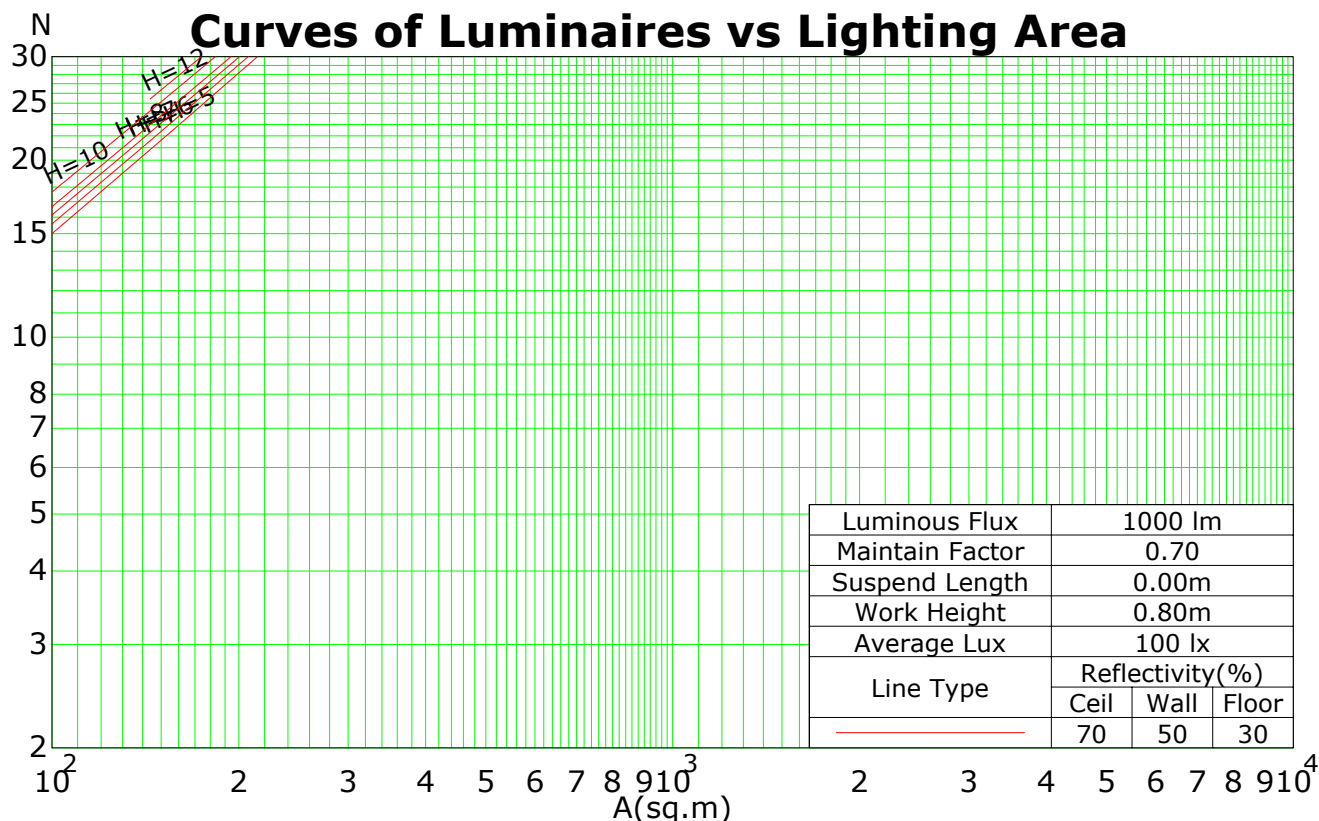

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Isocandela (rectangle)

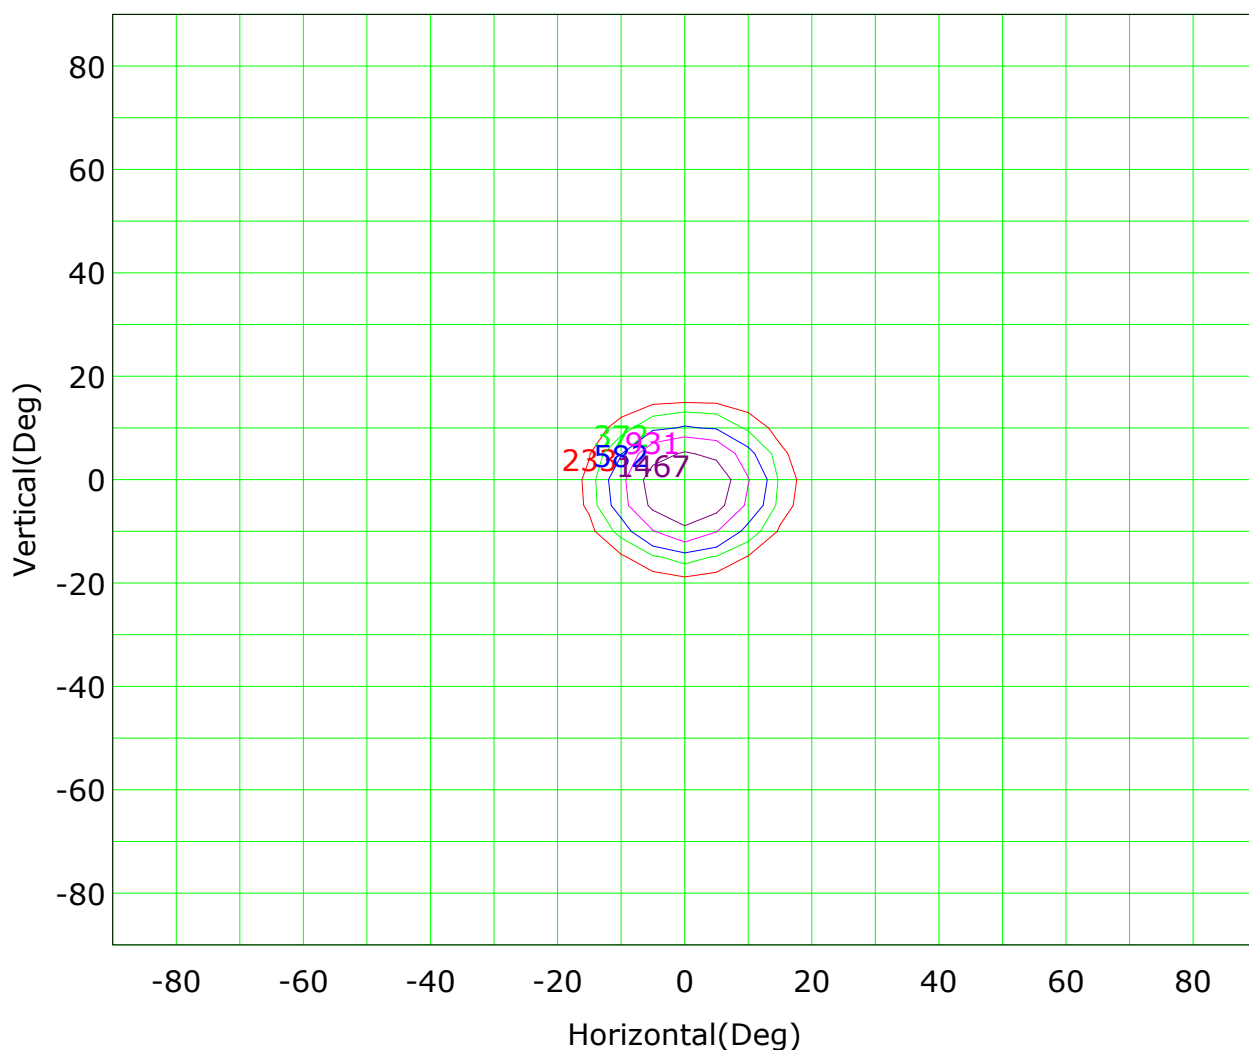


Imax (100%): 2328 cd

(10%): 233 cd	(16%): 372 cd
(25%): 582 cd	(40%): 931 cd
(63%): 1467 cd	(100%): 2328 cd

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Isocandela (sphere)

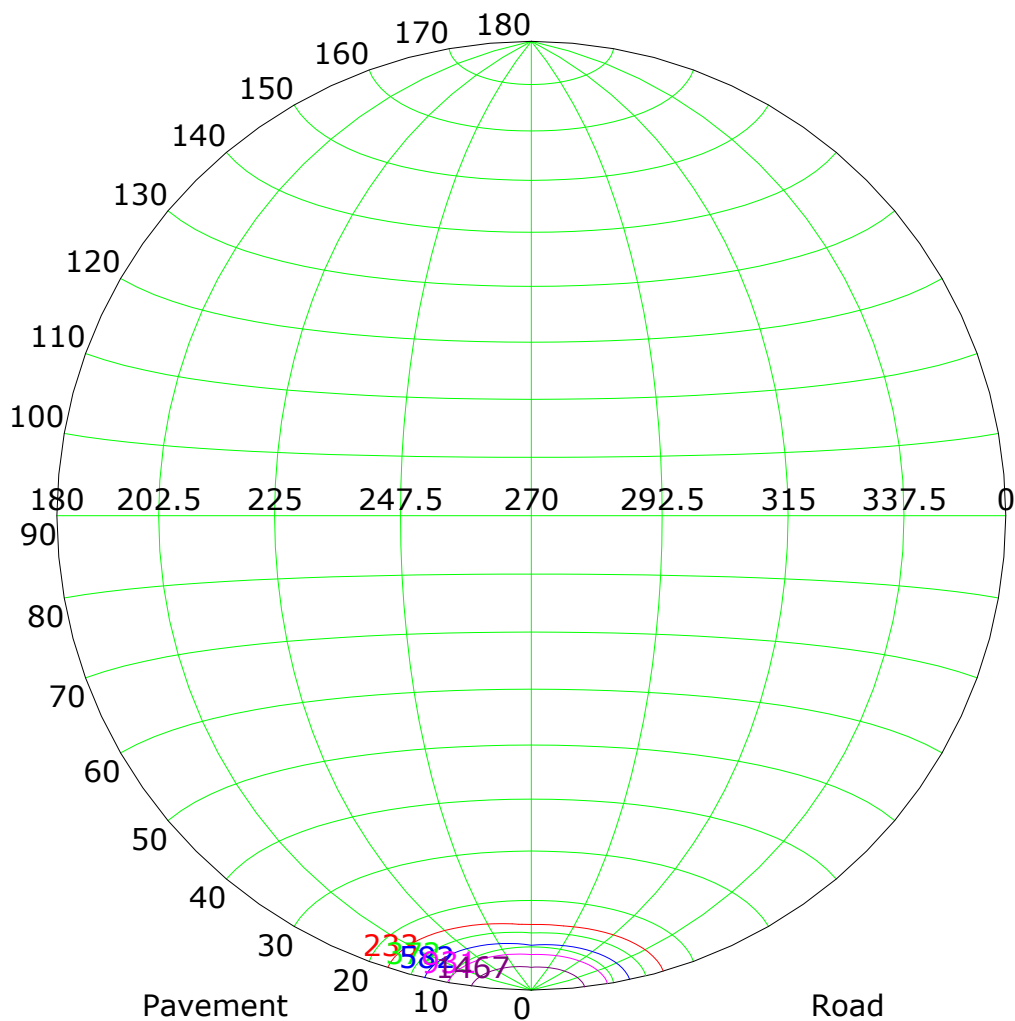


Imax (100%): 2328 cd

(10%): 233 cd
(25%): 582 cd
(63%): 1467 cd

(16%): 372 cd
(40%): 931 cd
(100%): 2328 cd

IsoLux Plot

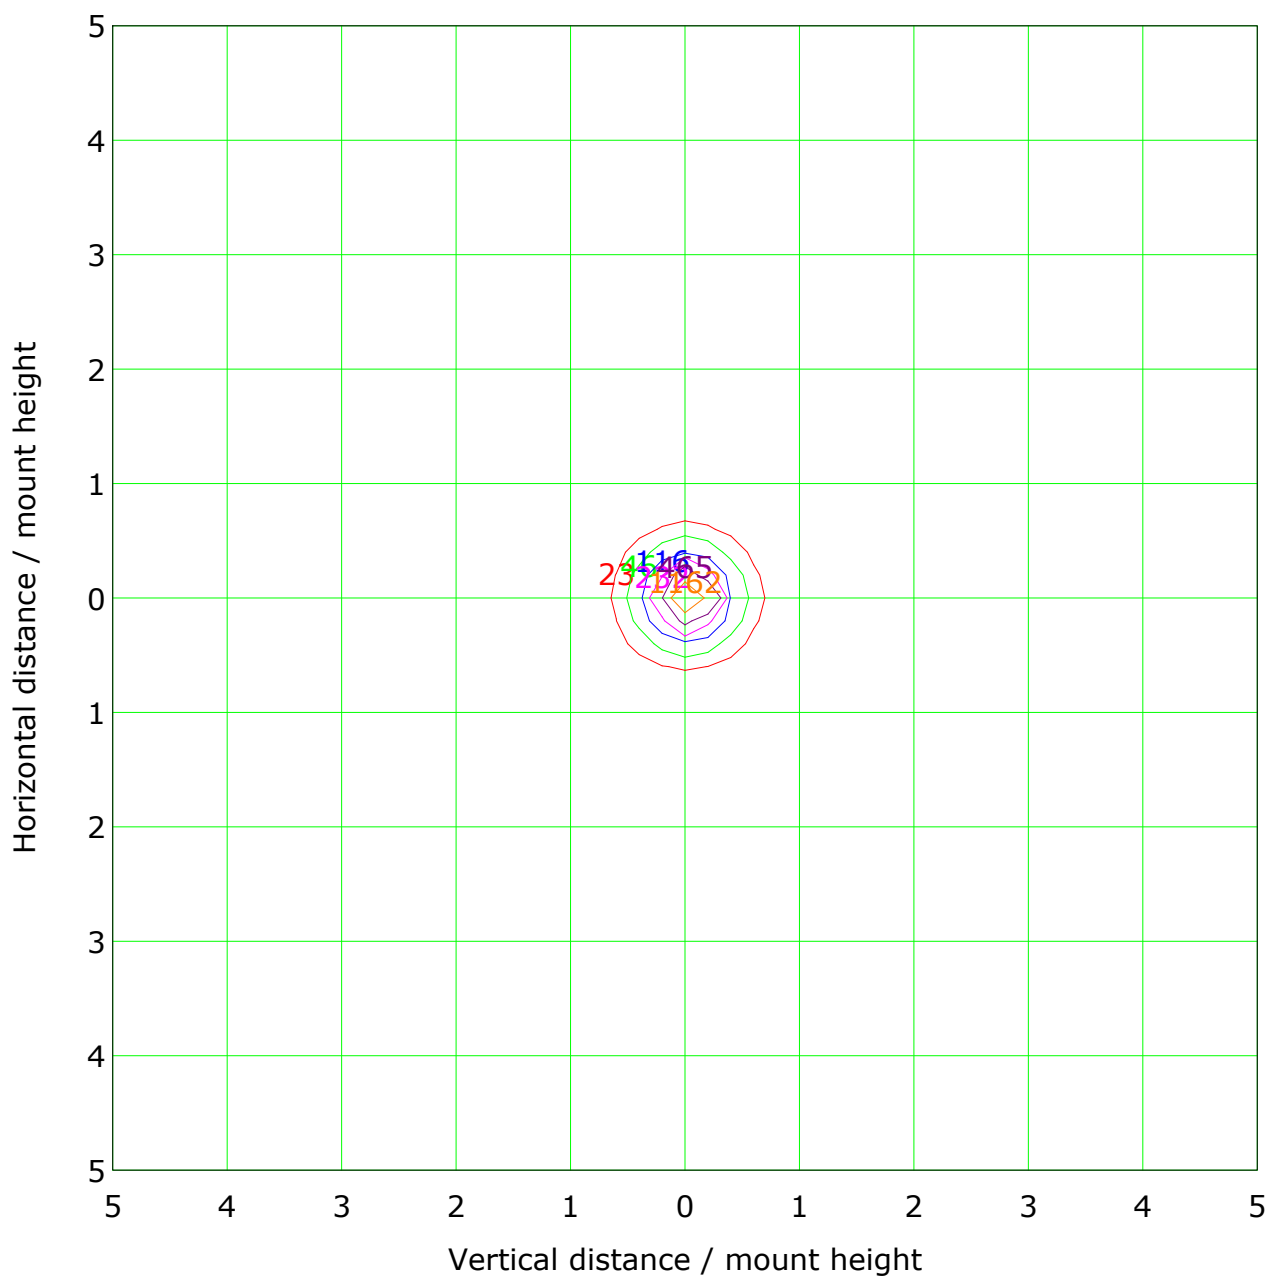

Mounting Height: 1.0m Max Lux(100%): 2323.6 lx


— (1%): 23.2 lx	— (2%): 46.5 lx
— (5%): 116.2 lx	— (10%): 232.4 lx
— (20%): 464.7 lx	— (50%): 1161.8 lx
— (100%): 2323.6 lx	

C Plane (°): 0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Roadway CU Curve

Efficiency(%)


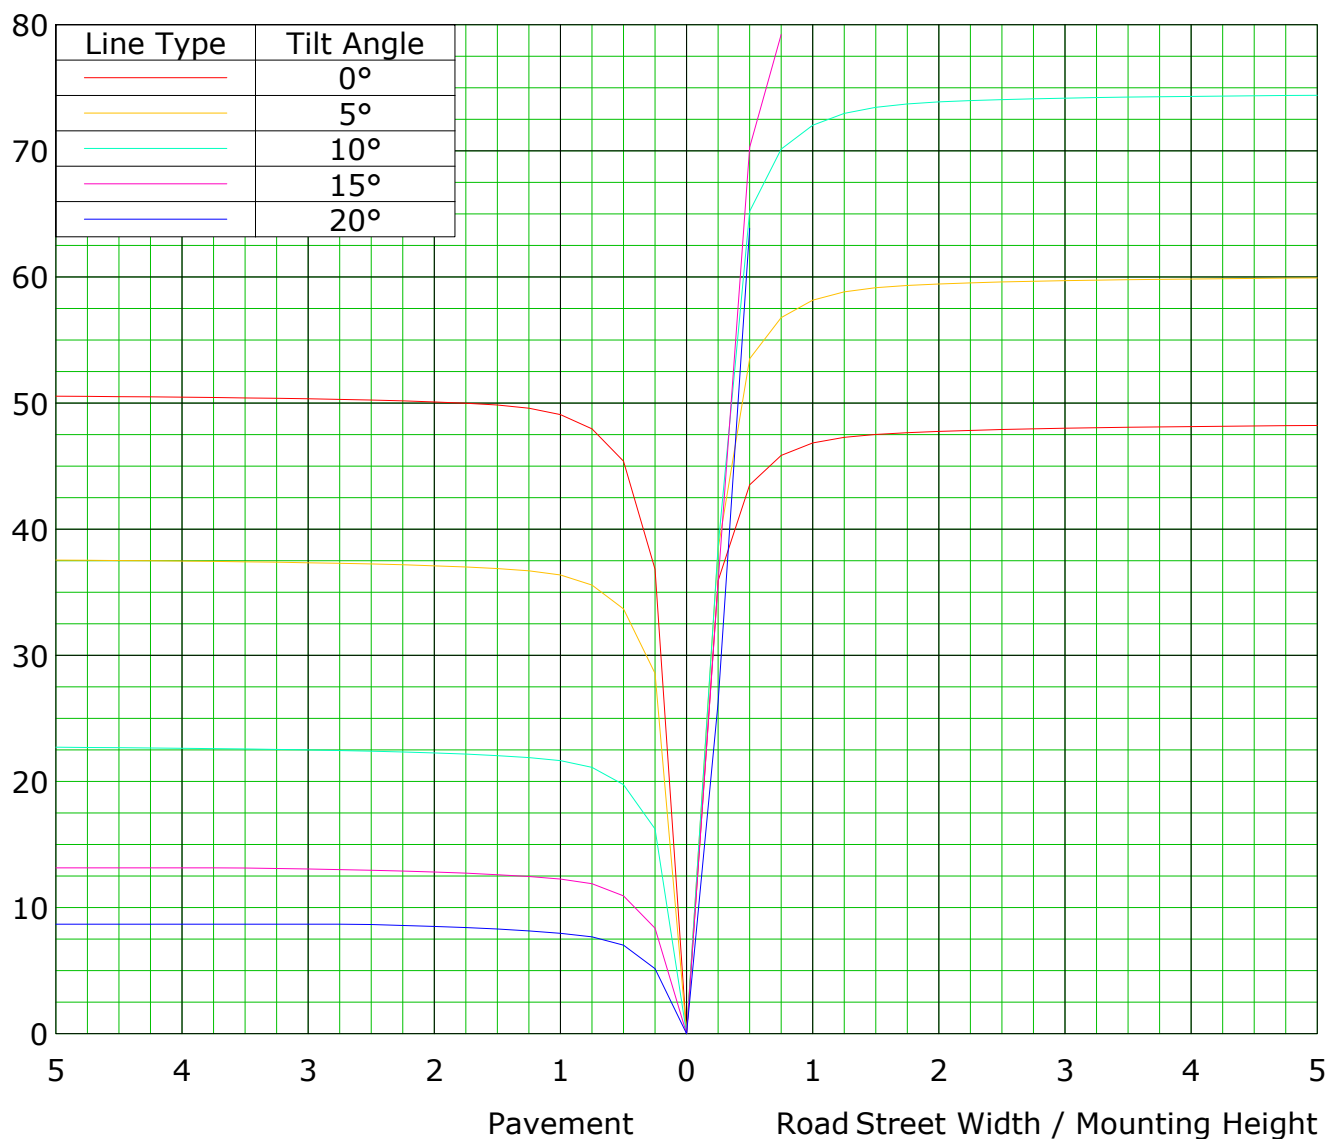


C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

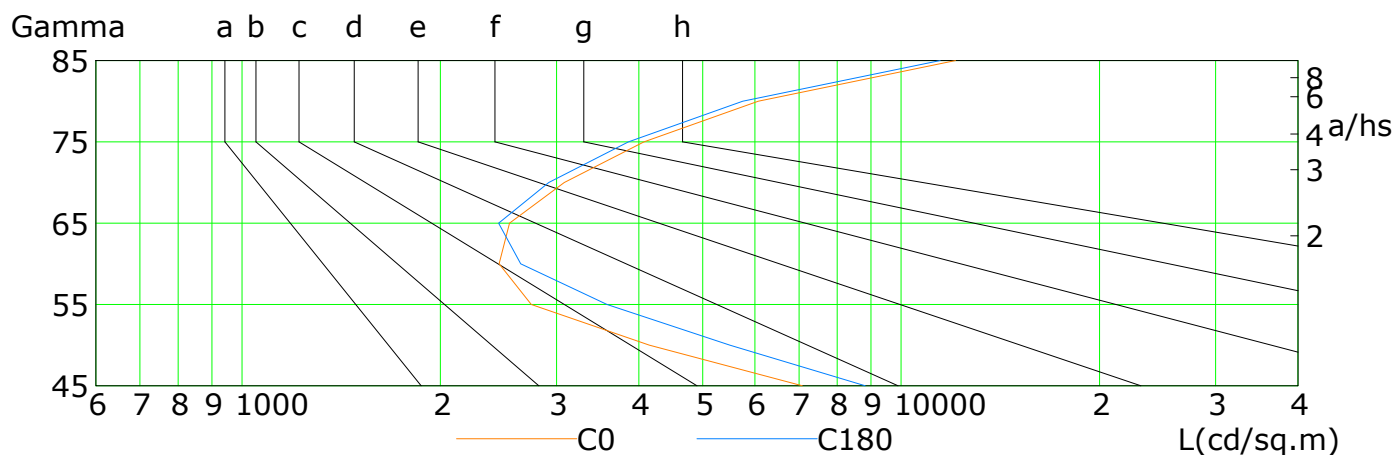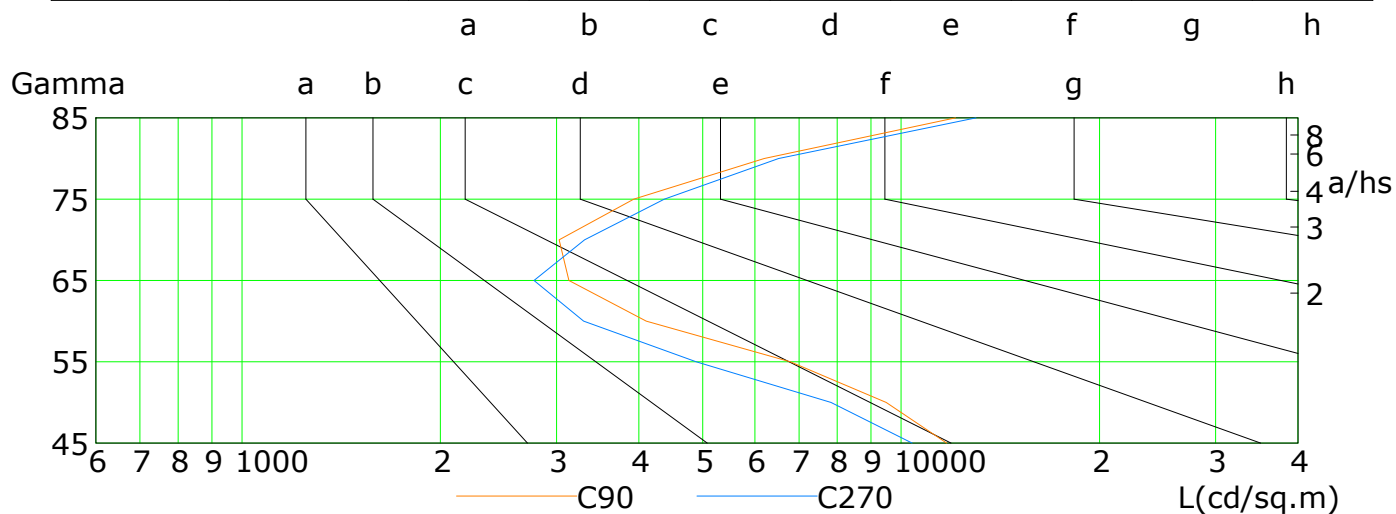

L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	7082	4148	2747	2456	2546	3082	4072	6070	12093
C90	11726	9493	6789	4105	3133	3028	3929	6197	12093
C180	8818	5495	3578	2648	2450	2919	3858	5750	11457
C270	10392	7825	4887	3299	2774	3309	4372	6517	12984

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: GPM-1600L

Distance: 8.443 m


Humidity:

Inspector:

Illuminance at a Distance

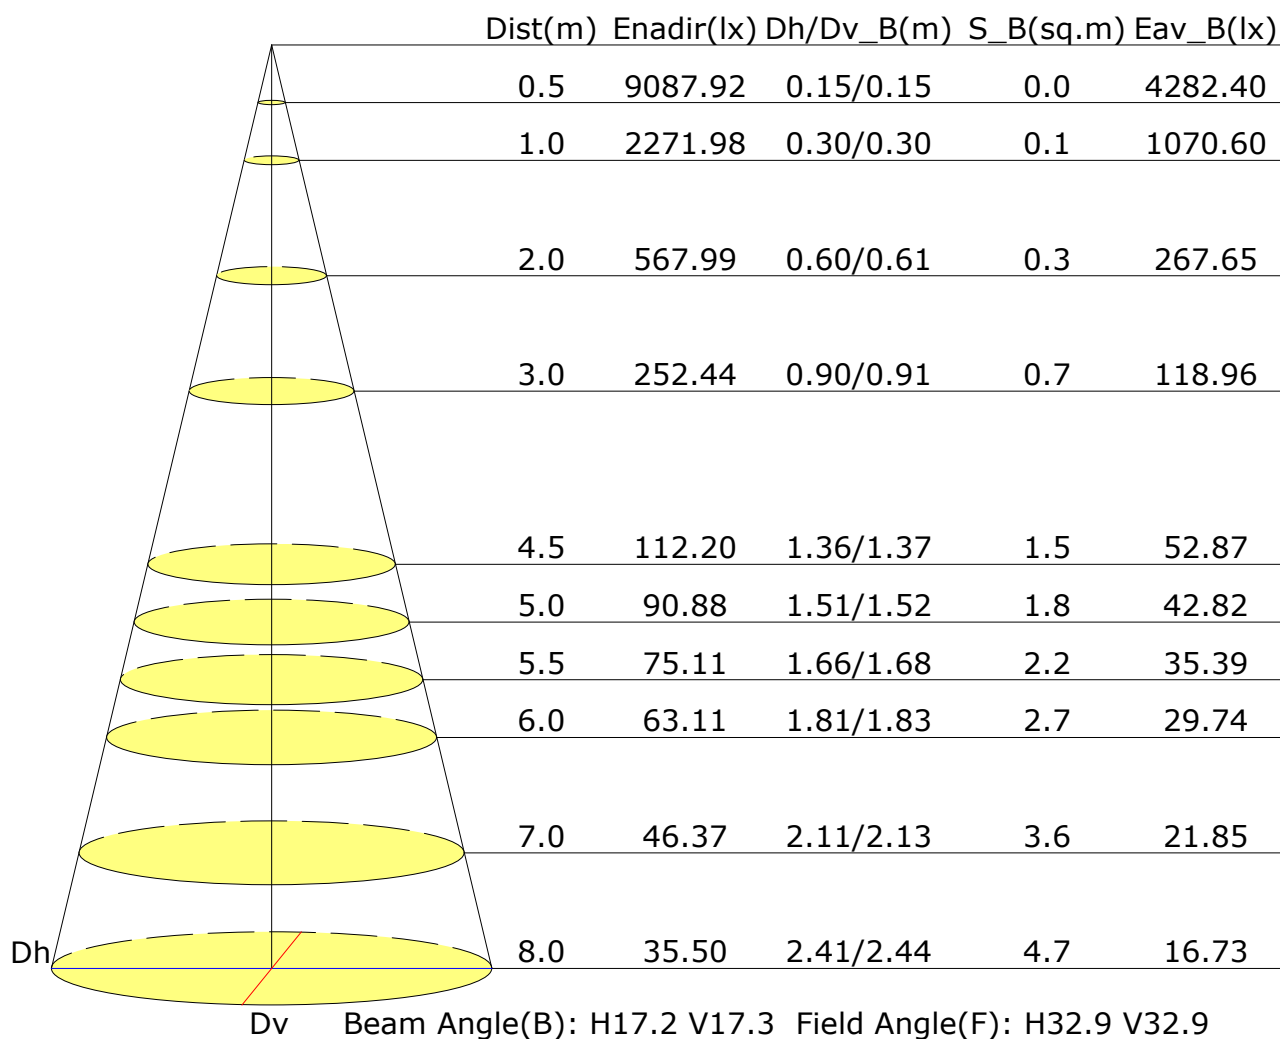

Vertical IsoLux Plot

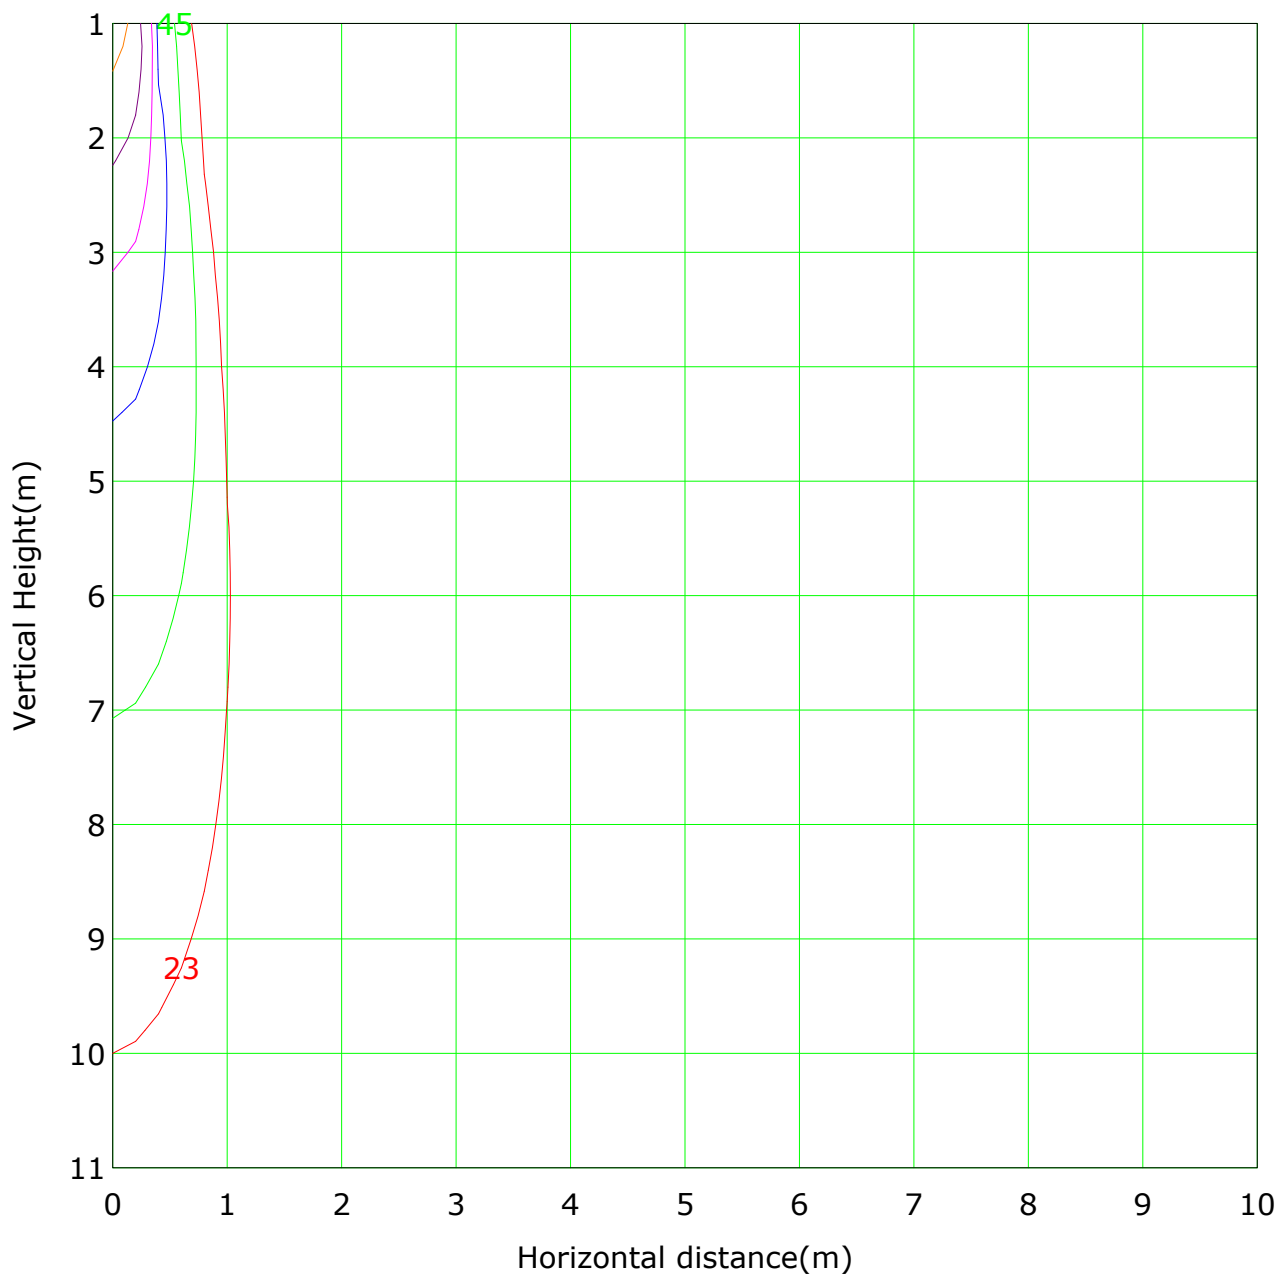

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 2272.0 lx
— (1%): 22.7 lx — (2%): 45.4 lx
— (5%): 113.6 lx — (10%): 227.2 lx
— (20%): 454.4 lx — (50%): 1136.0 lx
— (100%): 2272.0 lx

C Plane (°): 0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:


Gamma Plane (°): 0.0-90.0: 1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Unit: 1m

[illegible]

Inspector:

The Average Illuminance Effective Figure

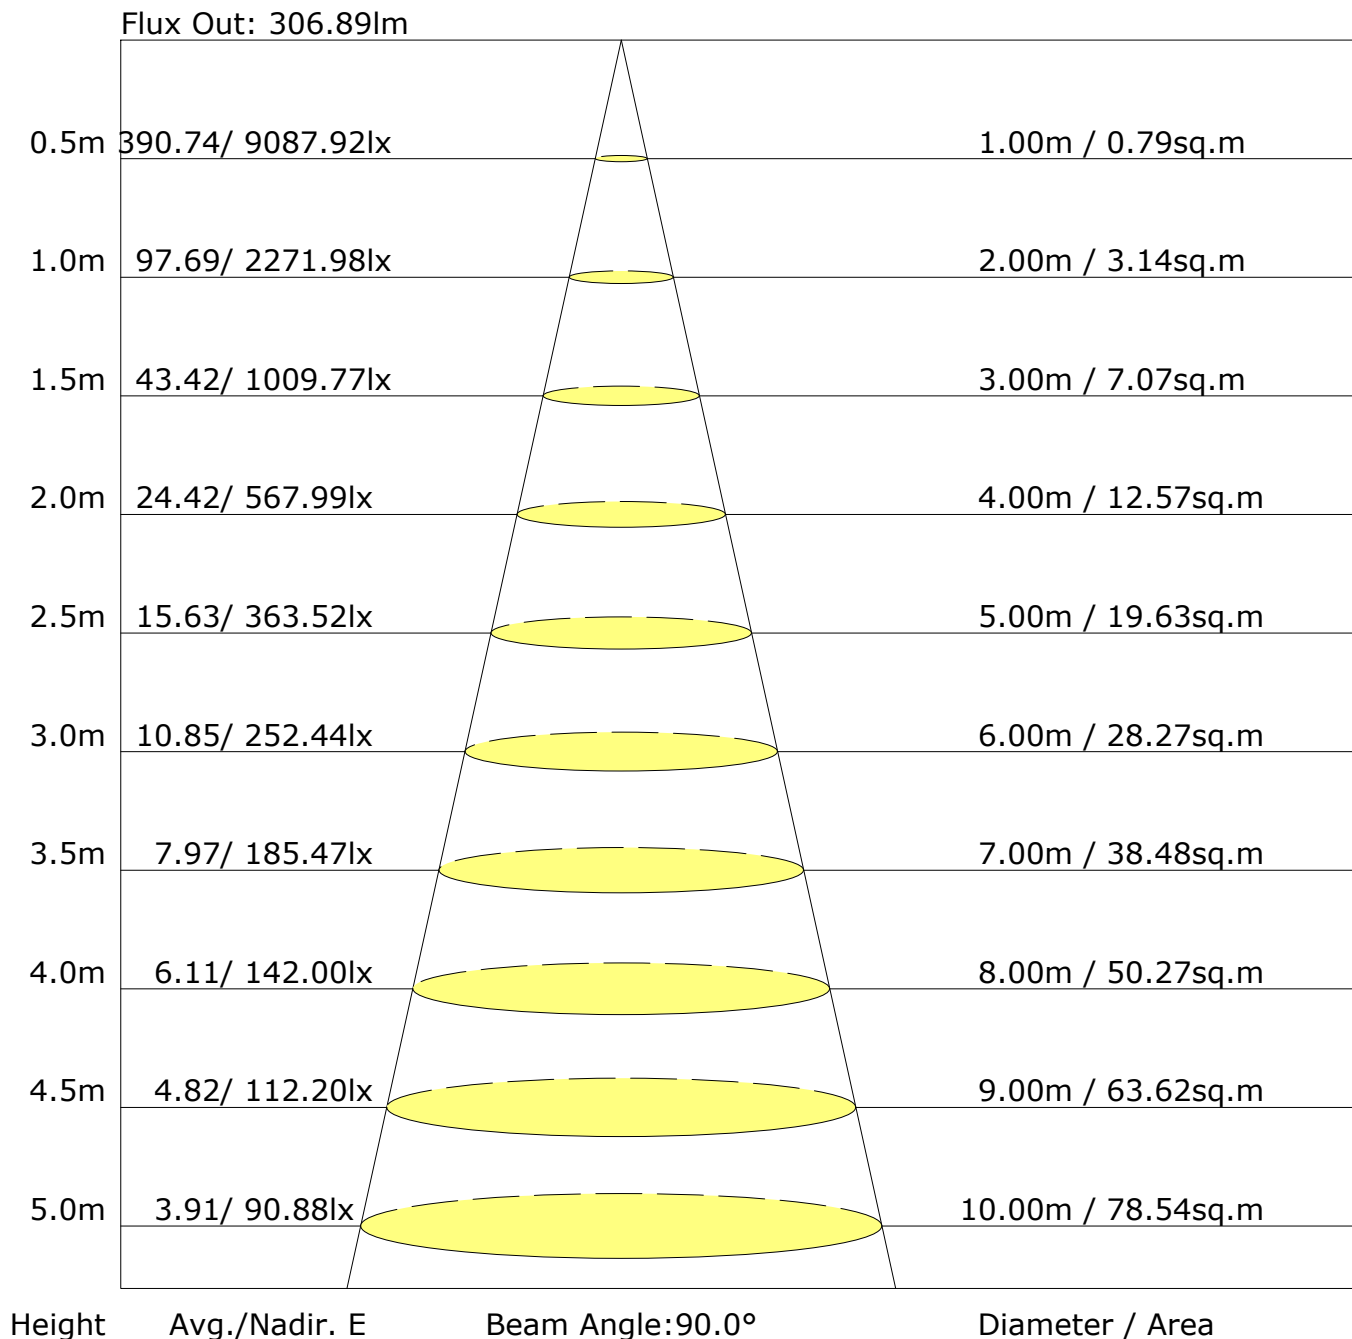

C Plane (°): 0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

UGR Table

Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	11.6	12.2	11.8	12.4	12.6	13.2	13.8	13.4	14.0	14.2
3H	12.2	12.8	12.5	13.1	13.3	13.6	14.2	13.9	14.4	14.7
4H	12.9	13.5	13.2	13.7	14.0	14.1	14.6	14.4	14.9	15.2
6H	14.0	14.5	14.3	14.8	15.1	14.9	15.4	15.2	15.7	16.0
8H	14.7	15.2	15.1	15.5	15.8	15.5	16.0	15.9	16.3	16.6
12H	15.7	16.2	16.0	16.5	16.8	16.3	16.8	16.7	17.2	17.5
X=4H Y=2H	11.8	12.3	12.1	12.6	12.9	13.2	13.8	13.5	14.0	14.3
3H	12.7	13.2	13.1	13.5	13.9	13.9	14.4	14.2	14.7	15.0
4H	13.7	14.1	14.1	14.5	14.8	14.6	15.0	15.0	15.4	15.7
6H	15.1	15.5	15.5	15.9	16.3	15.8	16.2	16.2	16.5	16.9
8H	16.0	16.4	16.4	16.8	17.2	16.6	17.0	17.0	17.3	17.8
12H	17.2	17.5	17.6	17.9	18.3	17.7	18.0	18.1	18.4	18.8
X=8H Y=4H	14.1	14.5	14.6	14.9	15.3	14.9	15.3	15.3	15.7	16.1
6H	15.9	16.2	16.4	16.6	17.1	16.4	16.7	16.9	17.2	17.6
8H	17.1	17.3	17.5	17.8	18.2	17.5	17.8	18.0	18.2	18.7
12H	18.5	18.7	19.0	19.2	19.7	18.8	19.1	19.3	19.5	20.0
X=12H Y=4H	14.3	14.6	14.7	15.0	15.5	15.0	15.4	15.5	15.8	16.2
6H	16.2	16.4	16.6	16.9	17.4	16.7	16.9	17.1	17.4	17.9
8H	17.5	17.7	17.9	18.2	18.7	17.8	18.1	18.3	18.6	19.1
Variations with the observer position at spacings:										
S=1.0H	+0.6/-0.7					+0.5/-0.7				
S=1.5H	+1.1/-1.3					+1.0/-1.3				
S=2.0H	+2.0/-1.8					+1.8/-1.9				

Calculate in accordance with CIE Pub.117. The table is revised with 329lm ($8\log(F/F_0) = -3.9$).

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM


	ZONE	LUMENS	% LAMP LUMENS
	FORWARD LIGHT	159	48.2
	FL (0°-30°)	134	40.7
	FM (30°-60°)	20	6.1
	FH (60°-80°)	3	1.0
	FVH (80°-90°)	2	0.5
	BACK LIGHT	170	51.8
	BL (0°-30°)	144	43.7
	BM (30°-60°)	22	6.6
	BH (60°-80°)	3	0.9
	BVH (80°-90°)	2	0.5
	UP LIGHT	0	0.0
	UL (90°-100°)	0	0.0
	UH (100°-180°)	0	0.0
	TRAPPED LIGHT	NA	NA

BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B1 U0 G0
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B1 U0 G0

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

LCS Graph

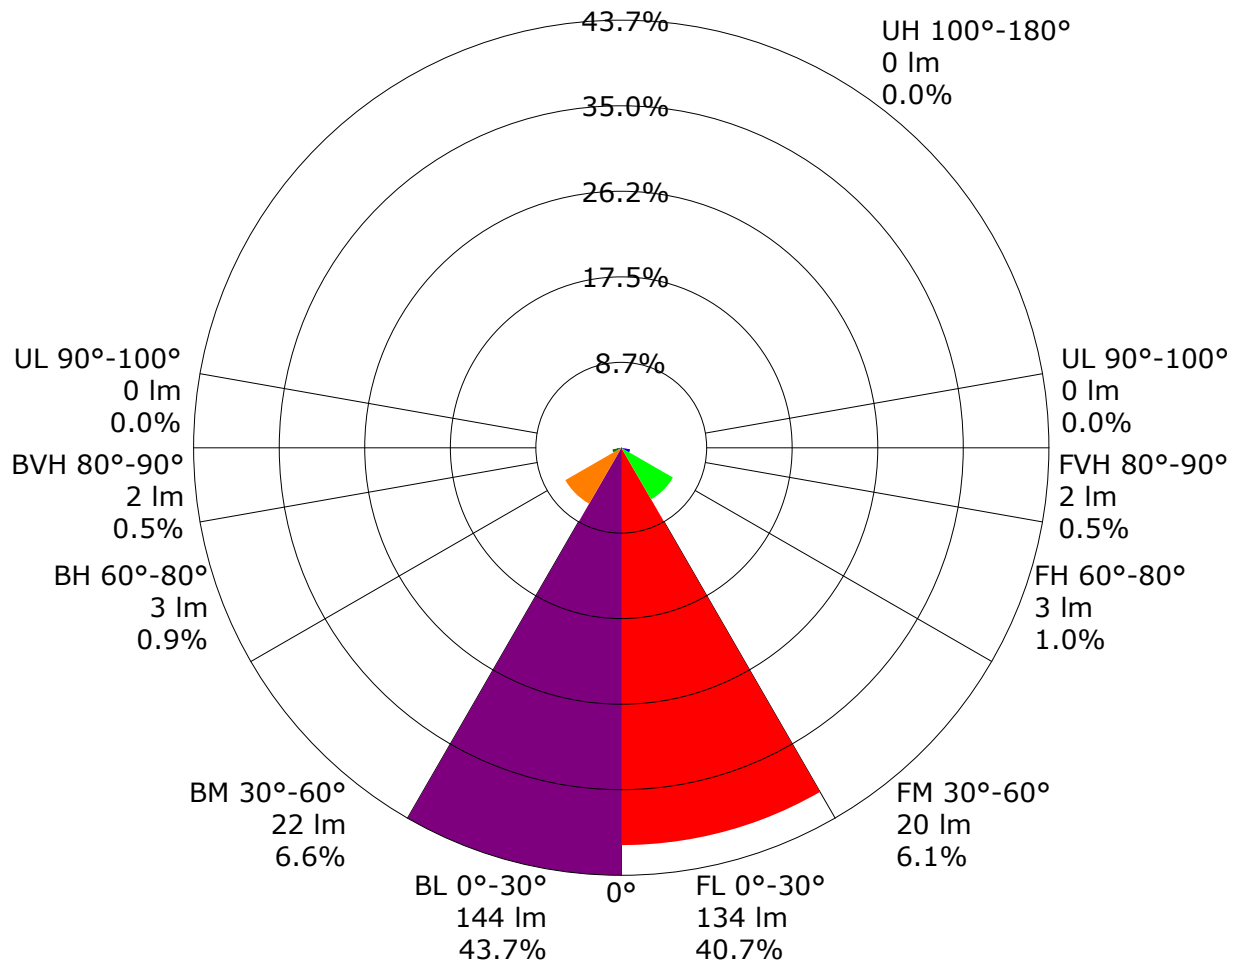

Back Light

Forward Light

Scale= MAX LCS%

Trapped Light:NA,NA

Utilisation Factor Table(Floor cavity)

Utilisation Factors UF(F)			SHR NOM = 0.50									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.96	1.01	1.04	1.07	1.10	1.12	1.14	1.16	1.17	
	0.30		0.92	0.97	1.00	1.03	1.07	1.09	1.11	1.14	1.15	
	0.20		0.89	0.94	0.97	1.00	1.04	1.07	1.09	1.12	1.14	
0.50	0.50	0.20	0.95	0.99	1.02	1.04	1.07	1.09	1.10	1.12	1.13	
	0.30		0.91	0.96	0.99	1.01	1.04	1.07	1.08	1.10	1.11	
	0.20		0.89	0.93	0.96	0.99	1.02	1.04	1.06	1.09	1.10	
0.30	0.50	0.20	0.94	0.98	1.00	1.02	1.04	1.06	1.07	1.08	1.09	
	0.30		0.91	0.95	0.98	0.99	1.02	1.04	1.05	1.07	1.08	
	0.20		0.88	0.92	0.95	0.97	1.00	1.02	1.04	1.06	1.07	
0.00	0.00	0.00	0.87	0.90	0.93	0.95	0.97	0.99	1.00	1.01	1.02	
Rating:6W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

Utilisation Factor Table(Wall)

Utilisation Factors UF(W)			SHR NOM = 0.50									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.51	0.42	0.36	0.32	0.25	0.21	0.18	0.14	0.12	
	0.30		0.43	0.36	0.31	0.28	0.23	0.19	0.17	0.13	0.11	
	0.20		0.37	0.32	0.28	0.25	0.21	0.18	0.16	0.13	0.11	
0.50	0.50	0.20	0.49	0.40	0.34	0.29	0.23	0.24	0.17	0.13	0.11	
	0.30		0.41	0.34	0.30	0.26	0.21	0.18	0.16	0.12	0.10	
	0.20		0.36	0.30	0.27	0.24	0.20	0.17	0.15	0.12	0.10	
0.30	0.50	0.20	0.46	0.37	0.31	0.27	0.21	0.18	0.15	0.12	0.10	
	0.30		0.39	0.33	0.28	0.25	0.20	0.17	0.14	0.11	0.09	
	0.20		0.35	0.29	0.25	0.23	0.18	0.16	0.14	0.11	0.09	
0.00	0.00	0.00	0.20	0.16	0.13	0.11	0.09	0.08	0.07	0.05	0.04	
Rating:6W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

Utilisation Factor Table(Ceiling cavity)

Utilisation Factors UF(C)			SHR NOM = 0.50									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.13	0.15	0.16	0.17	0.19	0.20	0.20	0.21	0.22	
	0.30		0.09	0.11	0.13	0.14	0.16	0.17	0.18	0.20	0.21	
	0.20		0.07	0.09	0.10	0.12	0.14	0.15	0.17	0.18	0.19	
0.50	0.50	0.20	0.12	0.14	0.15	0.16	0.18	0.19	0.20	0.20	0.21	
	0.30		0.09	0.11	0.13	0.14	0.16	0.17	0.18	0.19	0.20	
	0.20		0.07	0.09	0.10	0.12	0.14	0.15	0.16	0.18	0.19	
0.30	0.50	0.20	0.12	0.14	0.15	0.16	0.17	0.18	0.19	0.20	0.20	
	0.30		0.09	0.11	0.12	0.13	0.15	0.16	0.17	0.18	0.19	
	0.20		0.07	0.08	0.10	0.11	0.13	0.15	0.16	0.17	0.18	
0.00	0.00	0.00	NA	NA	NA	NA	NA	NA	NA	NA	NA	
Rating:6W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	2260.7	2.2	2.2	0.66	0.66
1.0-2.0	2221.7	6.4	8.5	1.94	2.60
2.0-3.0	2144.6	10.3	18.8	3.12	5.72
3.0-4.0	2035.9	13.6	32.4	4.15	9.86
4.0-5.0	1903.9	16.4	48.8	4.98	14.85
5.0-6.0	1742.5	18.3	67.1	5.57	20.42
6.0-7.0	1562.4	19.4	86.5	5.90	26.32
7.0-8.0	1372.5	19.6	106.2	5.98	32.29
8.0-9.0	1179.6	19.1	125.3	5.82	38.11
9.0-10.0	998.0	18.1	143.3	5.49	43.60
10.0-11.0	822.4	16.4	159.8	5.00	48.60
11.0-12.0	668.4	14.6	174.4	4.45	53.05
12.0-13.0	543.5	12.9	187.3	3.92	56.97
13.0-14.0	437.0	11.2	198.5	3.40	60.37
14.0-15.0	353.8	9.7	208.2	2.95	63.33
15.0-16.0	288.7	8.5	216.7	2.57	65.90
16.0-17.0	237.5	7.4	224.1	2.25	68.15
17.0-18.0	199.9	6.6	230.6	2.00	70.16
18.0-19.0	169.3	5.9	236.5	1.79	71.95
19.0-20.0	144.7	5.3	241.8	1.61	73.56
20.0-21.0	125.7	4.8	246.7	1.47	75.03
21.0-22.0	109.9	4.4	251.1	1.34	76.37
22.0-23.0	97.2	4.1	255.2	1.24	77.61
23.0-24.0	86.6	3.8	258.9	1.15	78.77
24.0-25.0	77.8	3.5	262.5	1.08	79.84
25.0-26.0	70.5	3.3	265.8	1.01	80.86
26.0-27.0	64.2	3.1	269.0	0.96	81.81
27.0-28.0	58.6	3.0	271.9	0.90	82.71
28.0-29.0	54.0	2.8	274.7	0.86	83.57
29.0-30.0	49.8	2.7	277.4	0.82	84.39
30.0-31.0	46.2	2.6	280.0	0.78	85.17
31.0-32.0	42.9	2.5	282.5	0.75	85.92
32.0-33.0	40.0	2.4	284.8	0.72	86.64
33.0-34.0	37.4	2.3	287.1	0.69	87.33
34.0-35.0	34.9	2.2	289.3	0.66	87.99
35.0-36.0	32.8	2.1	291.3	0.64	88.62

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	30.9	2.0	293.4	0.61	89.24
37.0-38.0	29.1	1.9	295.3	0.59	89.83
38.0-39.0	27.3	1.9	297.2	0.57	90.39
39.0-40.0	25.7	1.8	299.0	0.55	90.94
40.0-41.0	24.2	1.7	300.7	0.52	91.46
41.0-42.0	22.8	1.7	302.3	0.50	91.97
42.0-43.0	21.4	1.6	303.9	0.48	92.45
43.0-44.0	20.1	1.5	305.4	0.46	92.91
44.0-45.0	18.8	1.4	306.9	0.44	93.35
45.0-46.0	17.5	1.4	308.3	0.42	93.77
46.0-47.0	16.2	1.3	309.5	0.39	94.16
47.0-48.0	14.9	1.2	310.7	0.37	94.52
48.0-49.0	13.5	1.1	311.9	0.34	94.86
49.0-50.0	12.3	1.0	312.9	0.31	95.18
50.0-51.0	11.1	0.9	313.8	0.29	95.46
51.0-52.0	10.1	0.9	314.7	0.26	95.72
52.0-53.0	9.1	0.8	315.5	0.24	95.97
53.0-54.0	8.2	0.7	316.2	0.22	96.19
54.0-55.0	7.4	0.7	316.9	0.20	96.39
55.0-56.0	6.6	0.6	317.5	0.18	96.57
56.0-57.0	5.9	0.5	318.0	0.16	96.73
57.0-58.0	5.3	0.5	318.5	0.15	96.88
58.0-59.0	4.8	0.5	319.0	0.14	97.02
59.0-60.0	4.4	0.4	319.4	0.13	97.15
60.0-61.0	4.0	0.4	319.8	0.12	97.27
61.0-62.0	3.8	0.4	320.1	0.11	97.38
62.0-63.0	3.5	0.3	320.5	0.10	97.48
63.0-64.0	3.4	0.3	320.8	0.10	97.58
64.0-65.0	3.2	0.3	321.1	0.10	97.68
65.0-66.0	3.1	0.3	321.4	0.09	97.77
66.0-67.0	3.0	0.3	321.7	0.09	97.86
67.0-68.0	2.9	0.3	322.0	0.09	97.95
68.0-69.0	2.9	0.3	322.3	0.09	98.04
69.0-70.0	2.9	0.3	322.6	0.09	98.13
70.0-71.0	2.9	0.3	322.9	0.09	98.22
71.0-72.0	2.9	0.3	323.2	0.09	98.31

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G0.0	2272.0	2270.5	2272.0	2270.5	2272.0					
G1.0	2236.3	2319.0	2266.3	2179.3	2236.3					
G2.0	2164.7	2327.9	2224.1	2055.9	2164.7					
G3.0	2047.3	2298.1	2143.8	1894.8	2047.3					
G4.0	1914.7	2235.8	2034.9	1717.6	1914.7					
G5.0	1751.0	2146.8	1897.5	1533.1	1751.0					
G6.0	1558.7	2010.9	1728.0	1313.7	1558.7					
G7.0	1362.2	1856.9	1546.8	1122.2	1362.2					
G8.0	1152.7	1671.3	1335.5	932.0	1152.7					
G9.0	967.2	1476.5	1147.4	753.8	967.2					
G10.0	788.6	1282.8	958.4	609.6	788.6					
G11.0	621.0	1063.8	771.6	483.0	621.0					
G12.0	501.0	882.9	631.1	392.9	501.0					
G13.0	405.5	699.0	509.7	326.0	405.5					
G14.0	322.4	557.1	409.3	266.9	322.4					
G15.0	267.4	447.2	335.1	224.7	267.4					
G16.0	219.4	350.7	272.9	192.6	219.4					
G17.0	185.4	287.5	228.8	163.0	185.4					
G18.0	159.7	236.9	195.3	142.3	159.7					
G19.0	136.0	196.5	164.8	122.9	136.0					
G20.0	119.3	167.7	142.4	108.5	119.3					
G21.0	104.9	141.7	125.0	96.7	104.9					
G22.0	92.6	123.6	108.8	86.3	92.6					
G23.0	82.9	108.1	97.0	78.0	82.9					
G24.0	74.5	95.1	86.0	71.3	74.5					
G25.0	67.8	84.8	78.1	64.6	67.8					
G26.0	62.1	76.9	70.8	59.4	62.1					
G27.0	56.5	69.2	64.0	54.6	56.5					
G28.0	51.7	63.3	59.1	50.7	51.7					
G29.0	47.8	57.8	54.3	47.4	47.8					
G30.0	43.8	53.5	49.9	44.2	43.8					
G31.0	40.6	49.8	46.2	41.5	40.6					
G32.0	37.3	46.1	42.8	39.2	37.3					
G33.0	34.4	43.2	39.9	36.9	34.4					
G34.0	31.8	40.5	37.1	35.0	31.8					
G35.0	29.5	38.1	34.4	33.2	29.5					
G36.0	27.6	35.9	32.2	31.5	27.6					

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G37.0	25.8	33.9	30.2	29.9	25.8					
G38.0	24.1	32.2	28.1	28.2	24.1					
G39.0	22.4	30.5	26.4	26.8	22.4					
G40.0	20.8	28.8	24.6	25.4	20.8					
G41.0	19.3	27.4	23.0	24.2	19.3					
G42.0	18.0	26.0	21.5	23.1	18.0					
G43.0	16.3	24.7	19.9	21.9	16.3					
G44.0	15.1	23.7	18.4	20.9	15.1					
G45.0	13.5	22.4	16.9	19.9	13.5					
G46.0	12.1	21.3	15.5	18.6	12.1					
G47.0	10.6	20.2	14.1	17.3	10.6					
G48.0	9.3	18.9	12.4	15.9	9.3					
G49.0	8.1	17.8	11.1	14.7	8.1					
G50.0	7.2	16.5	9.6	13.6	7.2					
G51.0	6.4	15.3	8.4	12.3	6.4					
G52.0	5.7	13.9	7.6	11.2	5.7					
G53.0	5.1	12.7	6.8	9.9	5.1					
G54.0	4.7	11.7	6.3	8.7	4.7					
G55.0	4.3	10.5	5.6	7.6	4.3					
G56.0	4.0	9.2	4.9	6.6	4.0					
G57.0	3.8	8.1	4.5	6.1	3.8					
G58.0	3.6	7.0	4.1	5.5	3.6					
G59.0	3.5	6.2	3.8	5.0	3.5					
G60.0	3.3	5.6	3.6	4.5	3.3					
G61.0	3.1	5.0	3.3	4.1	3.1					
G62.0	3.1	4.6	3.2	3.7	3.1					
G63.0	2.9	4.3	3.0	3.5	2.9					
G64.0	2.9	3.9	3.0	3.3	2.9					
G65.0	2.9	3.6	2.8	3.2	2.9					
G66.0	2.9	3.3	2.8	3.2	2.9					
G67.0	2.8	3.1	2.7	3.1	2.8					
G68.0	2.9	3.0	2.8	3.1	2.9					
G69.0	2.9	2.9	2.7	3.1	2.9					
G70.0	2.8	2.8	2.7	3.1	2.8					
G71.0	2.9	2.9	2.7	3.1	2.9					
G72.0	2.9	2.8	2.7	3.1	2.9					
G73.0	2.8	2.8	2.7	3.1	2.8					

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Unit: cd

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector: