

Report No.:

Test Time: 2026-05-18 11:34

Luminaire Property

Luminaire Manufacturer: NORDECOR
Luminaire Description: 80086
Luminous Width (mm): 52
Current: 0.057 A
Power Factor: 0.461

Luminous Length (mm): 52
Voltage: 220.3 V
Power: 5.76 W

Photometric Results

CIE Class: Direct
Measurement Flux: 415 lm
Downward Ratio: 100%

Horizontal Diffuse Angle(10%,50%,80%,100%): H80.5,H49.7,H30.8,H1

Vertical Diffuse Angle(10%,50%,80%,100%): V82.6,V51.3,V33,V0

Luminaire Efficacy Rating (LER): 72.10

Max. Intensity: 547.22 cd

S/MH(C0/C180): 0.78

Total Rated Lamp Lumens: 415.0 lm

Efficiency: 100%


Upward Ratio: 0%

Central Intensity: 547.13 cd


Pos of Max. Intensity: H180 V1

S/MH(C90/C270): 0.81

Picture Of Luminaire



Luminous Intensity Distribution Curve

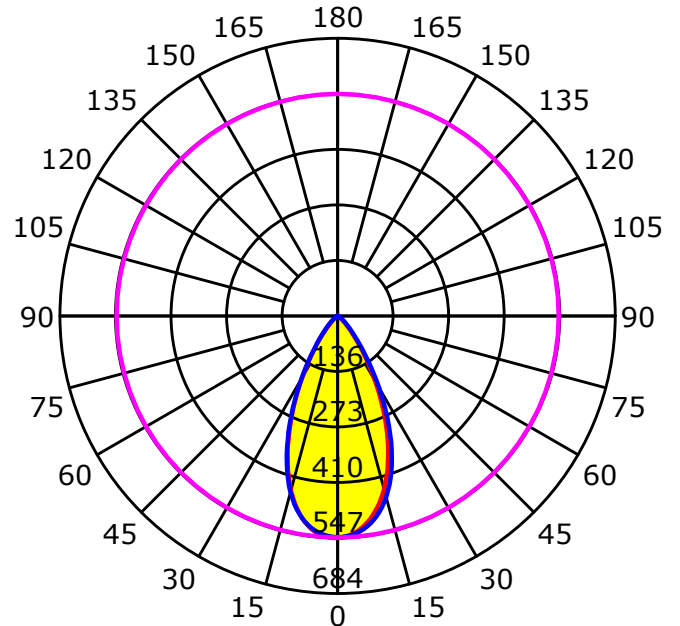

Average Diffuse Angle(50%): 50.5°

— C0-C180 — C90-C270 — G1

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0



Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

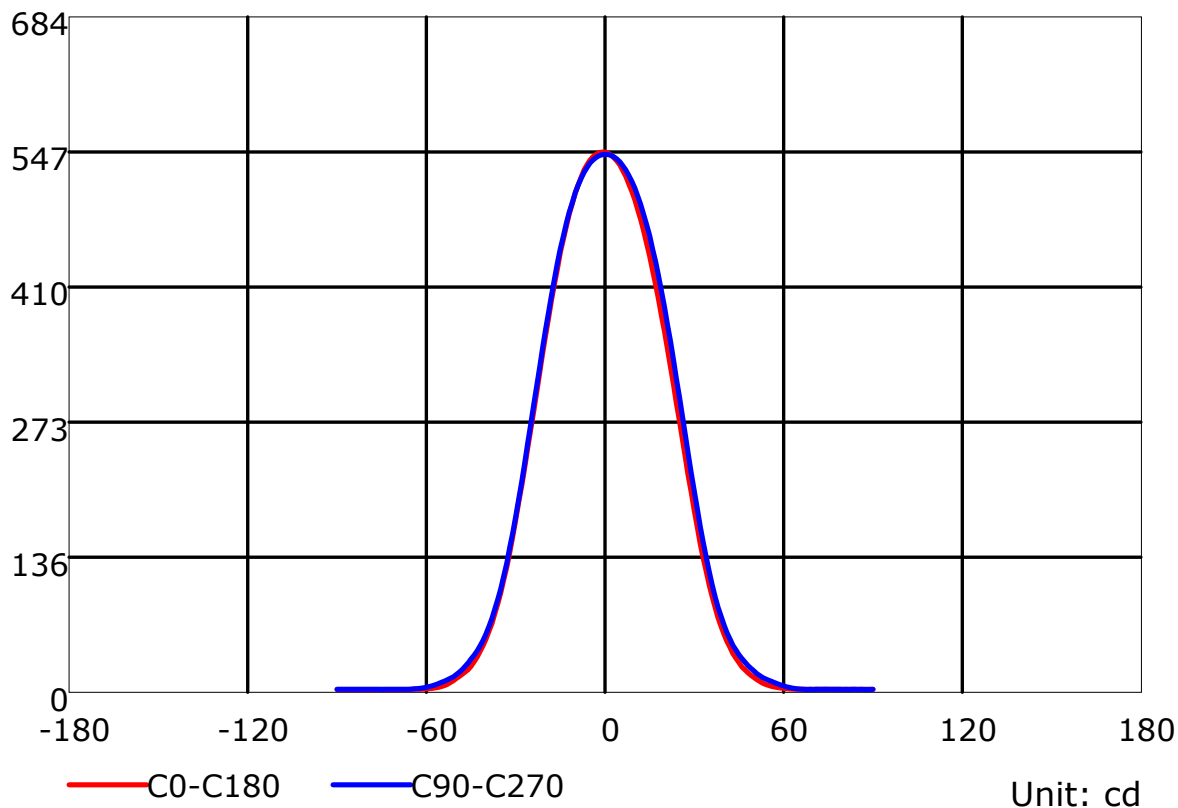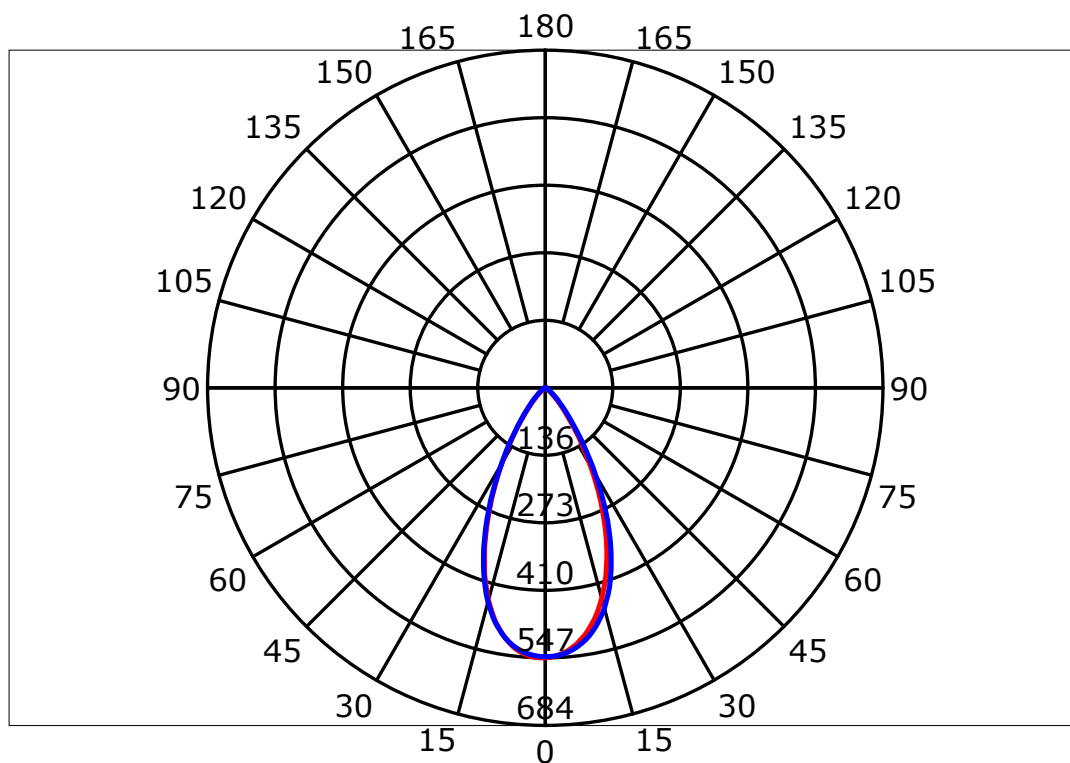

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Luminous Intensity Distribution Curve(cd/klm)

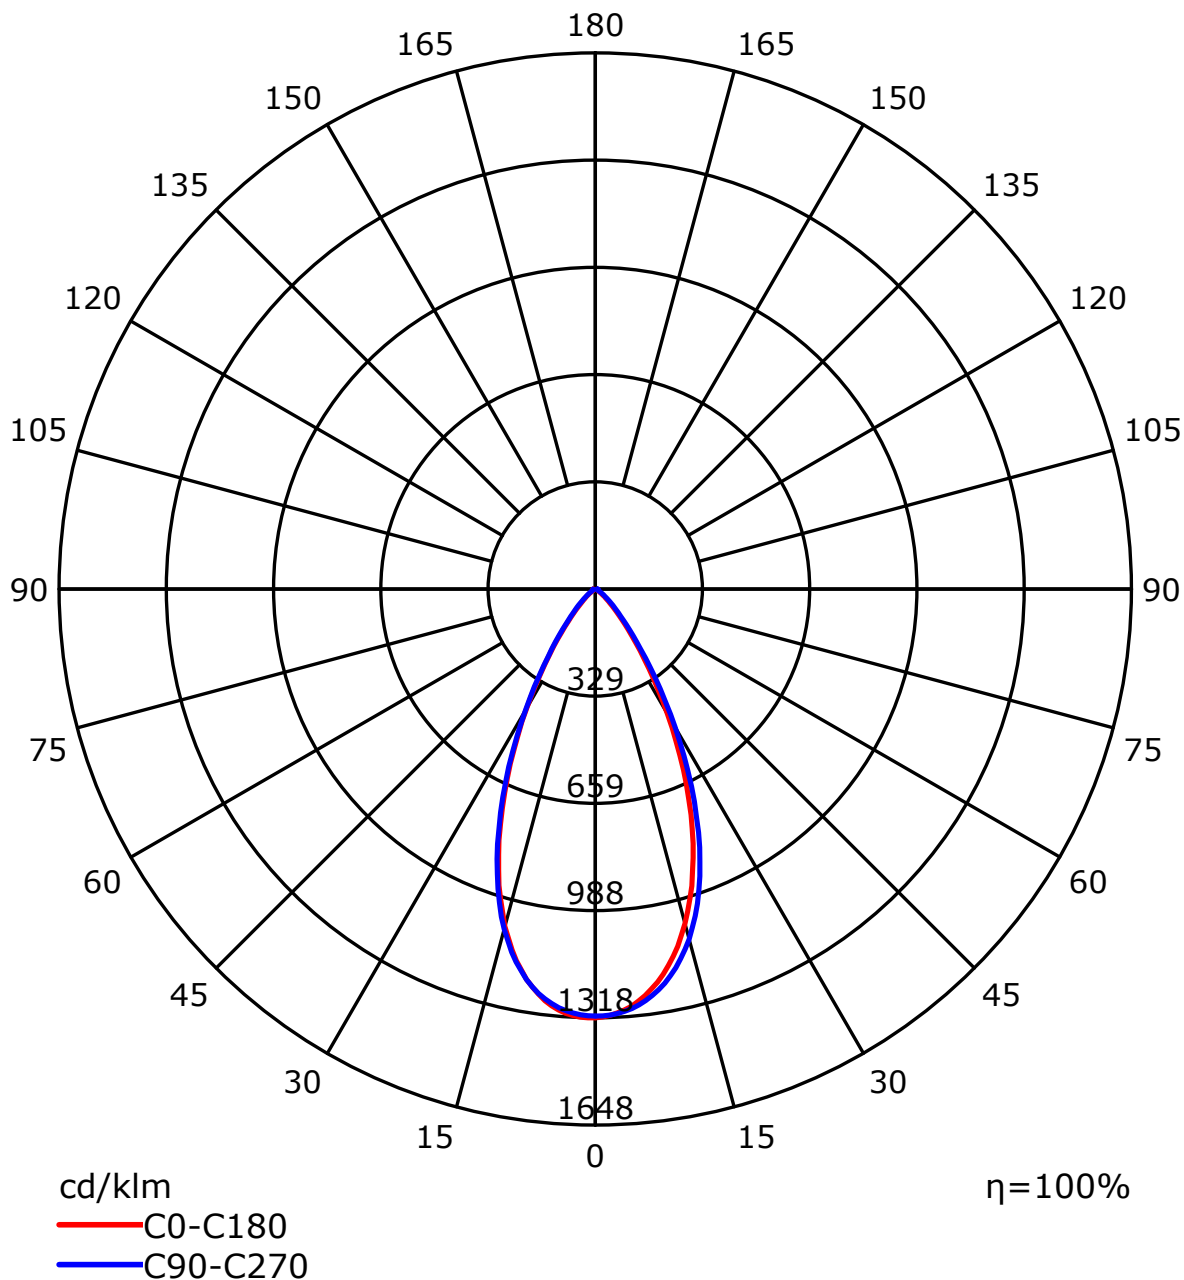

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:


Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86
3	102	95	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75
5	92	84	78	74	91	83	77	73	81	76	73	79	75	72	78	74	71	70
6	88	79	73	68	86	78	72	68	76	71	68	75	71	67	74	70	67	65
7	83	74	68	64	82	74	68	64	72	67	64	71	67	63	70	66	63	61
8	80	70	64	60	78	70	64	60	68	63	60	67	63	59	66	62	59	58
9	76	66	61	57	75	66	60	57	65	60	56	64	59	56	63	59	56	55
10	73	63	57	53	72	63	57	53	62	57	53	61	56	53	60	56	53	52

Spacing Criteria (0-180): 0.78
Spacing Criteria (90-270): 0.81
Spacing Criteria (Diagonal): 0.78


Curves of Luminaires vs Lighting Area

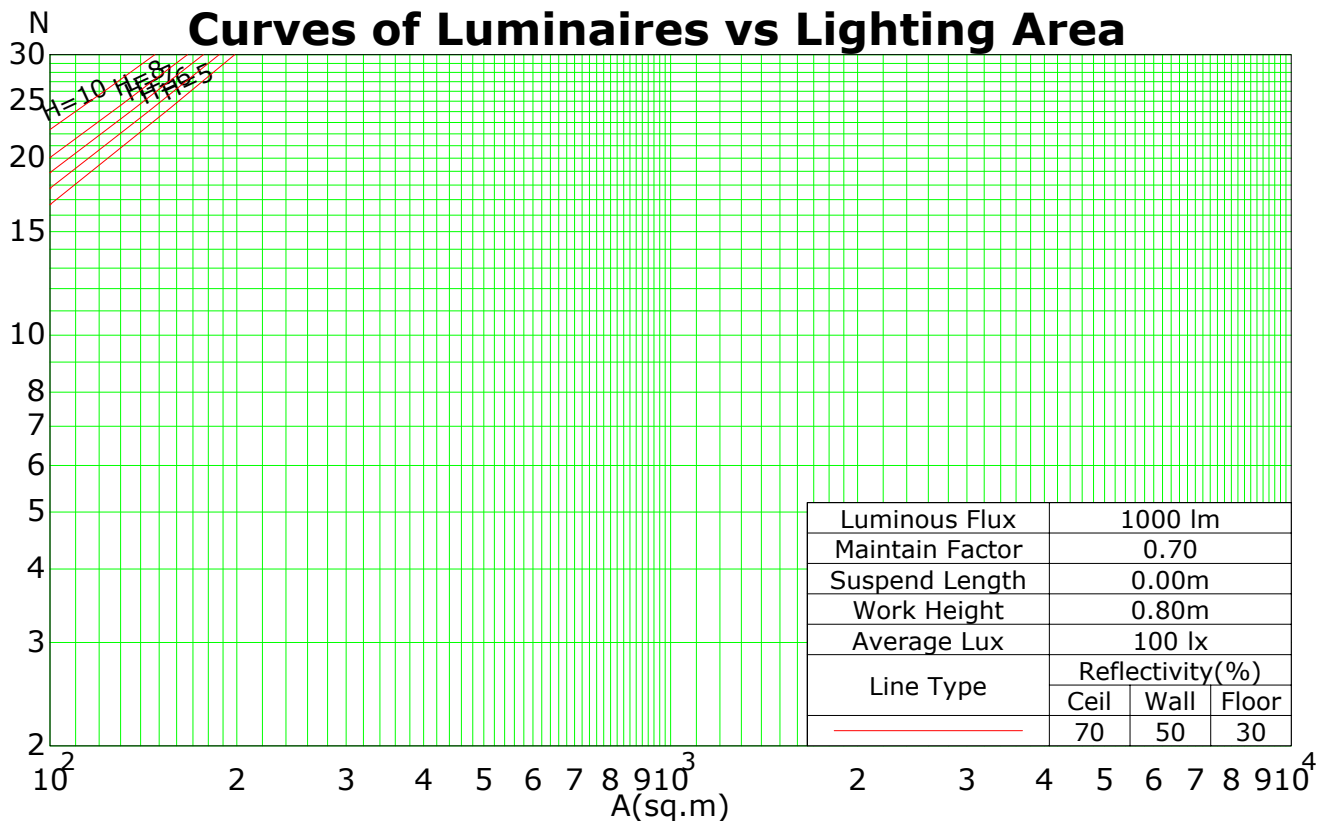

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Isocandela (rectangle)

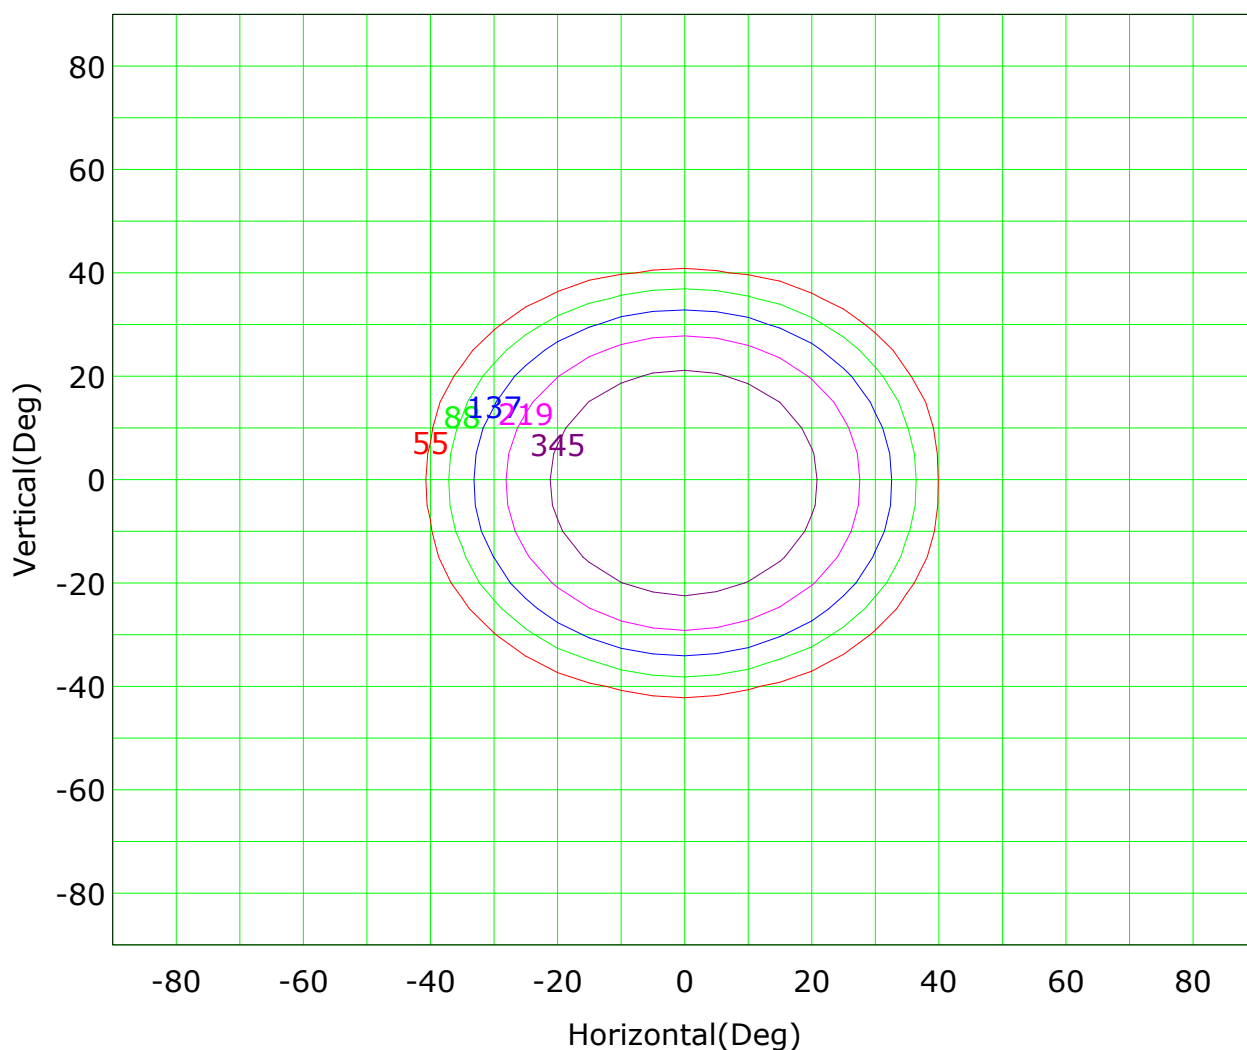


Imax (100%): 547 cd

(10%):	55 cd	(16%):	88 cd
(25%):	137 cd	(40%):	219 cd
(63%):	345 cd	(100%):	547 cd

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Isocandela (sphere)

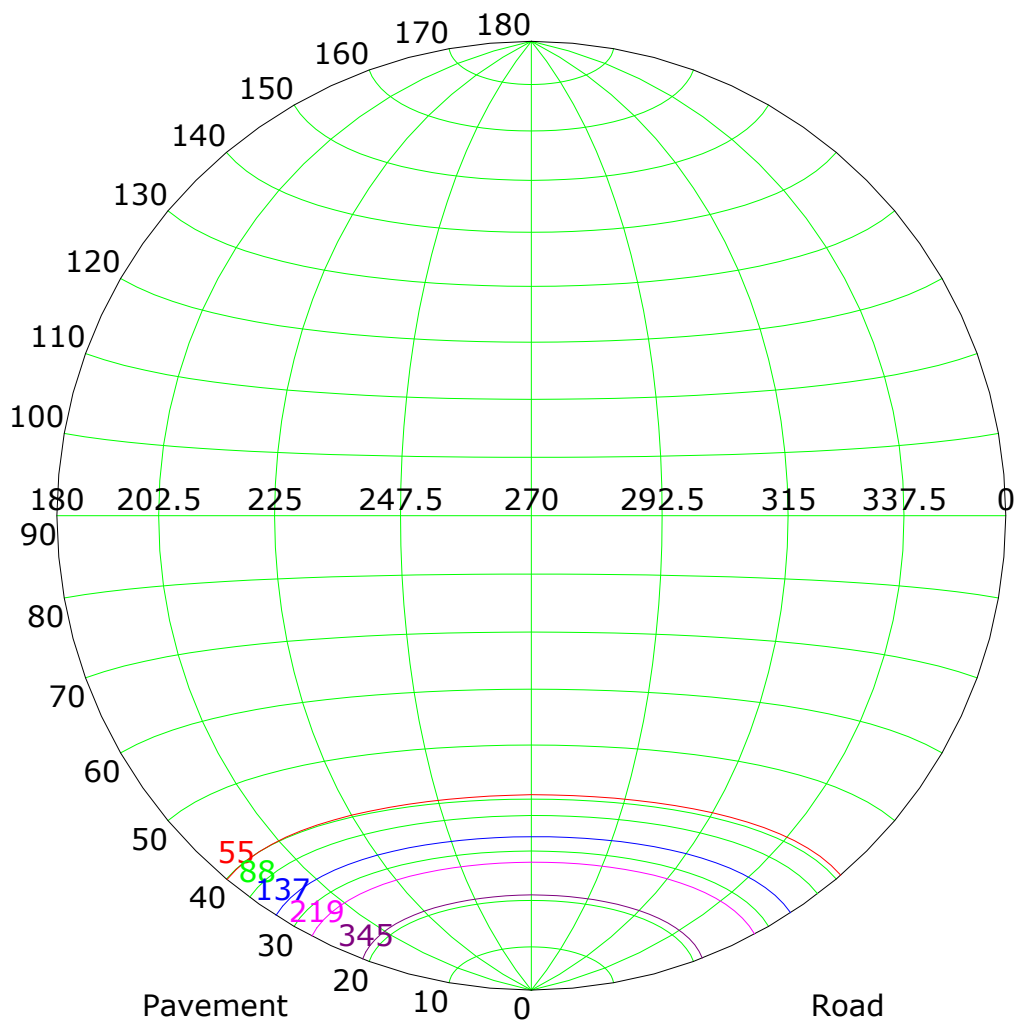

Imax (100%): 547 cd

(10%):	55 cd	(16%):	88 cd
(25%):	137 cd	(40%):	219 cd
(63%):	345 cd	(100%):	547 cd

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

IsoLux Plot

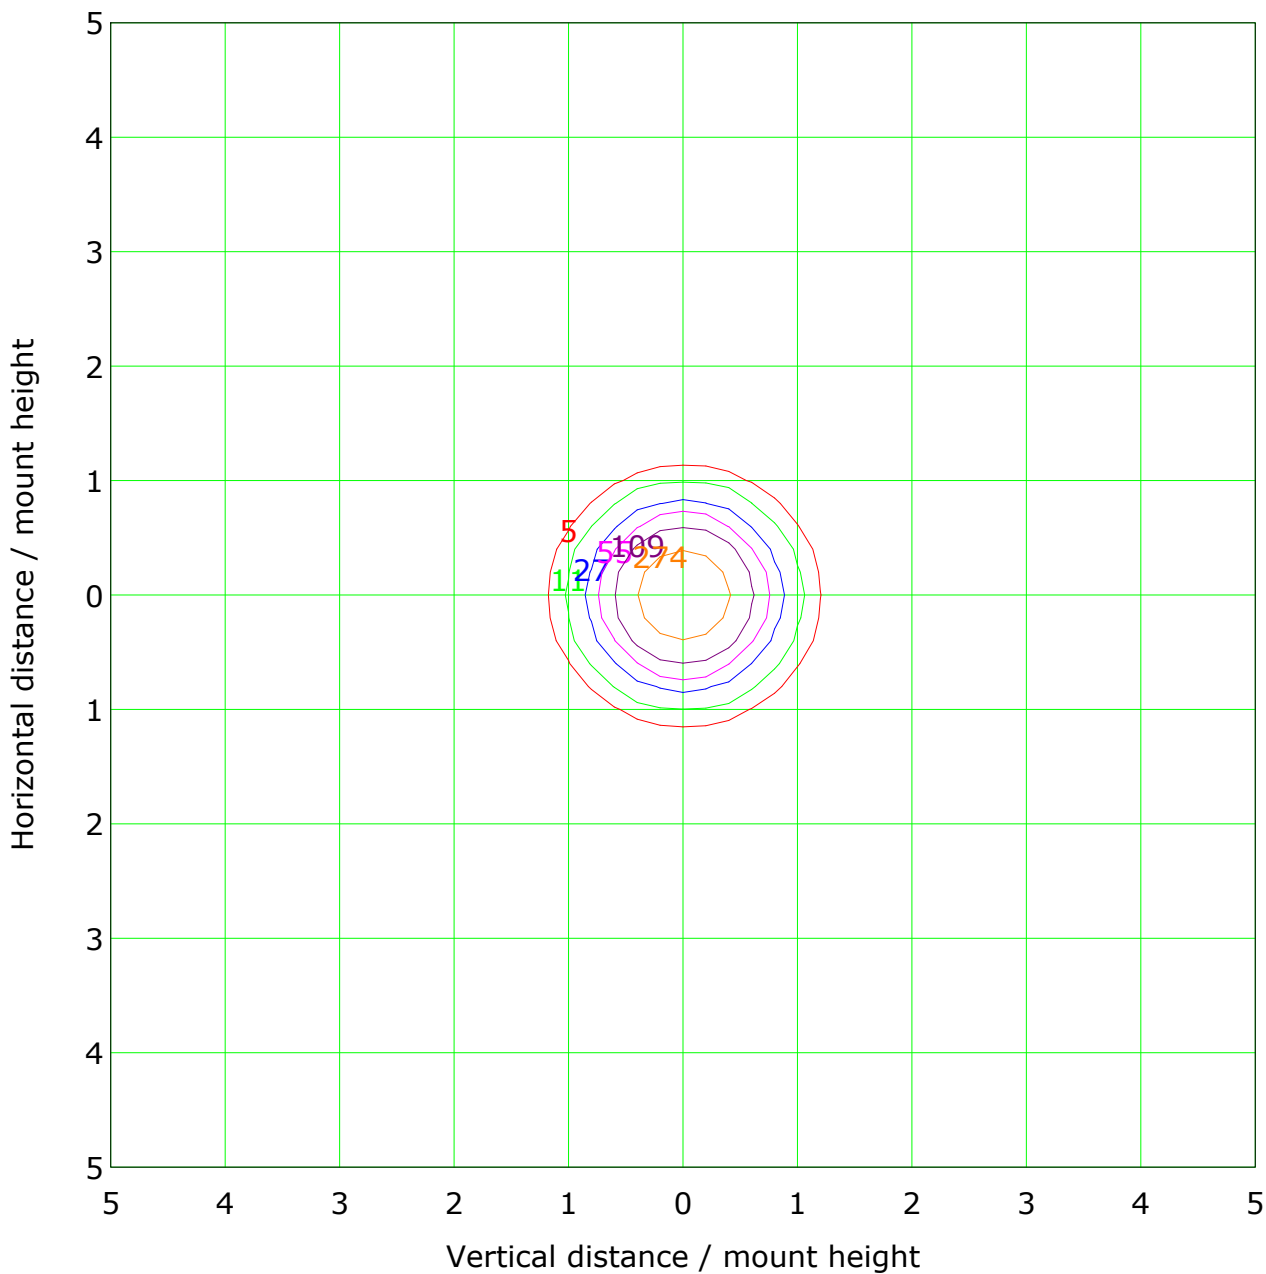

Mounting Height: 1.0m Max Lux(100%): 547.1 lx


(1%): 5.5 lx	(2%): 10.9 lx
(5%): 27.4 lx	(10%): 54.7 lx
(20%): 109.4 lx	(50%): 273.6 lx
(100%): 547.1 lx	

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Roadway CU Curve

Efficiency(%)

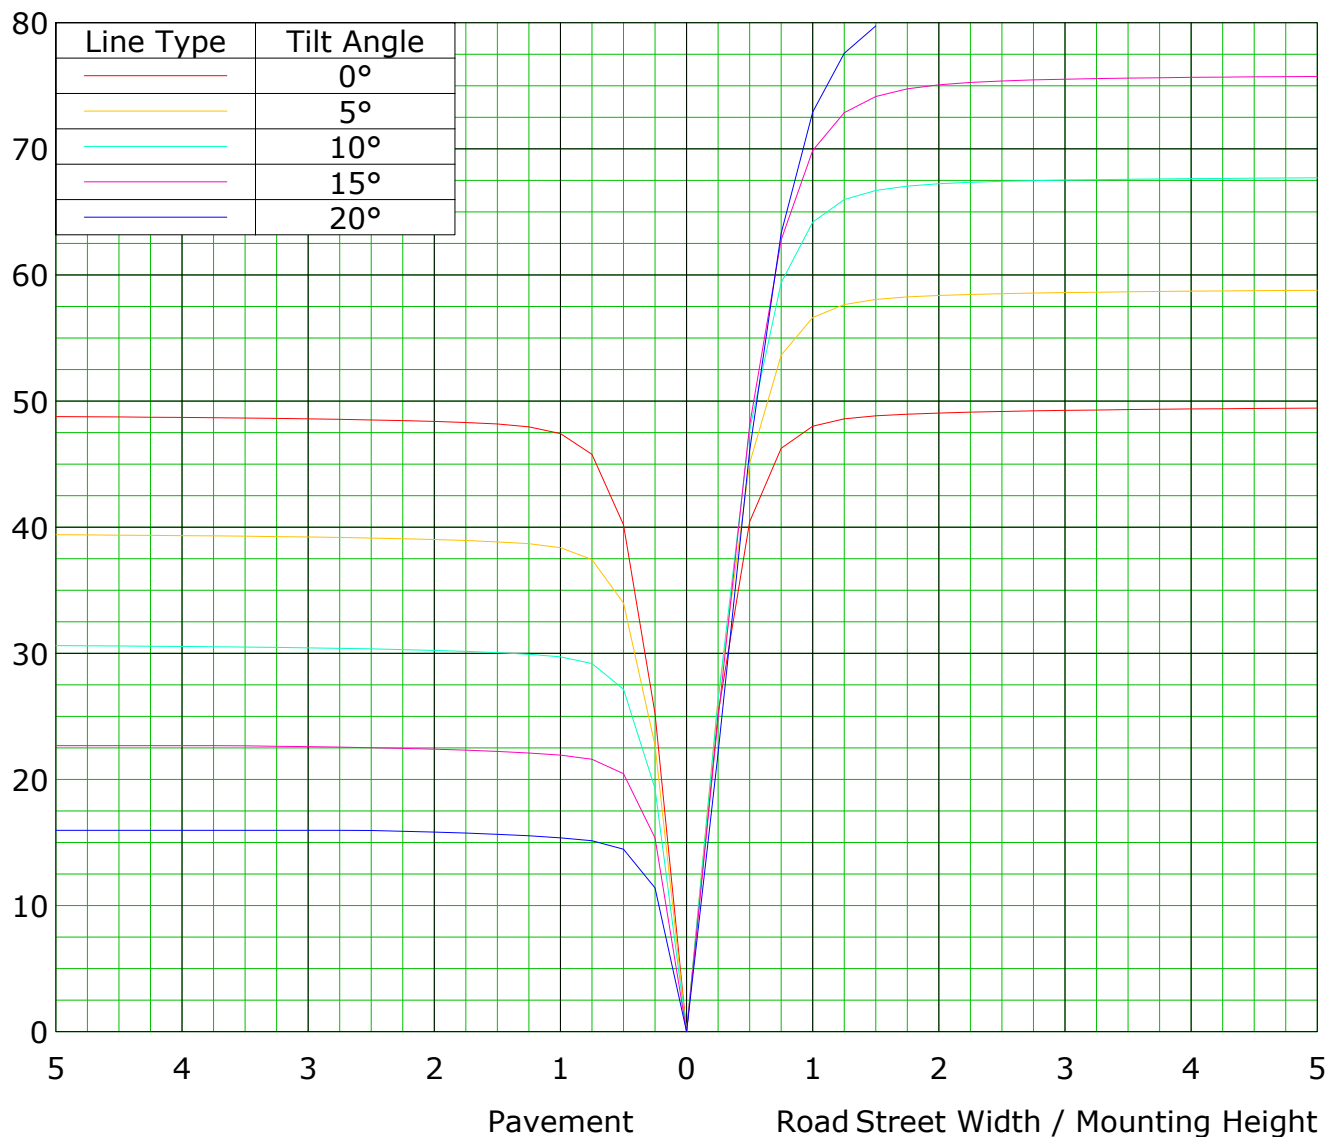

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0

Test Device: GPM-1600L



Distance: 8.443 m

Humidity:

Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

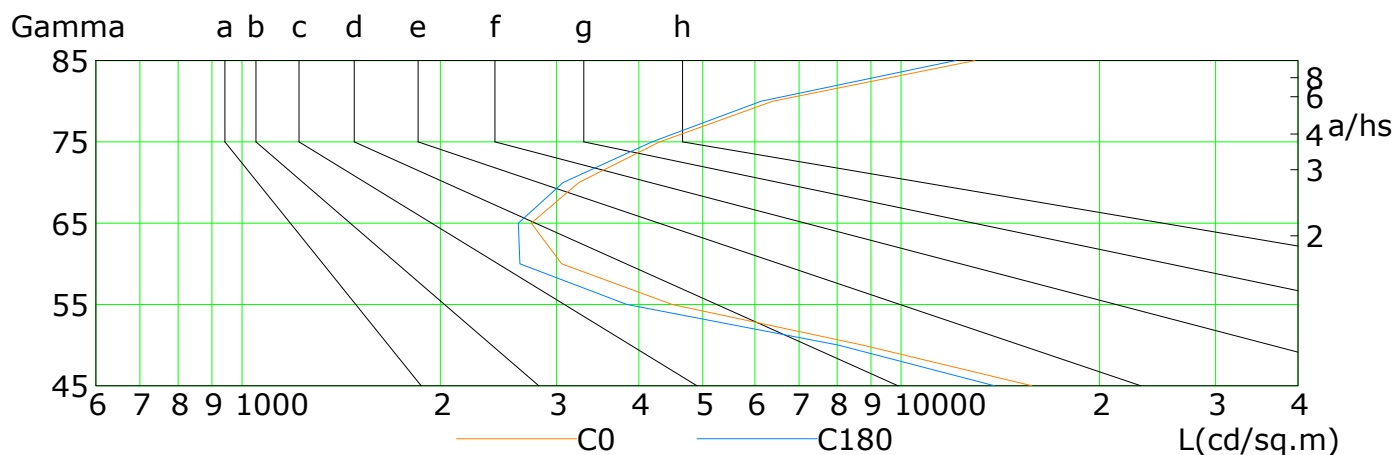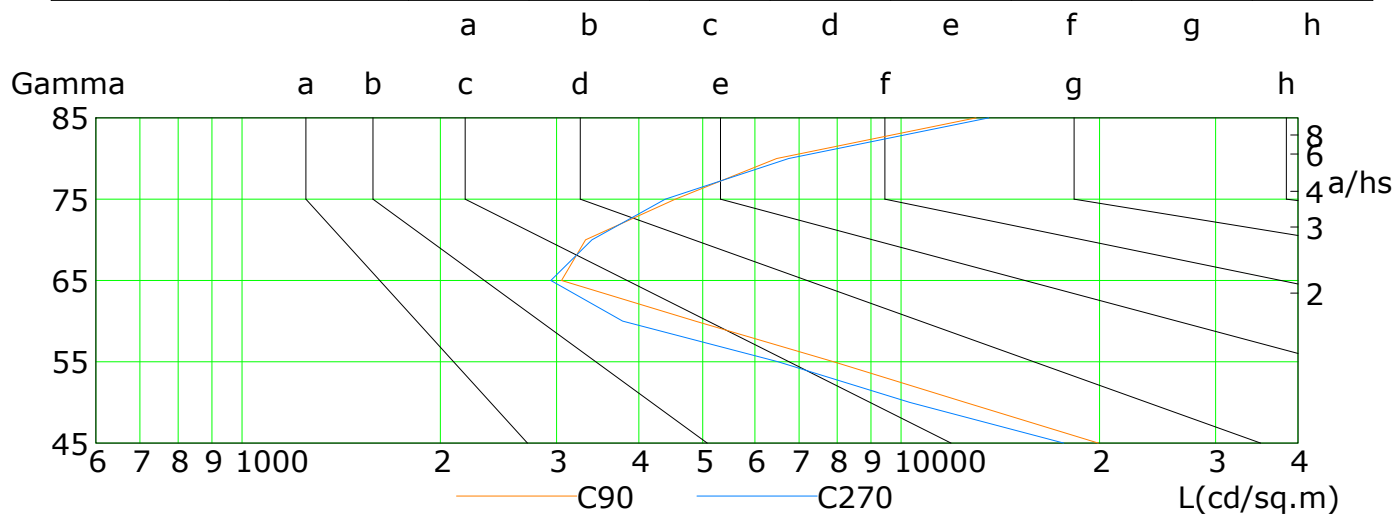

L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	15795	8745	4494	3055	2748	3244	4301	6389	12942
C90	19906	12519	7898	4874	3054	3320	4544	6474	12984
C180	13854	8032	3836	2641	2625	3071	4187	6134	12093
C270	17641	10310	6506	3780	2940	3395	4387	6751	13578

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: GPM-1600L

Distance: 8.443 m


Humidity:

Inspector:

Illuminance at a Distance

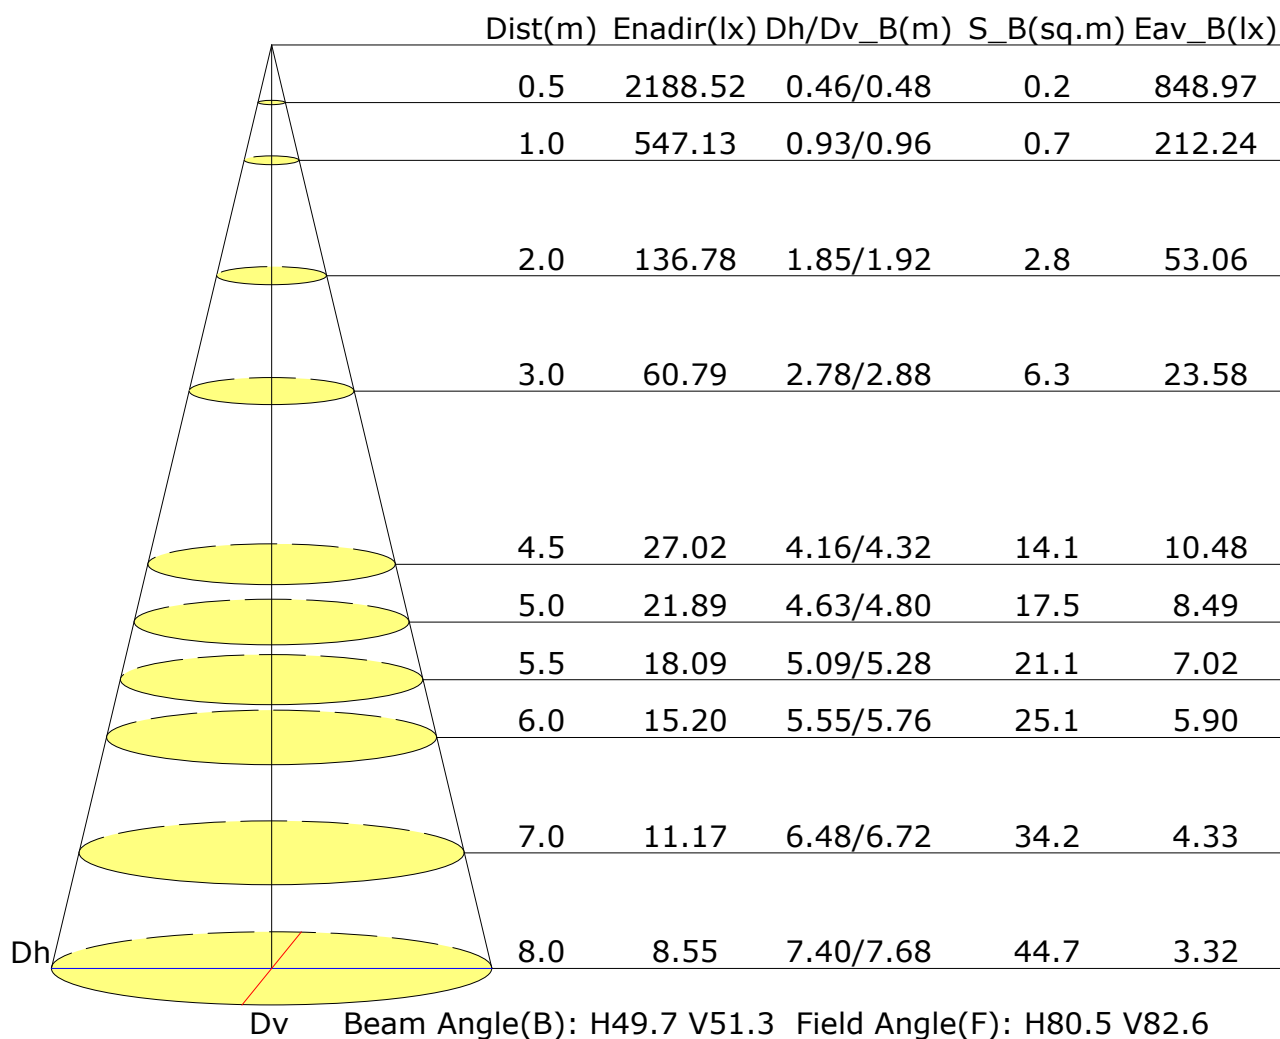

Vertical IsoLux Plot

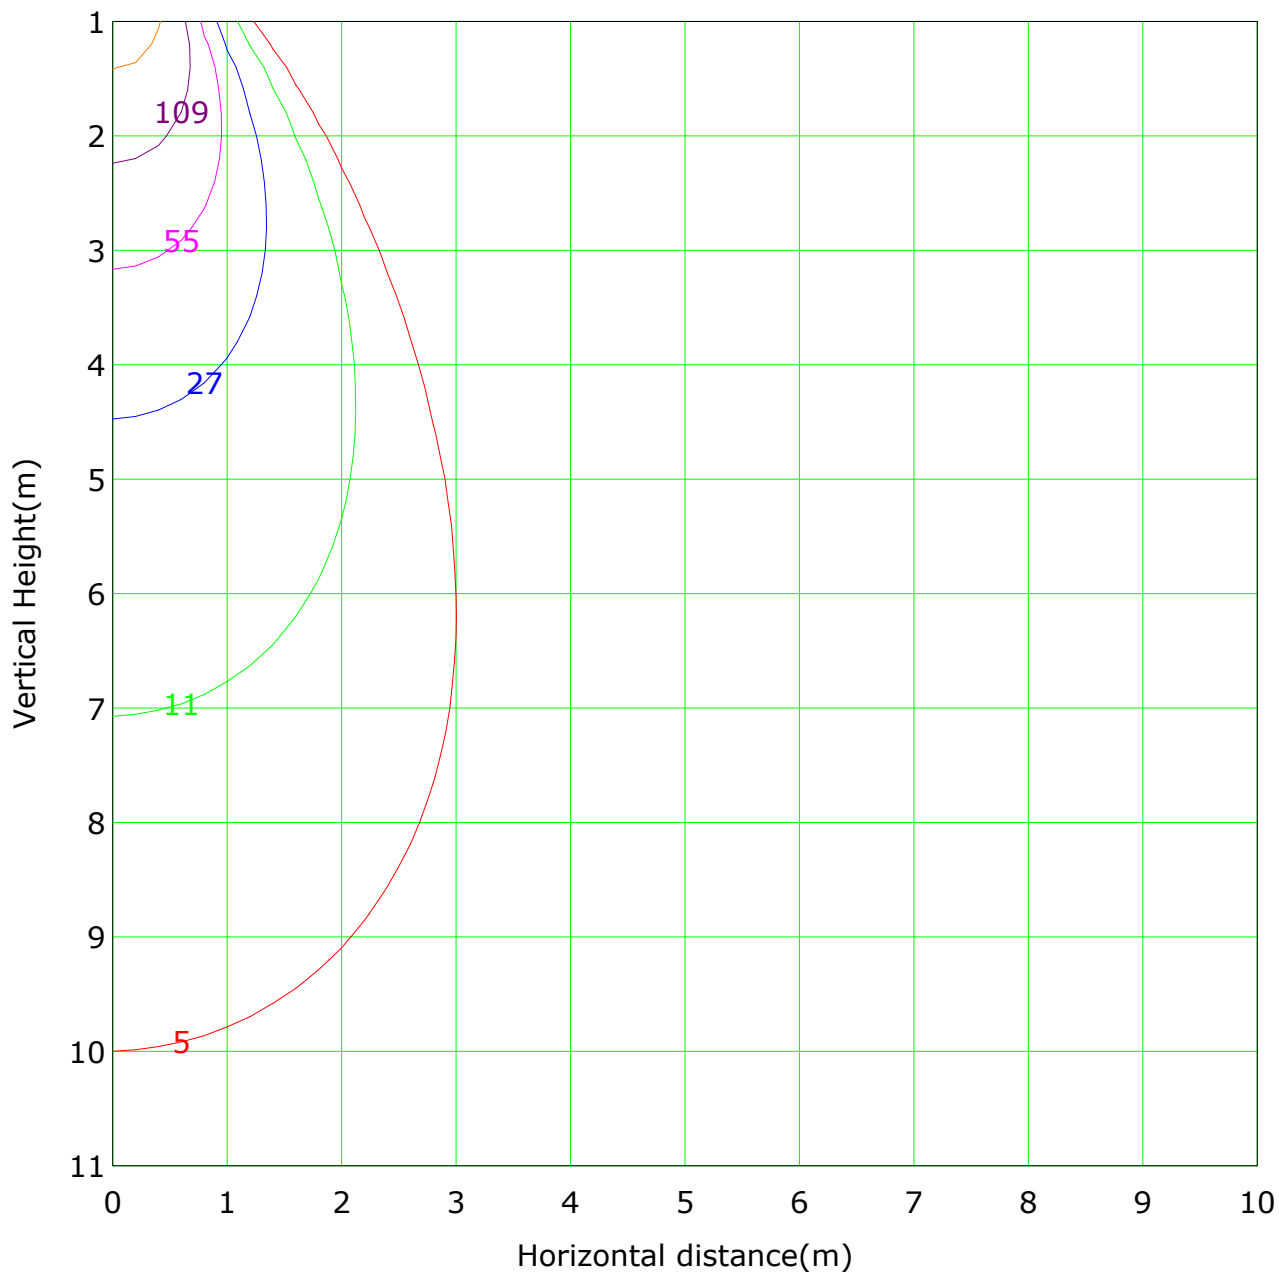

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 547.1 lx


(1%): 5.5 lx	(2%): 10.9 lx
(5%): 27.4 lx	(10%): 54.7 lx
(20%): 109.4 lx	(50%): 273.6 lx
(100%): 547.1 lx	

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

The Average Illuminance Effective Figure

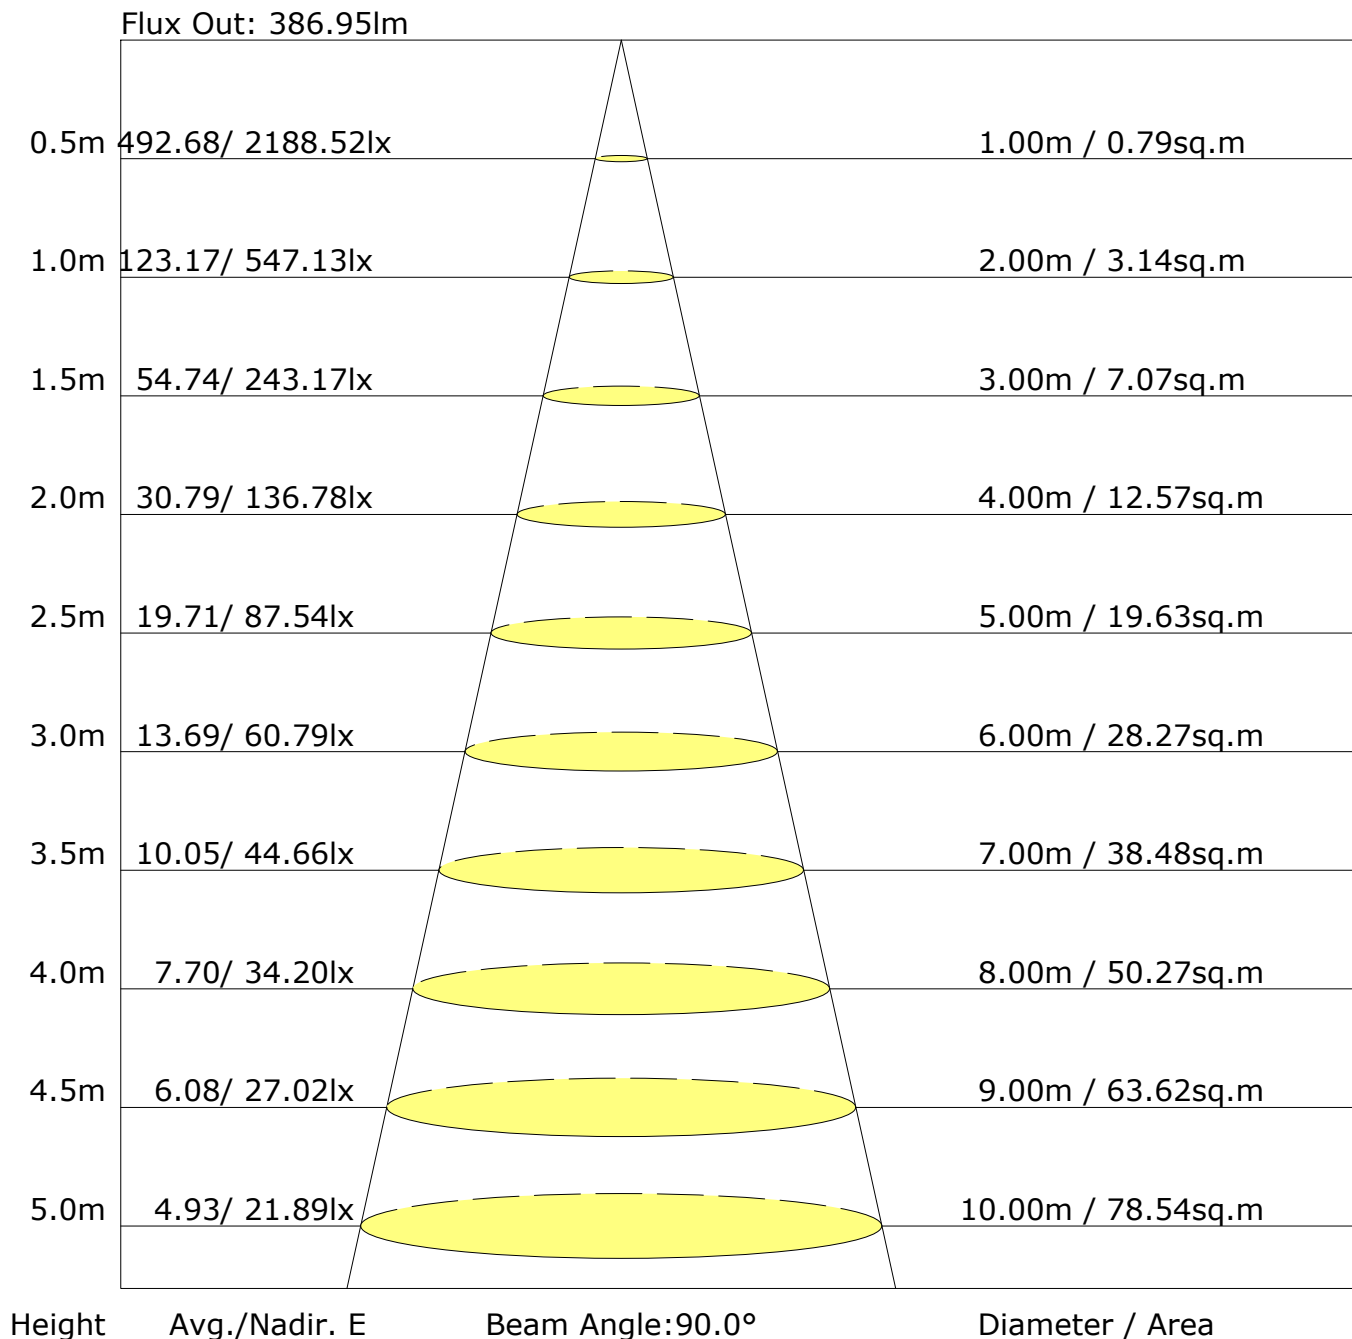

C Plane (°): 0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

UGR Table

Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	17.1	18.0	17.4	18.2	18.4	17.6	18.4	17.8	18.6	18.8
3H	17.1	17.9	17.4	18.2	18.4	17.6	18.4	17.9	18.6	18.8
4H	17.2	18.0	17.5	18.2	18.5	17.6	18.4	18.0	18.7	18.9
6H	17.5	18.2	17.8	18.5	18.8	17.9	18.6	18.2	18.9	19.1
8H	17.7	18.4	18.1	18.7	19.0	18.1	18.8	18.4	19.1	19.4
12H	18.1	18.7	18.4	19.0	19.3	18.5	19.1	18.8	19.4	19.7
X=4H Y=2H	17.0	17.7	17.3	18.0	18.3	17.4	18.2	17.7	18.4	18.7
3H	17.1	17.7	17.4	18.0	18.4	17.5	18.1	17.8	18.4	18.8
4H	17.3	17.9	17.7	18.2	18.6	17.7	18.2	18.1	18.6	18.9
6H	17.7	18.2	18.2	18.6	19.0	18.1	18.6	18.5	19.0	19.4
8H	18.1	18.6	18.6	19.0	19.4	18.5	18.9	18.9	19.3	19.7
12H	18.7	19.1	19.2	19.6	20.0	19.0	19.5	19.5	19.9	20.3
X=8H Y=4H	17.4	17.8	17.8	18.2	18.6	17.7	18.2	18.2	18.6	19.0
6H	18.0	18.4	18.5	18.8	19.3	18.4	18.7	18.8	19.2	19.6
8H	18.6	18.9	19.1	19.4	19.9	18.9	19.2	19.4	19.7	20.2
12H	19.5	19.8	20.0	20.2	20.7	19.8	20.1	20.3	20.5	21.0
X=12H Y=4H	17.4	17.8	17.8	18.2	18.6	17.7	18.2	18.2	18.6	19.0
6H	18.2	18.5	18.6	18.9	19.4	18.5	18.8	18.9	19.2	19.7
8H	18.8	19.1	19.3	19.6	20.1	19.1	19.4	19.6	19.9	20.4
Variations with the observer position at spacings:										
S=1.0H	+3.0/-2.9					+2.7/-2.5				
S=1.5H	+5.3/-3.6					+5.0/-3.4				
S=2.0H	+7.1/-4.3					+6.9/-4.1				

Calculate in accordance with CIE Pub.117. The table is revised with 415lm ($8\log(F/F_0) = -3.1$).

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM


	ZONE	LUMENS	% LAMP LUMENS
	FORWARD LIGHT	209	50.3
	FL (0°-30°)	151	36.3
	FM (30°-60°)	53	12.8
	FH (60°-80°)	3	0.8
	FVH (80°-90°)	2	0.4
	BACK LIGHT	206	49.7
	BL (0°-30°)	150	36.1
	BM (30°-60°)	51	12.4
	BH (60°-80°)	3	0.8
	BVH (80°-90°)	2	0.4
	UP LIGHT	0	0.0
	UL (90°-100°)	0	0.0
	UH (100°-180°)	0	0.0
	TRAPPED LIGHT	NA	NA

BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B1 U0 G0
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B1 U0 G0

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

LCS Graph

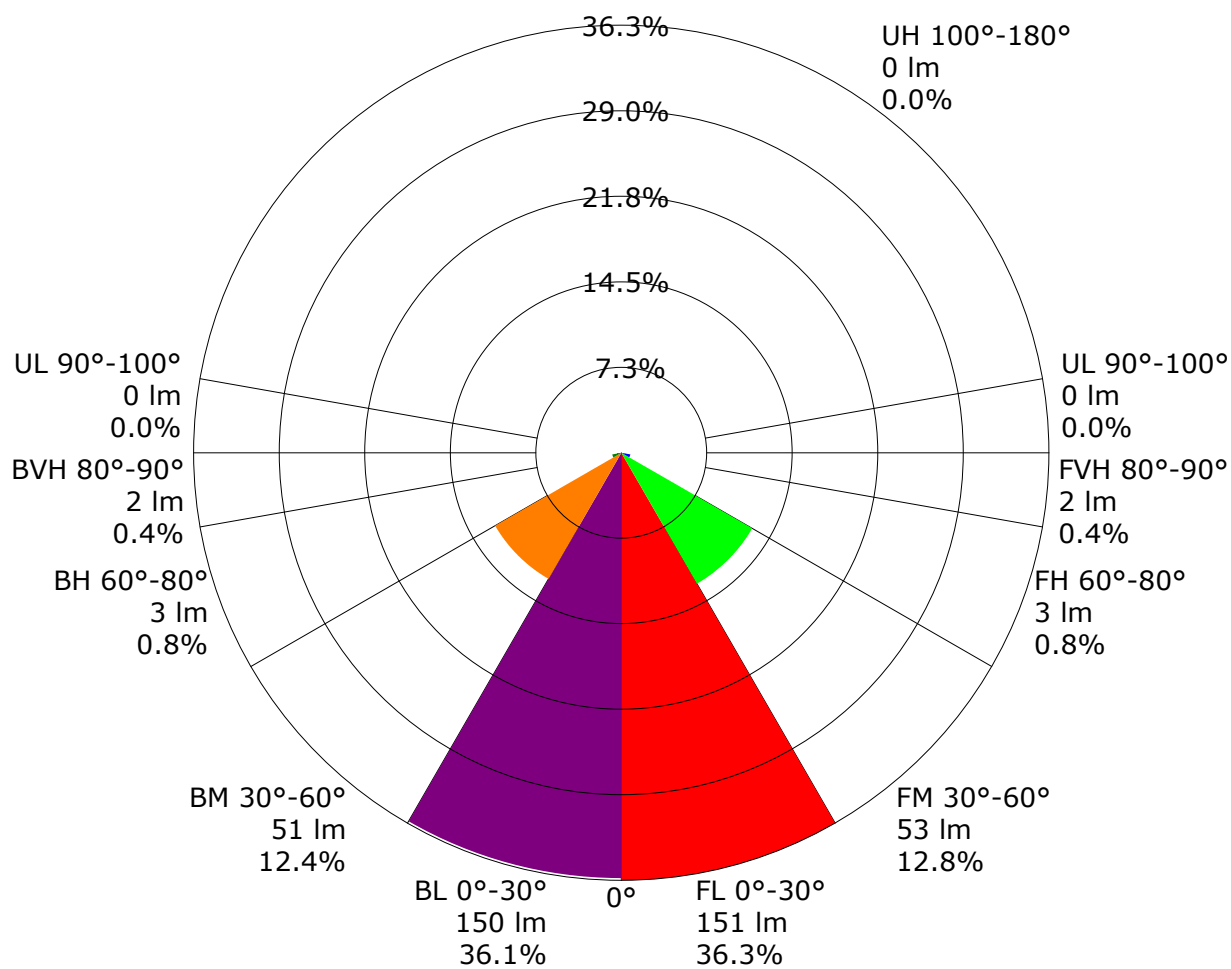

Back Light

Forward Light

Scale= MAX LCS%

Trapped Light:NA,NA

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Utilisation Factor Table(Floor cavity)

Utilisation Factors UF(F)			SHR NOM = 0.75									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.82	0.89	0.94	0.97	1.01	1.04	1.06	1.08	1.10	
	0.30		0.77	0.85	0.89	0.93	0.98	1.01	1.03	1.06	1.08	
	0.20		0.74	0.81	0.86	0.90	0.95	0.98	1.01	1.04	1.06	
0.50	0.50	0.20	0.81	0.88	0.92	0.95	0.98	1.01	1.03	1.05	1.06	
	0.30		0.77	0.84	0.88	0.91	0.95	0.98	1.00	1.03	1.04	
	0.20		0.74	0.80	0.85	0.88	0.93	0.96	0.98	1.01	1.03	
0.30	0.50	0.20	0.80	0.86	0.90	0.92	0.96	0.98	0.99	1.01	1.02	
	0.30		0.76	0.83	0.87	0.90	0.93	0.96	0.97	1.00	1.01	
	0.20		0.73	0.80	0.84	0.87	0.91	0.94	0.96	0.98	1.00	
0.00	0.00	0.00	0.72	0.78	0.82	0.85	0.88	0.90	0.92	0.94	0.95	
Rating:6W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

Utilisation Factor Table(Wall)

Utilisation Factors UF(W)			SHR NOM = 0.75									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.62	0.50	0.42	0.36	0.29	0.24	0.20	0.16	0.13	
	0.30		0.52	0.43	0.36	0.32	0.26	0.22	0.19	0.15	0.12	
	0.20		0.44	0.37	0.32	0.29	0.24	0.20	0.17	0.14	0.12	
0.50	0.50	0.20	0.59	0.47	0.39	0.34	0.27	0.26	0.19	0.14	0.12	
	0.30		0.50	0.41	0.35	0.30	0.24	0.20	0.18	0.14	0.11	
	0.20		0.43	0.36	0.31	0.27	0.22	0.19	0.16	0.13	0.11	
0.30	0.50	0.20	0.57	0.45	0.37	0.32	0.25	0.20	0.17	0.13	0.11	
	0.30		0.48	0.39	0.33	0.29	0.23	0.19	0.16	0.13	0.11	
	0.20		0.42	0.35	0.30	0.26	0.21	0.18	0.15	0.12	0.10	
0.00	0.00	0.00	0.29	0.23	0.19	0.16	0.13	0.10	0.09	0.07	0.06	
Rating:6W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

Utilisation Factor Table(Ceiling cavity)

Utilisation Factors UF(C)			SHR NOM = 0.75									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.13	0.15	0.16	0.17	0.18	0.19	0.20	0.20	0.21	
	0.30		0.09	0.11	0.12	0.13	0.15	0.16	0.17	0.19	0.19	
	0.20		0.06	0.08	0.09	0.11	0.13	0.14	0.15	0.17	0.18	
0.50	0.50	0.20	0.13	0.14	0.15	0.16	0.17	0.18	0.19	0.20	0.20	
	0.30		0.09	0.11	0.12	0.13	0.15	0.16	0.17	0.18	0.19	
	0.20		0.06	0.08	0.09	0.11	0.13	0.14	0.15	0.17	0.17	
0.30	0.50	0.20	0.12	0.14	0.15	0.15	0.17	0.17	0.18	0.19	0.19	
	0.30		0.09	0.10	0.12	0.13	0.14	0.15	0.16	0.17	0.18	
	0.20		0.06	0.08	0.09	0.10	0.12	0.14	0.15	0.16	0.17	
0.00	0.00	0.00	NA	NA	NA	NA	NA	NA	NA	NA	NA	
Rating:6W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	545.8	0.5	0.5	0.13	0.13
1.0-2.0	545.1	1.6	2.1	0.38	0.50
2.0-3.0	543.6	2.6	4.7	0.63	1.13
3.0-4.0	541.4	3.6	8.3	0.87	2.00
4.0-5.0	538.4	4.6	12.9	1.12	3.12
5.0-6.0	534.4	5.6	18.6	1.35	4.47
6.0-7.0	529.5	6.6	25.1	1.58	6.06
7.0-8.0	523.7	7.5	32.6	1.81	7.86
8.0-9.0	516.9	8.4	41.0	2.02	9.88
9.0-10.0	509.4	9.2	50.2	2.22	12.10
10.0-11.0	500.6	10.0	60.2	2.41	14.51
11.0-12.0	491.0	10.7	71.0	2.59	17.10
12.0-13.0	480.5	11.4	82.4	2.75	19.85
13.0-14.0	468.7	12.0	94.4	2.89	22.74
14.0-15.0	456.1	12.5	106.9	3.02	25.76
15.0-16.0	442.6	13.0	119.9	3.13	28.88
16.0-17.0	427.8	13.3	133.2	3.21	32.10
17.0-18.0	412.8	13.6	146.8	3.28	35.38
18.0-19.0	396.4	13.8	160.6	3.32	38.70
19.0-20.0	379.1	13.9	174.5	3.34	42.04
20.0-21.0	361.9	13.9	188.4	3.35	45.39
21.0-22.0	343.6	13.8	202.2	3.33	48.72
22.0-23.0	325.1	13.6	215.8	3.29	52.01
23.0-24.0	306.1	13.4	229.2	3.23	55.23
24.0-25.0	286.9	13.0	242.3	3.14	58.38
25.0-26.0	268.5	12.7	254.9	3.05	61.43
26.0-27.0	249.3	12.2	267.1	2.94	64.37
27.0-28.0	230.1	11.7	278.8	2.81	67.18
28.0-29.0	212.1	11.1	289.9	2.67	69.85
29.0-30.0	194.1	10.5	300.4	2.53	72.38
30.0-31.0	176.8	9.8	310.2	2.37	74.75
31.0-32.0	160.2	9.2	319.4	2.21	76.96
32.0-33.0	144.3	8.5	327.9	2.05	79.01
33.0-34.0	130.0	7.9	335.8	1.90	80.91
34.0-35.0	116.3	7.2	343.0	1.74	82.65
35.0-36.0	103.6	6.6	349.6	1.59	84.24

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	92.4	6.0	355.6	1.45	85.69
37.0-38.0	81.8	5.5	361.1	1.32	87.00
38.0-39.0	72.4	4.9	366.0	1.19	88.20
39.0-40.0	64.0	4.5	370.5	1.08	89.27
40.0-41.0	56.5	4.0	374.5	0.97	90.24
41.0-42.0	50.0	3.6	378.1	0.88	91.12
42.0-43.0	44.1	3.3	381.4	0.79	91.90
43.0-44.0	38.8	2.9	384.3	0.71	92.61
44.0-45.0	34.3	2.6	387.0	0.64	93.24
45.0-46.0	30.2	2.4	389.3	0.57	93.81
46.0-47.0	26.7	2.1	391.4	0.51	94.33
47.0-48.0	23.7	1.9	393.4	0.46	94.79
48.0-49.0	20.9	1.7	395.1	0.41	95.20
49.0-50.0	18.4	1.5	396.6	0.37	95.57
50.0-51.0	16.0	1.4	398.0	0.33	95.90
51.0-52.0	14.0	1.2	399.2	0.29	96.19
52.0-53.0	12.2	1.1	400.2	0.26	96.44
53.0-54.0	10.6	0.9	401.2	0.23	96.67
54.0-55.0	9.4	0.8	402.0	0.20	96.87
55.0-56.0	8.3	0.7	402.7	0.18	97.05
56.0-57.0	7.3	0.7	403.4	0.16	97.21
57.0-58.0	6.5	0.6	404.0	0.14	97.36
58.0-59.0	5.8	0.5	404.6	0.13	97.49
59.0-60.0	5.1	0.5	405.0	0.12	97.60
60.0-61.0	4.6	0.4	405.5	0.11	97.71
61.0-62.0	4.2	0.4	405.9	0.10	97.80
62.0-63.0	3.8	0.4	406.2	0.09	97.89
63.0-64.0	3.5	0.3	406.6	0.08	97.98
64.0-65.0	3.3	0.3	406.9	0.08	98.06
65.0-66.0	3.2	0.3	407.2	0.08	98.13
66.0-67.0	3.1	0.3	407.5	0.07	98.21
67.0-68.0	3.0	0.3	407.9	0.07	98.28
68.0-69.0	3.0	0.3	408.2	0.07	98.36
69.0-70.0	3.0	0.3	408.5	0.07	98.43
70.0-71.0	3.0	0.3	408.8	0.08	98.51
71.0-72.0	3.1	0.3	409.1	0.08	98.58

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G0.0	547.1	544.9	547.1	544.9	547.1					
G1.0	546.2	544.7	547.2	544.5	546.2					
G2.0	544.2	543.9	546.6	543.6	544.2					
G3.0	541.5	542.4	545.1	541.7	541.5					
G4.0	538.2	540.1	542.6	539.3	538.2					
G5.0	534.2	537.2	539.2	536.3	534.2					
G6.0	528.5	533.4	534.7	531.8	528.5					
G7.0	522.7	529.0	529.2	526.9	522.7					
G8.0	515.2	523.7	522.0	521.1	515.2					
G9.0	507.8	517.6	514.2	513.9	507.8					
G10.0	499.2	510.8	505.8	505.9	499.2					
G11.0	489.1	502.7	495.3	496.1	489.1					
G12.0	478.9	494.0	484.9	486.5	478.9					
G13.0	467.8	484.0	472.6	475.4	467.8					
G14.0	454.8	473.5	459.1	462.1	454.8					
G15.0	441.9	462.6	445.8	449.4	441.9					
G16.0	427.6	449.1	429.5	435.1	427.6					
G17.0	413.0	436.3	413.6	418.4	413.0					
G18.0	398.5	422.0	397.8	402.3	398.5					
G19.0	381.1	406.0	378.9	384.4	381.1					
G20.0	365.2	389.9	360.9	366.7	365.2					
G21.0	348.1	372.4	343.3	348.5	348.1					
G22.0	329.8	355.6	322.8	328.1	329.8					
G23.0	312.8	337.5	304.0	309.8	312.8					
G24.0	292.8	317.3	284.1	290.6	292.8					
G25.0	275.3	299.3	265.4	270.5	275.3					
G26.0	257.0	280.3	247.6	252.3	257.0					
G27.0	237.9	260.4	227.6	231.7	237.9					
G28.0	219.2	241.3	209.6	213.4	219.2					
G29.0	202.5	221.7	193.0	195.7	202.5					
G30.0	183.9	203.4	174.6	177.9	183.9					
G31.0	168.0	186.5	158.4	161.7	168.0					
G32.0	150.4	167.9	142.0	147.0	150.4					
G33.0	136.2	152.4	127.4	131.2	136.2					
G34.0	123.0	137.1	114.7	118.3	123.0					
G35.0	108.9	122.3	101.3	105.0	108.9					
G36.0	97.4	109.1	90.3	94.6	97.4					

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G37.0	86.1	96.7	80.2	84.5	86.1					
G38.0	75.8	86.2	69.9	75.0	75.8					
G39.0	66.9	77.0	62.1	66.6	66.9					
G40.0	58.8	68.0	53.9	58.9	58.8					
G41.0	51.7	60.4	47.4	52.6	51.7					
G42.0	45.6	53.9	41.4	47.0	45.6					
G43.0	39.3	47.6	35.7	41.9	39.3					
G44.0	34.6	42.8	31.0	37.6	34.6					
G45.0	30.2	38.1	26.5	33.7	30.2					
G46.0	25.9	34.3	23.1	29.7	25.9					
G47.0	22.9	30.7	20.7	26.4	22.9					
G48.0	19.9	27.4	18.3	23.1	19.9					
G49.0	17.5	24.4	16.1	20.3	17.5					
G50.0	15.2	21.8	14.0	17.9	15.2					
G51.0	13.0	19.1	11.8	15.7	13.0					
G52.0	11.1	17.0	9.9	14.1	11.1					
G53.0	9.4	15.0	8.3	12.8	9.4					
G54.0	8.0	13.5	6.9	11.3	8.0					
G55.0	7.0	12.3	5.9	10.1	7.0					
G56.0	6.1	11.1	5.1	8.8	6.1					
G57.0	5.5	9.8	4.6	7.7	5.5					
G58.0	5.0	8.6	4.1	6.7	5.0					
G59.0	4.5	7.6	3.8	5.8	4.5					
G60.0	4.1	6.6	3.6	5.1	4.1					
G61.0	3.8	5.7	3.4	4.6	3.8					
G62.0	3.5	4.9	3.2	4.1	3.5					
G63.0	3.3	4.3	3.1	3.9	3.3					
G64.0	3.2	3.8	3.1	3.6	3.2					
G65.0	3.1	3.5	3.0	3.4	3.1					
G66.0	3.0	3.3	2.9	3.2	3.0					
G67.0	3.0	3.2	2.8	3.2	3.0					
G68.0	3.0	3.1	2.9	3.2	3.0					
G69.0	3.1	3.1	2.8	3.2	3.1					
G70.0	3.0	3.1	2.8	3.1	3.0					
G71.0	3.1	3.1	2.9	3.2	3.1					
G72.0	3.0	3.1	2.8	3.1	3.0					
G73.0	3.1	3.1	2.8	3.2	3.1					

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Unit: cd

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector: