

Report No.:

Test Time: 2026-04-11 14:27

Luminaire Property

Luminaire Manufacturer: NORDECOR
Luminaire Description: 80095
Luminous Width (mm): 65
Current: 0.083 A
Power Factor: 0.465


Luminous Length (mm): 65
Voltage: 220.5 V
Power: 8.46 W

Photometric Results


CIE Class: Direct
Measurement Flux: 547.9 lm
Downward Ratio: 100%
Horizontal Diffuse Angle(10%,50%,80%,100%): H92.5,H55.9,H39.1,H5
Vertical Diffuse Angle(10%,50%,80%,100%): V92.7,V55.7,V38.8,V4
Luminaire Efficacy Rating (LER): 64.81
Max. Intensity: 585.15 cd
S/MH(C0/C180): 0.89

Total Rated Lamp Lumens: 547.9 lm
Efficiency: 100%
Upward Ratio: 0%
Central Intensity: 581.99 cd
Pos of Max. Intensity: H180 V5
S/MH(C90/C270): 0.88



Picture Of Luminaire



Luminous Intensity Distribution Curve

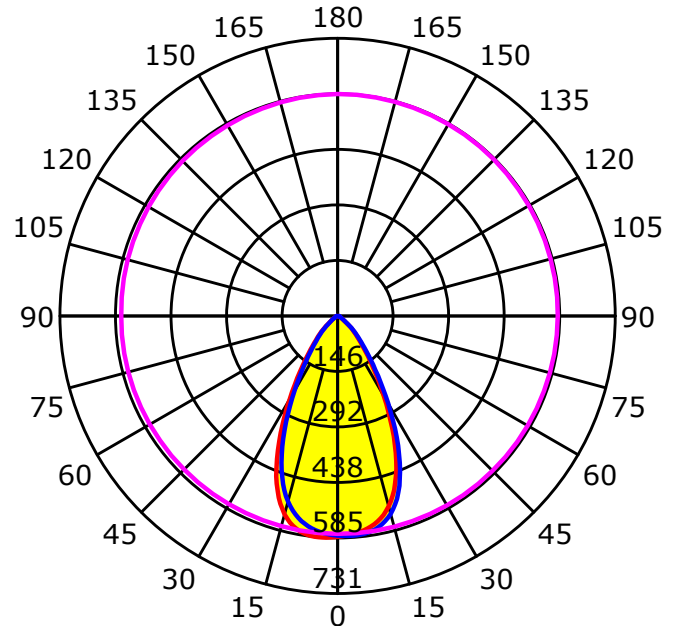


Luminous Intensity Distribution Curve

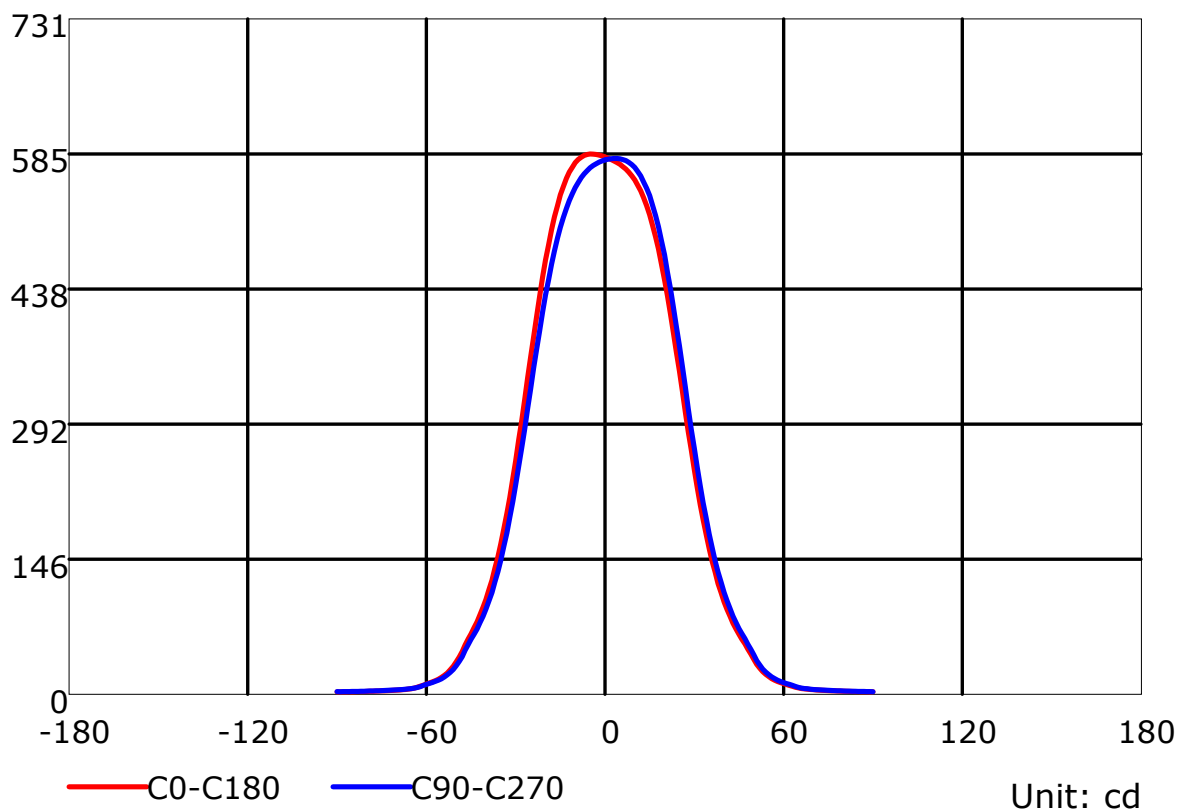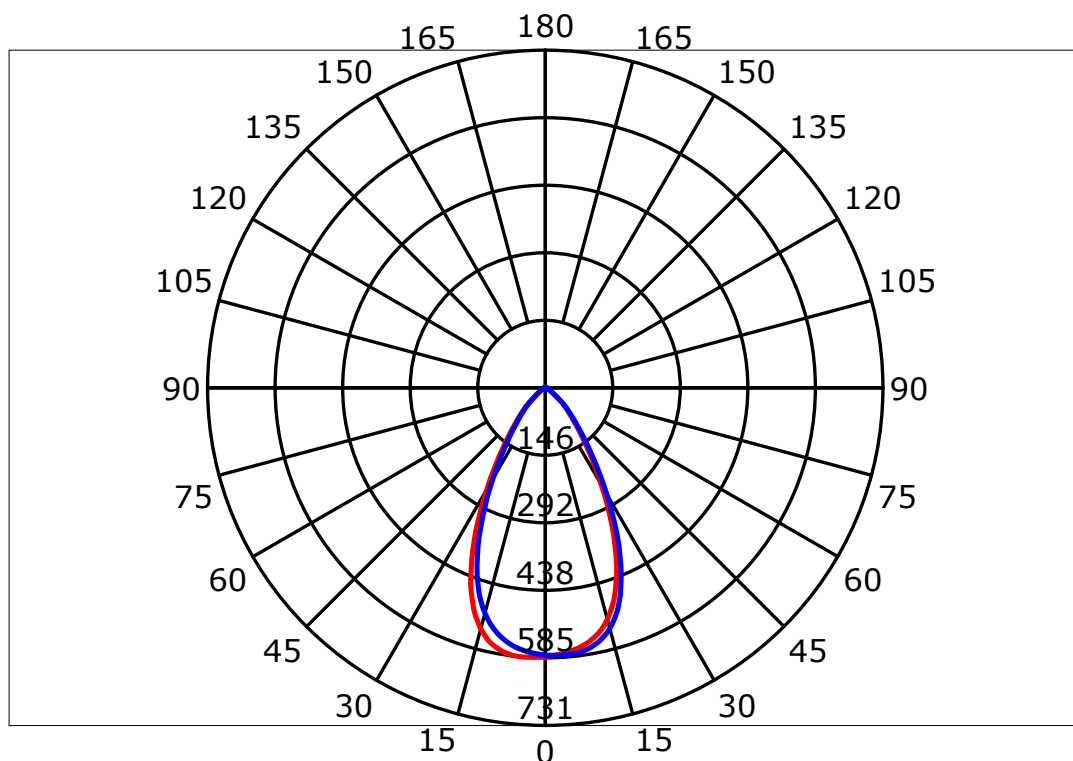

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Luminous Intensity Distribution Curve(cd/klm)

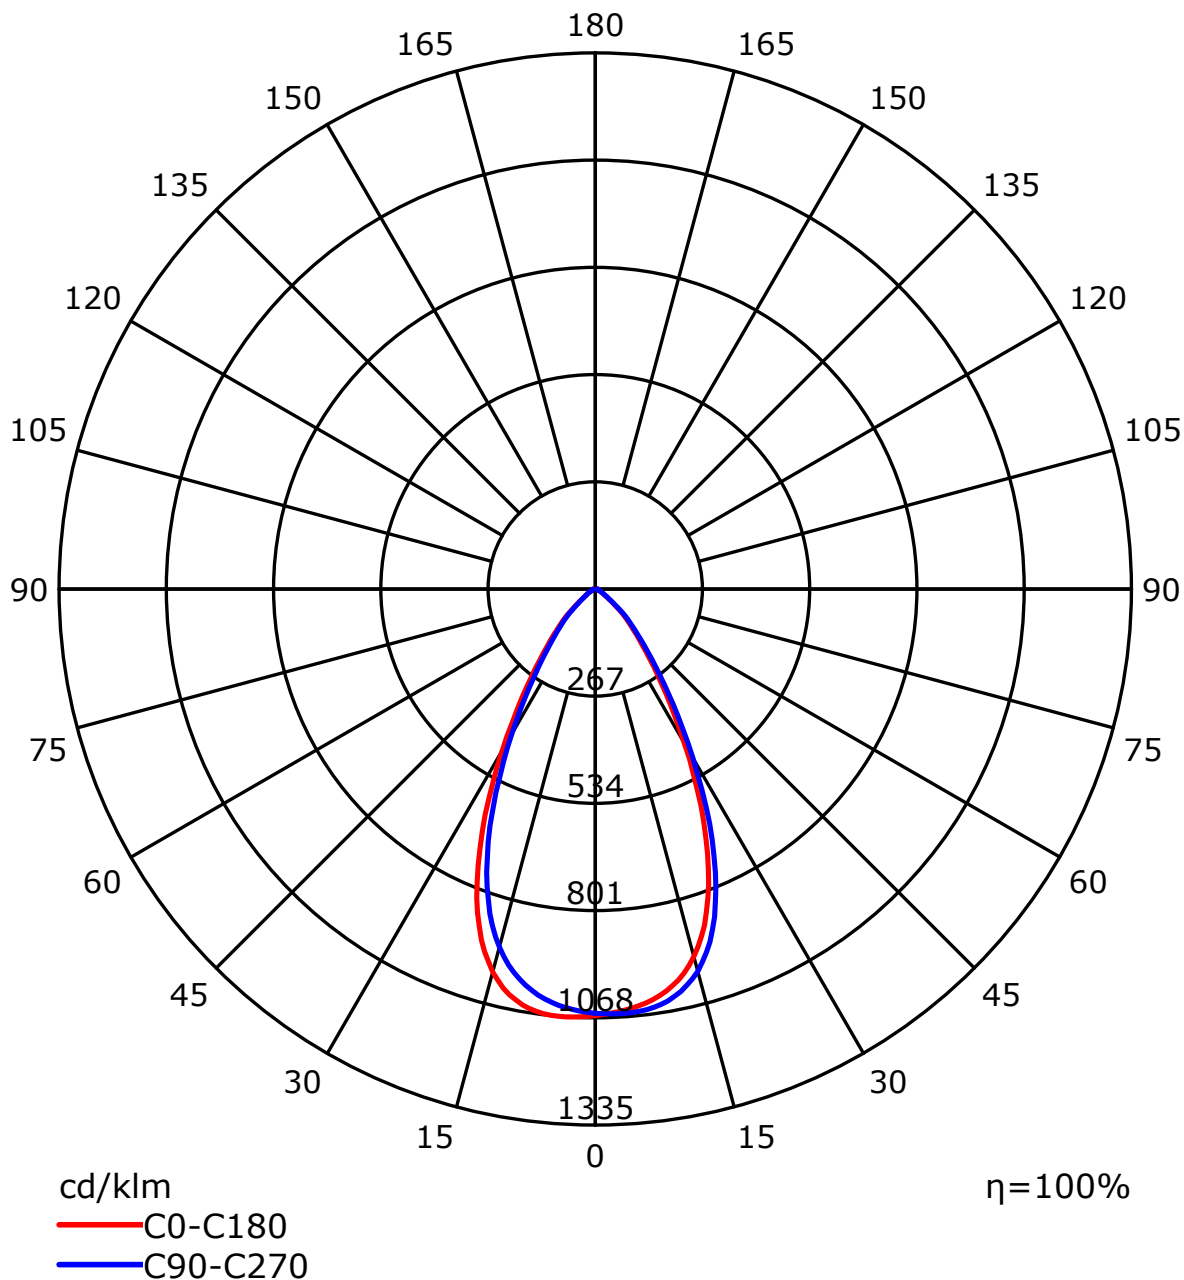


C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92
2	107	101	97	93	104	100	96	92	96	93	90	93	91	88	91	88	86	85
3	101	94	89	84	99	93	88	84	90	86	82	87	84	81	85	82	80	78
4	95	87	81	77	94	86	81	76	84	79	76	82	78	75	80	77	74	72
5	90	81	75	71	89	80	75	70	79	74	70	77	73	69	75	72	68	67
6	86	76	70	65	84	75	69	65	74	69	65	72	68	64	71	67	64	62
7	81	71	65	61	80	71	65	60	69	64	60	68	63	60	67	63	59	58
8	77	67	61	56	76	67	61	56	65	60	56	64	59	56	63	59	56	54
9	73	63	57	53	72	63	57	53	62	56	53	61	56	52	60	56	52	51
10	70	60	54	50	69	59	53	50	58	53	49	58	53	49	57	52	49	48


Spacing Criteria (0-180): 0.89
Spacing Criteria (90-270): 0.88
Spacing Criteria (Diagonal): 0.85

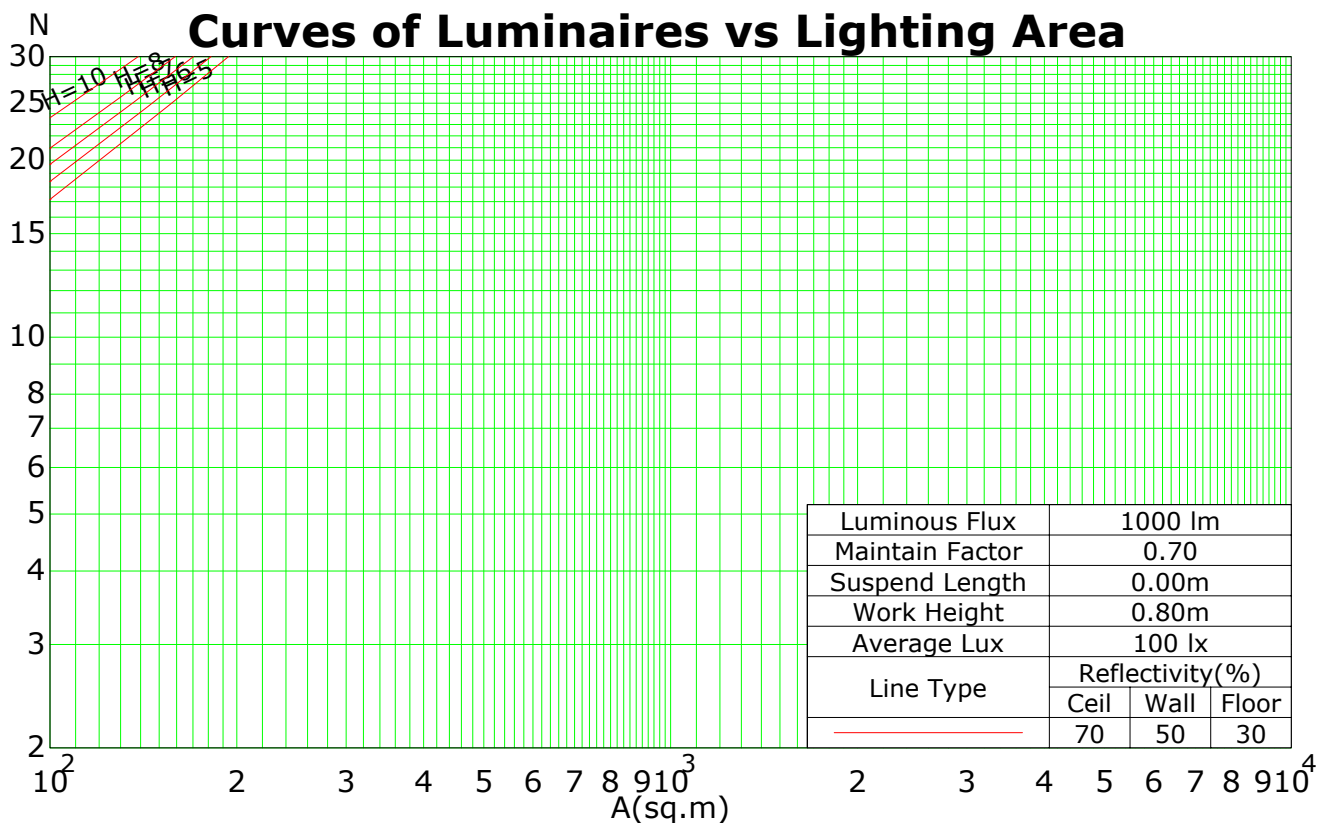

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Isocandela (rectangle)

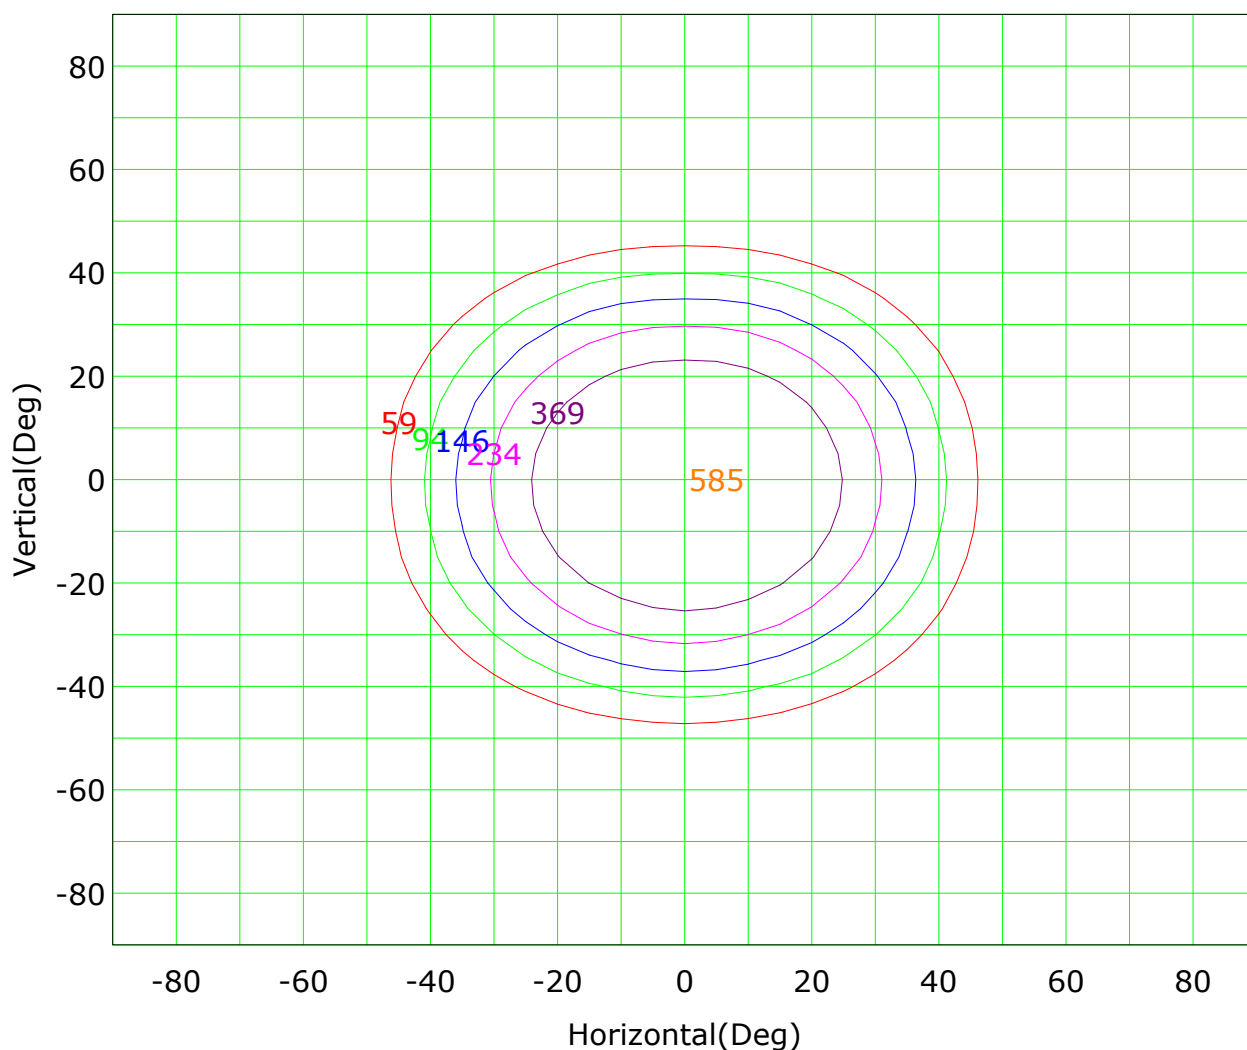


Imax (100%): 585 cd

(10%):	59 cd	(16%):	94 cd
(25%):	146 cd	(40%):	234 cd
(63%):	369 cd	(100%):	585 cd

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Isocandela (sphere)

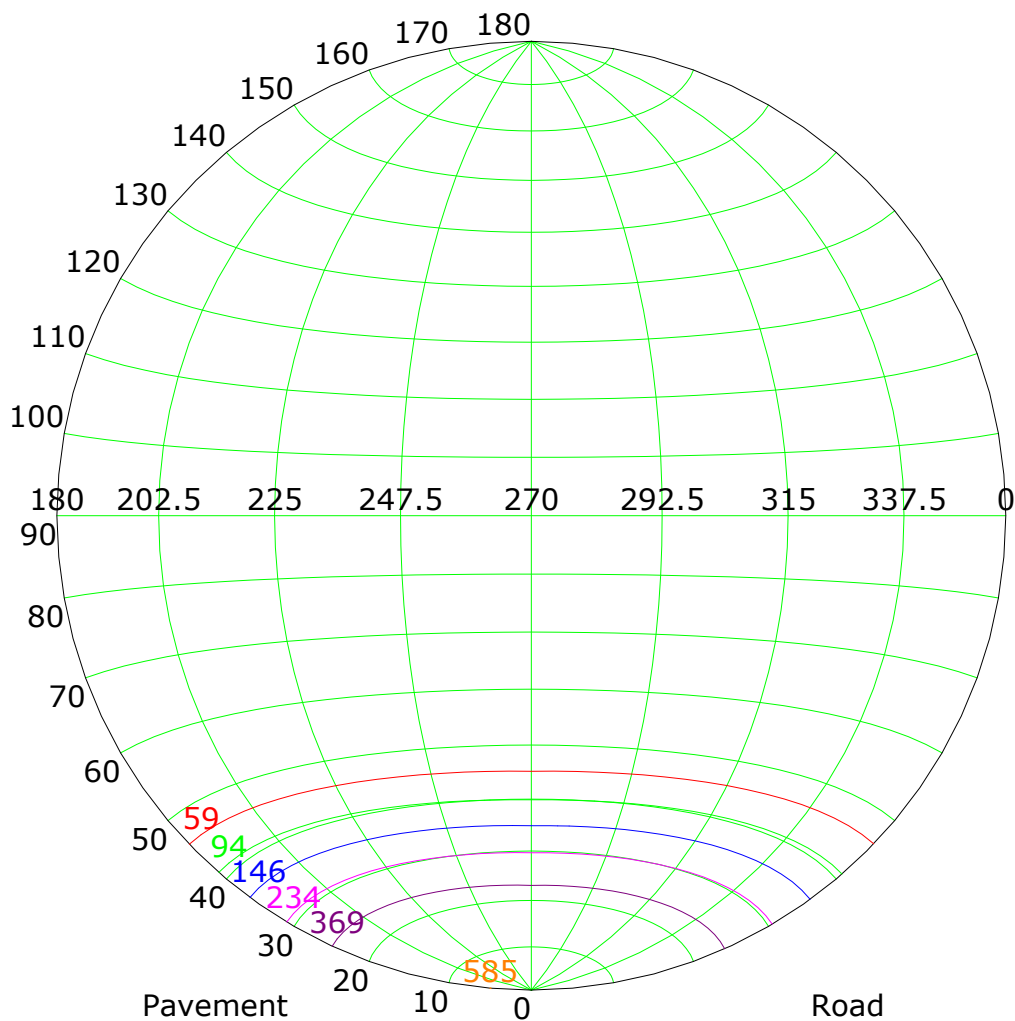


Imax (100%): 585 cd

— (10%):	59 cd	— (16%):	94 cd
— (25%):	146 cd	— (40%):	234 cd
— (63%):	369 cd	— (100%):	585 cd

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

IsoLux Plot

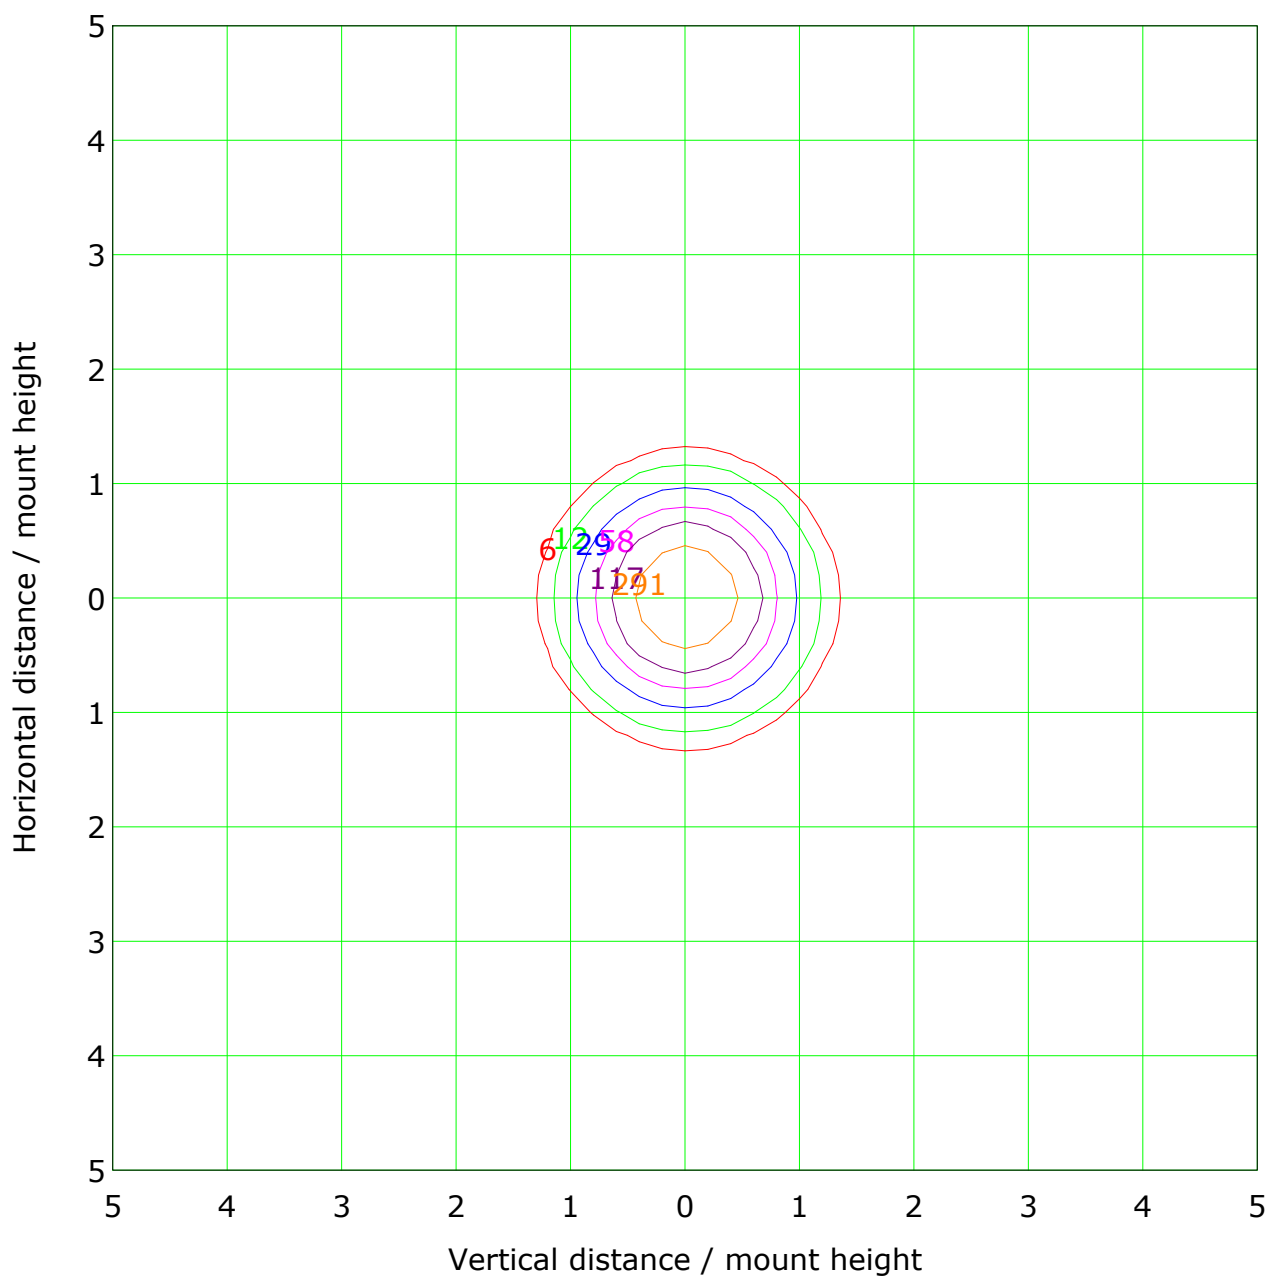

Mounting Height: 1.0m Max Lux(100%): 582.9 lx


(1%): 5.8 lx	(2%): 11.7 lx
(5%): 29.1 lx	(10%): 58.3 lx
(20%): 116.6 lx	(50%): 291.5 lx
(100%): 582.9 lx	

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Roadway CU Curve

Efficiency(%)


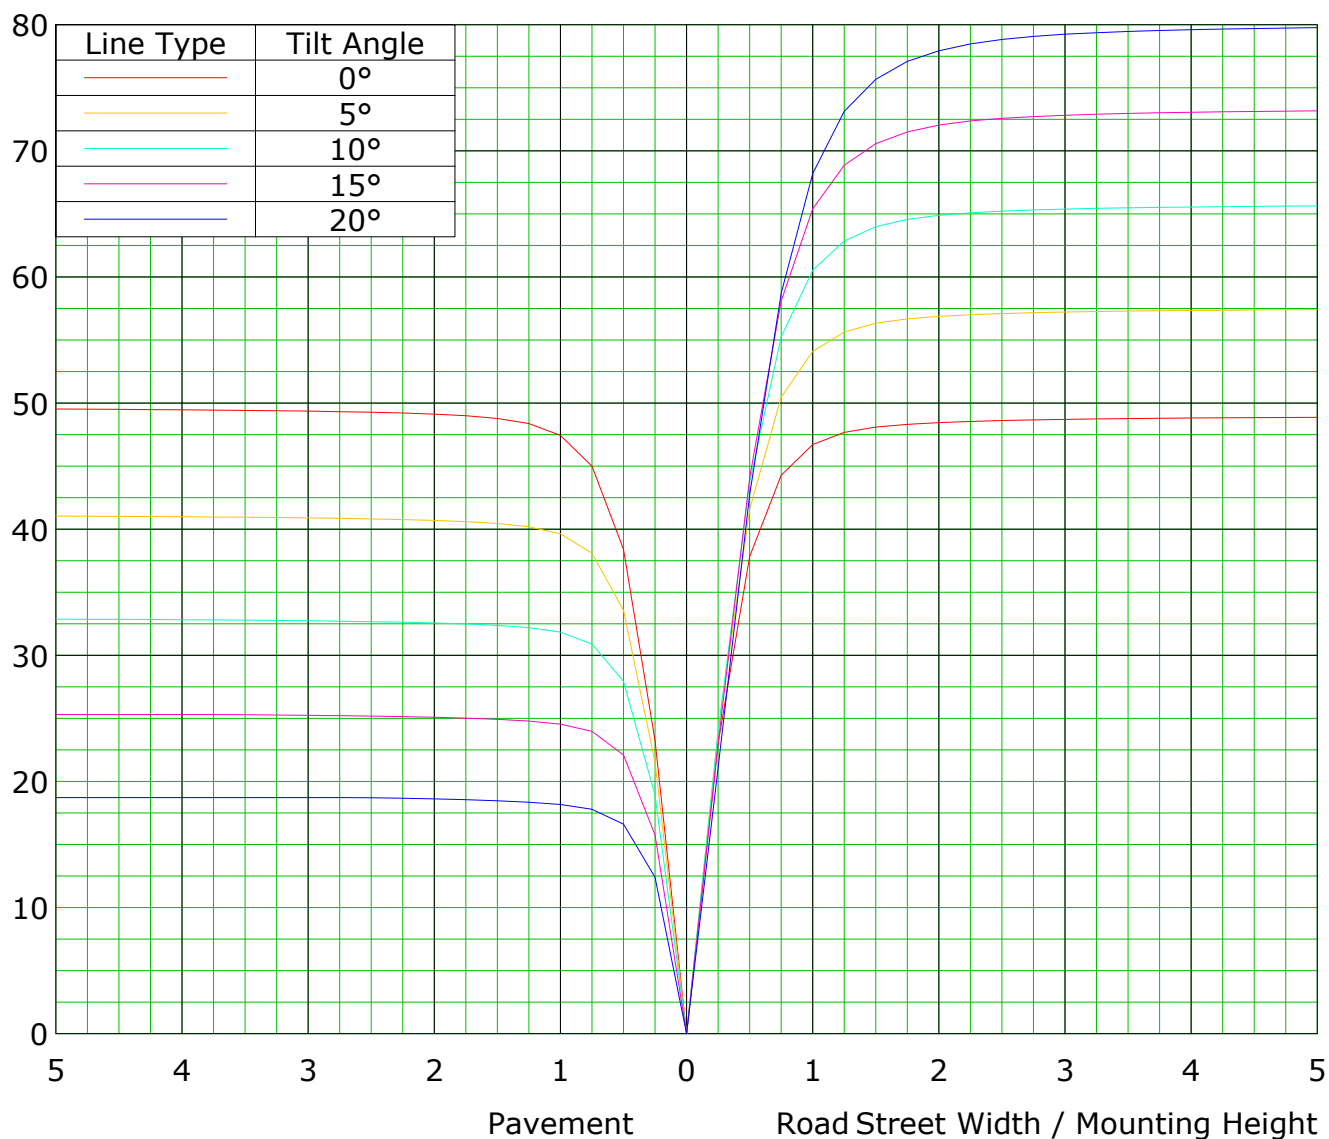


C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

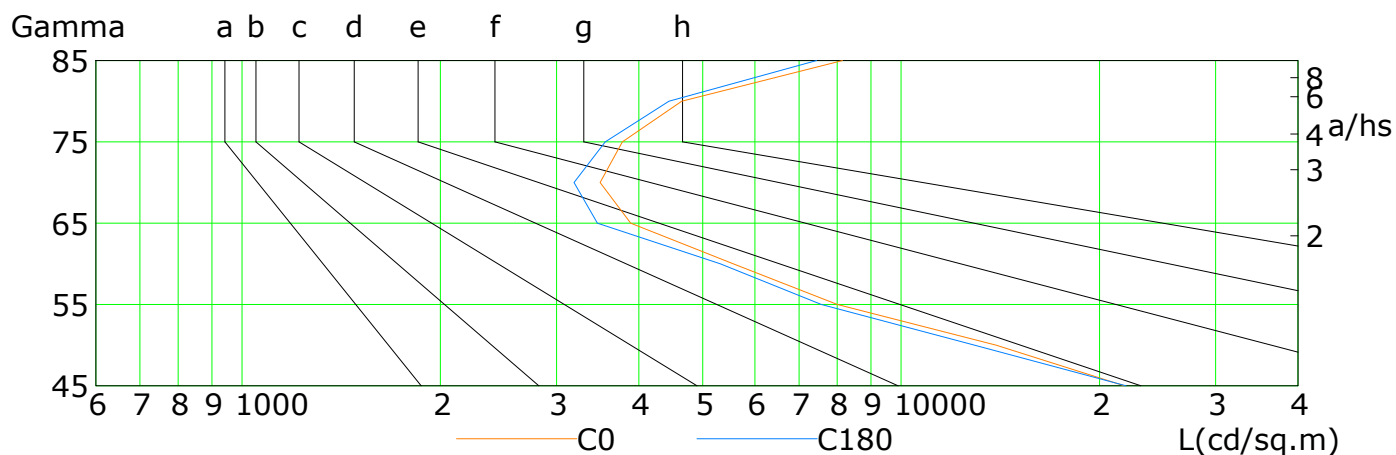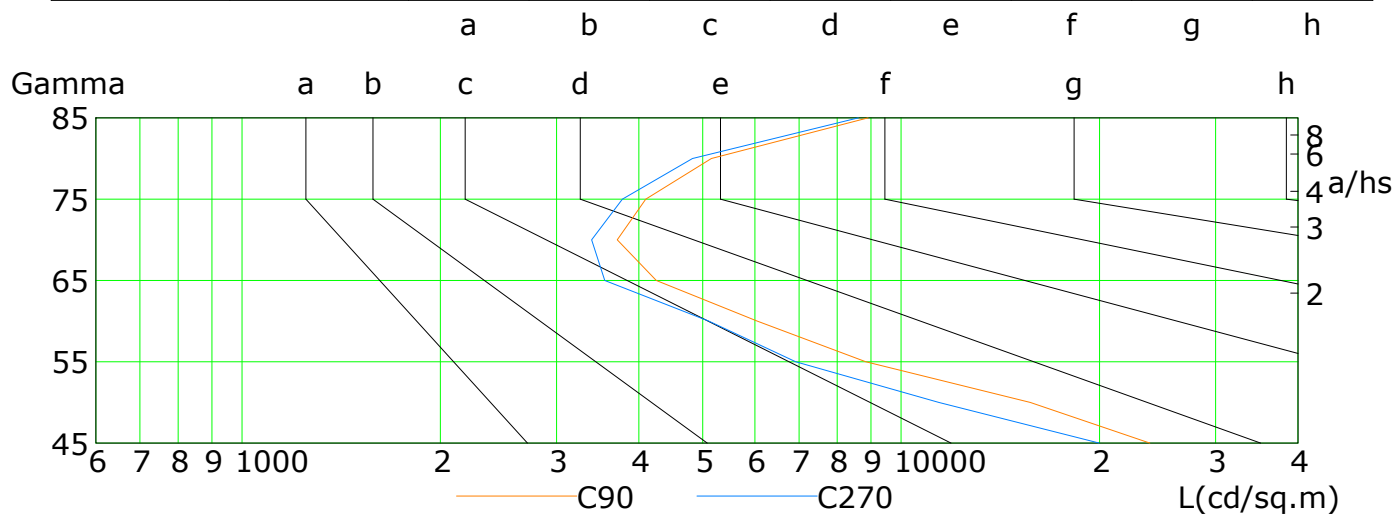

L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	21807	13926	8001	5562	3887	3495	3777	4648	8147
C90	23842	15701	8839	6050	4251	3709	4097	5152	8907
C180	21928	12917	7568	5316	3461	3190	3557	4443	7441
C270	19980	11407	6920	5108	3551	3391	3777	4825	8609

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: GPM-1600L

Distance: 8.443 m


Humidity:

Inspector:

Illuminance at a Distance

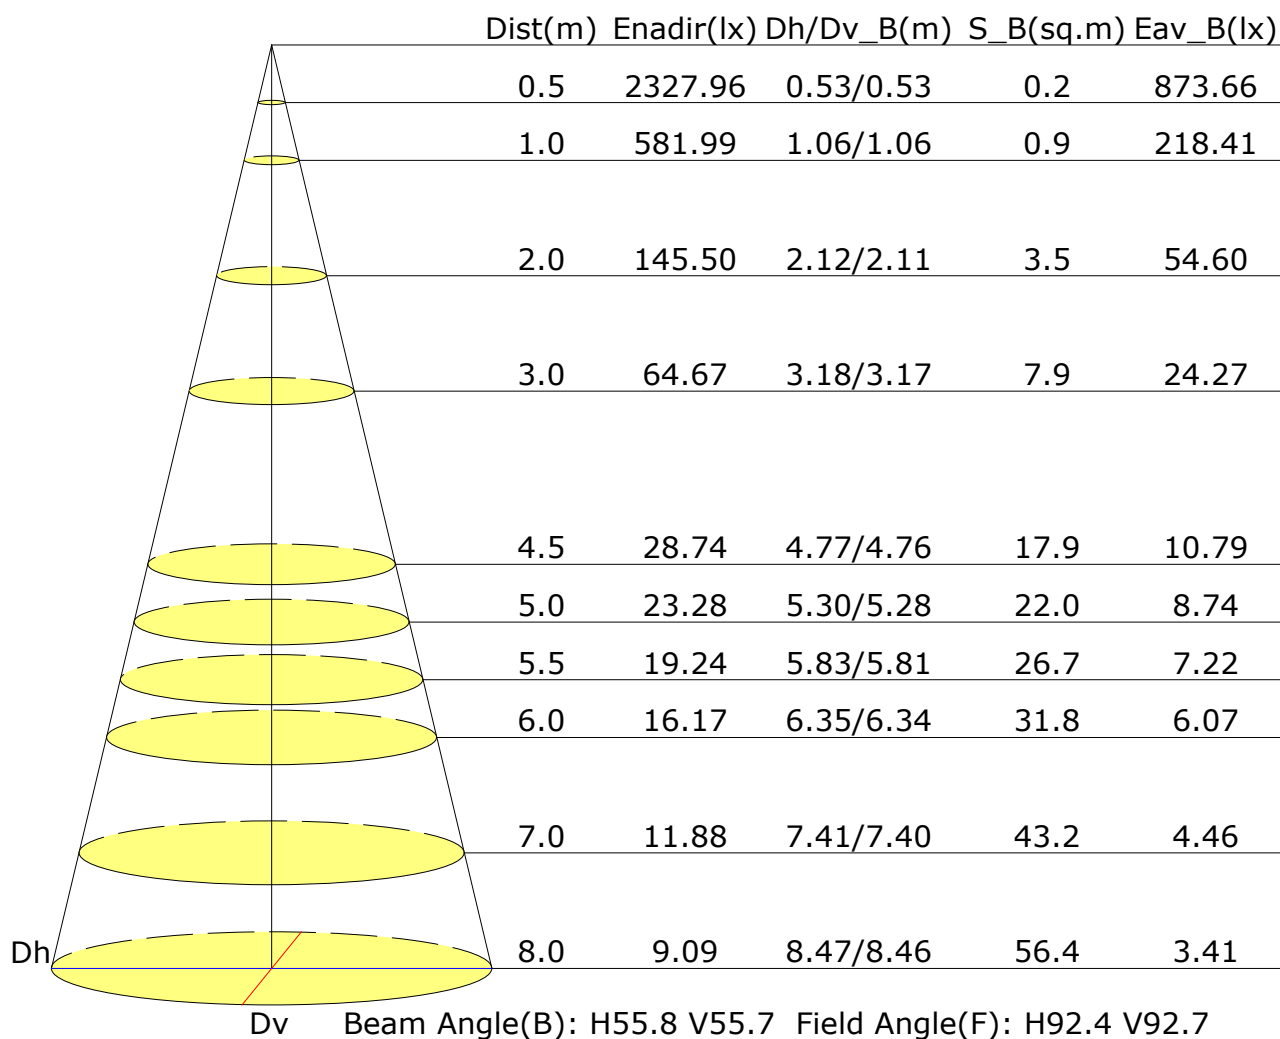

Vertical IsoLux Plot

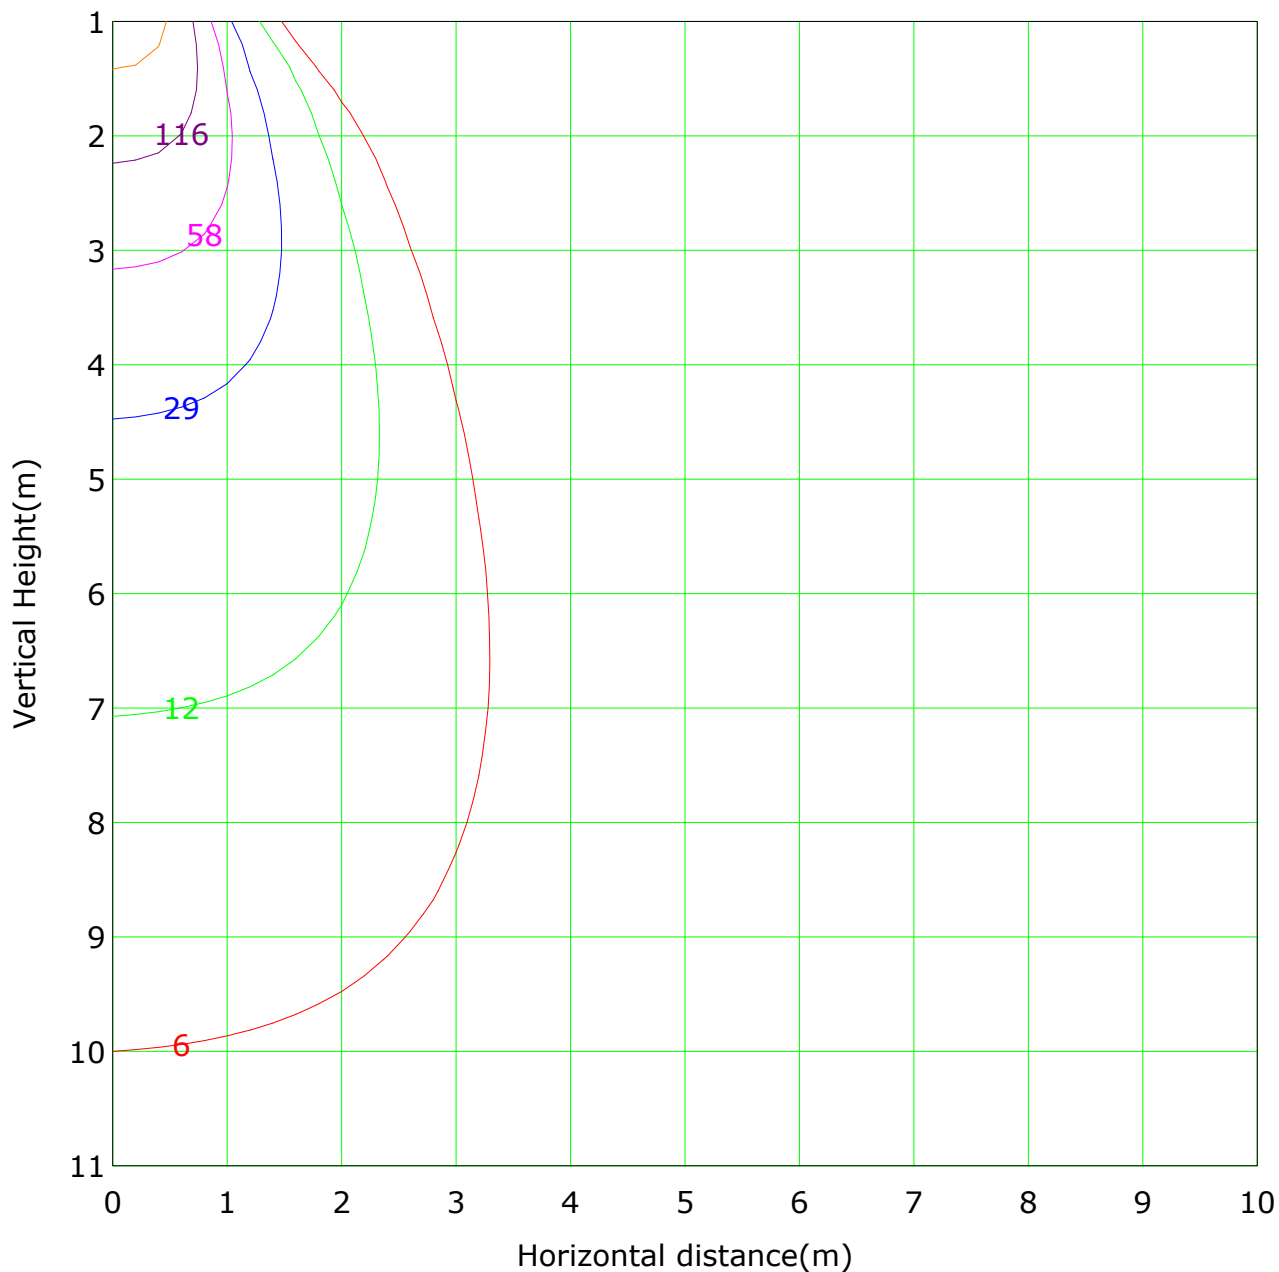


Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 582.0 lx
— (1%): 5.8 lx — (2%): 11.6 lx
— (5%): 29.1 lx — (10%): 58.2 lx
— (20%): 116.4 lx — (50%): 291.0 lx
— (100%): 582.0 lx

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

The Average Illuminance Effective Figure

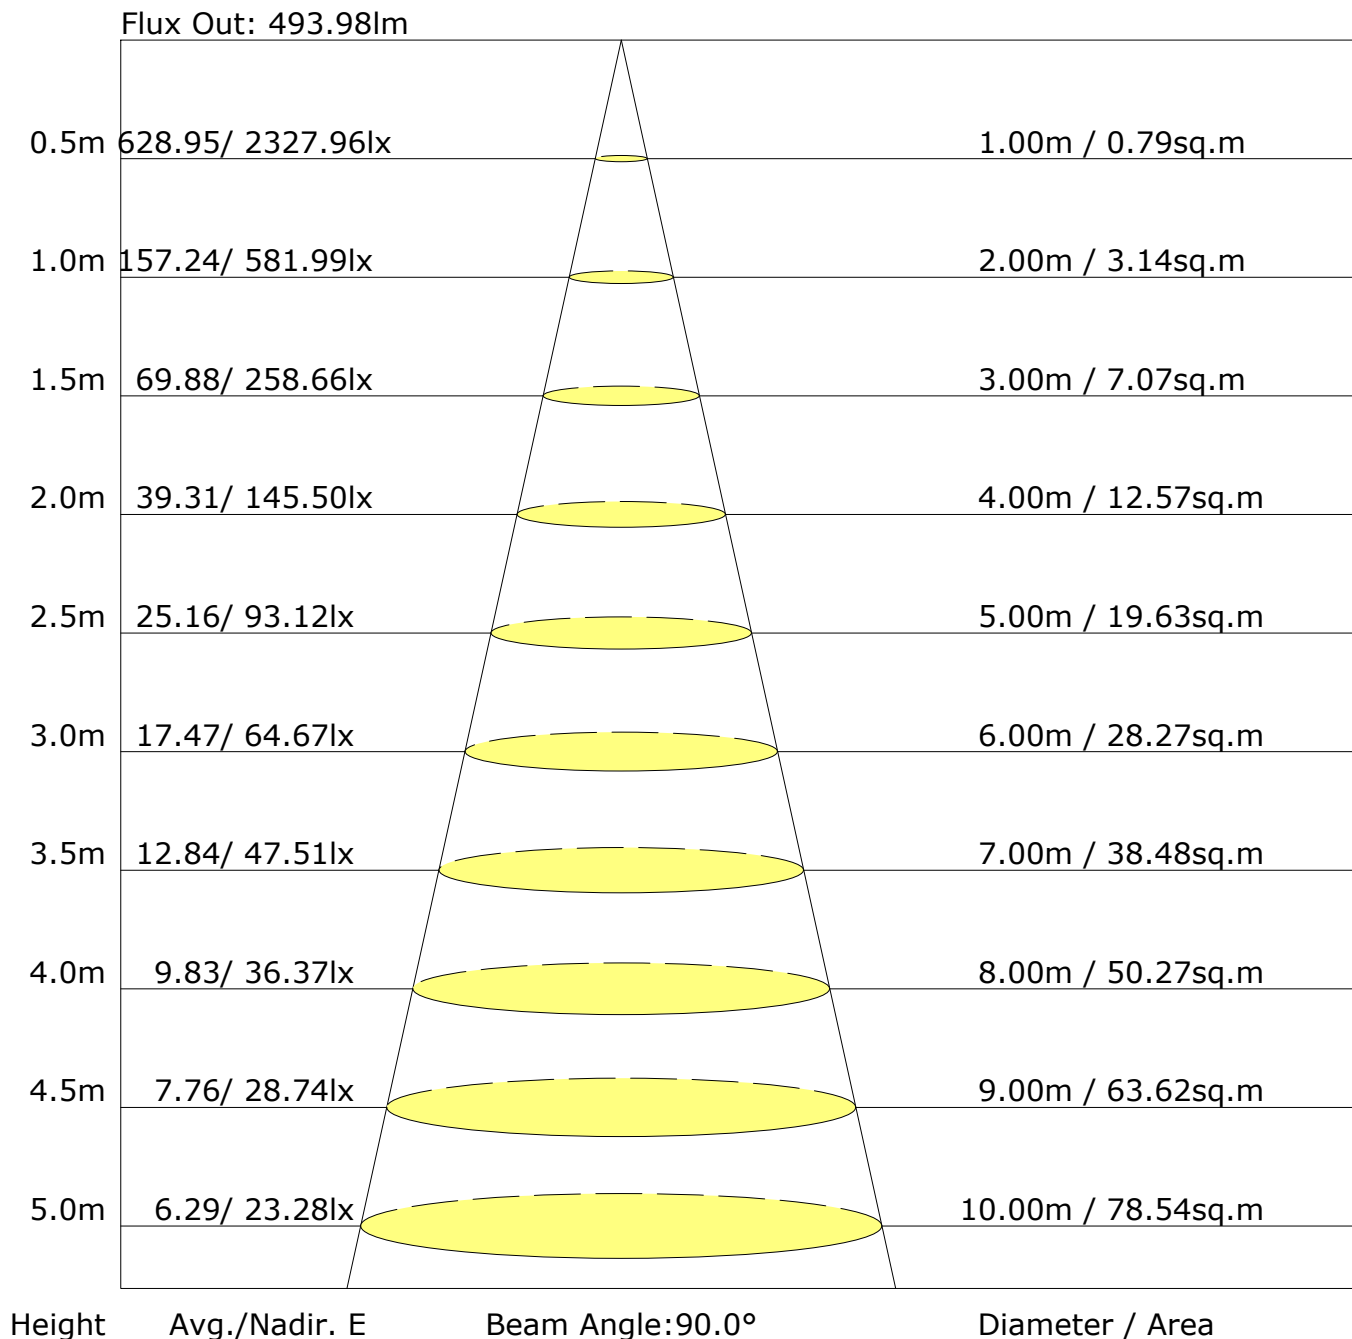

C Plane (°): 0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

UGR Table

Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	18.4	19.3	18.6	19.5	19.7	18.4	19.3	18.7	19.5	19.7
3H	18.4	19.2	18.7	19.5	19.7	18.4	19.3	18.7	19.5	19.7
4H	18.4	19.2	18.7	19.5	19.7	18.5	19.2	18.8	19.5	19.8
6H	18.5	19.2	18.8	19.5	19.8	18.6	19.3	18.9	19.6	19.9
8H	18.6	19.3	18.9	19.6	19.9	18.7	19.4	19.0	19.7	20.0
12H	18.7	19.4	19.1	19.7	20.0	18.8	19.5	19.2	19.8	20.1
X=4H Y=2H	18.3	19.1	18.6	19.3	19.6	18.3	19.1	18.6	19.4	19.6
3H	18.4	19.0	18.7	19.3	19.7	18.4	19.1	18.8	19.4	19.7
4H	18.5	19.1	18.9	19.4	19.8	18.5	19.1	18.9	19.4	19.8
6H	18.7	19.2	19.1	19.6	19.9	18.7	19.2	19.1	19.6	20.0
8H	18.8	19.3	19.2	19.7	20.1	18.9	19.4	19.3	19.8	20.2
12H	19.0	19.5	19.5	19.9	20.3	19.1	19.6	19.6	20.0	20.4
X=8H Y=4H	18.5	19.0	18.9	19.3	19.8	18.5	19.0	18.9	19.4	19.8
6H	18.8	19.2	19.2	19.6	20.0	18.8	19.2	19.3	19.7	20.1
8H	19.0	19.4	19.5	19.8	20.3	19.1	19.5	19.6	19.9	20.4
12H	19.4	19.7	19.9	20.2	20.7	19.5	19.8	20.0	20.3	20.8
X=12H Y=4H	18.5	18.9	18.9	19.3	19.7	18.5	18.9	18.9	19.3	19.8
6H	18.8	19.2	19.3	19.6	20.1	18.9	19.2	19.3	19.7	20.1
8H	19.1	19.4	19.6	19.9	20.4	19.2	19.5	19.7	20.0	20.5
Variations with the observer position at spacings:										
S=1.0H	+2.2/-2.8					+2.1/-2.8				
S=1.5H	+4.3/-4.0					+4.2/-3.8				
S=2.0H	+6.1/-4.9					+6.0/-4.5				

Calculate in accordance with CIE Pub.117. The table is revised with 548lm ($8\log(F/F_0) = -2.1$).

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM


	ZONE	LUMENS	% LAMP LUMENS
	FORWARD LIGHT	272	49.6
	FL (0°-30°)	179	32.7
	FM (30°-60°)	85	15.6
	FH (60°-80°)	6	1.1
	FVH (80°-90°)	2	0.3
	BACK LIGHT	276	50.4
	BL (0°-30°)	183	33.3
	BM (30°-60°)	86	15.7
	BH (60°-80°)	6	1.0
	BVH (80°-90°)	2	0.3
	UP LIGHT	0	0.0
	UL (90°-100°)	0	0.0
	UH (100°-180°)	0	0.0
	TRAPPED LIGHT	NA	NA

BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B1 U0 G0
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B1 U0 G0

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

LCS Graph

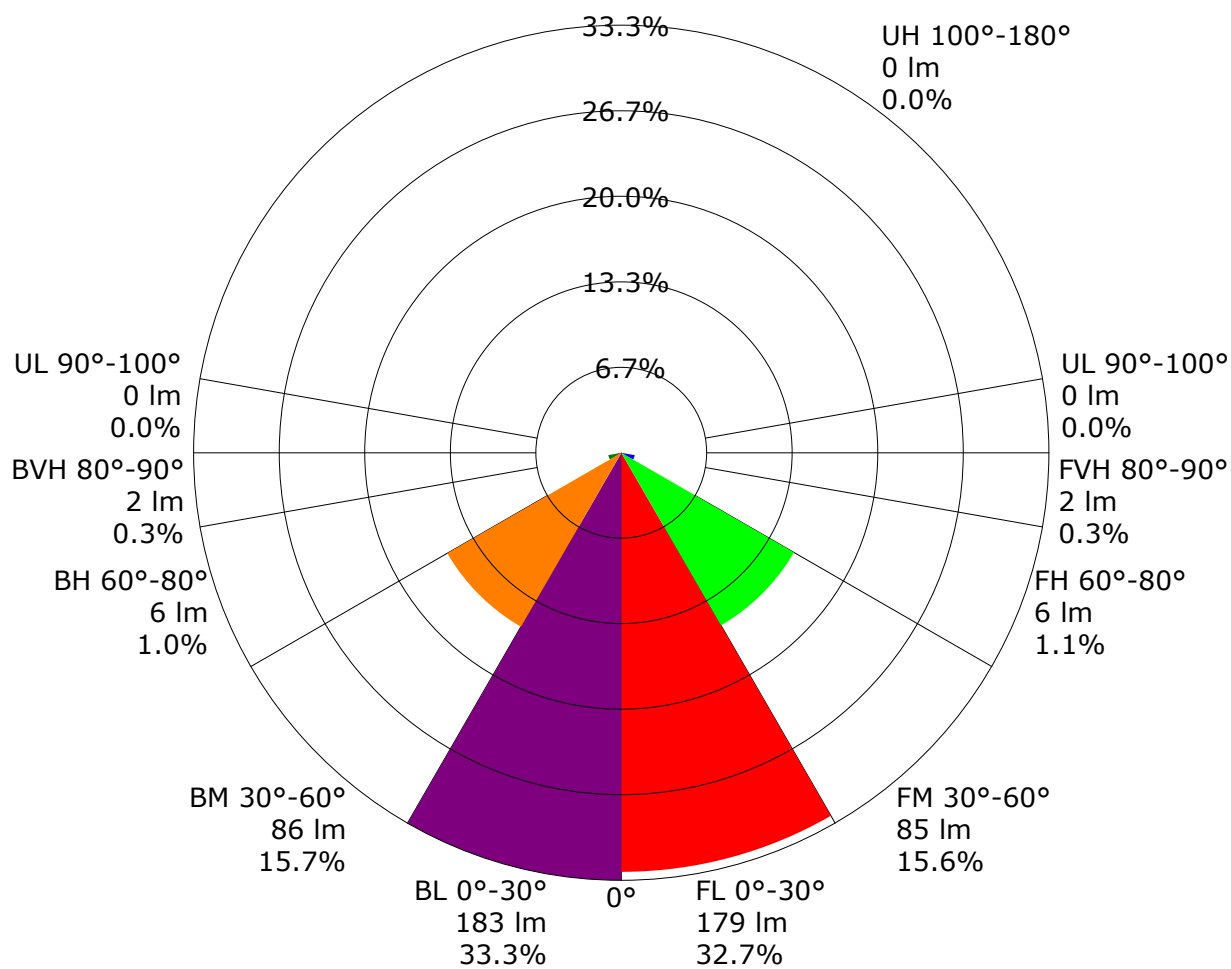

Back Light

Forward Light

Scale= MAX LCS%

Trapped Light:NA,NA

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Utilisation Factor Table(Floor cavity)

Utilisation Factors UF(F)			SHR NOM = 0.75									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.79	0.86	0.92	0.95	1.00	1.03	1.05	1.08	1.09	
	0.30		0.73	0.81	0.87	0.91	0.96	0.99	1.02	1.05	1.07	
	0.20		0.70	0.78	0.83	0.87	0.93	0.96	0.99	1.03	1.05	
0.50	0.50	0.20	0.77	0.85	0.89	0.93	0.97	1.00	1.01	1.04	1.05	
	0.30		0.73	0.80	0.85	0.89	0.94	0.97	0.99	1.02	1.04	
	0.20		0.69	0.77	0.82	0.86	0.91	0.94	0.97	1.00	1.02	
0.30	0.50	0.20	0.76	0.83	0.87	0.90	0.94	0.97	0.98	1.00	1.02	
	0.30		0.72	0.79	0.84	0.87	0.92	0.94	0.96	0.99	1.00	
	0.20		0.69	0.76	0.81	0.85	0.89	0.92	0.94	0.97	0.99	
0.00	0.00	0.00	0.67	0.74	0.79	0.82	0.86	0.89	0.91	0.93	0.94	
Rating:8W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

Utilisation Factor Table(Wall)

Utilisation Factors UF(W)			SHR NOM = 0.75									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.67	0.54	0.45	0.39	0.30	0.25	0.21	0.17	0.14	
	0.30		0.56	0.46	0.39	0.34	0.28	0.23	0.20	0.16	0.13	
	0.20		0.48	0.40	0.35	0.31	0.25	0.21	0.18	0.15	0.12	
0.50	0.50	0.20	0.64	0.51	0.43	0.37	0.29	0.27	0.20	0.15	0.12	
	0.30		0.54	0.44	0.38	0.33	0.26	0.22	0.19	0.15	0.12	
	0.20		0.47	0.39	0.34	0.30	0.24	0.20	0.18	0.14	0.12	
0.30	0.50	0.20	0.62	0.49	0.40	0.34	0.27	0.22	0.19	0.14	0.12	
	0.30		0.53	0.43	0.36	0.31	0.25	0.21	0.17	0.14	0.11	
	0.20		0.46	0.38	0.33	0.29	0.23	0.19	0.17	0.13	0.11	
0.00	0.00	0.00	0.33	0.26	0.22	0.19	0.14	0.12	0.10	0.08	0.06	
Rating:8W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

Utilisation Factor Table(Ceiling cavity)

Utilisation Factors UF(C)			SHR NOM = 0.75									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.14	0.15	0.16	0.17	0.18	0.19	0.20	0.20	0.21	
	0.30		0.09	0.11	0.12	0.13	0.15	0.16	0.17	0.19	0.19	
	0.20		0.06	0.08	0.09	0.11	0.13	0.14	0.15	0.17	0.18	
0.50	0.50	0.20	0.13	0.14	0.16	0.16	0.18	0.18	0.19	0.20	0.20	
	0.30		0.09	0.11	0.12	0.13	0.15	0.16	0.17	0.18	0.19	
	0.20		0.06	0.08	0.09	0.10	0.12	0.14	0.15	0.16	0.17	
0.30	0.50	0.20	0.13	0.14	0.15	0.16	0.17	0.18	0.18	0.19	0.19	
	0.30		0.09	0.10	0.12	0.13	0.14	0.15	0.16	0.17	0.18	
	0.20		0.06	0.07	0.09	0.10	0.12	0.14	0.15	0.16	0.17	
0.00	0.00	0.00	NA	NA	NA	NA	NA	NA	NA	NA	NA	
Rating:8W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	580.3	0.6	0.6	0.10	0.10
1.0-2.0	580.1	1.7	2.2	0.30	0.41
2.0-3.0	579.7	2.8	5.0	0.51	0.91
3.0-4.0	579.0	3.9	8.9	0.71	1.62
4.0-5.0	578.0	5.0	13.8	0.91	2.53
5.0-6.0	576.5	6.1	19.9	1.11	3.63
6.0-7.0	574.6	7.1	27.0	1.30	4.93
7.0-8.0	572.2	8.2	35.2	1.49	6.43
8.0-9.0	569.1	9.2	44.4	1.68	8.11
9.0-10.0	565.2	10.2	54.7	1.87	9.98
10.0-11.0	560.4	11.2	65.9	2.04	12.02
11.0-12.0	554.8	12.1	78.0	2.21	14.24
12.0-13.0	548.2	13.0	91.0	2.37	16.61
13.0-14.0	540.3	13.8	104.8	2.52	19.14
14.0-15.0	531.3	14.6	119.4	2.66	21.80
15.0-16.0	520.9	15.3	134.7	2.79	24.59
16.0-17.0	509.0	15.9	150.6	2.89	27.48
17.0-18.0	496.1	16.4	166.9	2.99	30.47
18.0-19.0	481.1	16.7	183.7	3.06	33.52
19.0-20.0	464.8	17.0	200.7	3.11	36.63
20.0-21.0	447.7	17.2	217.9	3.14	39.77
21.0-22.0	428.7	17.2	235.1	3.14	42.91
22.0-23.0	408.7	17.2	252.2	3.13	46.04
23.0-24.0	388.0	17.0	269.2	3.10	49.14
24.0-25.0	366.4	16.7	285.9	3.04	52.18
25.0-26.0	345.1	16.3	302.2	2.97	55.15
26.0-27.0	322.7	15.8	318.0	2.88	58.03
27.0-28.0	300.2	15.2	333.2	2.77	60.81
28.0-29.0	279.1	14.6	347.8	2.67	63.47
29.0-30.0	258.1	13.9	361.7	2.54	66.02
30.0-31.0	237.8	13.2	374.9	2.42	68.43
31.0-32.0	218.6	12.5	387.5	2.29	70.72
32.0-33.0	200.4	11.8	399.3	2.15	72.87
33.0-34.0	183.9	11.1	410.4	2.03	74.91
34.0-35.0	167.9	10.4	420.8	1.90	76.81
35.0-36.0	153.1	9.7	430.6	1.78	78.59

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	140.0	9.1	439.7	1.67	80.26
37.0-38.0	127.7	8.5	448.2	1.56	81.81
38.0-39.0	116.7	8.0	456.2	1.45	83.27
39.0-40.0	106.5	7.4	463.6	1.36	84.62
40.0-41.0	97.2	6.9	470.5	1.26	85.89
41.0-42.0	89.2	6.5	477.0	1.18	87.07
42.0-43.0	81.6	6.0	483.1	1.10	88.17
43.0-44.0	74.7	5.6	488.7	1.03	89.20
44.0-45.0	68.5	5.3	494.0	0.96	90.16
45.0-46.0	62.6	4.9	498.9	0.89	91.06
46.0-47.0	56.9	4.5	503.4	0.83	91.88
47.0-48.0	50.9	4.1	507.5	0.75	92.63
48.0-49.0	44.9	3.7	511.2	0.67	93.31
49.0-50.0	39.4	3.3	514.5	0.60	93.91
50.0-51.0	34.1	2.9	517.4	0.53	94.43
51.0-52.0	29.6	2.5	519.9	0.46	94.90
52.0-53.0	25.9	2.3	522.2	0.41	95.31
53.0-54.0	22.7	2.0	524.2	0.37	95.67
54.0-55.0	20.1	1.8	526.0	0.33	96.00
55.0-56.0	18.0	1.6	527.6	0.30	96.30
56.0-57.0	16.1	1.5	529.1	0.27	96.57
57.0-58.0	14.6	1.4	530.4	0.25	96.81
58.0-59.0	13.3	1.2	531.7	0.23	97.04
59.0-60.0	12.2	1.2	532.8	0.21	97.25
60.0-61.0	11.1	1.1	533.9	0.19	97.44
61.0-62.0	10.0	1.0	534.8	0.18	97.62
62.0-63.0	9.0	0.9	535.7	0.16	97.78
63.0-64.0	8.0	0.8	536.5	0.14	97.92
64.0-65.0	7.1	0.7	537.2	0.13	98.05
65.0-66.0	6.5	0.7	537.8	0.12	98.17
66.0-67.0	6.1	0.6	538.5	0.11	98.28
67.0-68.0	5.7	0.6	539.0	0.11	98.39
68.0-69.0	5.4	0.5	539.6	0.10	98.49
69.0-70.0	5.1	0.5	540.1	0.10	98.58
70.0-71.0	4.9	0.5	540.6	0.09	98.67
71.0-72.0	4.7	0.5	541.1	0.09	98.76

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G0.0	582.0	578.8	582.0	578.8	582.0					
G1.0	580.8	579.5	583.1	577.7	580.8					
G2.0	579.3	580.0	584.0	576.5	579.3					
G3.0	577.8	580.3	584.8	574.7	577.8					
G4.0	576.0	580.3	585.1	572.7	576.0					
G5.0	574.1	580.0	585.1	570.3	574.1					
G6.0	571.5	579.2	584.7	567.2	571.5					
G7.0	568.9	578.1	583.7	563.8	568.9					
G8.0	565.6	576.2	581.8	559.7	565.6					
G9.0	561.7	573.8	579.3	554.4	561.7					
G10.0	557.1	570.7	575.8	548.9	557.1					
G11.0	551.5	566.3	570.9	542.2	551.5					
G12.0	545.4	561.5	565.7	534.8	545.4					
G13.0	538.0	554.9	558.9	526.4	538.0					
G14.0	529.2	548.1	550.1	516.5	529.2					
G15.0	519.4	540.1	541.0	505.9	519.4					
G16.0	507.9	529.6	529.0	494.0	507.9					
G17.0	495.5	518.5	517.2	480.3	495.5					
G18.0	482.4	506.4	503.2	465.8	482.4					
G19.0	465.6	491.0	486.3	448.5	465.6					
G20.0	448.9	476.0	470.1	432.2	448.9					
G21.0	431.9	457.1	451.8	414.0	431.9					
G22.0	411.9	439.4	430.3	393.0	411.9					
G23.0	392.0	419.6	409.5	374.0	392.0					
G24.0	370.4	398.0	386.9	353.3	370.4					
G25.0	350.2	377.5	364.8	330.2	350.2					
G26.0	328.8	355.7	343.3	310.0	328.8					
G27.0	305.5	332.6	318.9	287.0	305.5					
G28.0	284.5	309.5	296.6	267.3	284.5					
G29.0	264.8	286.8	275.8	247.3	264.8					
G30.0	243.2	266.5	252.9	227.1	243.2					
G31.0	224.2	246.1	233.7	208.9	224.2					
G32.0	205.3	225.7	213.0	191.6	205.3					
G33.0	189.1	207.4	195.9	174.8	189.1					
G34.0	173.2	190.9	179.2	160.4	173.2					
G35.0	157.8	173.4	163.0	145.3	157.8					
G36.0	144.2	159.3	148.9	132.8	144.2					

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G37.0	132.4	144.4	136.5	121.8	132.4					
G38.0	120.1	132.5	123.7	110.4	120.1					
G39.0	110.2	121.7	113.4	101.3	110.2					
G40.0	100.1	110.3	102.8	92.3	100.1					
G41.0	92.1	101.4	94.3	84.4	92.1					
G42.0	84.8	92.9	86.2	77.7	84.8					
G43.0	77.2	84.8	78.6	70.7	77.2					
G44.0	71.0	77.9	72.3	65.1	71.0					
G45.0	65.2	71.2	65.5	59.7	65.2					
G46.0	59.6	65.8	59.8	53.8	59.6					
G47.0	54.8	60.4	53.5	47.8	54.8					
G48.0	49.1	54.4	46.4	40.8	49.1					
G49.0	43.7	48.8	40.4	35.6	43.7					
G50.0	37.8	42.6	35.1	31.0	37.8					
G51.0	32.5	36.5	30.4	27.0	32.5					
G52.0	28.4	31.8	26.5	23.8	28.4					
G53.0	24.7	27.4	23.2	21.2	24.7					
G54.0	21.8	24.2	20.5	18.8	21.8					
G55.0	19.4	21.4	18.3	16.8	19.4					
G56.0	17.1	19.0	16.3	15.3	17.1					
G57.0	15.4	17.1	14.8	14.1	15.4					
G58.0	14.0	15.3	13.6	12.9	14.0					
G59.0	12.7	14.0	12.3	11.8	12.7					
G60.0	11.8	12.8	11.2	10.8	11.8					
G61.0	10.7	11.7	10.0	9.8	10.7					
G62.0	9.7	10.9	8.9	8.4	9.7					
G63.0	8.7	9.8	7.8	7.6	8.7					
G64.0	7.7	8.5	6.9	6.8	7.7					
G65.0	6.9	7.6	6.2	6.3	6.9					
G66.0	6.4	6.9	5.8	6.1	6.4					
G67.0	5.9	6.4	5.4	5.6	5.9					
G68.0	5.6	6.1	5.1	5.3	5.6					
G69.0	5.3	5.7	4.8	5.0	5.3					
G70.0	5.1	5.4	4.6	4.9	5.1					
G71.0	4.8	5.1	4.5	4.7	4.8					
G72.0	4.6	5.0	4.3	4.6	4.6					
G73.0	4.4	4.7	4.1	4.4	4.4					

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Unit: cd

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector: