

Report No.:

Test Time: 2026-05-28 15:23

Luminaire Property

Luminaire Manufacturer: NORDECOR
Luminaire Description: 80101
Luminous Width (mm): 80
Current: 0.141 A
Power Factor: 0.462


Luminous Length (mm): 80
Voltage: 220.4 V
Power: 14.41 W

Photometric Results


CIE Class: Direct
Measurement Flux: 1317 lm
Downward Ratio: 100%
Horizontal Diffuse Angle(10%,50%,80%,100%): H49.6,H31.8,H19,H0
Vertical Diffuse Angle(10%,50%,80%,100%): V49.4,V33.1,V20.7,V1
Luminaire Efficacy Rating (LER): 91.45
Max. Intensity: 3876.73 cd
S/MH(C0/C180): 0.53

Total Rated Lamp Lumens: 1317.0 lm
Efficiency: 100%
Upward Ratio: 0%
Central Intensity: 3876.73 cd
Pos of Max. Intensity: H0 V0
S/MH(C90/C270): 0.55

Picture Of Luminaire



Luminous Intensity Distribution Curve

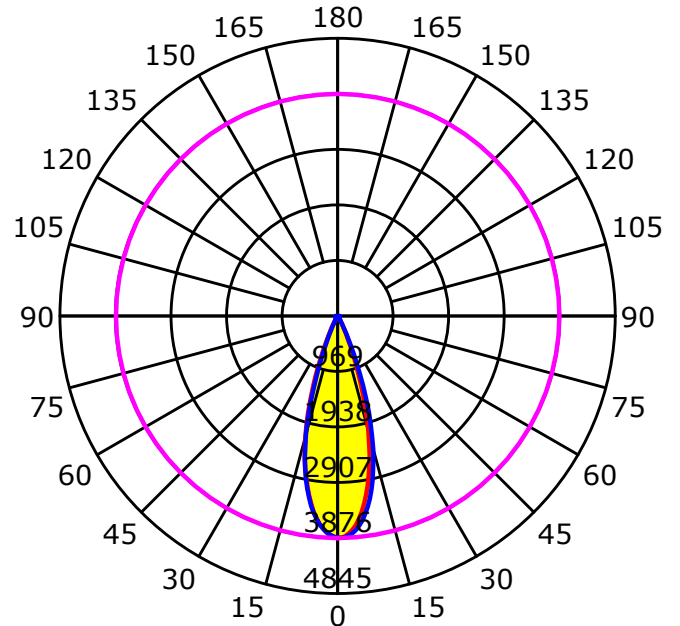

Unit: cd

Average Diffuse Angle(50%): 32.4°

— C0-C180 — C90-C270 — G0

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

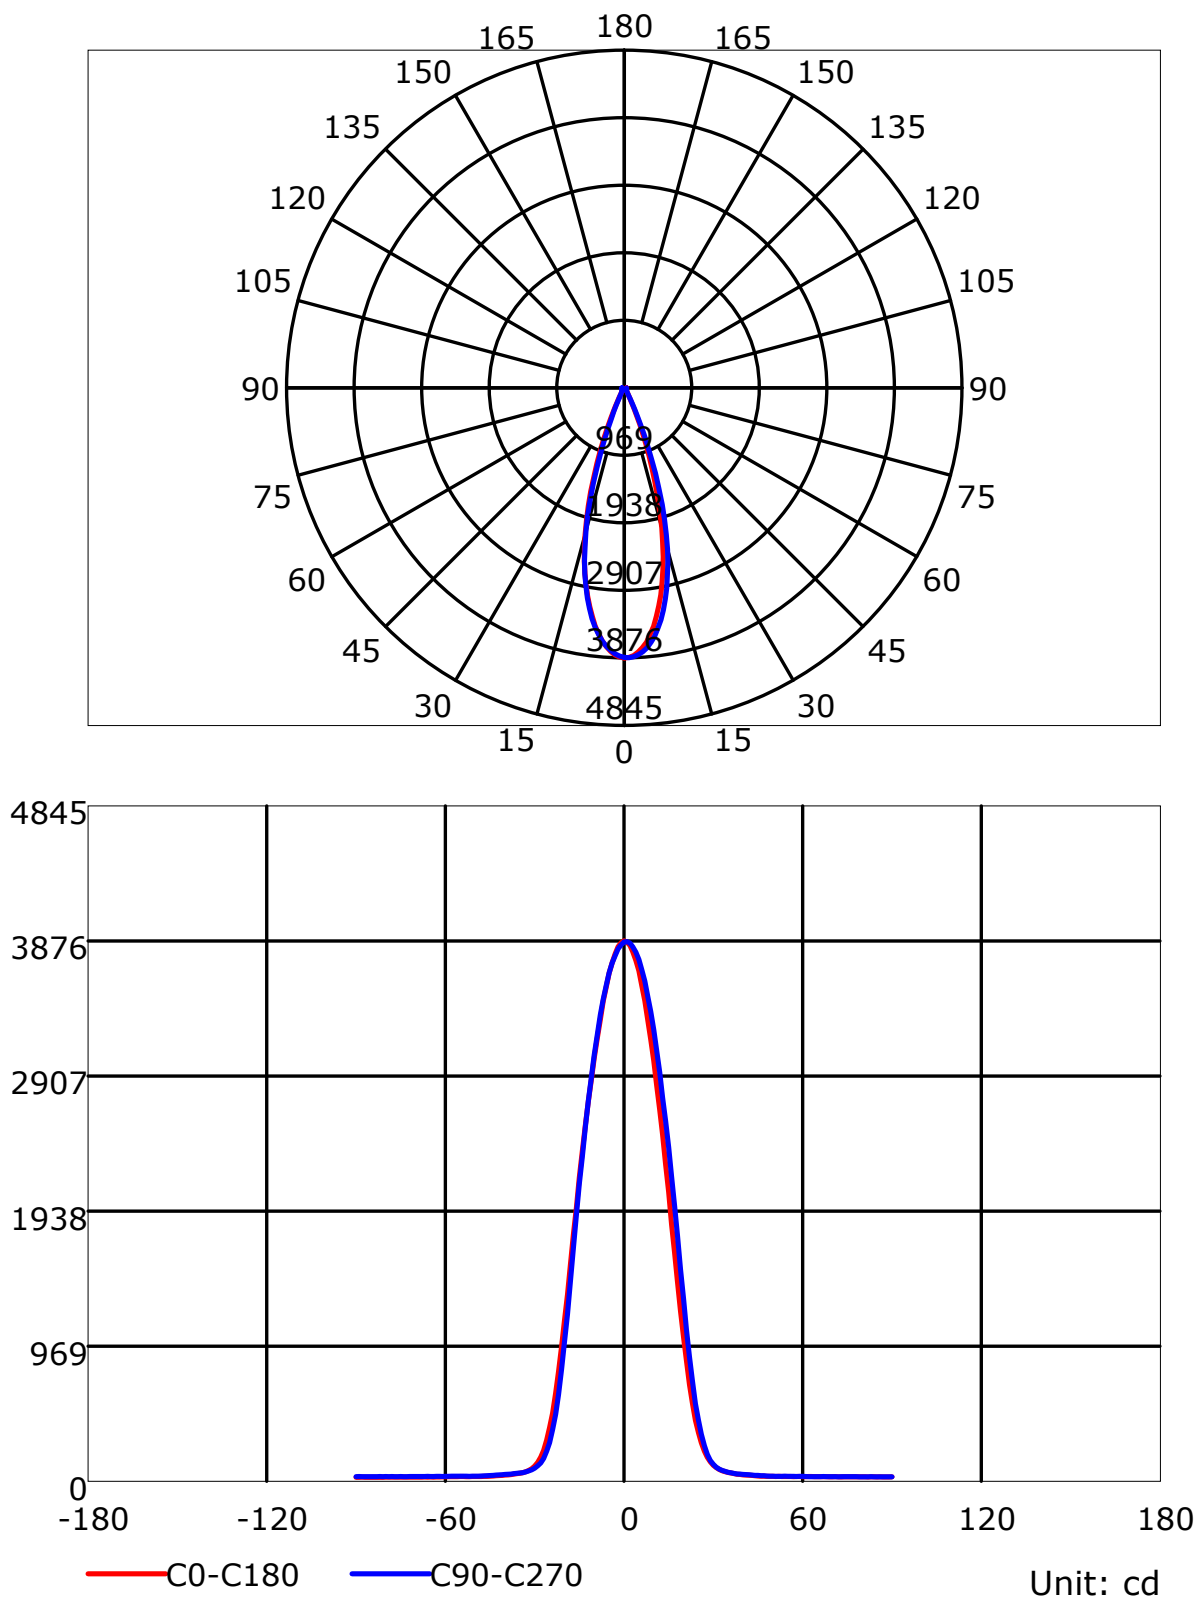

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Luminous Intensity Distribution Curve(cd/klm)

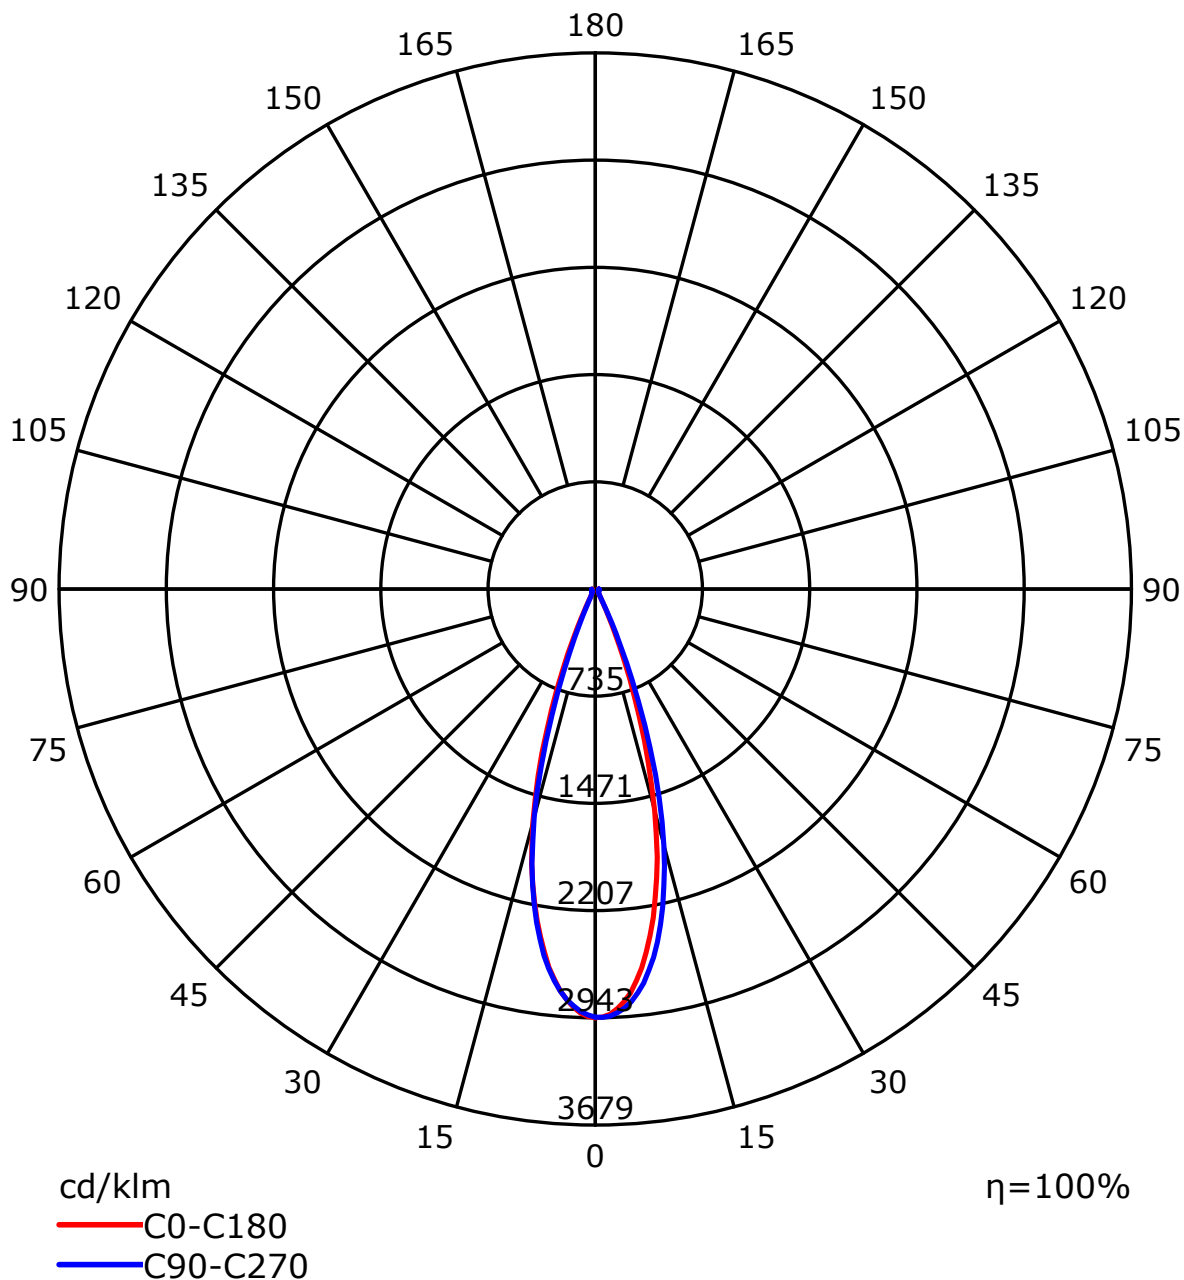


C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	107	104	110	107	105	103	103	101	100	100	98	97	96	95	94	92
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86
3	103	97	92	88	101	96	91	88	93	89	86	91	87	85	88	86	84	82
4	99	92	87	83	97	91	86	83	89	85	82	87	83	81	85	82	80	78
5	95	88	83	79	94	87	82	78	85	81	78	84	80	77	82	79	76	75
6	92	84	79	75	91	83	79	75	82	78	74	81	77	74	79	76	74	72
7	89	81	76	72	88	80	75	72	79	75	72	78	74	71	77	74	71	70
8	86	78	73	69	85	77	73	69	76	72	69	75	72	69	75	71	68	67
9	83	75	70	67	82	75	70	67	74	70	67	73	69	66	72	69	66	65
10	81	73	68	65	80	72	68	65	72	67	64	71	67	64	70	67	64	63


Spacing Criteria (0-180): 0.53
Spacing Criteria (90-270): 0.55
Spacing Criteria (Diagonal): 0.51

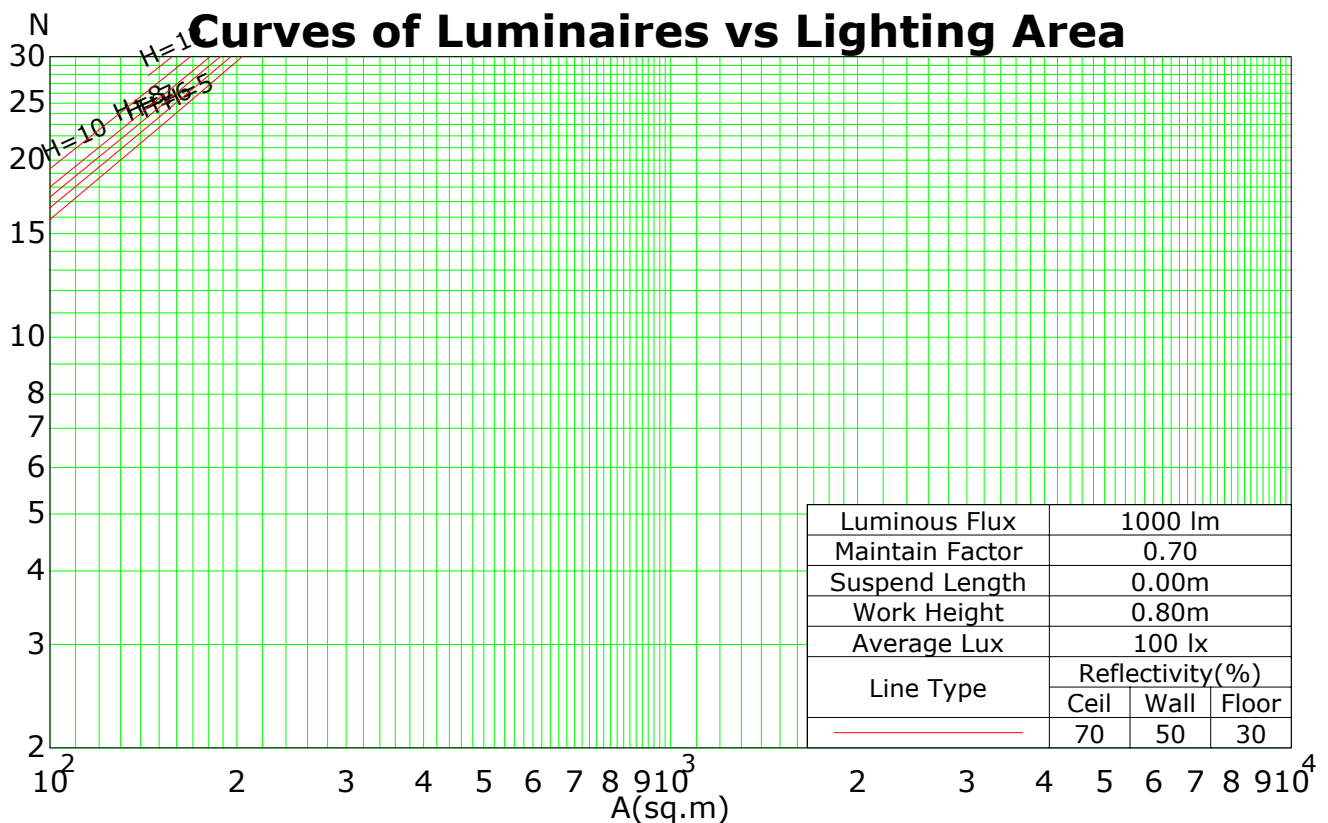

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Isocandela (rectangle)

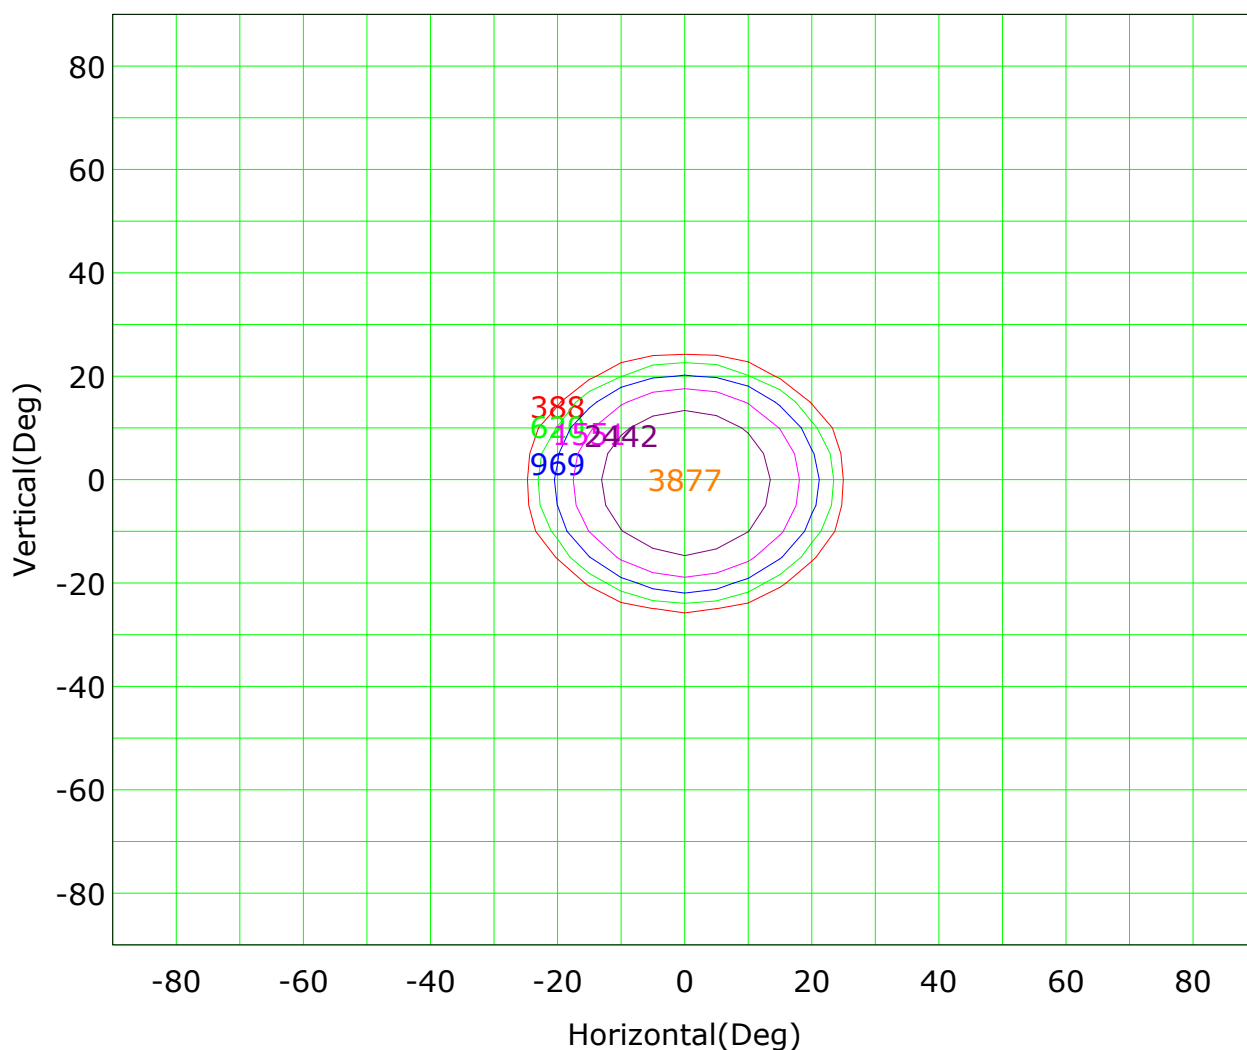


I_{max} (100%): 3877 cd

(10%): 388 cd	(16%): 620 cd
(25%): 969 cd	(40%): 1551 cd
(63%): 2442 cd	(100%): 3877 cd

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Isocandela (sphere)

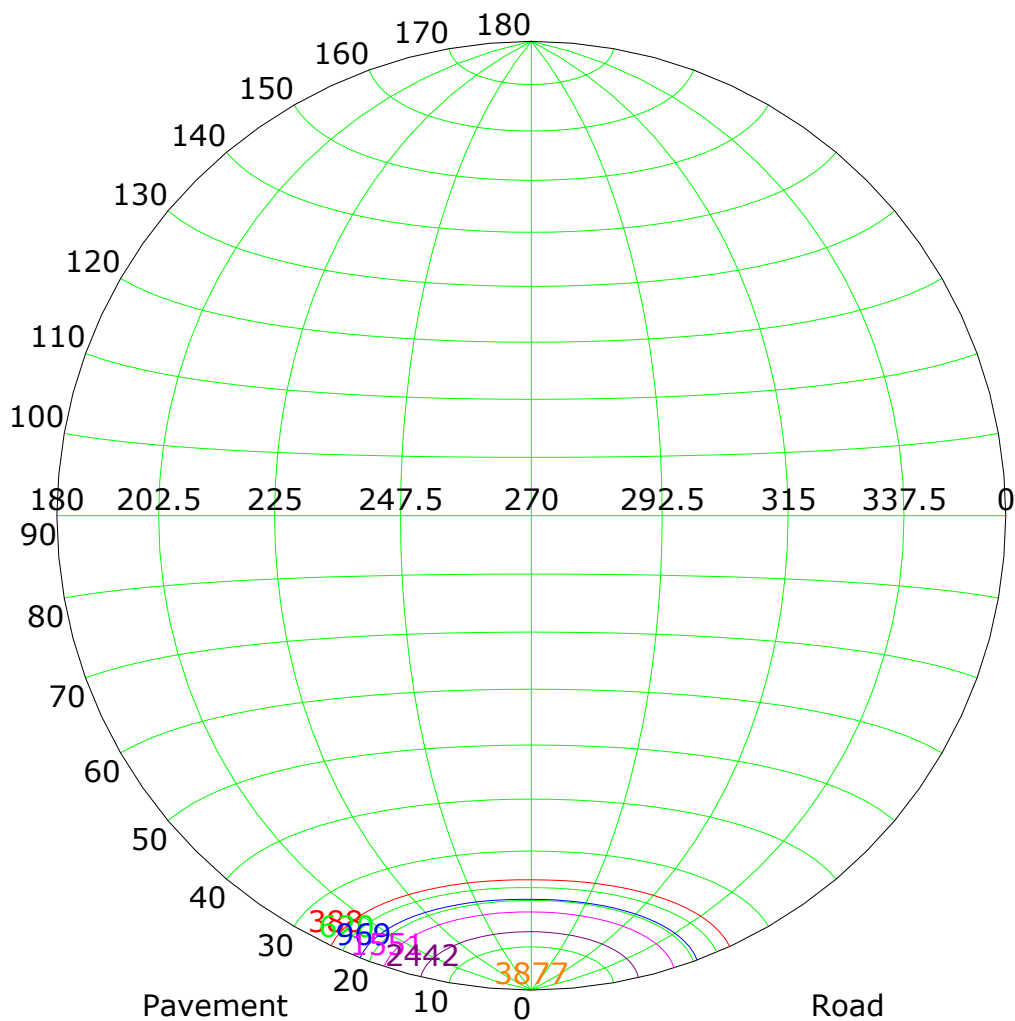

Imax (100%): 3877 cd

— (10%): 388 cd
— (25%): 969 cd
— (63%): 2442 cd

— (16%): 620 cd
— (40%): 1551 cd
— (100%): 3877 cd

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

IsoLux Plot

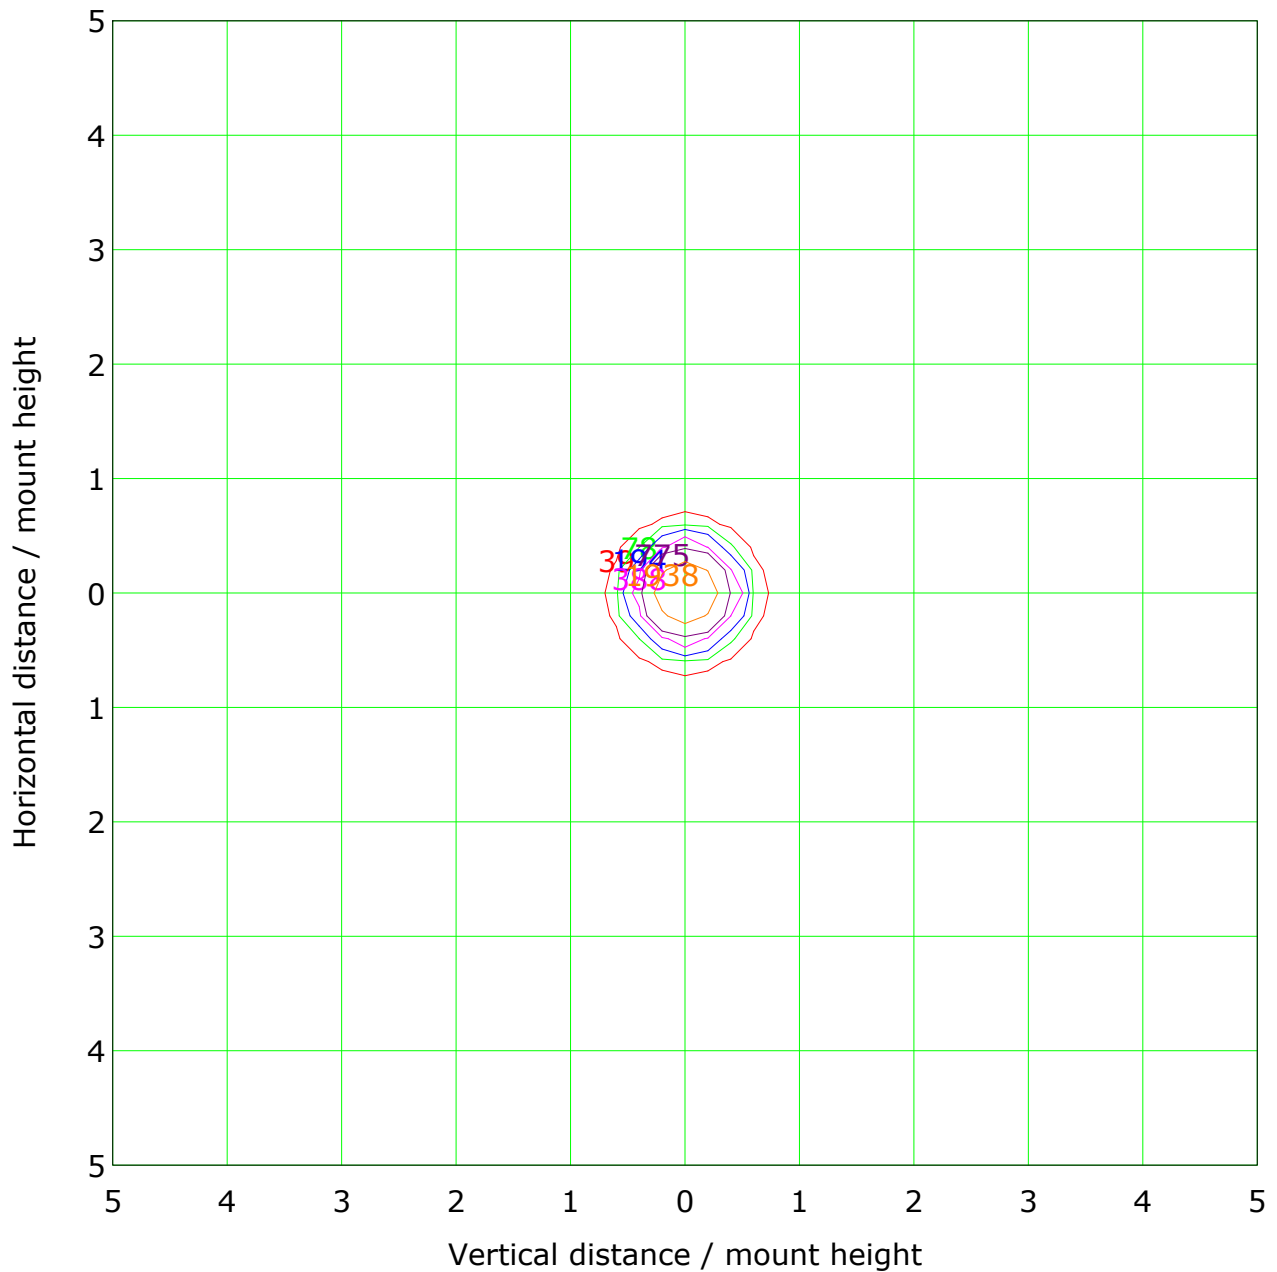

Mounting Height: 1.0m Max Lux(100%): 3876.7 lx


(1%): 38.8 lx	(2%): 77.5 lx
(5%): 193.8 lx	(10%): 387.7 lx
(20%): 775.3 lx	(50%): 1938.4 lx
(100%): 3876.7 lx	

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Roadway CU Curve

Efficiency(%)


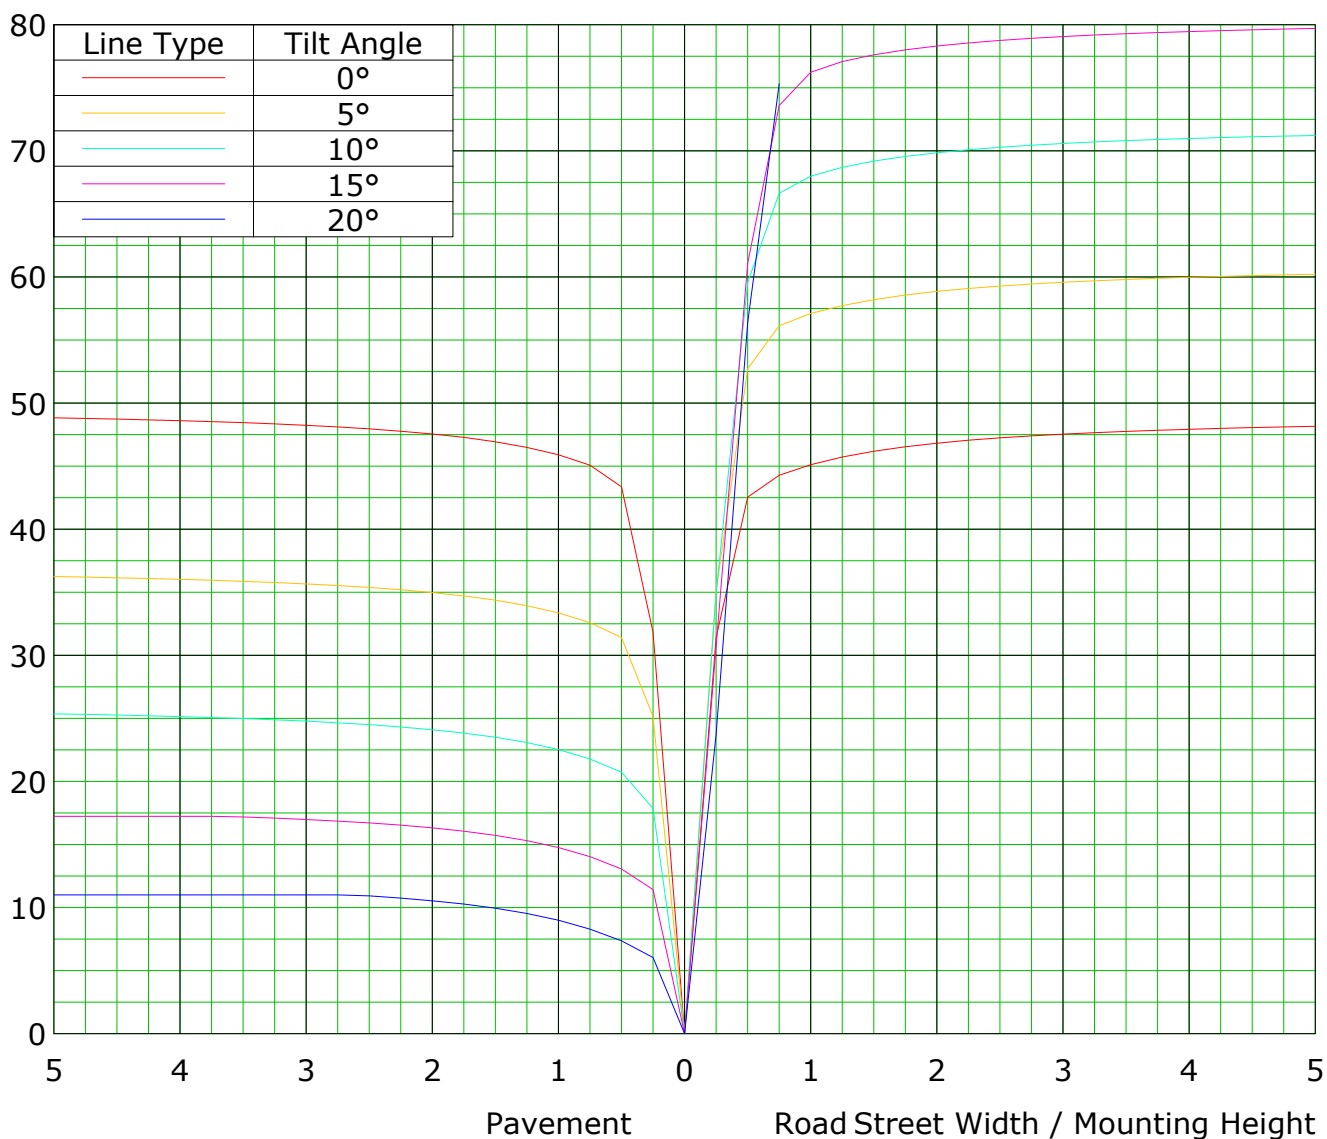


C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

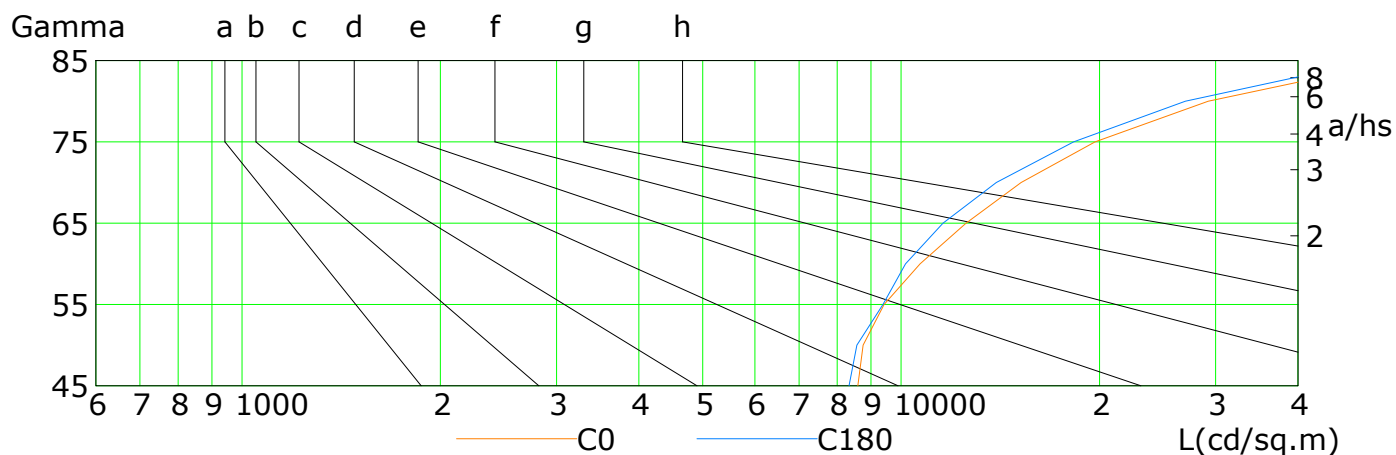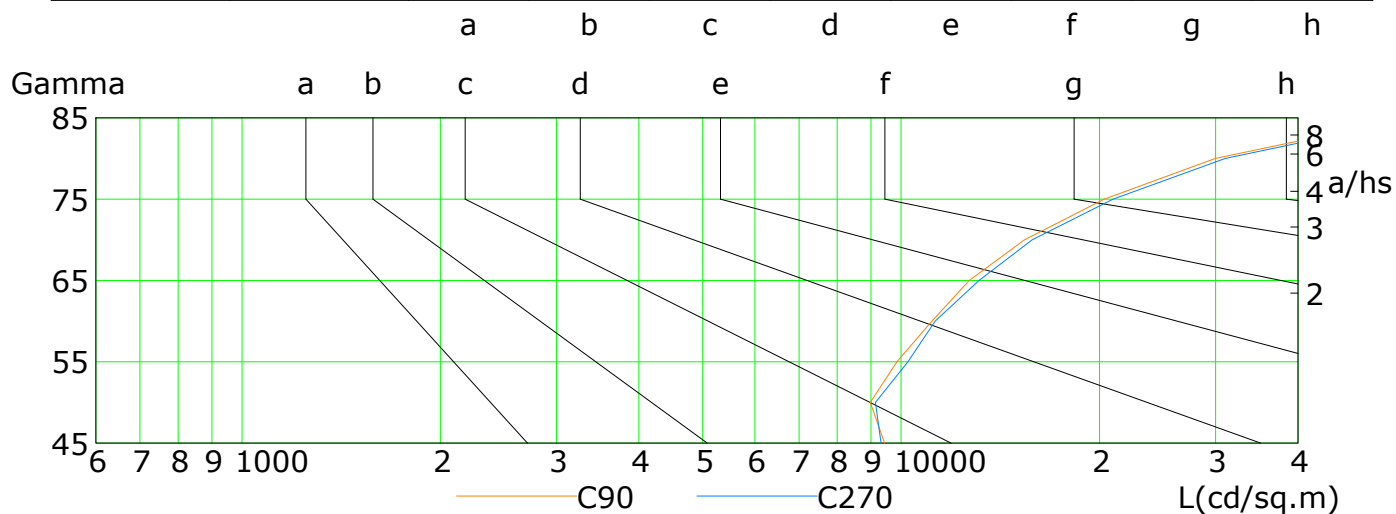

L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	8598	8758	9423	10684	12545	15204	19693	29235	57064
C90	9438	8979	9850	11134	12689	15382	20327	29946	58713
C180	8337	8566	9385	10153	11576	13943	18268	26994	51901
C270	9321	9140	10243	11259	13125	15802	20961	30998	60829

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: GPM-1600L

Distance: 8.443 m


Humidity:

Inspector:

Illuminance at a Distance

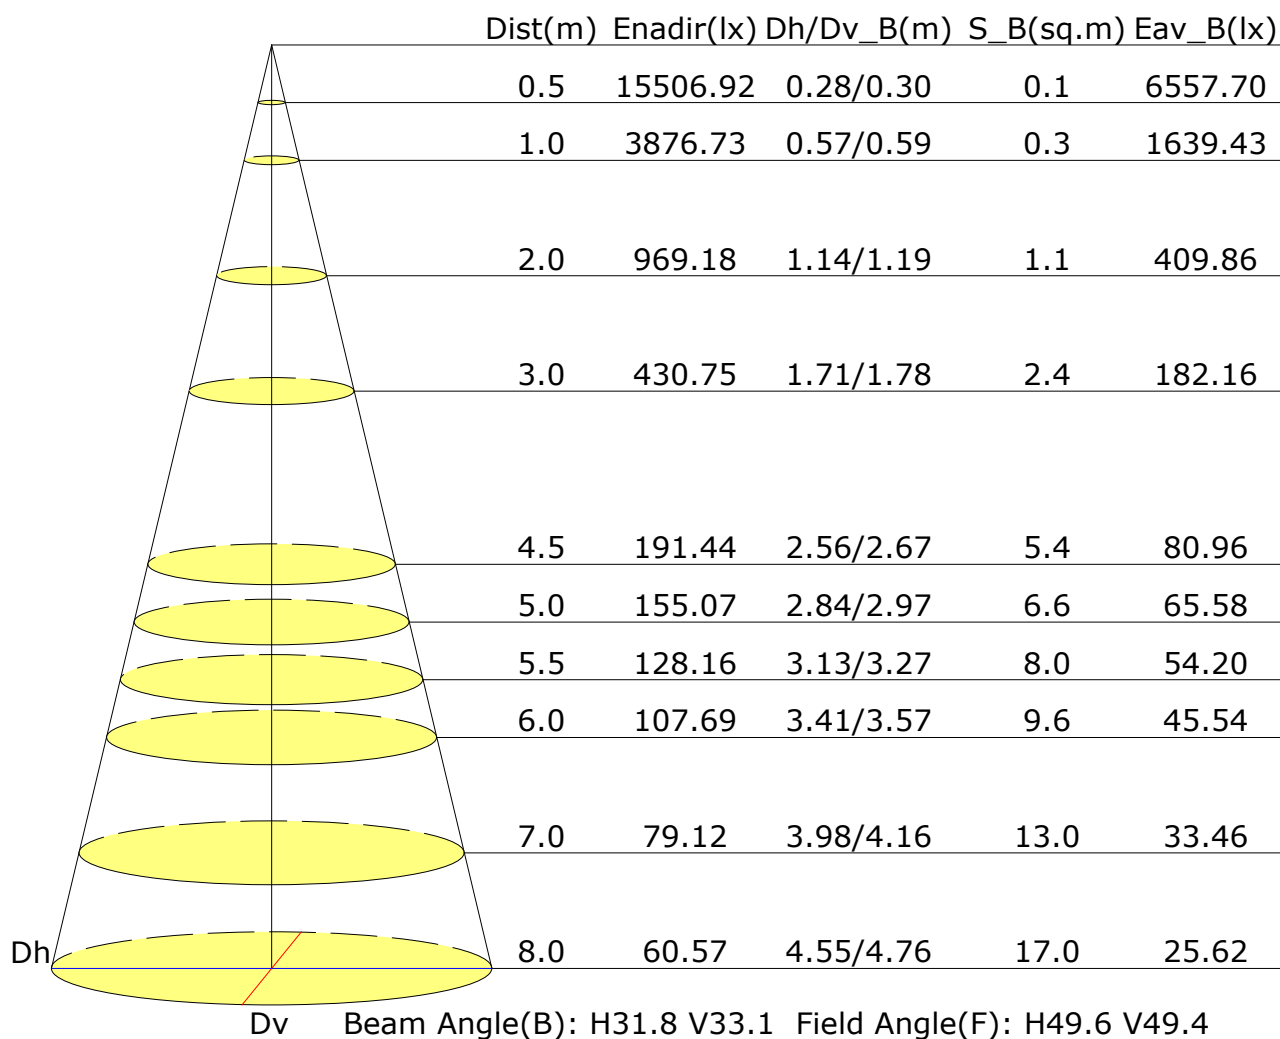

Vertical IsoLux Plot

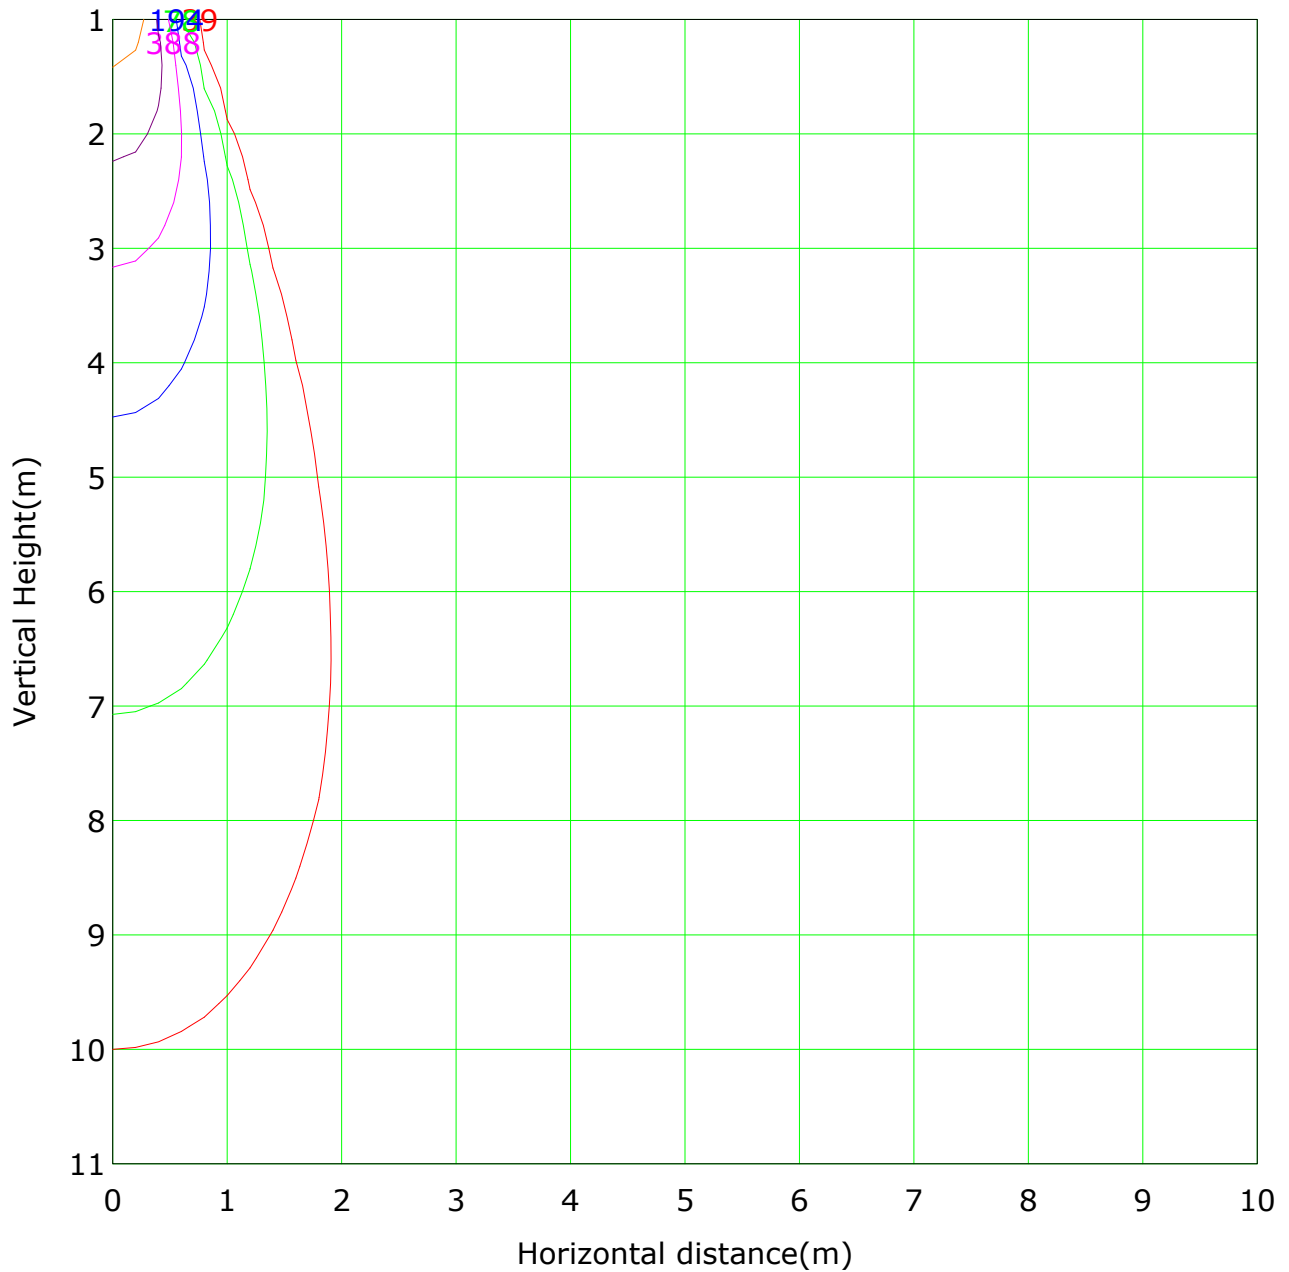

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 3876.7 lx


(1%): 38.8 lx	(2%): 77.5 lx
(5%): 193.8 lx	(10%): 387.7 lx
(20%): 775.3 lx	(50%): 1938.4 lx
(100%): 3876.7 lx	

C Plane (°): 0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

The Average Illuminance Effective Figure

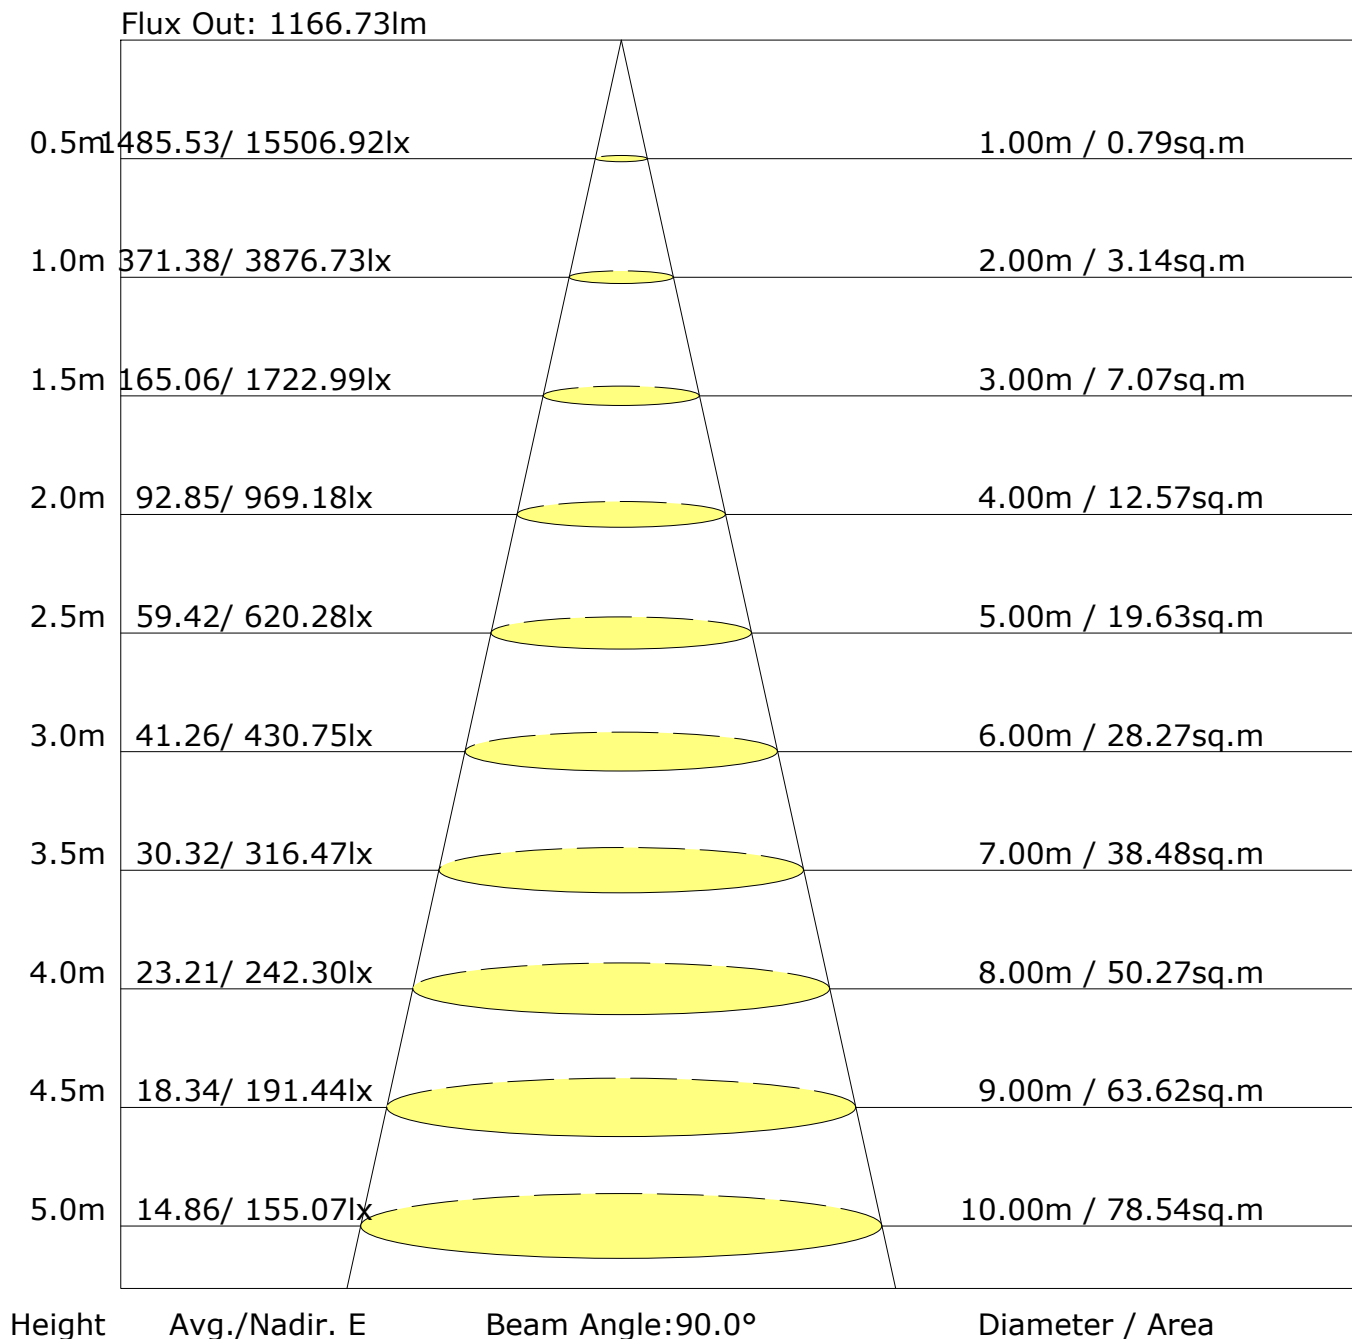

C Plane (°): 0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

UGR Table

Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	14.6	15.4	14.9	15.6	15.8	14.8	15.5	15.0	15.7	15.9
3H	17.7	18.4	18.0	18.6	18.9	17.8	18.6	18.1	18.8	19.0
4H	19.4	20.1	19.7	20.3	20.6	19.6	20.3	19.9	20.6	20.8
6H	21.4	22.1	21.8	22.3	22.6	21.6	22.3	22.0	22.6	22.9
8H	22.5	23.2	22.9	23.5	23.8	22.8	23.4	23.1	23.7	24.0
12H	23.8	24.4	24.2	24.8	25.1	24.1	24.7	24.5	25.0	25.3
X=4H Y=2H	15.8	16.5	16.1	16.7	17.0	15.9	16.6	16.2	16.8	17.1
3H	19.0	19.6	19.4	19.9	20.3	19.1	19.7	19.5	20.1	20.4
4H	20.9	21.5	21.3	21.8	22.2	21.1	21.6	21.5	22.0	22.3
6H	23.1	23.6	23.5	24.0	24.3	23.3	23.8	23.7	24.1	24.5
8H	24.3	24.8	24.7	25.1	25.6	24.5	25.0	24.9	25.4	25.8
12H	25.7	26.1	26.1	26.5	27.0	25.9	26.3	26.4	26.8	27.2
X=8H Y=4H	21.8	22.2	22.2	22.6	23.0	21.9	22.3	22.3	22.7	23.1
6H	24.2	24.6	24.7	25.0	25.5	24.3	24.7	24.8	25.1	25.6
8H	25.6	25.9	26.1	26.4	26.9	25.8	26.1	26.2	26.6	27.0
12H	27.2	27.5	27.7	28.0	28.5	27.4	27.7	27.9	28.2	28.7
X=12H Y=4H	22.0	22.4	22.4	22.8	23.2	22.1	22.5	22.5	22.9	23.4
6H	24.6	24.9	25.0	25.3	25.8	24.7	25.0	25.2	25.5	25.9
8H	26.1	26.4	26.6	26.8	27.3	26.2	26.5	26.7	27.0	27.5
Variations with the observer position at spacings:										
S=1.0H	+0.4/-0.4					+0.4/-0.4				
S=1.5H	+0.6/-0.8					+0.6/-0.7				
S=2.0H	+0.8/-1.1					+0.8/-1.1				

Calculate in accordance with CIE Pub.117. The table is revised with 1317lm ($8\log(F/F_0) = 1.0$).

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM


	ZONE	LUMENS	% LAMP LUMENS
	FORWARD LIGHT	654	49.7
	FL (0°-30°)	549	41.7
	FM (30°-60°)	53	4.0
	FH (60°-80°)	35	2.6
	FVH (80°-90°)	18	1.4
	BACK LIGHT	663	50.3
	BL (0°-30°)	560	42.5
	BM (30°-60°)	52	3.9
	BH (60°-80°)	33	2.5
	BVH (80°-90°)	17	1.3
	UP LIGHT	0	0.0
	UL (90°-100°)	0	0.0
	UH (100°-180°)	0	0.0
	TRAPPED LIGHT	NA	NA

BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B2 U1 G1
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B2 U1 G1

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

LCS Graph

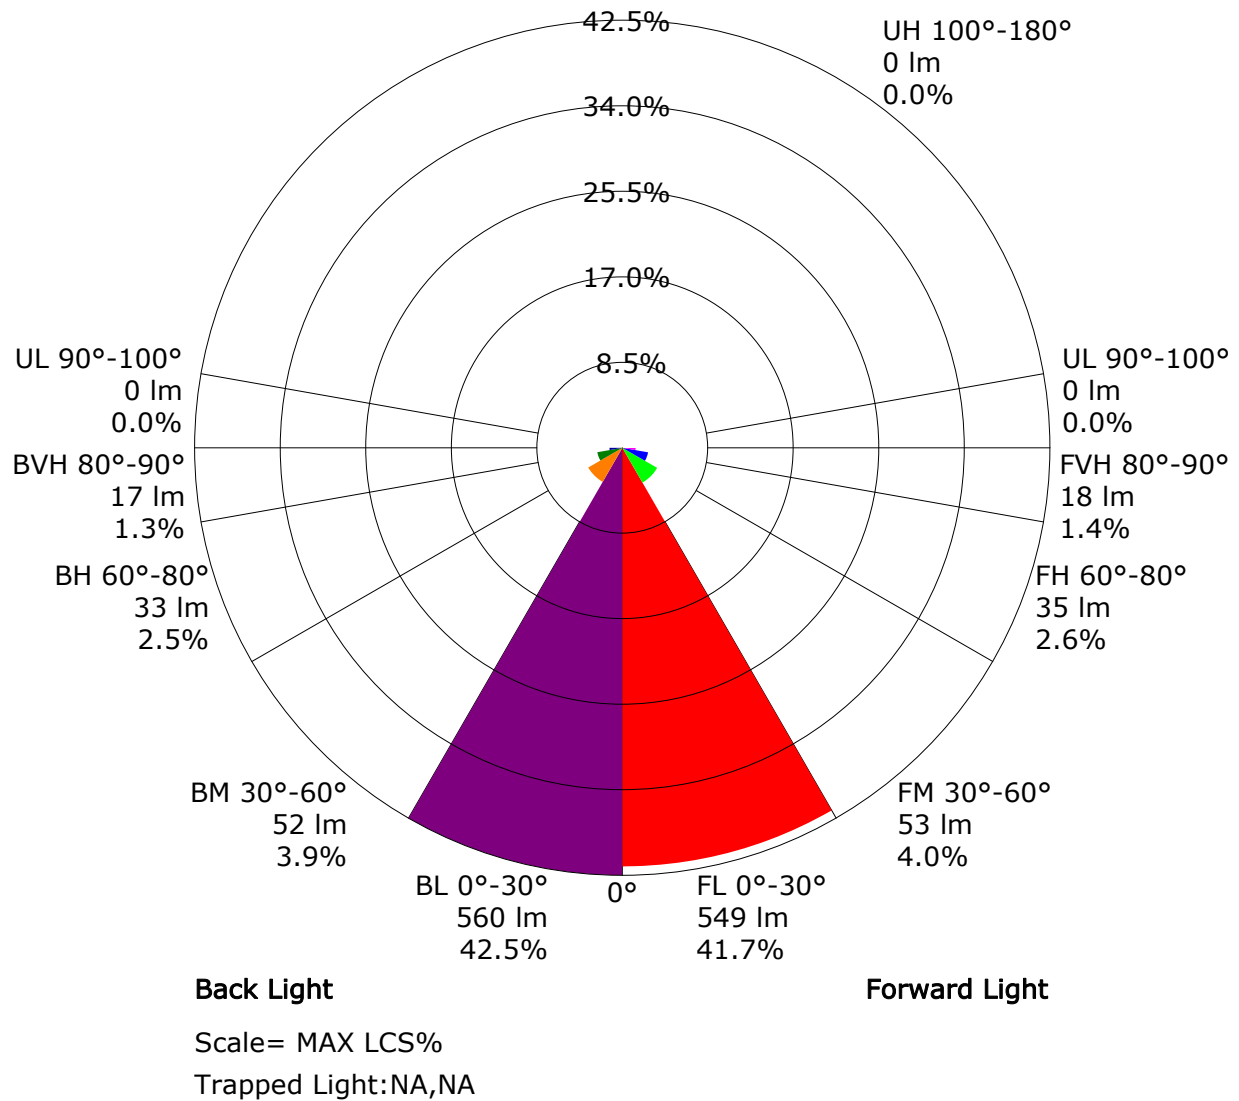

Utilisation Factor Table(Floor cavity)

Utilisation Factors UF(F)			SHR NOM = 0.75									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.93	0.96	0.99	1.01	1.04	1.06	1.08	1.10	1.11	
	0.30		0.89	0.93	0.95	0.98	1.01	1.03	1.05	1.07	1.09	
	0.20		0.86	0.90	0.92	0.95	0.98	1.01	1.03	1.05	1.07	
0.50	0.50	0.20	0.92	0.95	0.97	0.99	1.01	1.03	1.04	1.06	1.07	
	0.30		0.88	0.91	0.94	0.96	0.99	1.01	1.02	1.04	1.06	
	0.20		0.86	0.89	0.91	0.93	0.96	0.98	1.00	1.02	1.04	
0.30	0.50	0.20	0.91	0.93	0.95	0.97	0.99	1.00	1.01	1.03	1.04	
	0.30		0.88	0.90	0.93	0.94	0.96	0.98	0.99	1.01	1.02	
	0.20		0.85	0.88	0.90	0.92	0.95	0.96	0.98	1.00	1.01	
0.00	0.00	0.00	0.84	0.86	0.88	0.89	0.91	0.93	0.94	0.95	0.96	
Rating:14W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

Utilisation Factor Table(Wall)

Utilisation Factors UF(W)			SHR NOM = 0.75									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.48	0.41	0.36	0.32	0.27	0.23	0.20	0.16	0.13	
	0.30		0.40	0.35	0.32	0.29	0.24	0.21	0.18	0.15	0.13	
	0.20		0.35	0.31	0.28	0.26	0.22	0.19	0.17	0.14	0.12	
0.50	0.50	0.20	0.46	0.39	0.34	0.30	0.25	0.25	0.18	0.15	0.12	
	0.30		0.39	0.34	0.30	0.27	0.23	0.19	0.17	0.14	0.12	
	0.20		0.34	0.30	0.27	0.24	0.21	0.18	0.16	0.13	0.11	
0.30	0.50	0.20	0.44	0.37	0.32	0.28	0.23	0.19	0.17	0.13	0.11	
	0.30		0.37	0.32	0.28	0.25	0.21	0.18	0.16	0.13	0.11	
	0.20		0.33	0.29	0.26	0.23	0.20	0.17	0.15	0.12	0.10	
0.00	0.00	0.00	0.18	0.16	0.14	0.13	0.11	0.09	0.08	0.07	0.06	
Rating:14W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

Utilisation Factor Table(Ceiling cavity)

Utilisation Factors UF(C)			SHR NOM = 0.75									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.12	0.14	0.15	0.17	0.18	0.19	0.20	0.21	0.21	
	0.30		0.09	0.11	0.12	0.14	0.15	0.17	0.18	0.19	0.20	
	0.20		0.06	0.08	0.10	0.11	0.13	0.15	0.16	0.17	0.18	
0.50	0.50	0.20	0.12	0.14	0.15	0.16	0.17	0.18	0.19	0.20	0.20	
	0.30		0.09	0.11	0.12	0.13	0.15	0.16	0.17	0.18	0.19	
	0.20		0.06	0.08	0.10	0.11	0.13	0.14	0.15	0.17	0.18	
0.30	0.50	0.20	0.11	0.13	0.14	0.15	0.17	0.18	0.18	0.19	0.20	
	0.30		0.08	0.10	0.12	0.13	0.14	0.16	0.16	0.18	0.18	
	0.20		0.06	0.08	0.10	0.11	0.13	0.14	0.15	0.16	0.17	
0.00	0.00	0.00	NA	NA	NA	NA	NA	NA	NA	NA	NA	
Rating:14W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	3868.7	3.7	3.7	0.28	0.28
1.0-2.0	3852.7	11.1	14.8	0.84	1.12
2.0-3.0	3819.7	18.3	33.0	1.39	2.51
3.0-4.0	3771.0	25.2	58.3	1.92	4.42
4.0-5.0	3709.9	31.9	90.2	2.42	6.85
5.0-6.0	3629.8	38.2	128.3	2.90	9.75
6.0-7.0	3534.7	43.9	172.2	3.33	13.08
7.0-8.0	3424.7	49.0	221.2	3.72	16.80
8.0-9.0	3297.5	53.4	274.7	4.06	20.86
9.0-10.0	3159.9	57.2	331.9	4.34	25.20
10.0-11.0	3008.6	60.1	392.0	4.57	29.76
11.0-12.0	2846.4	62.2	454.2	4.73	34.49
12.0-13.0	2675.7	63.5	517.8	4.82	39.31
13.0-14.0	2489.3	63.7	581.5	4.84	44.15
14.0-15.0	2295.1	63.0	644.5	4.78	48.93
15.0-16.0	2089.4	61.2	705.7	4.65	53.58
16.0-17.0	1873.3	58.3	764.1	4.43	58.01
17.0-18.0	1659.1	54.7	818.8	4.15	62.17
18.0-19.0	1436.3	50.0	868.8	3.79	65.96
19.0-20.0	1222.5	44.8	913.5	3.40	69.36
20.0-21.0	1028.0	39.5	953.0	3.00	72.36
21.0-22.0	840.7	33.8	986.8	2.57	74.92
22.0-23.0	675.1	28.3	1015.1	2.15	77.07
23.0-24.0	532.9	23.3	1038.4	1.77	78.84
24.0-25.0	414.1	18.8	1057.2	1.43	80.27
25.0-26.0	322.7	15.2	1072.5	1.16	81.43
26.0-27.0	248.8	12.2	1084.6	0.92	82.35
27.0-28.0	192.1	9.7	1094.4	0.74	83.09
28.0-29.0	151.8	7.9	1102.3	0.60	83.70
29.0-30.0	122.7	6.6	1108.9	0.50	84.20
30.0-31.0	102.2	5.7	1114.6	0.43	84.63
31.0-32.0	87.8	5.0	1119.7	0.38	85.01
32.0-33.0	77.5	4.6	1124.2	0.35	85.36
33.0-34.0	70.1	4.2	1128.5	0.32	85.68
34.0-35.0	64.4	4.0	1132.5	0.30	85.99
35.0-36.0	60.2	3.8	1136.3	0.29	86.28

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	56.8	3.7	1140.0	0.28	86.56
37.0-38.0	53.3	3.6	1143.6	0.27	86.83
38.0-39.0	50.7	3.5	1147.0	0.26	87.09
39.0-40.0	48.8	3.4	1150.4	0.26	87.35
40.0-41.0	46.9	3.3	1153.8	0.25	87.60
41.0-42.0	45.8	3.3	1157.1	0.25	87.86
42.0-43.0	44.3	3.3	1160.4	0.25	88.11
43.0-44.0	42.4	3.2	1163.6	0.24	88.35
44.0-45.0	41.0	3.2	1166.7	0.24	88.59
45.0-46.0	39.6	3.1	1169.8	0.24	88.82
46.0-47.0	38.5	3.1	1172.9	0.23	89.06
47.0-48.0	37.6	3.0	1175.9	0.23	89.29
48.0-49.0	36.8	3.0	1179.0	0.23	89.52
49.0-50.0	36.5	3.0	1182.0	0.23	89.75
50.0-51.0	36.1	3.1	1185.1	0.23	89.98
51.0-52.0	35.7	3.1	1188.1	0.23	90.21
52.0-53.0	35.7	3.1	1191.2	0.24	90.45
53.0-54.0	35.8	3.2	1194.4	0.24	90.69
54.0-55.0	35.8	3.2	1197.6	0.24	90.93
55.0-56.0	35.6	3.2	1200.8	0.24	91.18
56.0-57.0	35.5	3.2	1204.1	0.25	91.42
57.0-58.0	35.3	3.3	1207.3	0.25	91.67
58.0-59.0	35.1	3.3	1210.6	0.25	91.92
59.0-60.0	34.8	3.3	1213.9	0.25	92.17
60.0-61.0	34.4	3.3	1217.2	0.25	92.42
61.0-62.0	34.2	3.3	1220.5	0.25	92.67
62.0-63.0	34.1	3.3	1223.8	0.25	92.92
63.0-64.0	33.7	3.3	1227.1	0.25	93.17
64.0-65.0	33.6	3.3	1230.4	0.25	93.42
65.0-66.0	33.6	3.4	1233.8	0.25	93.68
66.0-67.0	33.6	3.4	1237.1	0.26	93.93
67.0-68.0	33.6	3.4	1240.5	0.26	94.19
68.0-69.0	33.3	3.4	1243.9	0.26	94.45
69.0-70.0	33.0	3.4	1247.3	0.26	94.71
70.0-71.0	33.2	3.4	1250.8	0.26	94.97
71.0-72.0	33.0	3.4	1254.2	0.26	95.23

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G0.0	3876.7	3869.6	3876.7	3869.6	3876.7					
G1.0	3869.3	3872.8	3864.4	3850.1	3869.3					
G2.0	3845.8	3862.6	3836.3	3820.5	3845.8					
G3.0	3798.8	3834.3	3785.8	3773.2	3798.8					
G4.0	3738.8	3796.7	3720.7	3719.6	3738.8					
G5.0	3663.8	3744.4	3646.8	3648.5	3663.8					
G6.0	3558.5	3670.5	3547.4	3558.1	3558.5					
G7.0	3449.3	3589.6	3445.7	3458.4	3449.3					
G8.0	3313.8	3481.6	3313.1	3346.4	3313.8					
G9.0	3170.7	3371.3	3179.8	3203.0	3170.7					
G10.0	3016.7	3239.1	3038.8	3060.2	3016.7					
G11.0	2842.2	3090.4	2882.9	2898.8	2842.2					
G12.0	2667.0	2935.4	2726.1	2728.6	2667.0					
G13.0	2489.1	2752.8	2559.5	2547.0	2489.1					
G14.0	2274.3	2584.6	2372.5	2334.5	2274.3					
G15.0	2077.2	2397.1	2182.7	2137.8	2077.2					
G16.0	1845.9	2188.4	1968.1	1918.3	1845.9					
G17.0	1641.2	1975.7	1772.0	1676.7	1641.2					
G18.0	1433.2	1764.3	1563.6	1446.0	1433.2					
G19.0	1222.9	1520.4	1339.5	1200.8	1222.9					
G20.0	1034.7	1309.7	1152.5	999.4	1034.7					
G21.0	868.0	1087.7	966.4	805.8	868.0					
G22.0	695.1	892.4	787.2	622.7	695.1					
G23.0	564.8	723.8	633.3	481.6	564.8					
G24.0	439.4	558.0	489.3	372.7	439.4					
G25.0	351.0	438.9	385.4	277.9	351.0					
G26.0	277.0	337.9	296.7	217.2	277.0					
G27.0	217.1	256.6	222.4	165.3	217.1					
G28.0	173.7	195.1	173.7	133.0	173.7					
G29.0	141.0	150.1	136.3	111.5	141.0					
G30.0	115.6	122.6	109.9	94.3	115.6					
G31.0	99.0	102.1	91.4	82.9	99.0					
G32.0	85.2	88.2	78.9	74.8	85.2					
G33.0	76.5	78.6	69.8	68.0	76.5					
G34.0	69.8	71.8	63.0	63.1	69.8					
G35.0	63.8	65.2	57.8	60.5	63.8					
G36.0	59.7	61.6	55.4	57.6	59.7					

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G37.0	55.5	56.9	52.3	55.5	55.5					
G38.0	51.5	53.5	48.9	52.5	51.5					
G39.0	49.4	51.8	47.0	51.2	49.4					
G40.0	46.8	49.5	44.9	49.5	46.8					
G41.0	45.2	49.3	42.8	47.3	45.2					
G42.0	44.5	47.7	42.5	46.8	44.5					
G43.0	42.8	44.8	40.2	44.8	42.8					
G44.0	40.9	43.4	38.9	43.4	40.9					
G45.0	38.9	42.7	37.7	42.2	38.9					
G46.0	37.7	40.9	36.2	40.9	37.7					
G47.0	36.8	40.5	35.8	39.7	36.8					
G48.0	36.5	38.3	35.4	38.1	36.5					
G49.0	36.5	37.5	34.8	37.6	36.5					
G50.0	36.0	36.9	35.2	37.6	36.0					
G51.0	35.1	36.3	34.5	37.1	35.1					
G52.0	35.8	36.2	34.1	36.5	35.8					
G53.0	35.4	36.7	34.3	36.9	35.4					
G54.0	34.5	36.8	34.6	37.6	34.5					
G55.0	34.6	36.2	34.5	37.6	34.6					
G56.0	35.1	36.0	33.8	37.3	35.1					
G57.0	34.3	36.3	33.8	37.3	34.3					
G58.0	34.5	35.5	33.7	36.9	34.5					
G59.0	34.6	36.0	33.4	35.9	34.6					
G60.0	34.2	35.6	32.5	36.0	34.2					
G61.0	33.4	35.0	32.6	35.5	33.4					
G62.0	34.6	34.3	32.0	35.9	34.6					
G63.0	34.6	34.3	31.2	35.6	34.6					
G64.0	33.5	34.3	30.5	35.2	33.5					
G65.0	33.9	34.3	31.3	35.5	33.9					
G66.0	33.7	33.5	30.7	35.9	33.7					
G67.0	33.5	34.6	31.6	35.5	33.5					
G68.0	33.8	34.3	30.1	35.5	33.8					
G69.0	33.1	33.9	30.4	34.8	33.1					
G70.0	33.3	33.7	30.5	34.6	33.3					
G71.0	33.4	33.9	30.8	35.4	33.4					
G72.0	32.9	32.8	30.1	34.8	32.9					
G73.0	32.0	34.1	30.0	33.9	32.0					

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Unit: cd

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector: