

Report No.:

Test Time: 2026-05-28 15:12

Luminaire Property


Luminaire Manufacturer: NORDECOR
Luminaire Description: 80102
Luminous Width (mm): 80
Current: 0.143 A
Power Factor: 0.464

Luminous Length (mm): 80
Voltage: 220.4 V
Power: 14.68 W


Photometric Results

CIE Class: Direct	Total Rated Lamp Lumens: 1321.9 lm
Measurement Flux: 1321.9 lm	Efficiency: 100%
Downward Ratio: 100%	Upward Ratio: 0%
Horizontal Diffuse Angle(10%,50%,80%,100%): H49.3,H32.5,H19.6,H0	
Vertical Diffuse Angle(10%,50%,80%,100%): V50.3,V33.2,V20.2,V1	
Luminaire Efficacy Rating (LER): 90.10	Central Intensity: 3883.93 cd
Max. Intensity: 3886.82 cd	Pos of Max. Intensity: H90 V1
S/MH(C0/C180): 0.54	S/MH(C90/C270): 0.56



Picture Of Luminaire



Luminous Intensity Distribution Curve

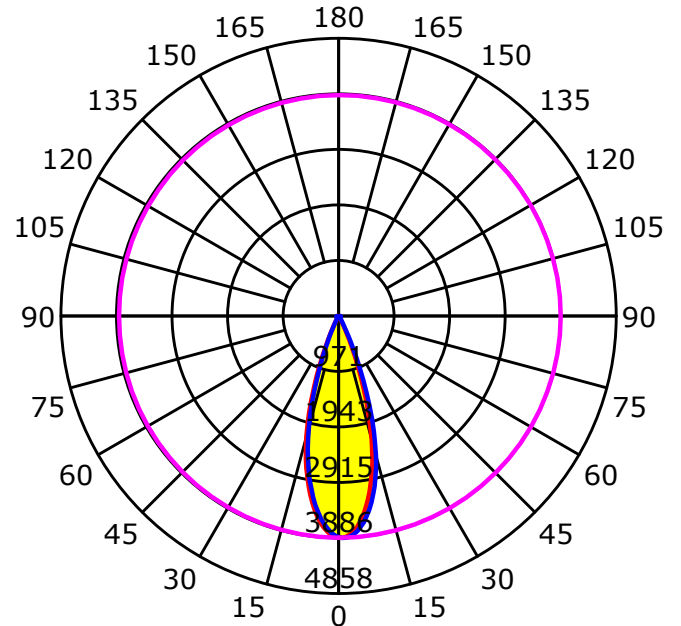


Luminous Intensity Distribution Curve

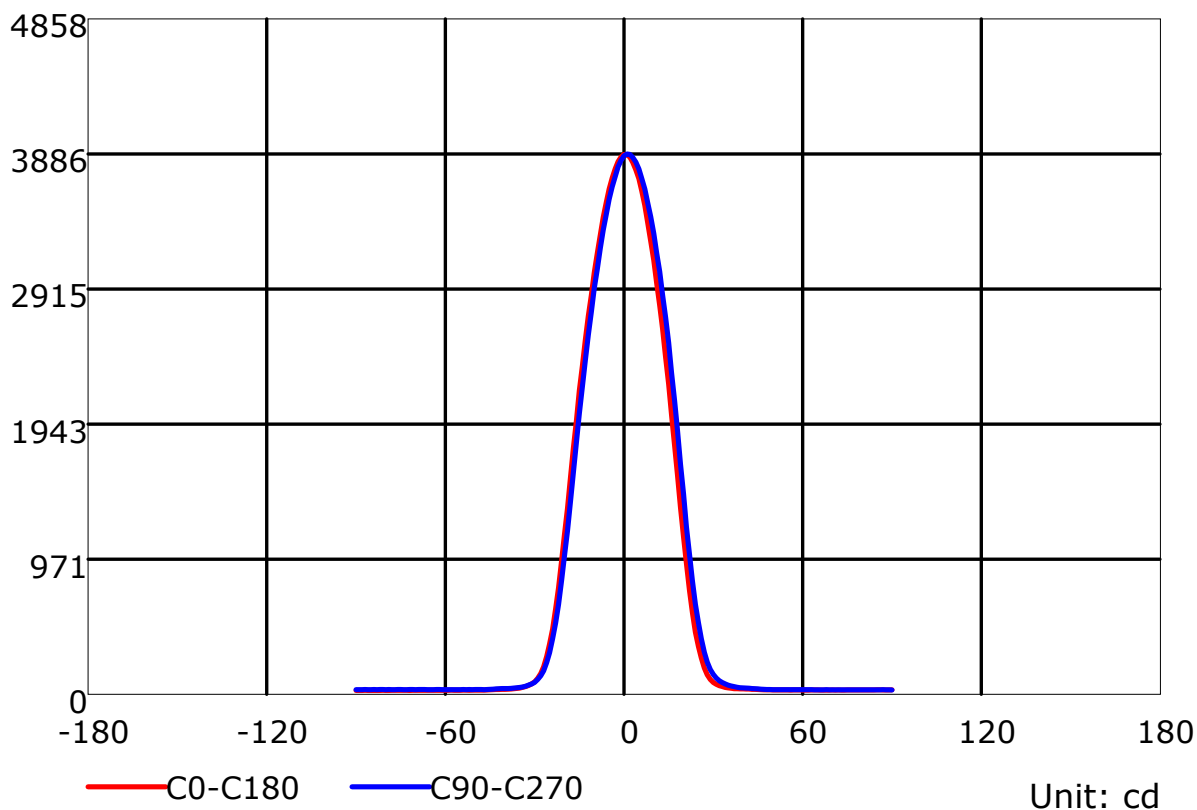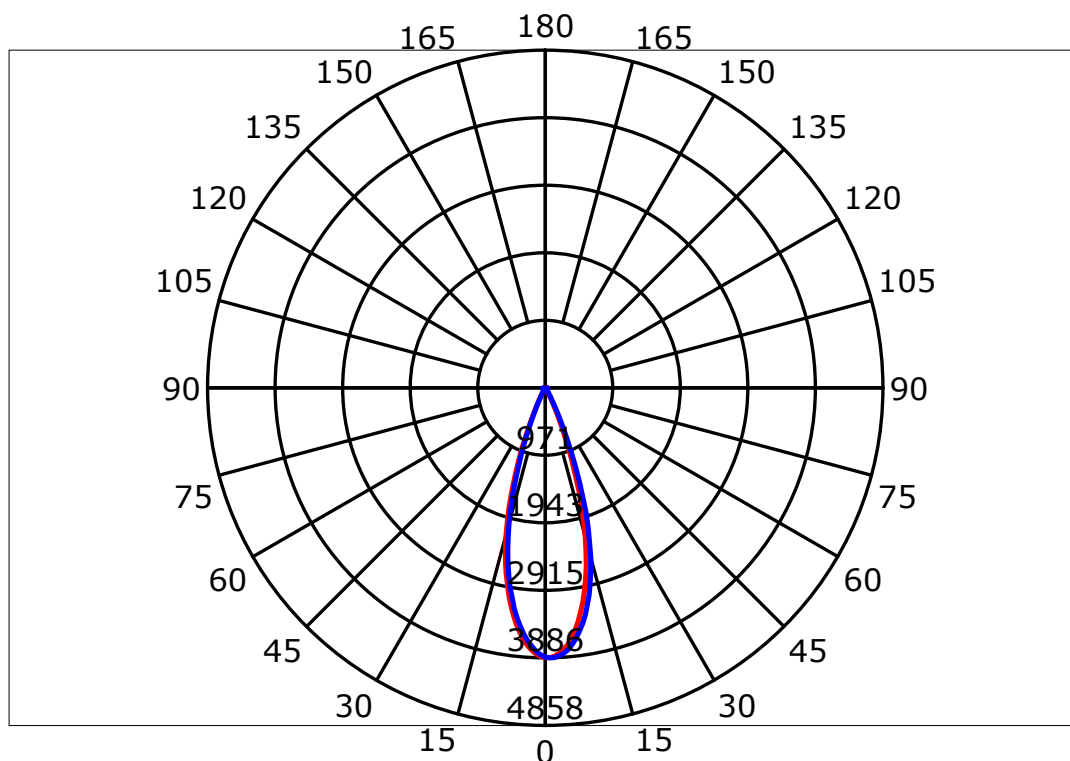

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Luminous Intensity Distribution Curve(cd/klm)

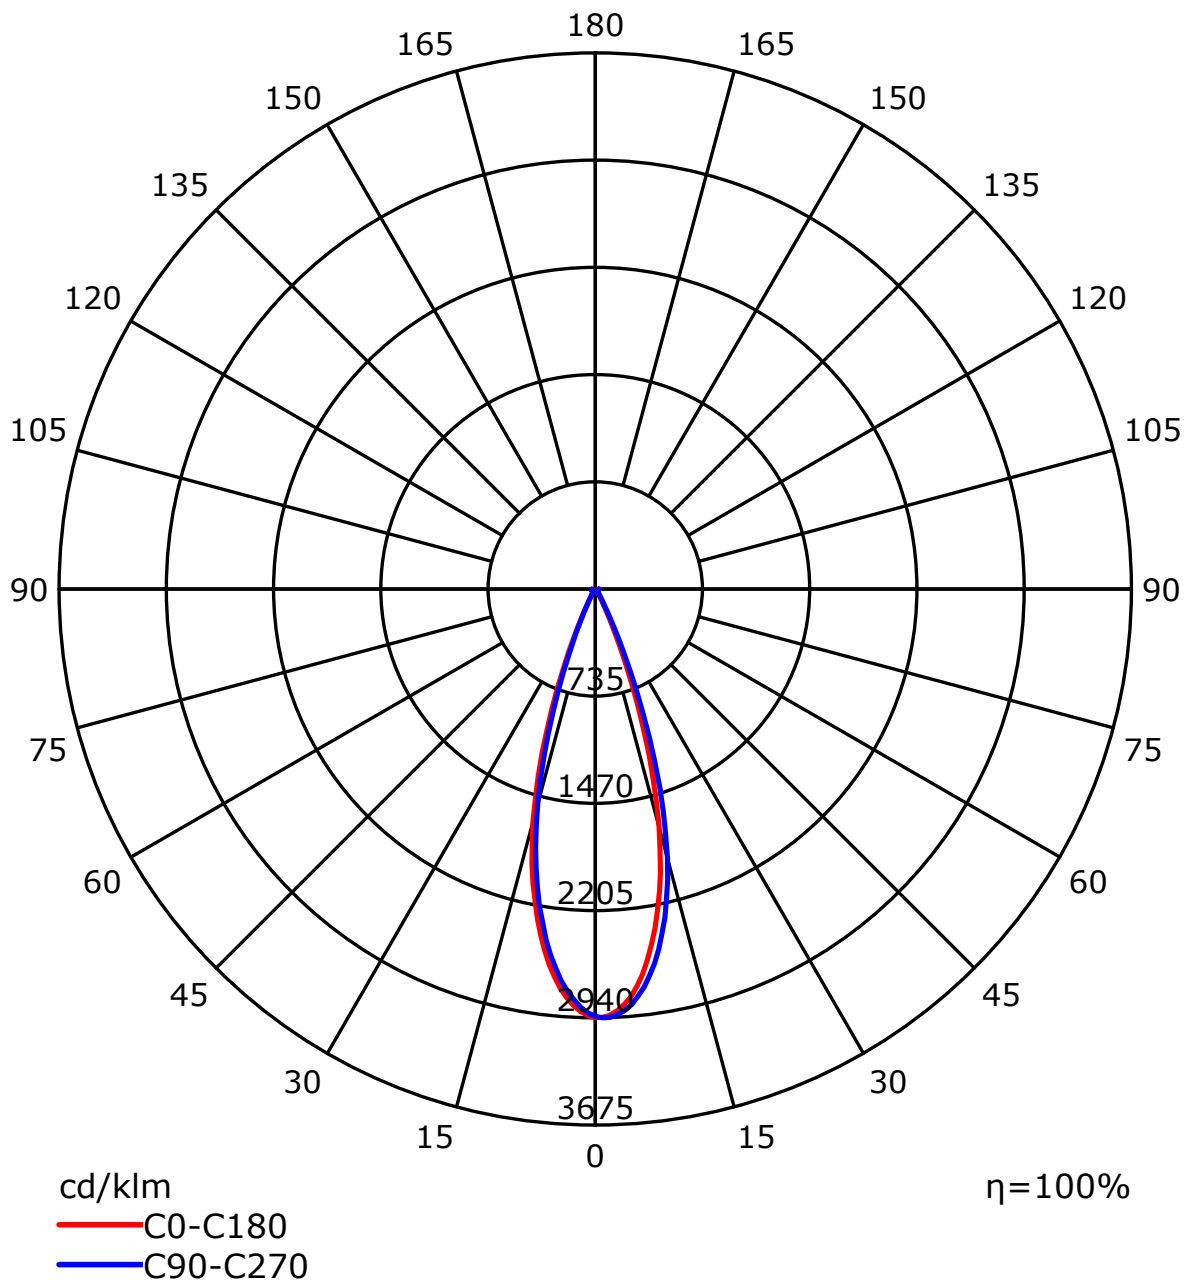


C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87
3	103	97	92	89	101	96	91	88	93	90	87	91	88	85	89	86	84	82
4	99	92	87	84	98	91	87	83	89	85	82	87	84	81	85	83	80	79
5	96	88	83	79	94	87	83	79	86	81	78	84	80	78	83	79	77	76
6	92	85	79	76	91	84	79	75	82	78	75	81	77	74	80	77	74	73
7	89	81	76	73	88	81	76	72	80	75	72	78	75	72	77	74	71	70
8	86	78	73	70	85	78	73	70	77	73	69	76	72	69	75	72	69	68
9	84	76	71	67	83	75	71	67	74	70	67	74	70	67	73	69	67	66
10	81	73	68	65	80	73	68	65	72	68	65	71	68	65	71	67	65	64

Spacing Criteria (0-180): 0.54
Spacing Criteria (90-270): 0.56
Spacing Criteria (Diagonal): 0.52

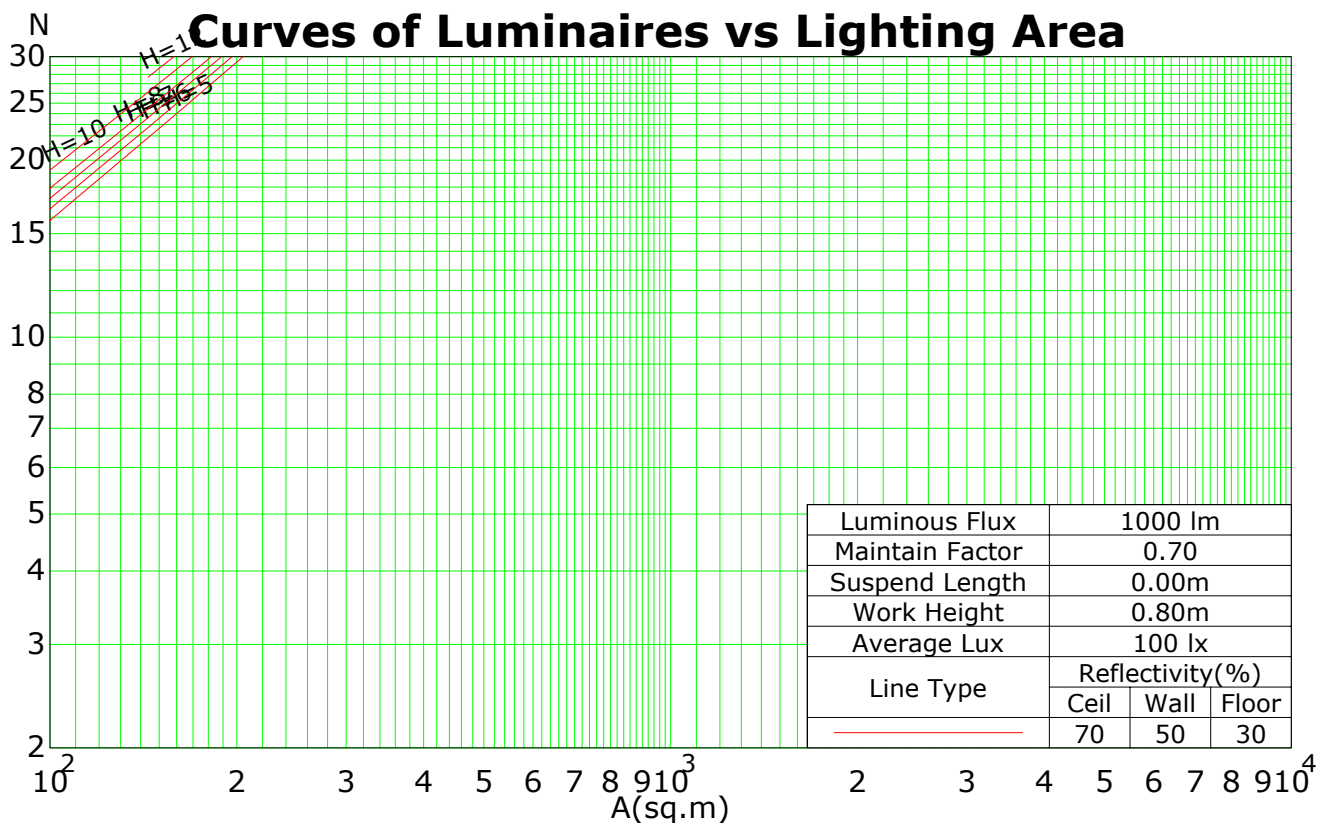

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:


Isocandela (rectangle)

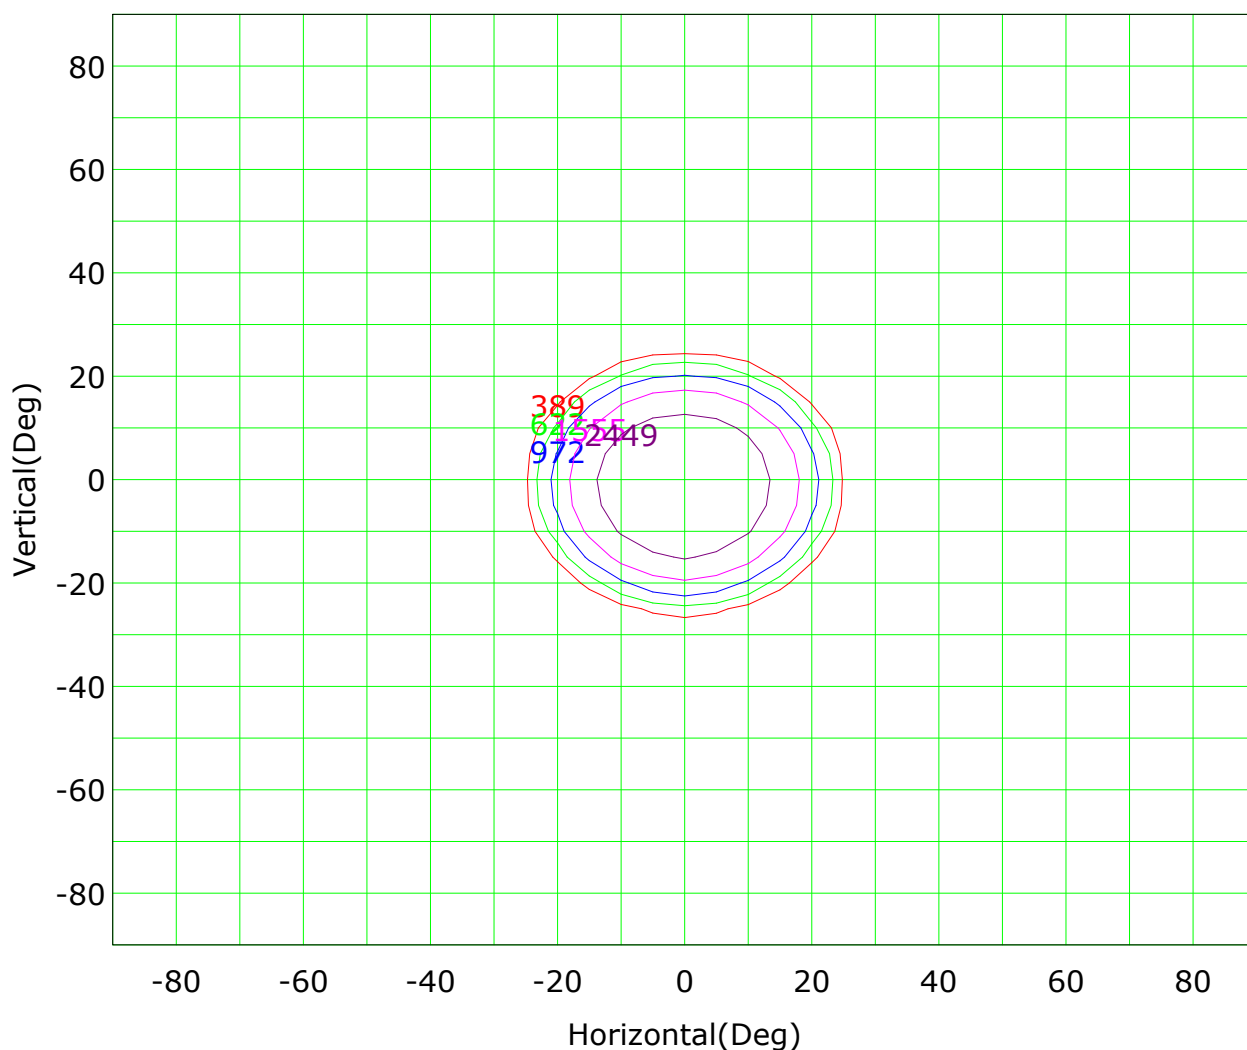

Imax (100%): 3887 cd

(10%): 389 cd	(16%): 622 cd
(25%): 972 cd	(40%): 1555 cd
(63%): 2449 cd	(100%): 3887 cd

Isocandela (sphere)

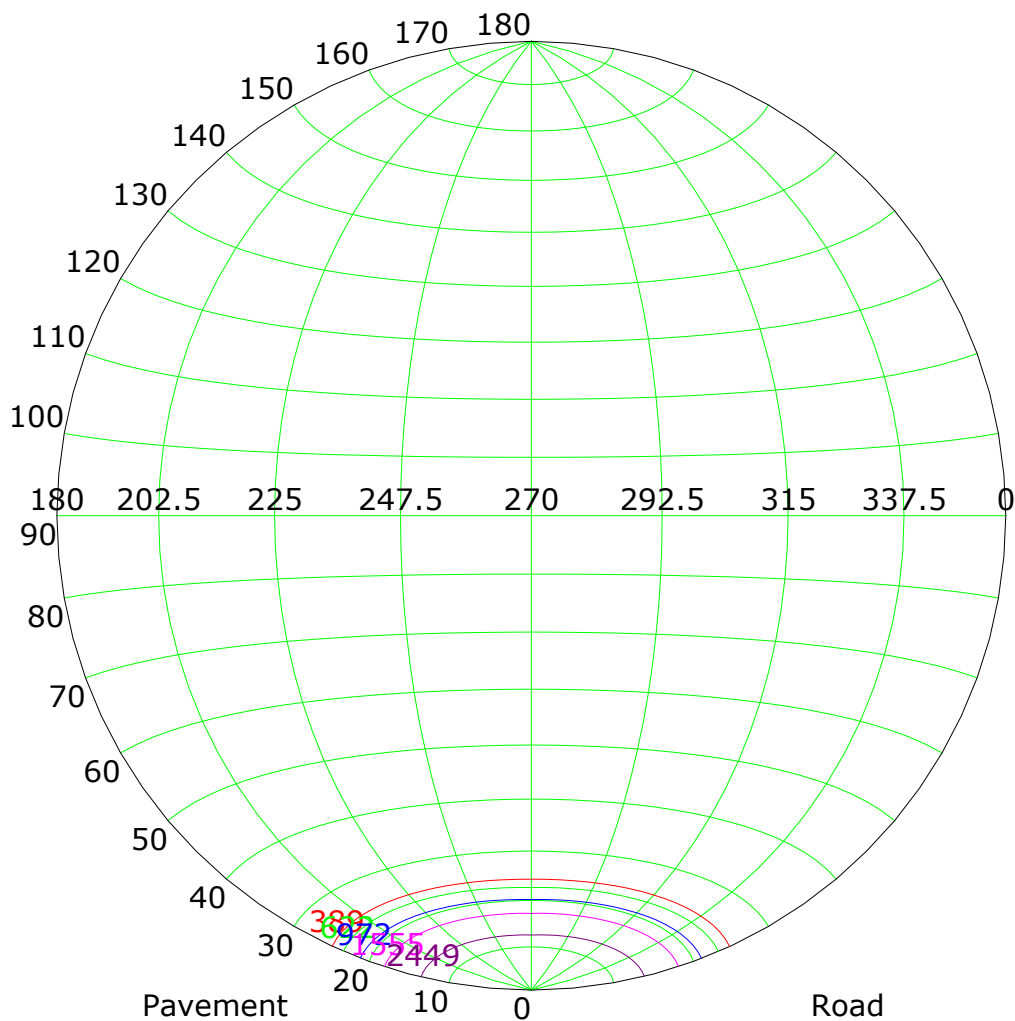

Imax (100%): 3887 cd


— (10%): 389 cd
— (25%): 972 cd
— (63%): 2449 cd

— (16%): 622 cd
— (40%): 1555 cd
— (100%): 3887 cd

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

IsoLux Plot

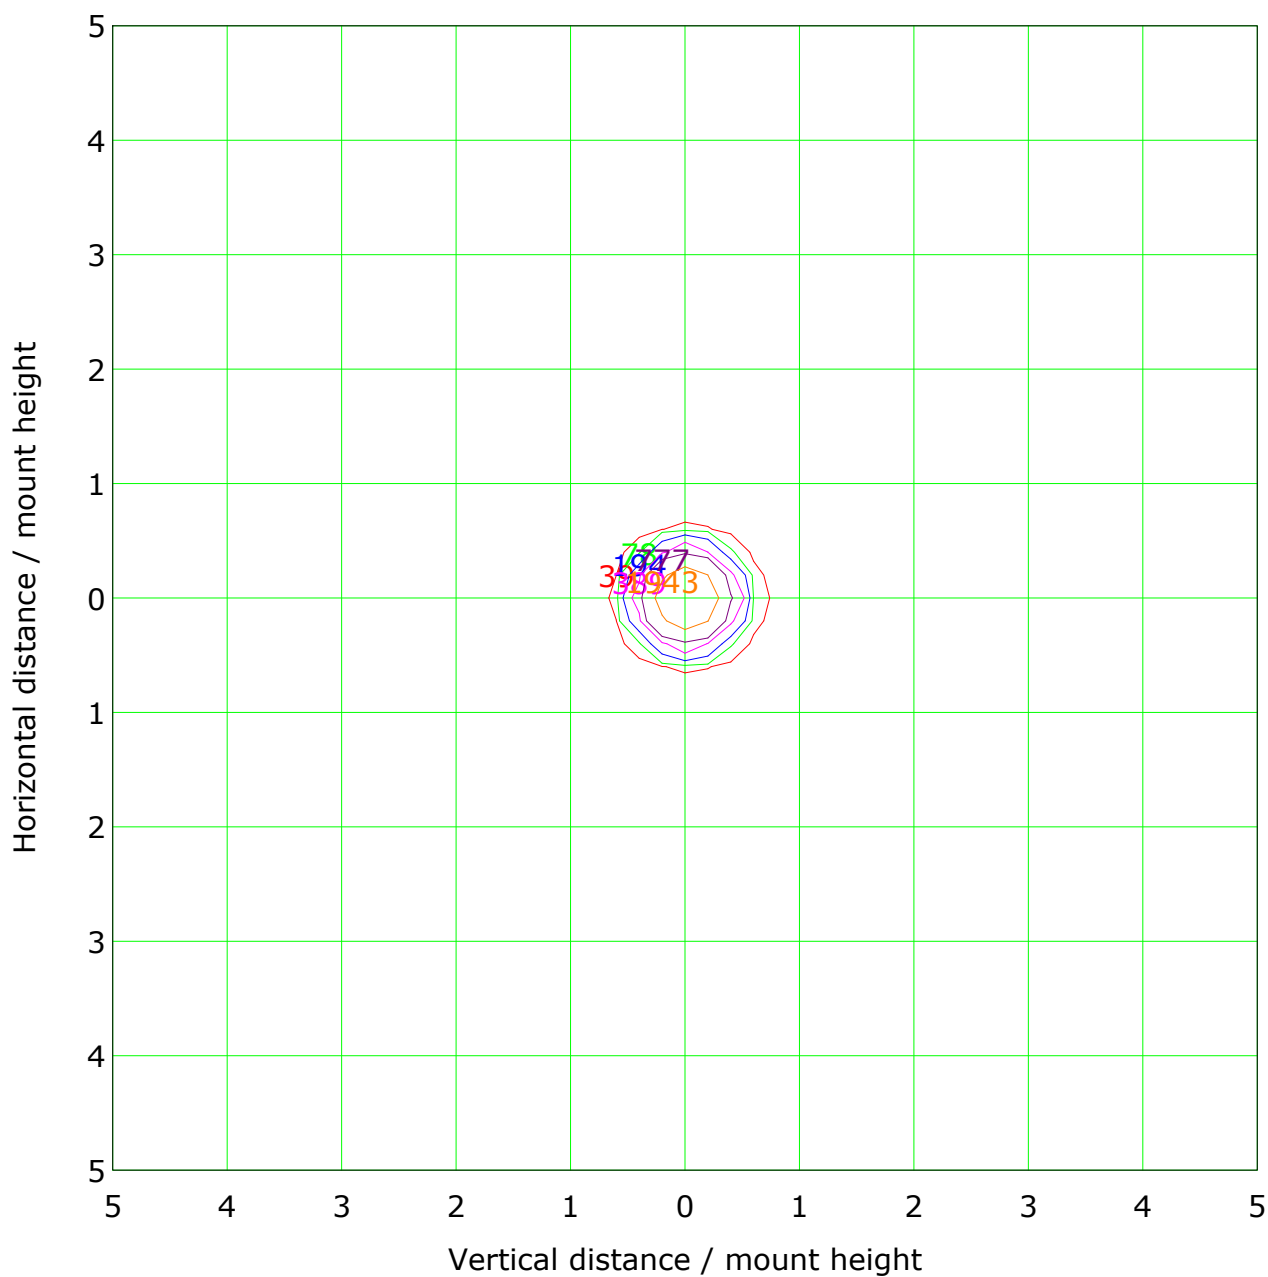

Mounting Height: 1.0m Max Lux(100%): 3885.0 lx


(1%): 38.9 lx	(2%): 77.7 lx
(5%): 194.3 lx	(10%): 388.5 lx
(20%): 777.0 lx	(50%): 1942.5 lx
(100%): 3885.0 lx	

C Plane (°): 0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Roadway CU Curve

Efficiency(%)


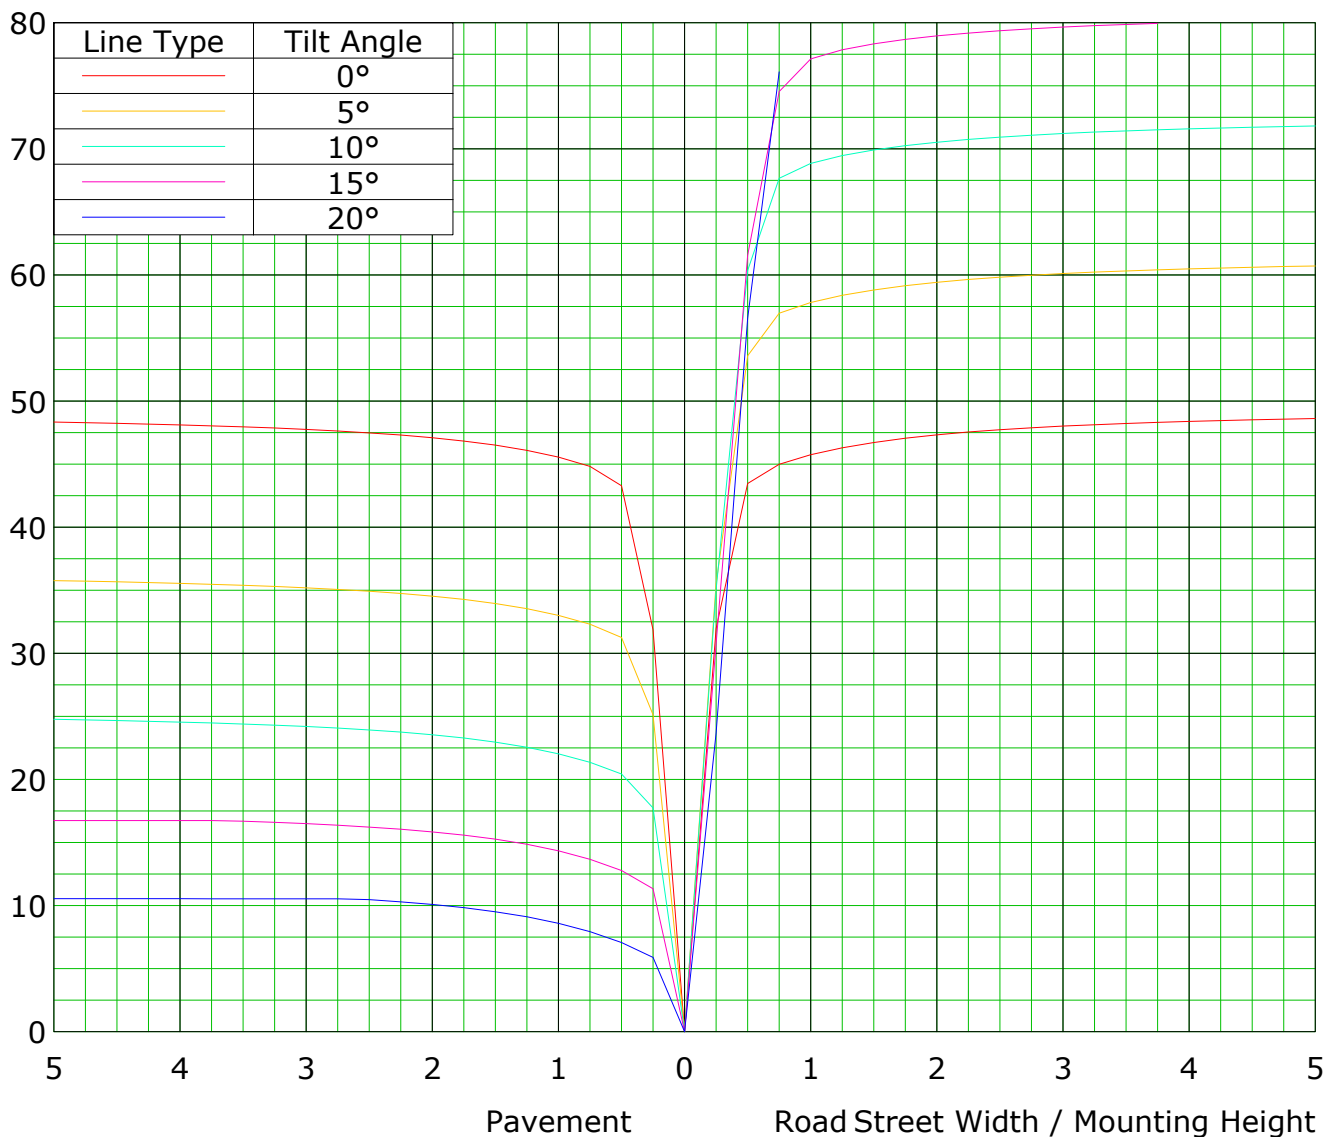


C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

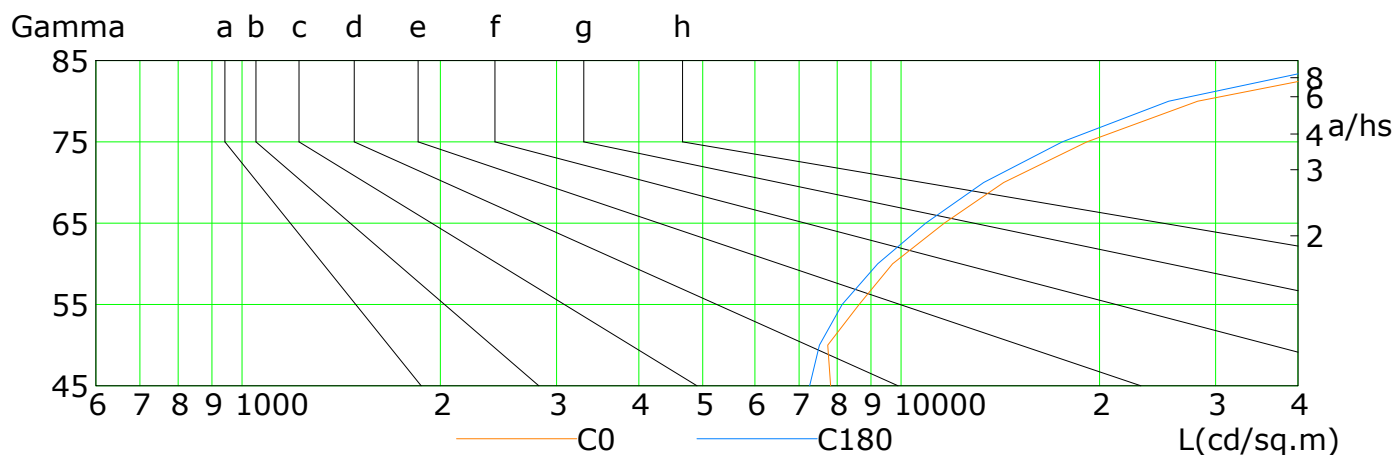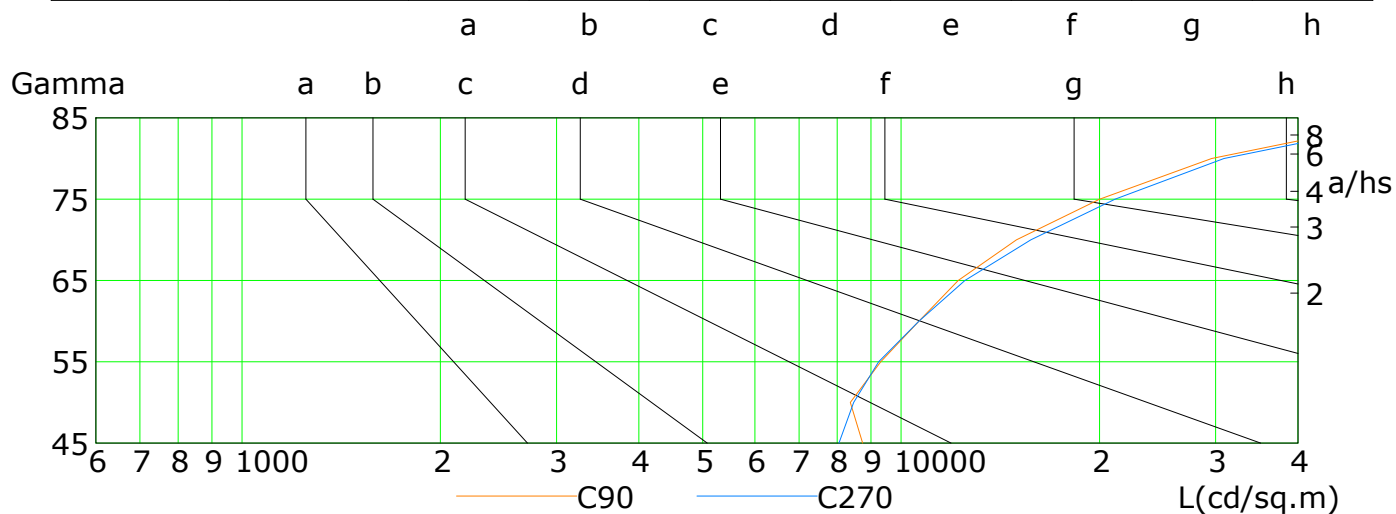

L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	7816	7737	8636	9703	11624	14304	19137	28173	58014
C90	8742	8374	9314	10644	12204	14962	20007	29586	59179
C180	7266	7516	8137	9213	10899	13344	17556	25465	49785
C270	8048	8471	9243	10644	12497	15738	21118	30881	61761

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: GPM-1600L

Distance: 8.443 m


Humidity:

Inspector:

Illuminance at a Distance

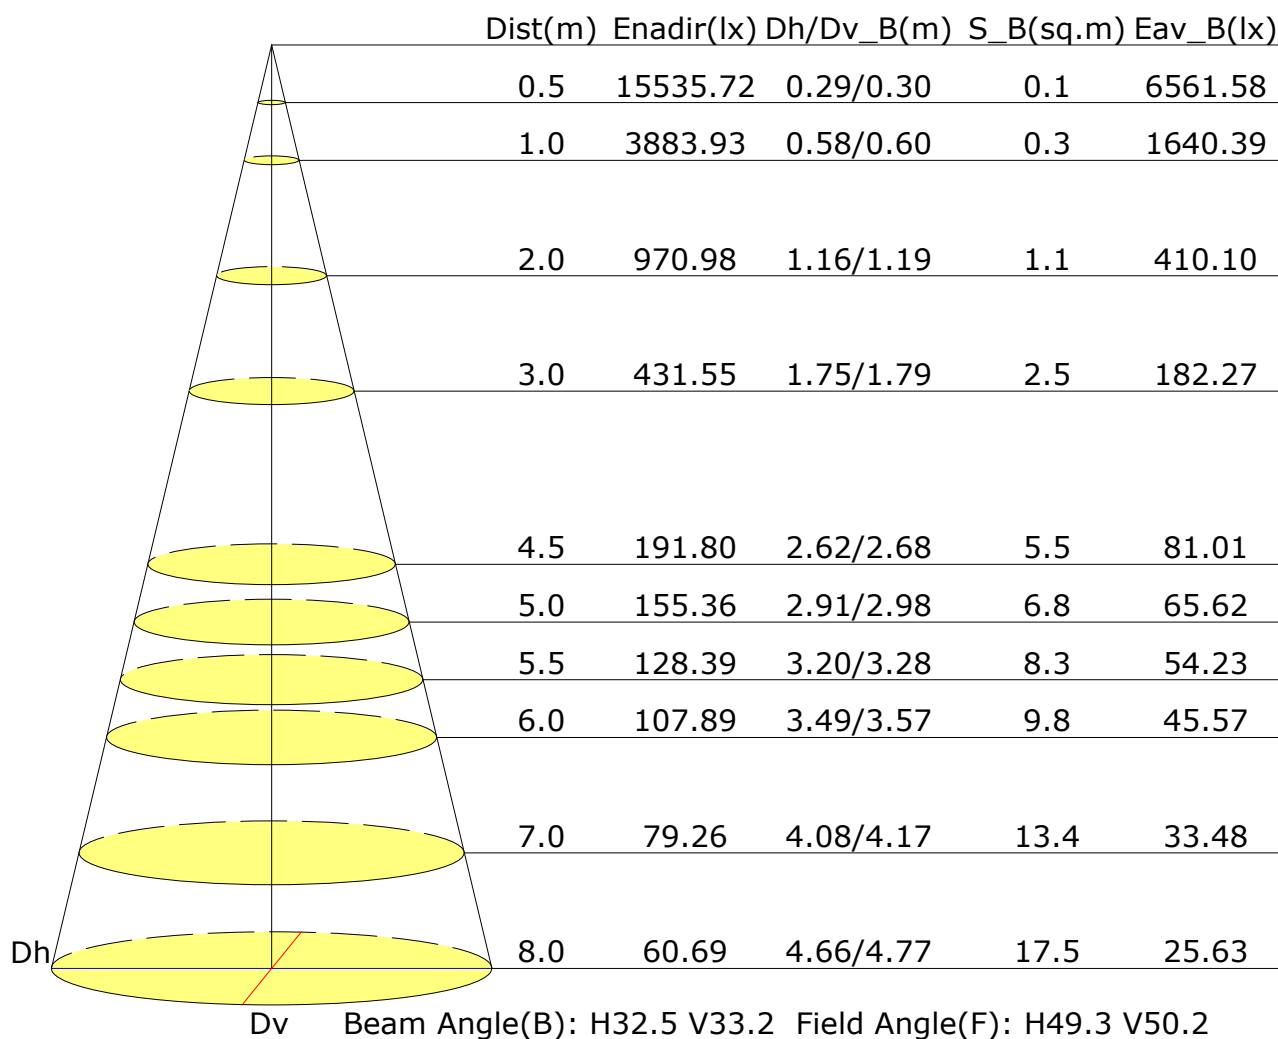

Vertical IsoLux Plot

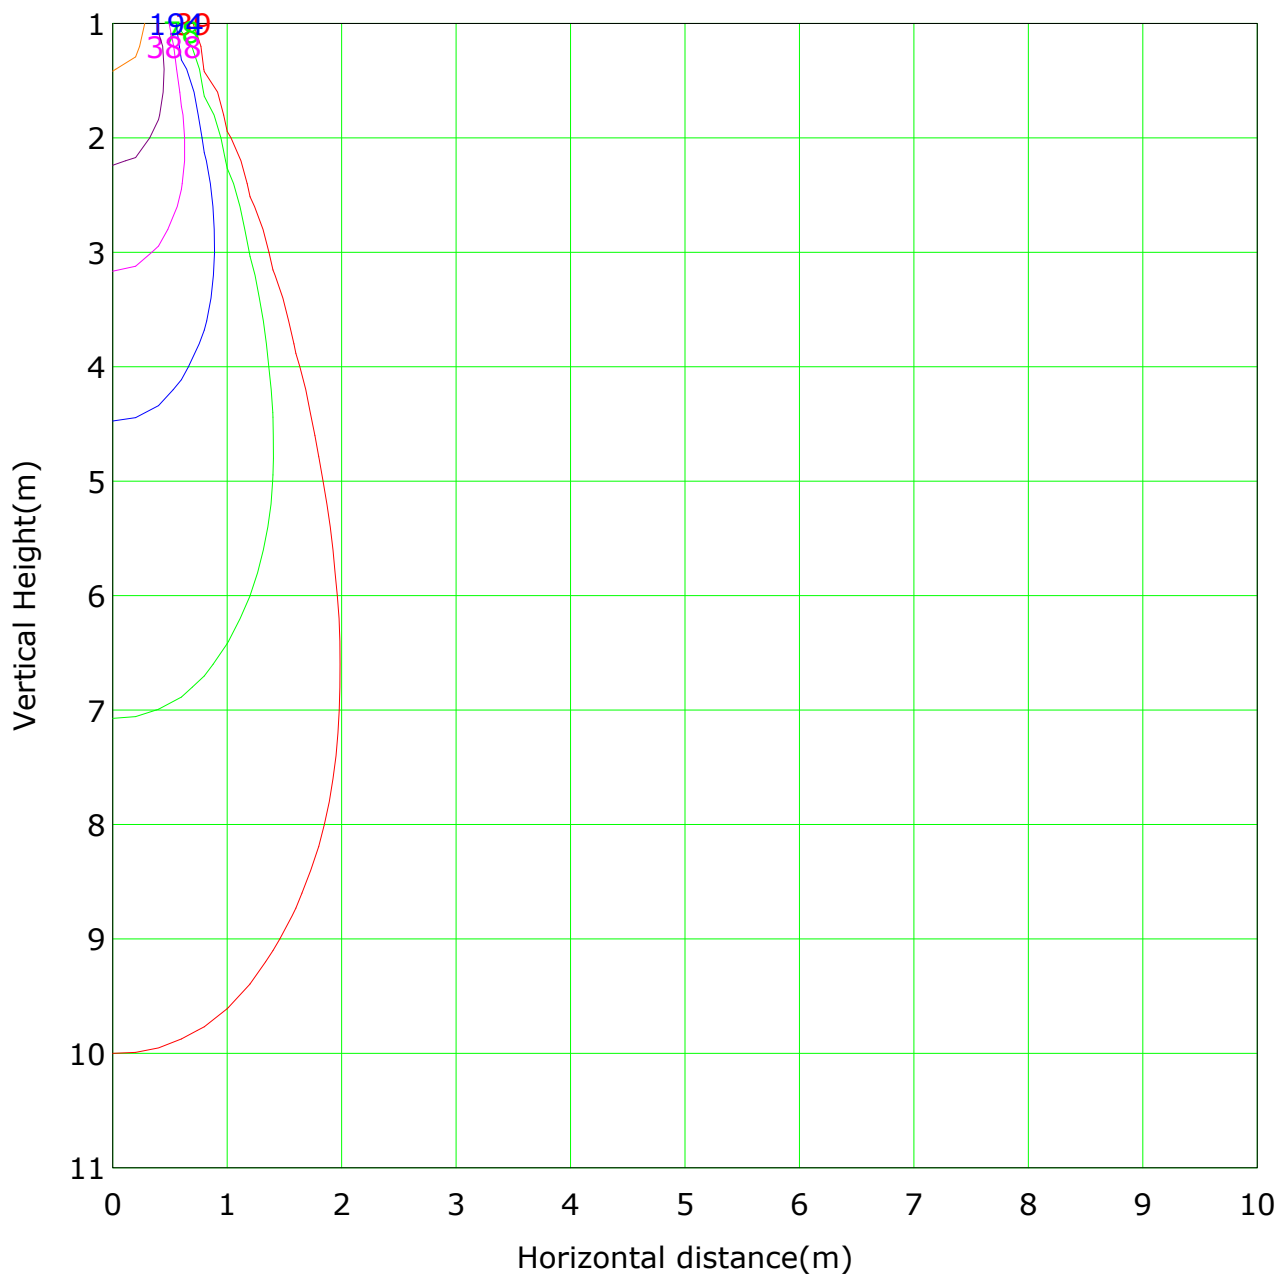

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 3883.9 lx

(1%): 38.8 lx	(2%): 77.7 lx
(5%): 194.2 lx	(10%): 388.4 lx
(20%): 776.8 lx	(50%): 1942.0 lx
(100%): 3883.9 lx	

C Plane (°): 0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Area Flux Table

[illegible]

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0


Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

The Average Illuminance Effective Figure

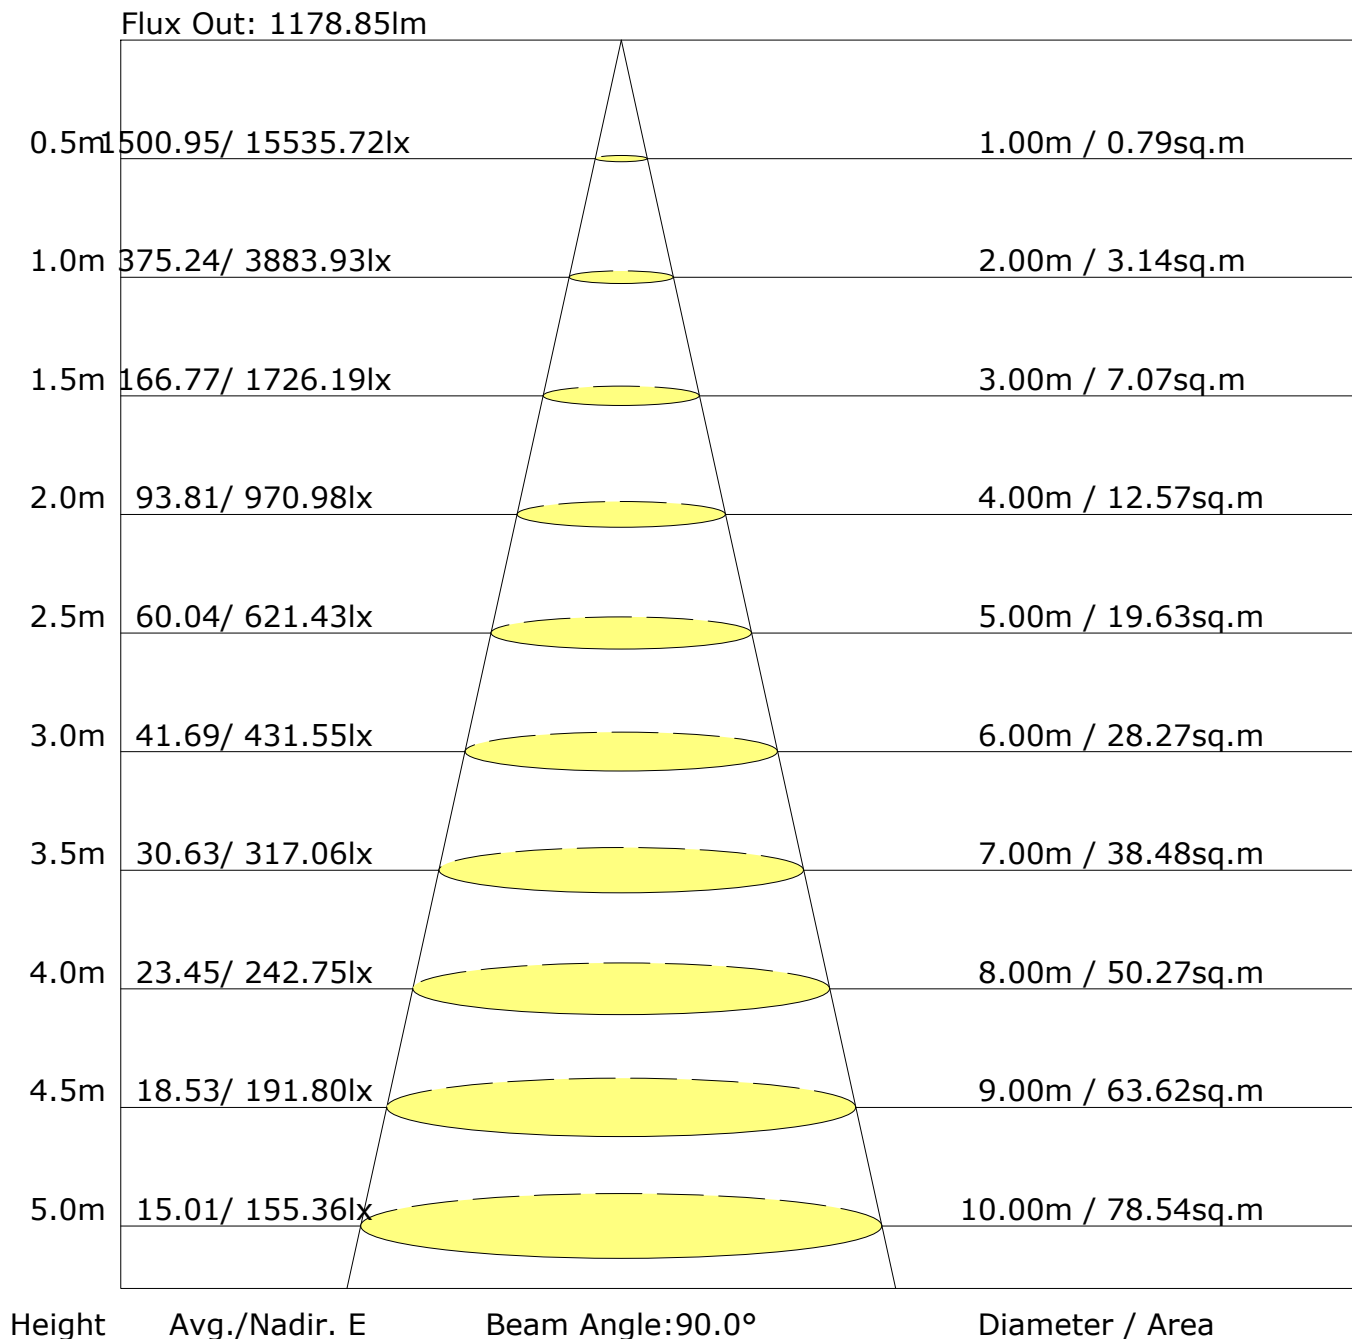

C Plane (°): 0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-90.0: 1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

UGR Table

Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	13.9	14.7	14.2	14.9	15.1	14.3	15.1	14.6	15.3	15.5
3H	17.1	17.8	17.4	18.1	18.3	17.5	18.2	17.8	18.5	18.7
4H	19.0	19.6	19.3	19.9	20.2	19.4	20.1	19.7	20.3	20.6
6H	21.1	21.7	21.4	22.0	22.3	21.5	22.1	21.8	22.4	22.7
8H	22.2	22.9	22.6	23.2	23.5	22.7	23.3	23.0	23.6	23.9
12H	23.6	24.2	24.0	24.5	24.9	24.0	24.6	24.4	24.9	25.3
X=4H Y=2H	15.2	15.8	15.5	16.1	16.4	15.5	16.1	15.8	16.4	16.6
3H	18.5	19.1	18.9	19.4	19.8	18.8	19.4	19.2	19.8	20.1
4H	20.5	21.1	20.9	21.4	21.8	20.9	21.4	21.2	21.7	22.1
6H	22.8	23.3	23.2	23.6	24.0	23.1	23.6	23.5	24.0	24.4
8H	24.0	24.5	24.5	24.9	25.3	24.4	24.9	24.8	25.2	25.7
12H	25.5	25.9	26.0	26.3	26.8	25.9	26.3	26.3	26.7	27.1
X=8H Y=4H	21.4	21.9	21.8	22.3	22.7	21.7	22.1	22.1	22.5	22.9
6H	23.9	24.3	24.4	24.7	25.2	24.2	24.6	24.7	25.0	25.5
8H	25.4	25.7	25.8	26.2	26.6	25.7	26.0	26.1	26.4	26.9
12H	27.1	27.4	27.6	27.8	28.3	27.3	27.6	27.8	28.1	28.6
X=12H Y=4H	21.7	22.1	22.1	22.5	22.9	21.9	22.3	22.3	22.7	23.1
6H	24.3	24.6	24.8	25.1	25.6	24.5	24.9	25.0	25.3	25.8
8H	25.9	26.2	26.4	26.6	27.1	26.1	26.4	26.6	26.9	27.4
Variations with the observer position at spacings:										
S=1.0H	+0.4/-0.4					+0.4/-0.4				
S=1.5H	+0.6/-0.8					+0.6/-0.8				
S=2.0H	+0.9/-1.1					+0.9/-1.1				

Calculate in accordance with CIE Pub.117. The table is revised with 1322lm ($8\log(F/F_0) = 1.0$).

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM


	ZONE	LUMENS	% LAMP LUMENS
	FORWARD LIGHT	664	50.2
	FL (0°-30°)	566	42.8
	FM (30°-60°)	47	3.5
	FH (60°-80°)	33	2.5
	FVH (80°-90°)	18	1.4
	BACK LIGHT	658	49.8
	BL (0°-30°)	563	42.6
	BM (30°-60°)	46	3.5
	BH (60°-80°)	32	2.4
	BVH (80°-90°)	17	1.3
	UP LIGHT	0	0.0
	UL (90°-100°)	0	0.0
	UH (100°-180°)	0	0.0
	TRAPPED LIGHT	NA	NA

BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B2 U1 G1
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B2 U1 G1

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

LCS Graph

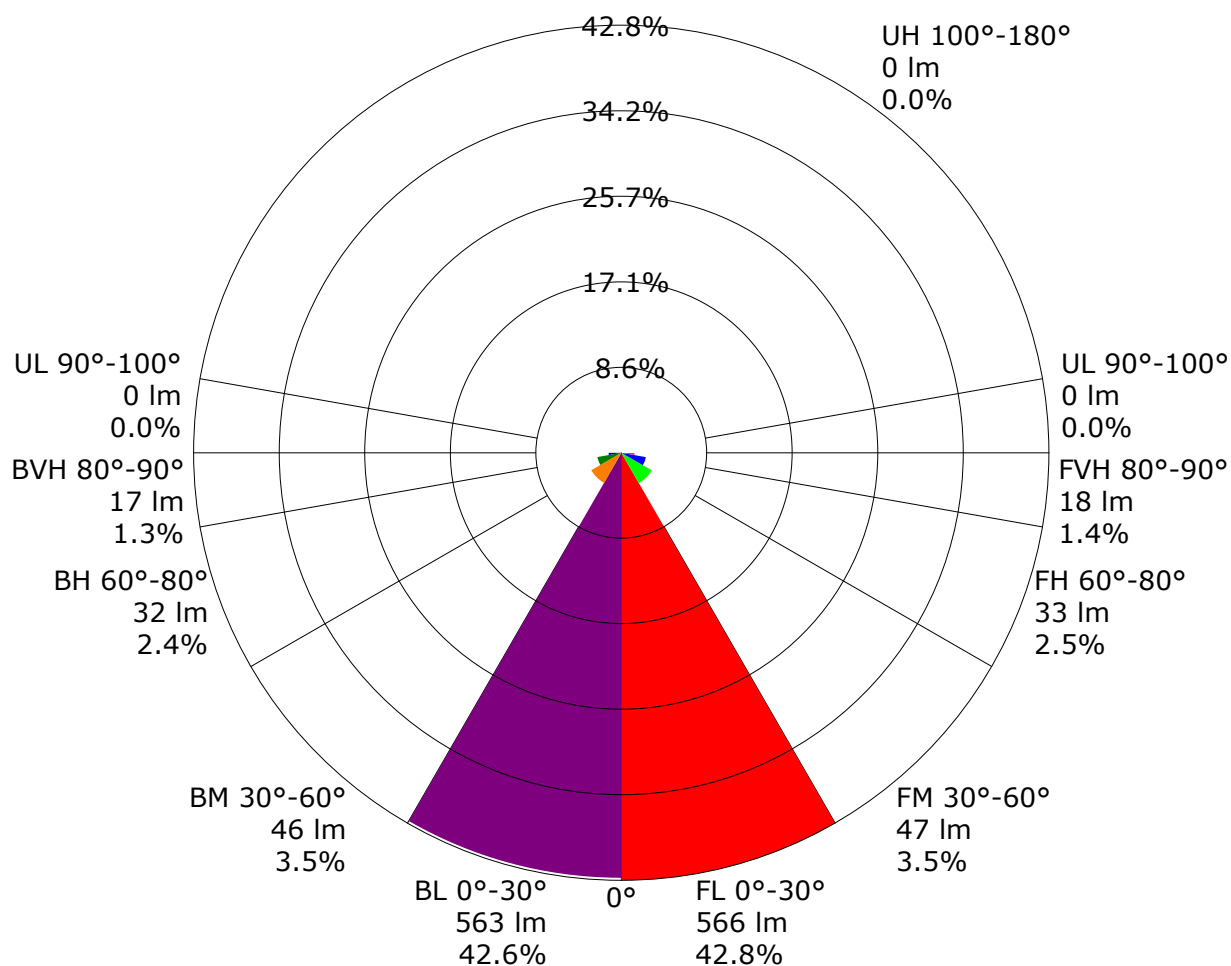

Back Light

Forward Light

Scale= MAX LCS%

Trapped Light:NA,NA

Utilisation Factor Table(Floor cavity)

Utilisation Factors UF(F)			SHR NOM = 0.75									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.93	0.97	1.00	1.02	1.05	1.07	1.08	1.10	1.12	
	0.30		0.90	0.93	0.96	0.98	1.01	1.03	1.05	1.08	1.09	
	0.20		0.87	0.90	0.93	0.95	0.98	1.01	1.03	1.06	1.07	
0.50	0.50	0.20	0.92	0.95	0.98	0.99	1.02	1.03	1.05	1.06	1.07	
	0.30		0.89	0.92	0.94	0.96	0.99	1.01	1.02	1.04	1.06	
	0.20		0.86	0.89	0.92	0.94	0.97	0.99	1.00	1.03	1.04	
0.30	0.50	0.20	0.91	0.94	0.96	0.97	0.99	1.00	1.01	1.03	1.04	
	0.30		0.88	0.91	0.93	0.95	0.97	0.98	1.00	1.01	1.02	
	0.20		0.86	0.89	0.91	0.92	0.95	0.97	0.98	1.00	1.01	
0.00	0.00	0.00	0.85	0.87	0.89	0.90	0.92	0.93	0.94	0.95	0.96	
Rating:15W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

Utilisation Factor Table(Wall)

Utilisation Factors UF(W)			SHR NOM = 0.75									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.48	0.41	0.36	0.32	0.26	0.22	0.20	0.16	0.13	
	0.30		0.40	0.35	0.31	0.28	0.24	0.20	0.18	0.15	0.12	
	0.20		0.34	0.30	0.28	0.25	0.22	0.19	0.17	0.14	0.12	
0.50	0.50	0.20	0.45	0.38	0.33	0.30	0.24	0.25	0.18	0.14	0.12	
	0.30		0.38	0.33	0.29	0.26	0.22	0.19	0.17	0.14	0.12	
	0.20		0.33	0.29	0.26	0.24	0.20	0.18	0.16	0.13	0.11	
0.30	0.50	0.20	0.43	0.36	0.31	0.28	0.22	0.19	0.17	0.13	0.11	
	0.30		0.37	0.32	0.28	0.25	0.21	0.18	0.16	0.13	0.11	
	0.20		0.32	0.28	0.25	0.23	0.19	0.17	0.15	0.12	0.10	
0.00	0.00	0.00	0.18	0.15	0.13	0.12	0.10	0.09	0.08	0.07	0.06	
Rating:15W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

Utilisation Factor Table(Ceiling cavity)

Utilisation Factors UF(C)			SHR NOM = 0.75									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.12	0.14	0.15	0.16	0.18	0.19	0.20	0.21	0.21	
	0.30		0.09	0.11	0.12	0.14	0.15	0.17	0.18	0.19	0.20	
	0.20		0.06	0.08	0.10	0.11	0.13	0.15	0.16	0.17	0.18	
0.50	0.50	0.20	0.12	0.13	0.15	0.16	0.17	0.18	0.19	0.20	0.20	
	0.30		0.09	0.11	0.12	0.13	0.15	0.16	0.17	0.18	0.19	
	0.20		0.06	0.08	0.10	0.11	0.13	0.14	0.15	0.17	0.18	
0.30	0.50	0.20	0.11	0.13	0.14	0.15	0.17	0.18	0.18	0.19	0.19	
	0.30		0.08	0.10	0.12	0.13	0.14	0.16	0.16	0.18	0.18	
	0.20		0.06	0.08	0.10	0.11	0.13	0.14	0.15	0.16	0.17	
0.00	0.00	0.00	NA	NA	NA	NA	NA	NA	NA	NA	NA	
Rating:15W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	3874.1	3.7	3.7	0.28	0.28
1.0-2.0	3856.6	11.1	14.8	0.84	1.12
2.0-3.0	3821.0	18.3	33.1	1.38	2.50
3.0-4.0	3770.0	25.2	58.3	1.91	4.41
4.0-5.0	3706.6	31.9	90.2	2.41	6.82
5.0-6.0	3625.7	38.1	128.3	2.88	9.71
6.0-7.0	3530.2	43.8	172.1	3.32	13.02
7.0-8.0	3420.8	49.0	221.1	3.70	16.72
8.0-9.0	3296.0	53.4	274.5	4.04	20.77
9.0-10.0	3164.4	57.3	331.8	4.33	25.10
10.0-11.0	3018.4	60.3	392.1	4.56	29.66
11.0-12.0	2862.8	62.6	454.7	4.73	34.40
12.0-13.0	2701.7	64.1	518.8	4.85	39.25
13.0-14.0	2522.7	64.6	583.4	4.89	44.13
14.0-15.0	2335.3	64.1	647.5	4.85	48.98
15.0-16.0	2135.0	62.6	710.1	4.73	53.72
16.0-17.0	1923.5	59.9	770.0	4.53	58.25
17.0-18.0	1714.2	56.5	826.5	4.28	62.52
18.0-19.0	1493.6	52.0	878.5	3.93	66.46
19.0-20.0	1278.7	46.8	925.3	3.54	70.00
20.0-21.0	1080.1	41.5	966.8	3.14	73.13
21.0-22.0	886.4	35.6	1002.4	2.70	75.83
22.0-23.0	713.9	30.0	1032.4	2.27	78.10
23.0-24.0	563.4	24.6	1057.0	1.86	79.96
24.0-25.0	435.8	19.8	1076.8	1.50	81.46
25.0-26.0	335.6	15.8	1092.7	1.20	82.66
26.0-27.0	252.9	12.4	1105.0	0.94	83.59
27.0-28.0	189.6	9.6	1114.6	0.73	84.32
28.0-29.0	145.9	7.6	1122.3	0.58	84.90
29.0-30.0	114.5	6.2	1128.4	0.47	85.37
30.0-31.0	93.6	5.2	1133.7	0.39	85.76
31.0-32.0	79.6	4.6	1138.2	0.34	86.10
32.0-33.0	69.1	4.1	1142.3	0.31	86.41
33.0-34.0	61.3	3.7	1146.0	0.28	86.69
34.0-35.0	55.0	3.4	1149.4	0.26	86.95
35.0-36.0	50.5	3.2	1152.6	0.24	87.19

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	47.2	3.1	1155.7	0.23	87.43
37.0-38.0	44.5	3.0	1158.7	0.22	87.65
38.0-39.0	42.6	2.9	1161.6	0.22	87.87
39.0-40.0	41.5	2.9	1164.5	0.22	88.09
40.0-41.0	40.8	2.9	1167.4	0.22	88.31
41.0-42.0	40.0	2.9	1170.3	0.22	88.53
42.0-43.0	39.0	2.9	1173.2	0.22	88.75
43.0-44.0	37.7	2.8	1176.0	0.22	88.97
44.0-45.0	36.5	2.8	1178.8	0.21	89.18
45.0-46.0	35.3	2.8	1181.6	0.21	89.39
46.0-47.0	33.9	2.7	1184.3	0.20	89.59
47.0-48.0	33.3	2.7	1187.0	0.20	89.79
48.0-49.0	33.3	2.7	1189.7	0.21	90.00
49.0-50.0	33.1	2.8	1192.5	0.21	90.21
50.0-51.0	32.8	2.8	1195.3	0.21	90.42
51.0-52.0	32.4	2.8	1198.1	0.21	90.63
52.0-53.0	32.3	2.8	1200.9	0.21	90.84
53.0-54.0	32.5	2.9	1203.7	0.22	91.06
54.0-55.0	32.5	2.9	1206.6	0.22	91.28
55.0-56.0	32.4	2.9	1209.6	0.22	91.50
56.0-57.0	32.3	3.0	1212.5	0.22	91.72
57.0-58.0	32.3	3.0	1215.5	0.23	91.95
58.0-59.0	32.2	3.0	1218.5	0.23	92.18
59.0-60.0	32.1	3.0	1221.5	0.23	92.41
60.0-61.0	32.1	3.1	1224.6	0.23	92.64
61.0-62.0	32.2	3.1	1227.7	0.23	92.87
62.0-63.0	32.4	3.2	1230.9	0.24	93.11
63.0-64.0	32.3	3.2	1234.0	0.24	93.35
64.0-65.0	32.1	3.2	1237.2	0.24	93.59
65.0-66.0	31.8	3.2	1240.4	0.24	93.83
66.0-67.0	31.8	3.2	1243.6	0.24	94.08
67.0-68.0	31.9	3.2	1246.8	0.24	94.32
68.0-69.0	32.1	3.3	1250.1	0.25	94.57
69.0-70.0	32.0	3.3	1253.4	0.25	94.82
70.0-71.0	31.9	3.3	1256.7	0.25	95.07
71.0-72.0	31.9	3.3	1260.0	0.25	95.32

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G0.0	3883.9	3873.3	3883.9	3873.3	3883.9					
G1.0	3882.4	3886.8	3867.0	3842.0	3882.4					
G2.0	3864.1	3883.4	3831.9	3794.9	3864.1					
G3.0	3825.9	3861.8	3780.0	3725.6	3825.9					
G4.0	3773.2	3828.4	3714.0	3651.3	3773.2					
G5.0	3710.0	3779.4	3634.6	3561.8	3710.0					
G6.0	3620.9	3709.6	3536.9	3452.3	3620.9					
G7.0	3518.0	3635.3	3430.0	3339.1	3518.0					
G8.0	3393.4	3536.1	3304.4	3209.9	3393.4					
G9.0	3259.7	3434.6	3171.3	3058.9	3259.7					
G10.0	3123.2	3315.5	3031.5	2920.5	3123.2					
G11.0	2959.2	3174.5	2870.7	2752.2	2959.2					
G12.0	2798.4	3040.6	2721.4	2585.1	2798.4					
G13.0	2630.2	2872.4	2555.8	2409.3	2630.2					
G14.0	2423.9	2711.3	2363.4	2214.9	2423.9					
G15.0	2231.9	2528.9	2186.2	2021.7	2231.9					
G16.0	2010.4	2312.1	1971.8	1816.8	2010.4					
G17.0	1790.6	2111.7	1774.7	1600.0	1790.6					
G18.0	1579.8	1900.1	1564.5	1392.6	1579.8					
G19.0	1342.8	1653.6	1338.5	1176.8	1342.8					
G20.0	1132.6	1440.4	1148.7	996.4	1132.6					
G21.0	941.8	1203.9	958.4	818.8	941.8					
G22.0	748.6	1007.8	766.0	646.1	748.6					
G23.0	591.5	818.8	616.3	515.8	591.5					
G24.0	447.5	647.0	469.0	401.1	447.5					
G25.0	344.3	515.4	361.8	300.0	344.3					
G26.0	261.5	400.1	272.4	229.4	261.5					
G27.0	189.3	301.8	198.3	170.3	189.3					
G28.0	140.7	232.5	150.0	134.0	140.7					
G29.0	108.1	178.9	115.4	107.8	108.1					
G30.0	85.8	142.9	90.1	86.6	85.8					
G31.0	73.2	118.4	76.1	75.3	73.2					
G32.0	62.9	98.8	65.0	66.9	62.9					
G33.0	56.5	85.7	57.1	59.6	56.5					
G34.0	50.4	75.6	51.6	54.0	50.4					
G35.0	46.8	65.9	46.0	50.0	46.8					
G36.0	44.2	60.0	43.4	47.4	44.2					

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G37.0	41.4	55.3	40.6	45.3	41.4					
G38.0	40.7	51.1	38.3	43.6	40.7					
G39.0	39.4	48.1	37.3	42.6	39.4					
G40.0	39.4	46.3	36.8	42.5	39.4					
G41.0	38.5	44.9	36.5	41.5	38.5					
G42.0	38.7	44.0	35.5	40.6	38.7					
G43.0	36.8	42.3	35.0	39.2	36.8					
G44.0	36.4	40.9	33.7	37.2	36.4					
G45.0	35.4	39.6	32.9	36.4	35.4					
G46.0	33.7	37.3	31.3	35.6	33.7					
G47.0	32.6	35.9	30.5	34.5	32.6					
G48.0	32.5	34.8	30.8	35.0	32.5					
G49.0	32.4	34.7	31.0	35.0	32.4					
G50.0	31.8	34.5	30.9	34.8	31.8					
G51.0	31.7	33.7	30.8	34.5	31.7					
G52.0	31.2	33.4	29.6	34.7	31.2					
G53.0	31.3	33.9	30.3	33.8	31.3					
G54.0	31.3	34.1	30.0	35.0	31.3					
G55.0	31.7	34.2	29.9	33.9	31.7					
G56.0	30.9	34.1	29.9	34.5	30.9					
G57.0	31.7	34.2	29.9	33.7	31.7					
G58.0	31.3	33.4	30.0	34.5	31.3					
G59.0	31.3	33.9	29.2	33.8	31.3					
G60.0	31.0	34.1	29.5	34.1	31.0					
G61.0	30.9	34.2	29.1	34.3	30.9					
G62.0	30.7	34.2	29.4	35.0	30.7					
G63.0	31.7	33.9	29.4	35.0	31.7					
G64.0	31.6	33.3	29.5	34.5	31.6					
G65.0	31.4	33.0	29.5	33.8	31.4					
G66.0	31.0	32.8	29.1	34.1	31.0					
G67.0	30.9	32.8	29.0	34.6	30.9					
G68.0	30.9	33.5	29.2	34.6	30.9					
G69.0	31.0	33.0	29.5	35.0	31.0					
G70.0	31.3	32.8	29.2	34.5	31.3					
G71.0	31.0	32.6	29.1	35.1	31.0					
G72.0	31.4	32.4	28.7	34.6	31.4					
G73.0	30.8	32.5	29.5	33.7	30.8					

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-90.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Unit: cd

Gamma Plane (°):0.0-90.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector: