

Report No.:

Test Time: 2026-05-27 16:23

Luminaire Property


Luminaire Manufacturer: NORDECOR
Luminaire Description: 80103
Luminous Width (mm): 80
Current: 0.142 A
Power Factor: 0.460

Luminous Length (mm): 80
Voltage: 220.4 V
Power: 14.38 W


Photometric Results

CIE Class: Direct	Total Rated Lamp Lumens: 1415.4 lm
Measurement Flux: 1415.4 lm	Efficiency: 100%
Downward Ratio: 97%	Upward Ratio: 3%
Horizontal Diffuse Angle(10%,50%,80%,100%): H49.4,H31.7,H19.3,H1	
Vertical Diffuse Angle(10%,50%,80%,100%): V50.2,V32.8,V20.5,V1	
Luminaire Efficacy Rating (LER): 98.48	Central Intensity: 4109.13 cd
Max. Intensity: 4112.15 cd	Pos of Max. Intensity: H0 V1
S/MH(C0/C180): 0.53	S/MH(C90/C270): 0.55

Picture Of Luminaire



Luminous Intensity Distribution Curve

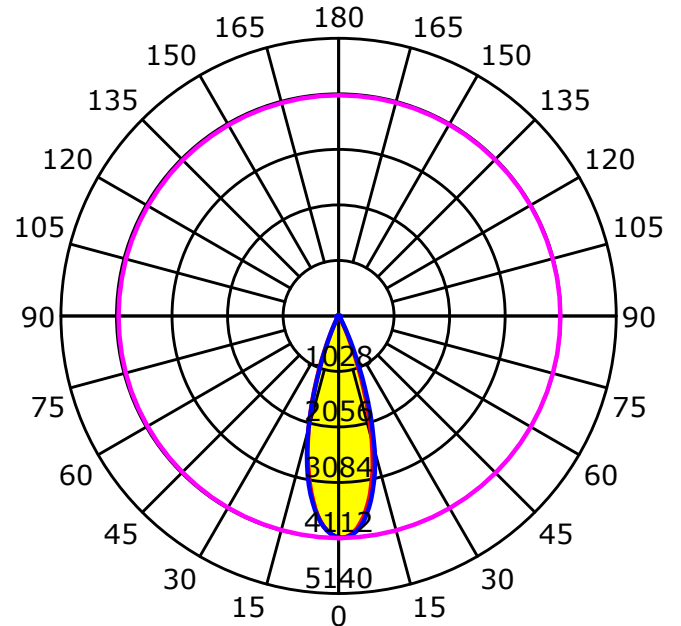

Unit: cd

Average Diffuse Angle(50%): 32.3°

— C0-C180 — C90-C270 — G1

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0



Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

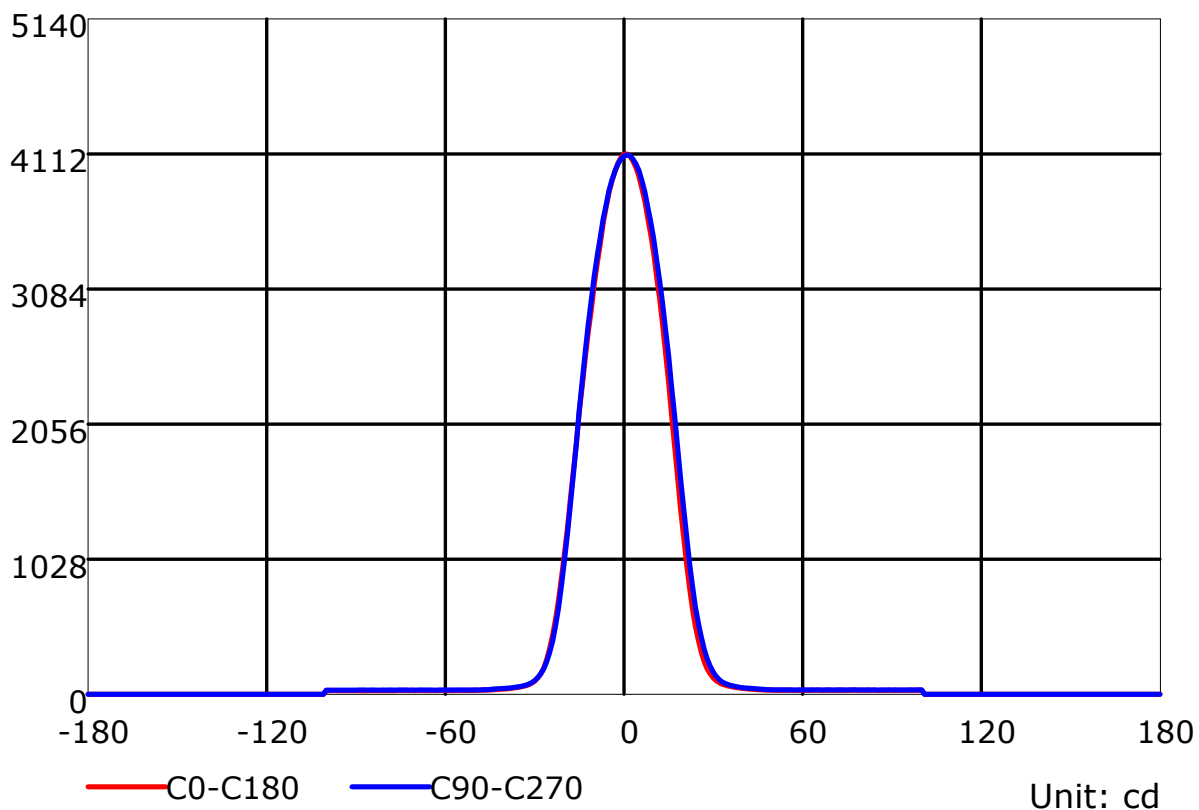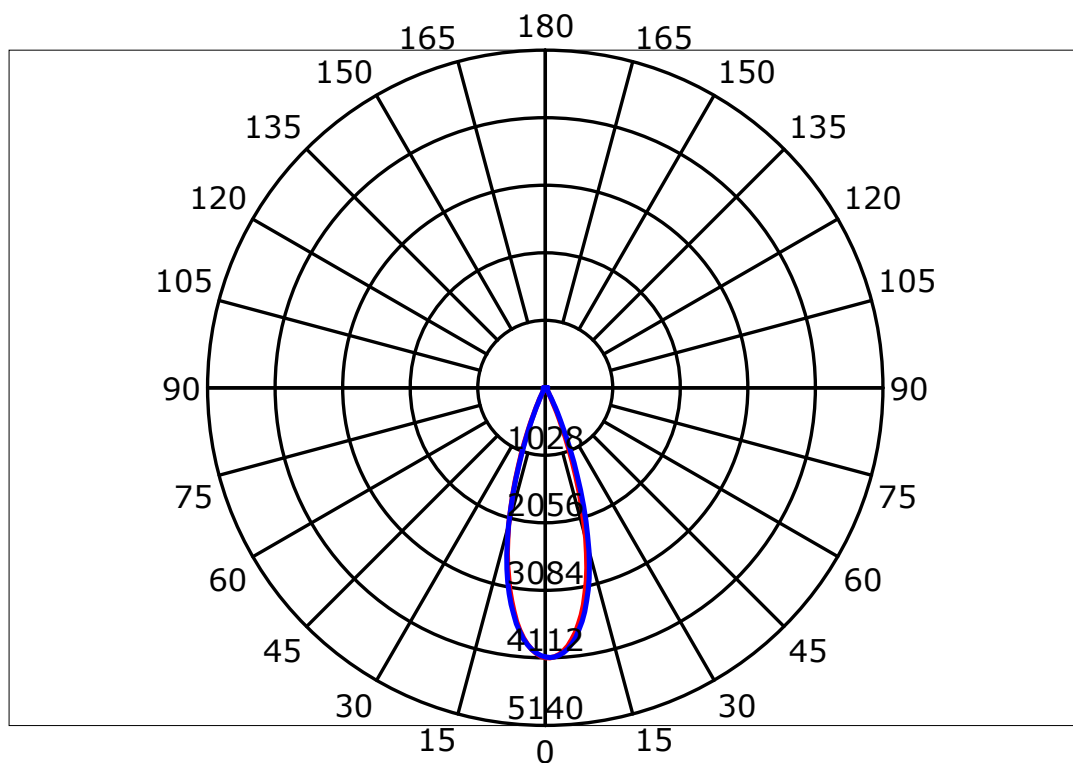

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Luminous Intensity Distribution Curve(cd/klm)

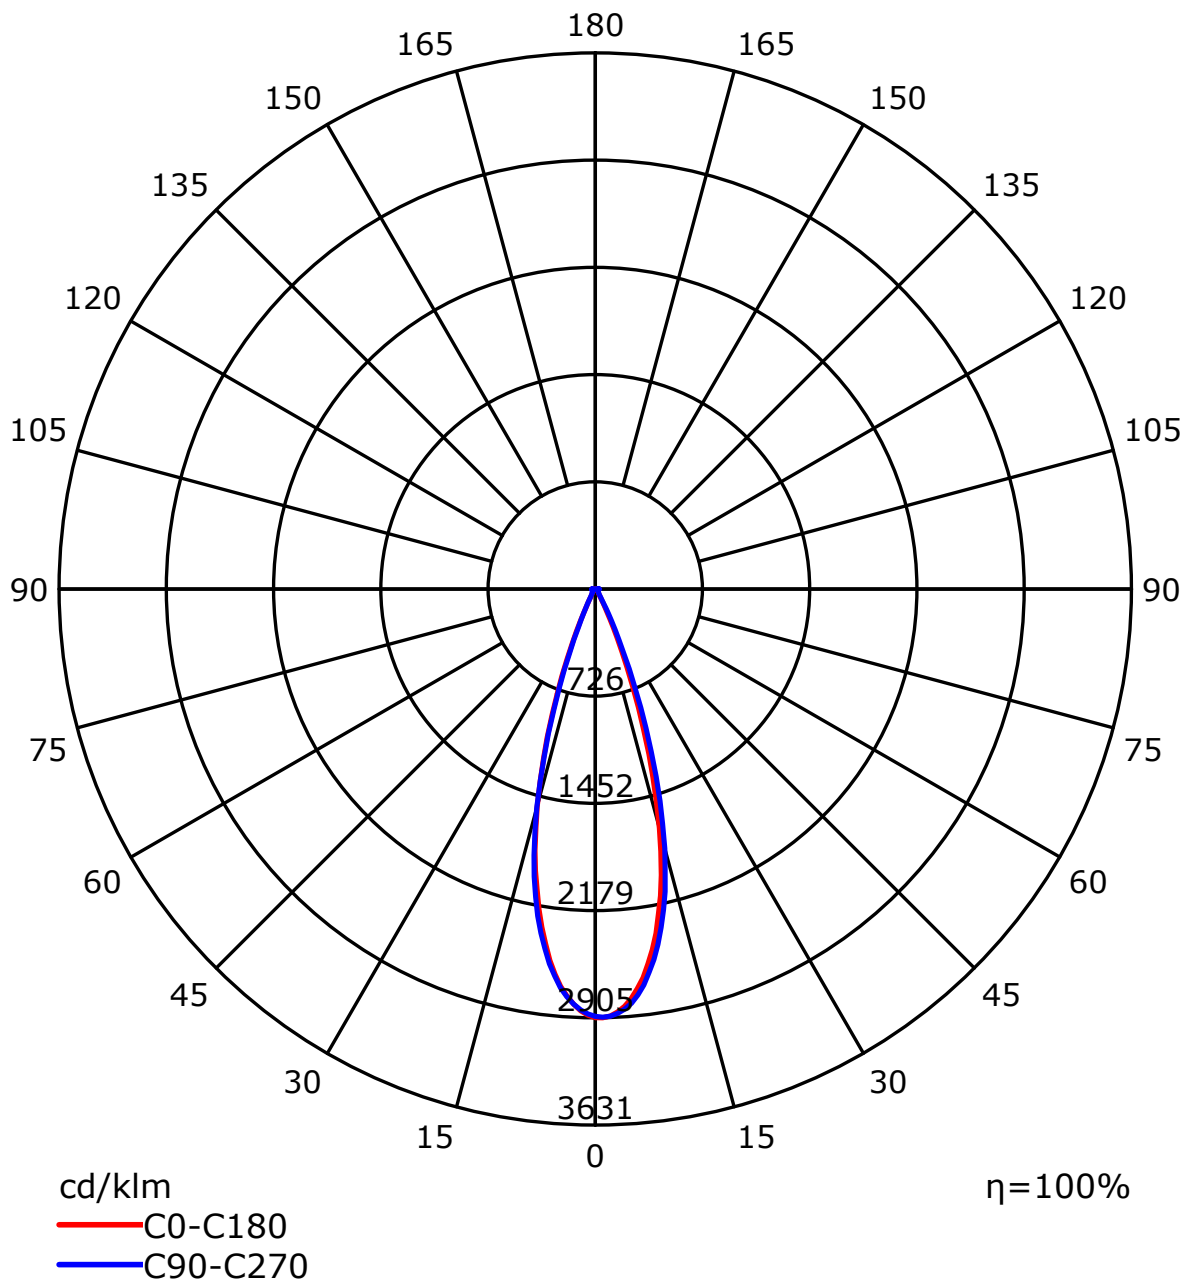


C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	118	118	118	118	115	115	115	115	110	110	110	104	104	104	100	100	100	97
1	112	109	106	104	109	107	104	102	102	100	98	98	97	95	94	93	92	90
2	107	102	98	95	105	100	97	94	97	94	91	93	91	89	90	88	87	85
3	103	97	92	88	101	95	91	87	92	88	85	89	86	84	87	84	82	81
4	99	92	87	83	97	90	86	82	88	84	81	86	82	80	84	81	79	77
5	95	88	82	78	93	86	82	78	84	80	77	83	79	76	81	78	75	74
6	92	84	79	75	90	83	78	75	81	77	74	80	76	73	78	75	72	71
7	88	80	75	72	87	80	75	71	78	74	71	77	73	70	76	72	70	69
8	86	77	72	69	84	77	72	69	76	71	68	75	71	68	73	70	68	66
9	83	75	70	66	82	74	70	66	73	69	66	72	68	66	71	68	65	64
10	80	72	67	64	79	72	67	64	71	67	64	70	66	64	69	66	63	62

Spacing Criteria (0-180): 0.53
Spacing Criteria (90-270): 0.55
Spacing Criteria (Diagonal): 0.51

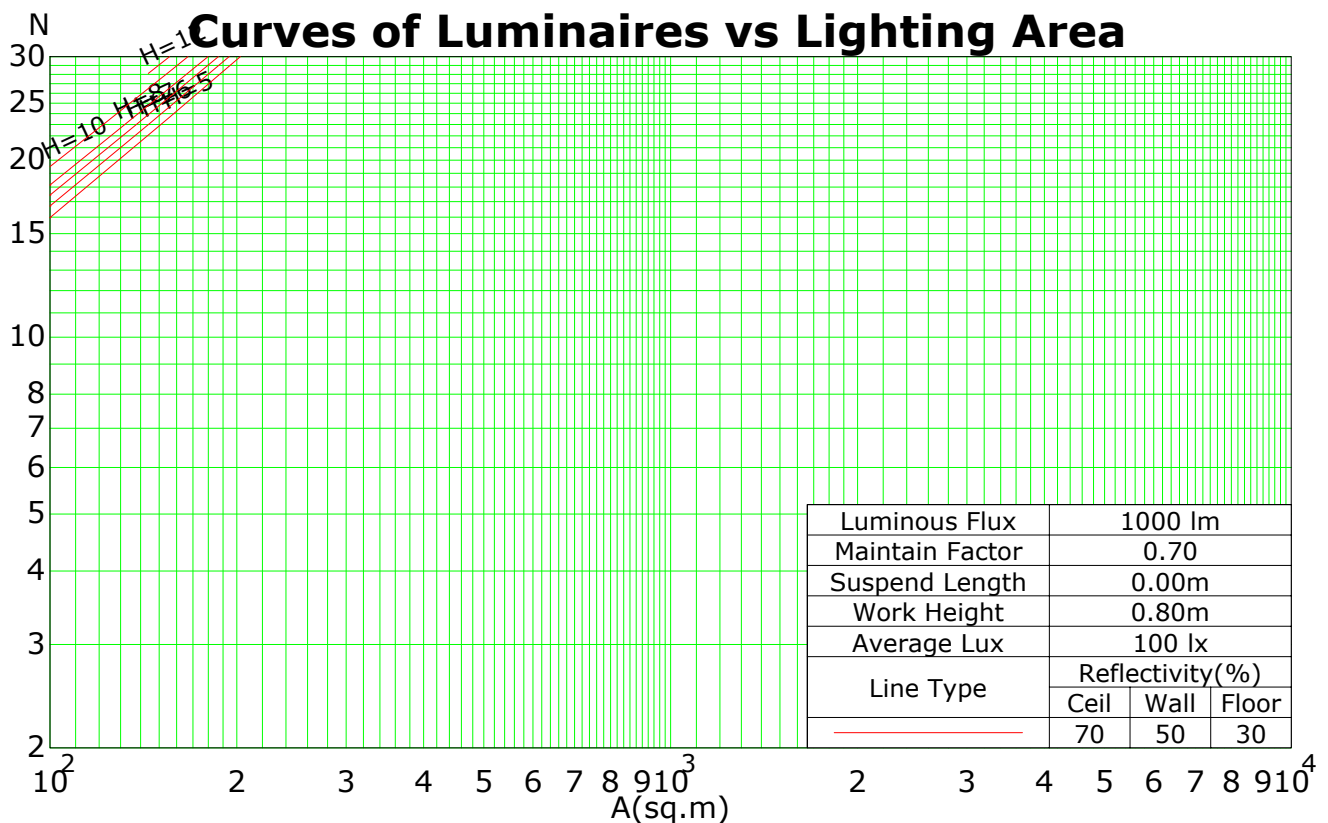

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Isocandela (rectangle)

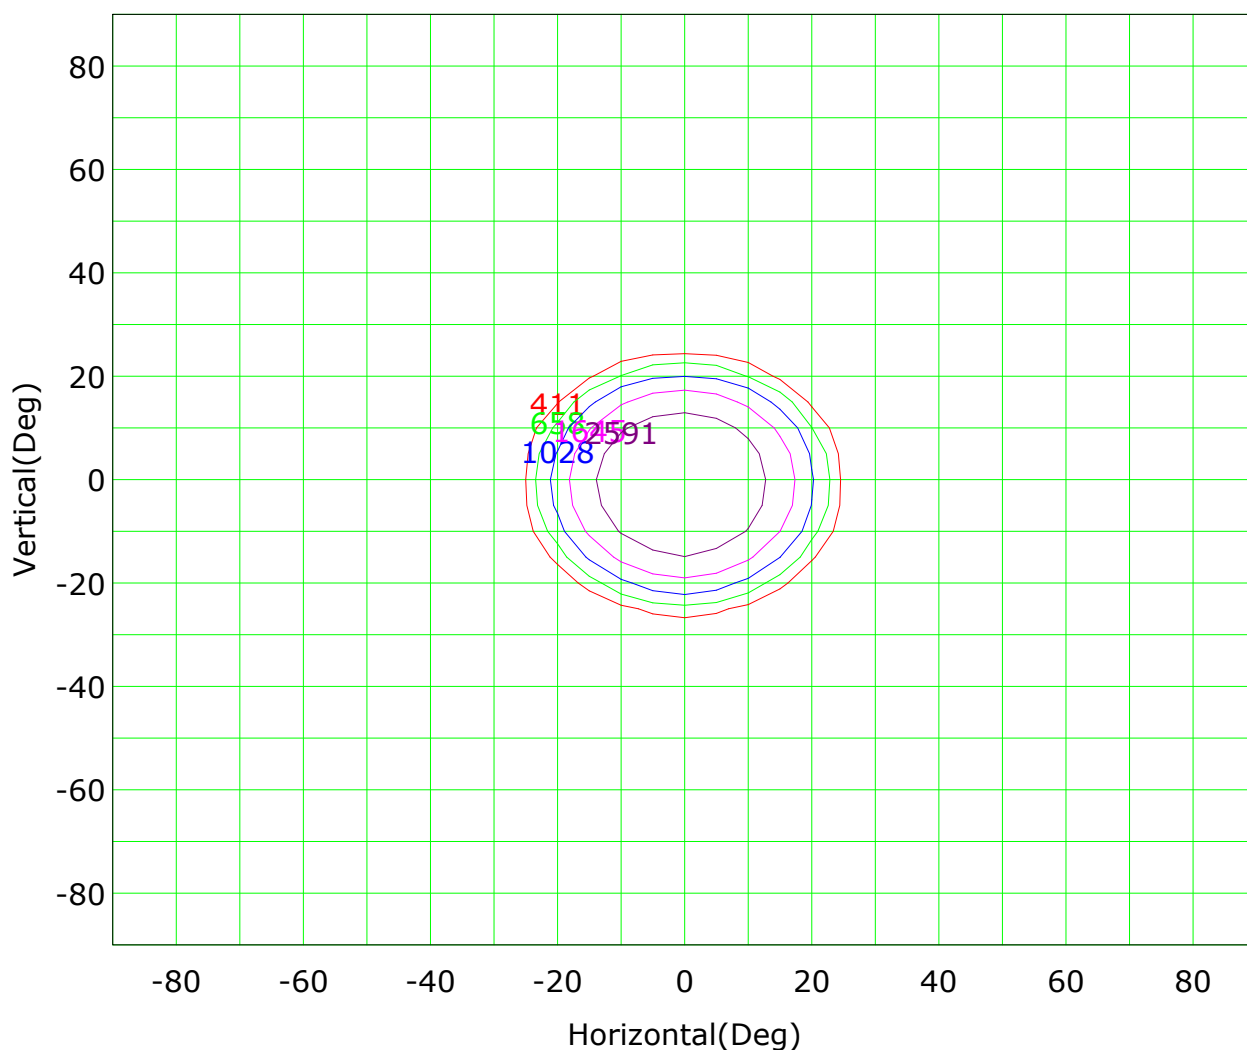


Imax (100%): 4112 cd

(10%): 411 cd	(16%): 658 cd
(25%): 1028 cd	(40%): 1645 cd
(63%): 2591 cd	(100%): 4112 cd

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Isocandela (sphere)

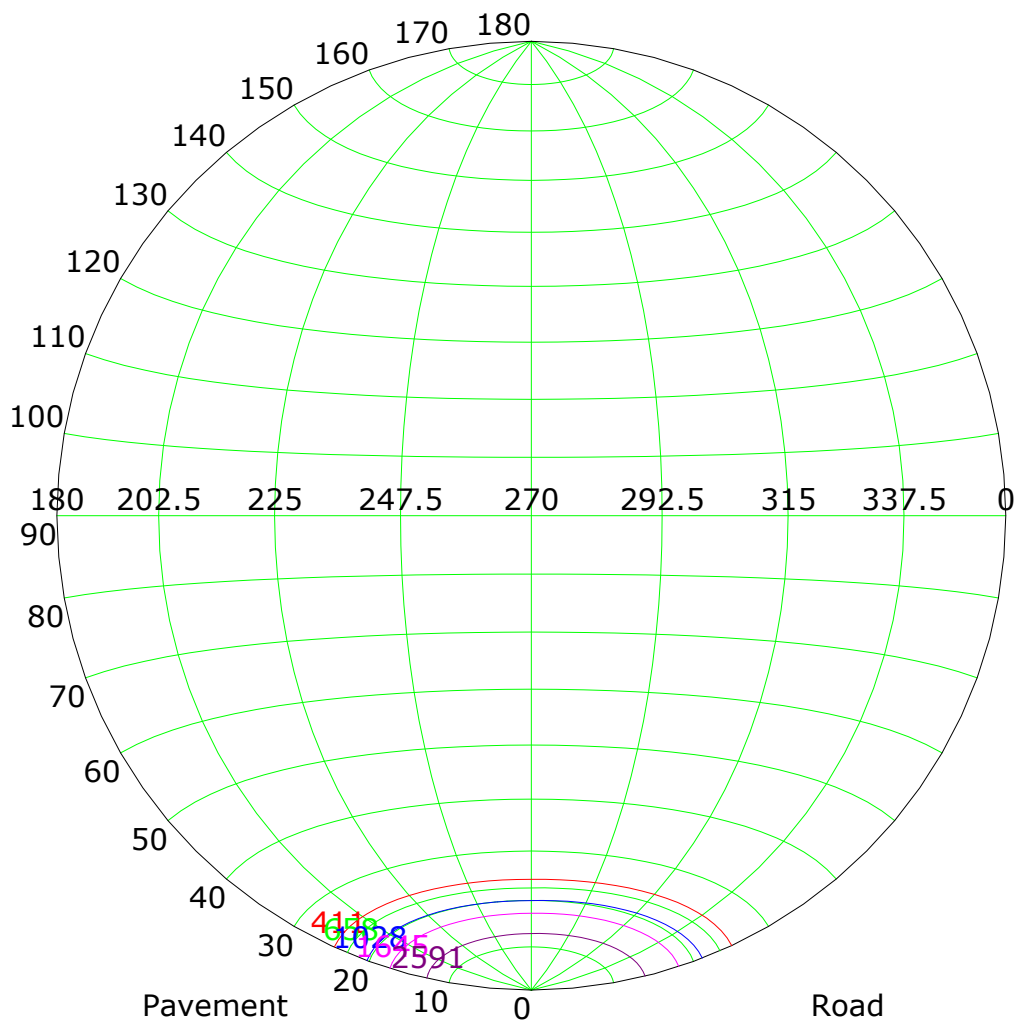

Imax (100%): 4112 cd


— (10%): 411 cd
— (25%): 1028 cd
— (63%): 2591 cd

— (16%): 658 cd
— (40%): 1645 cd
— (100%): 4112 cd

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

IsoLux Plot

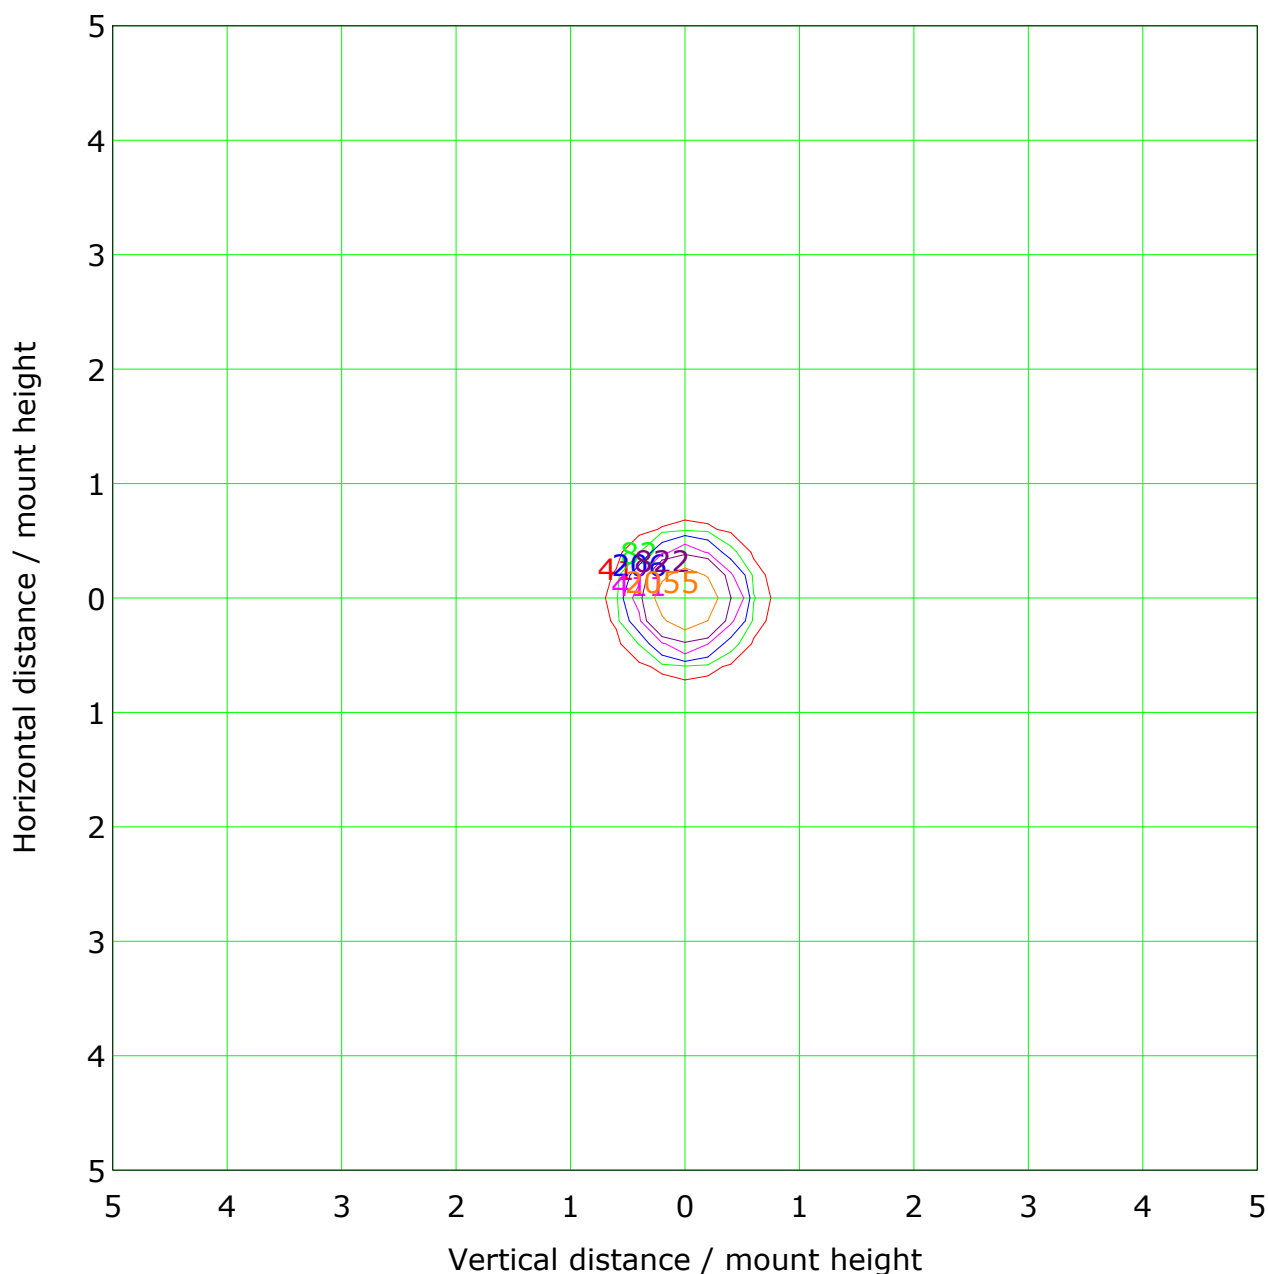

Mounting Height: 1.0m Max Lux(100%): 4110.3 lx


(1%): 41.1 lx	(2%): 82.2 lx
(5%): 205.5 lx	(10%): 411.0 lx
(20%): 822.1 lx	(50%): 2055.1 lx
(100%): 4110.3 lx	

C Plane (°): 0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-180.0: 1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Roadway CU Curve

Efficiency(%)

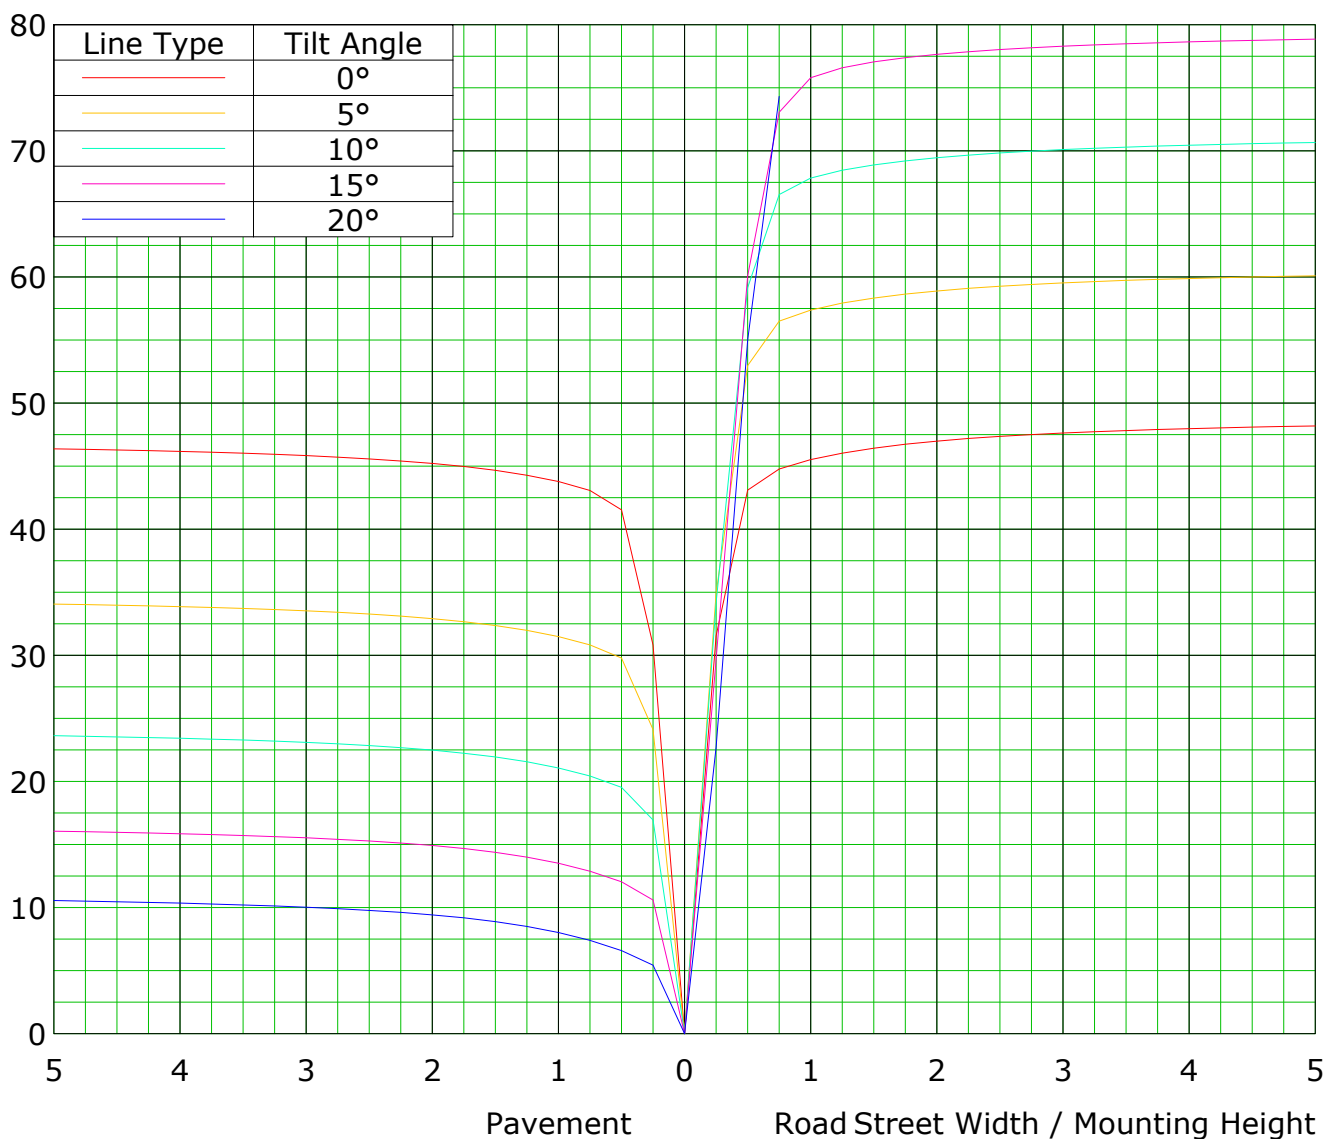

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L



Distance: 8.443 m

Humidity:

Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

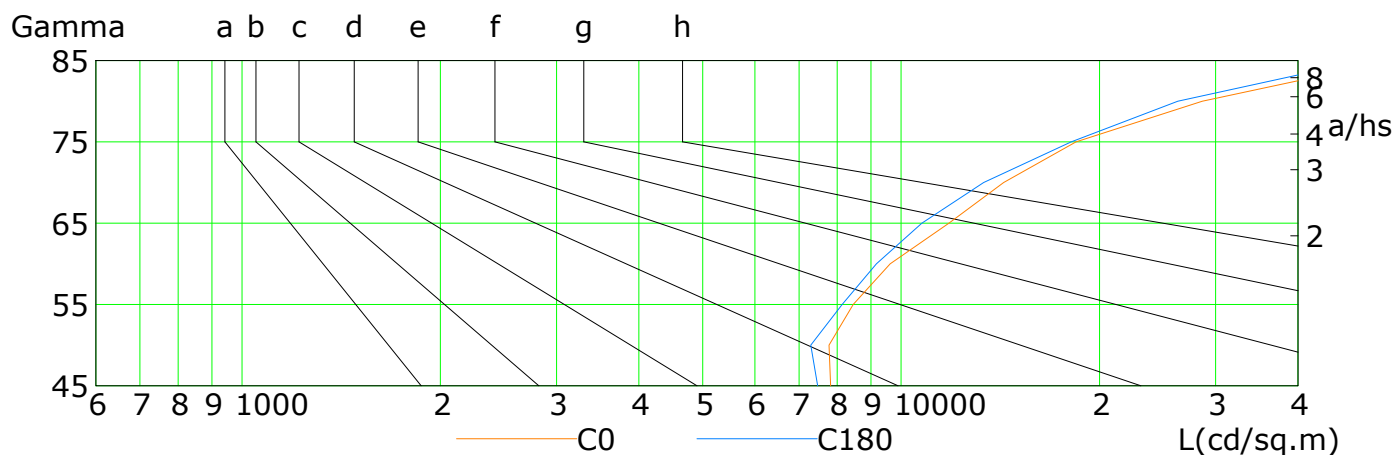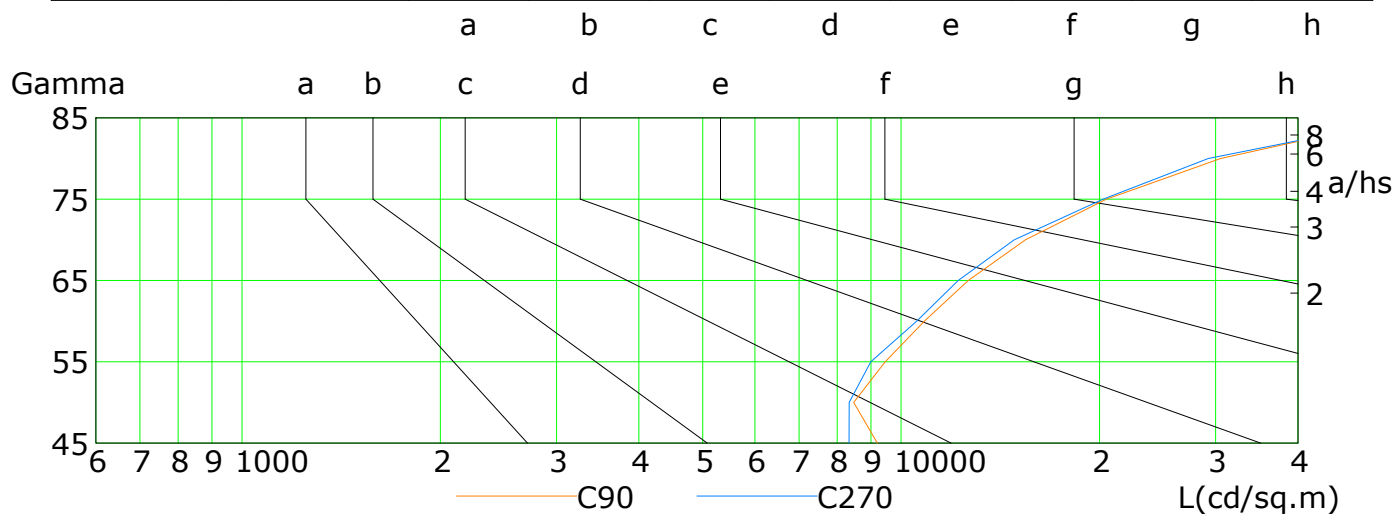

L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	7816	7771	8458	9622	11820	14304	18425	28641	55432
C90	9206	8471	9458	10850	12641	15441	20484	30530	58014
C180	7469	7292	8137	9172	10751	13344	18111	26283	50269
C270	8337	8343	8992	10563	12204	14843	20248	29235	59412

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-1600L

Distance: 8.443 m


Humidity:

Inspector:

Illuminance at a Distance

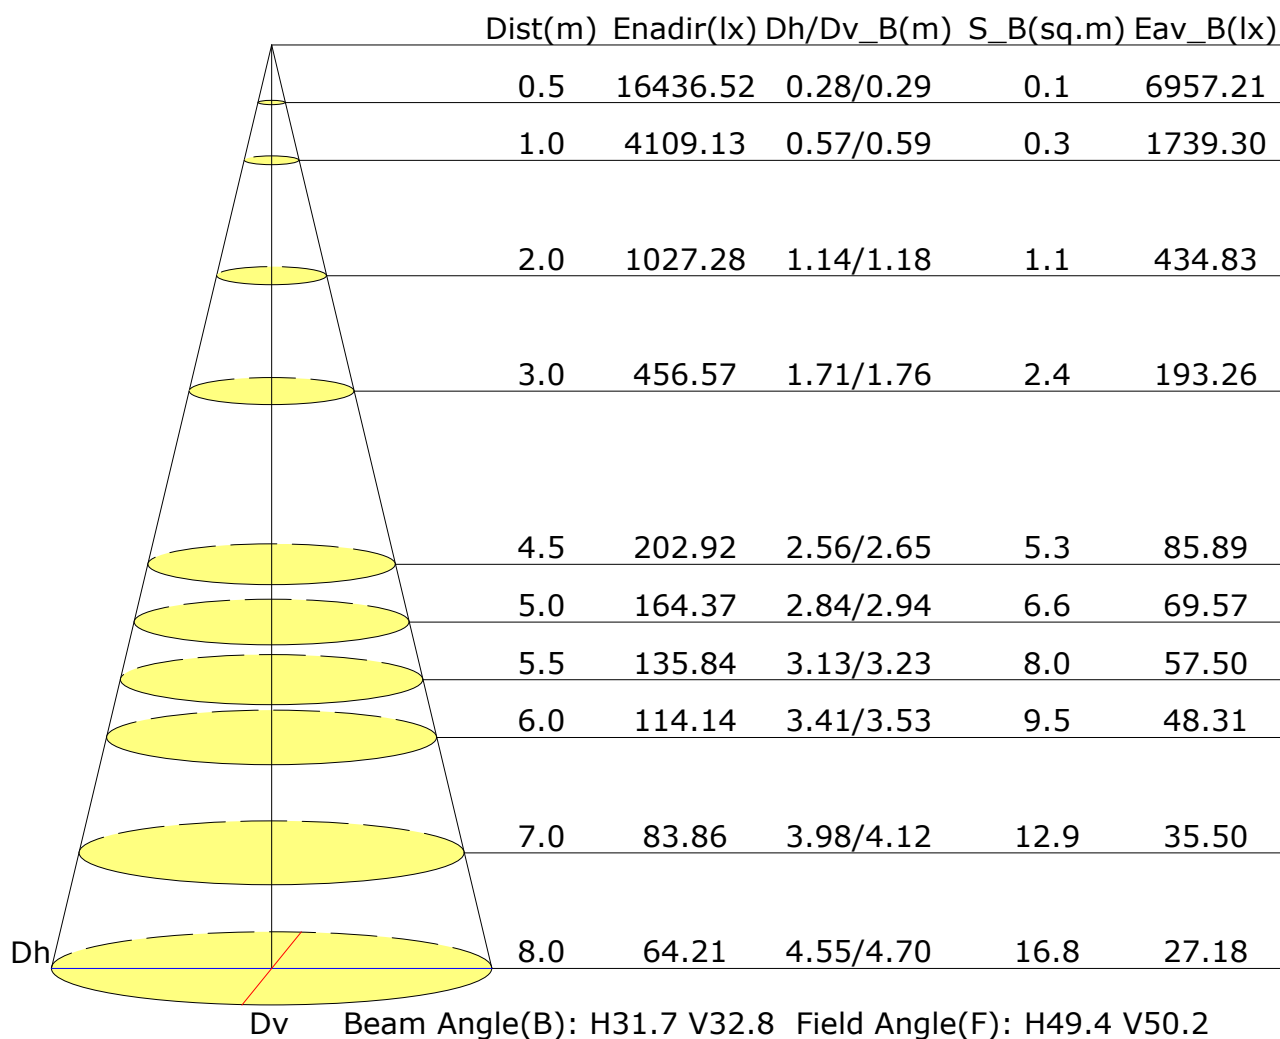

Vertical IsoLux Plot

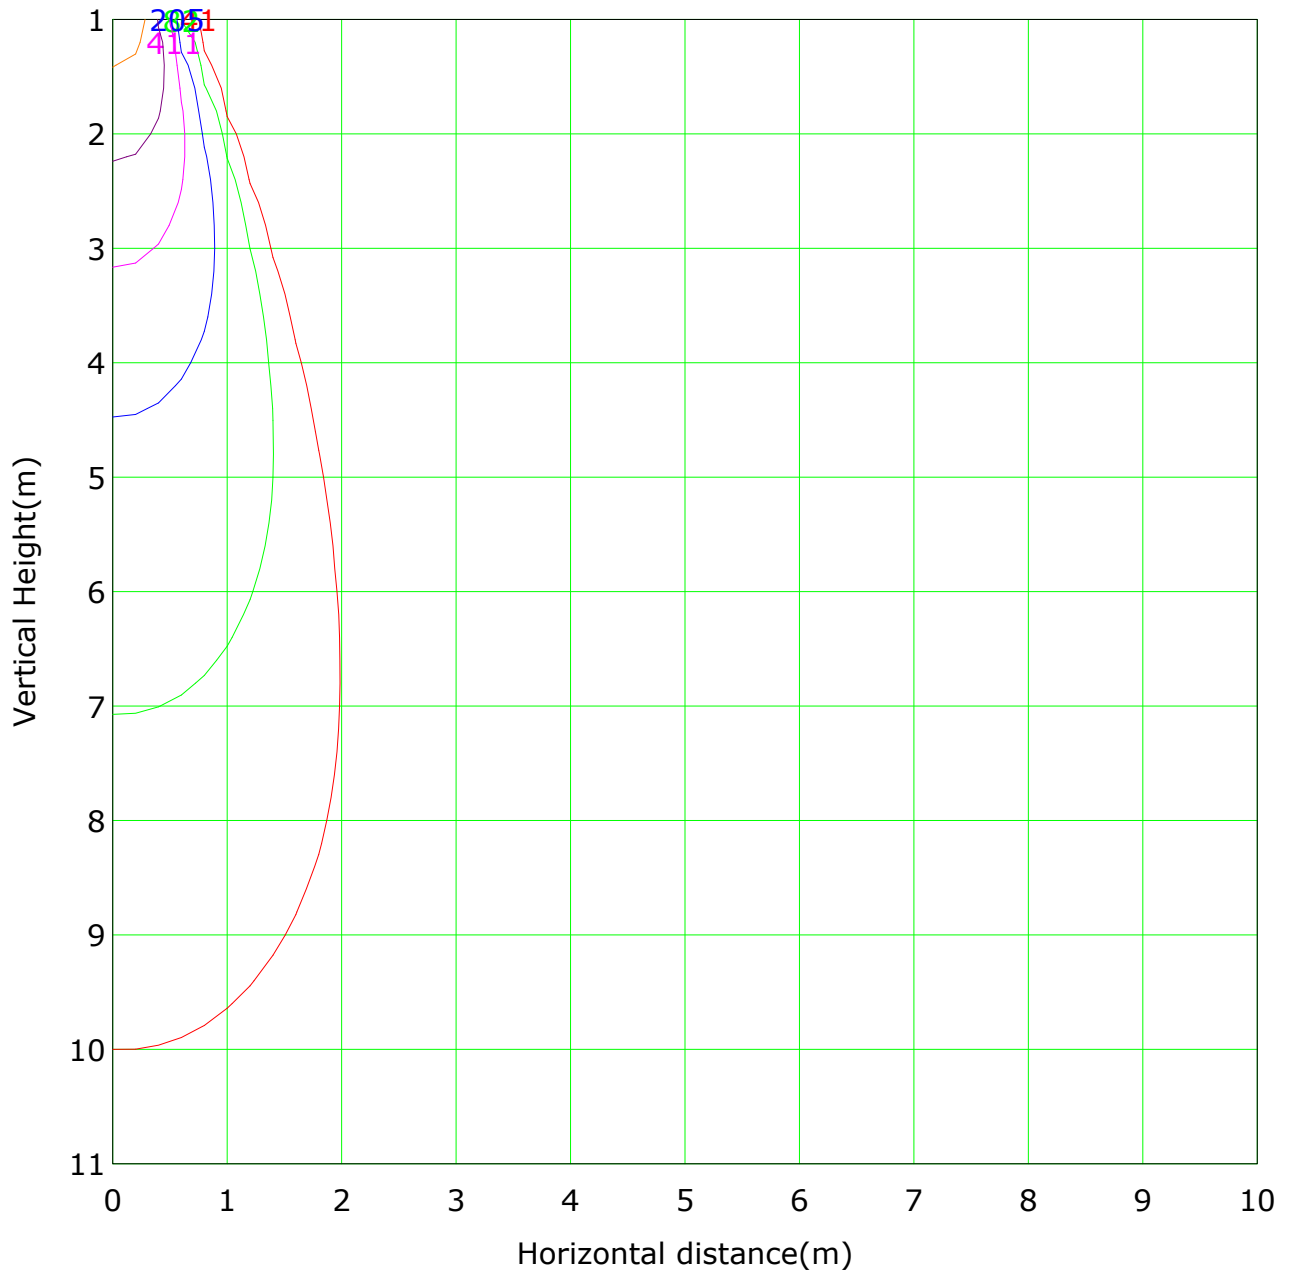

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 4109.1 lx
— (1%): 41.1 lx — (2%): 82.2 lx
— (5%): 205.5 lx — (10%): 410.9 lx
— (20%): 821.8 lx — (50%): 2054.6 lx
— (100%): 4109.1 lx

Area Flux Table

Unit: lm

Vertical plane		-90	-80	-70	-60	-50	-40	-30	-20	-10	0	10	20	30	40	50	60	70	80	90
Flux(E)	Flux(T)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	1.4
0.0	4.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	4.2
0.0	6.9	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	6.9
0.0	9.6	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	9.6
0.0	12.4	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	12.4
0.0	17.2	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	17.2
16.0	46.6	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	46.6
173.4	197.2	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	197.2
356.9	2379.3	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	2379.3
365.3	3387.7	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	3387.7
186.4	7210.7	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	7210.7
20.4	51.4	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	51.4
0.0	18.1	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	18.1
0.0	12.8	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	12.8
0.0	10.0	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	10.0
0.0	7.3	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	7.3
0.0	4.4	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	4.4
0.0	1.5	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	1.5
0.0	1379	11.3	11.2	11.2	11.2	11.2	11.2	11.2	11.2	11.2	11.2	11.2	11.2	11.2	11.2	11.2	11.2	11.2	11.2	1379
1118		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

The Average Illuminance Effective Figure

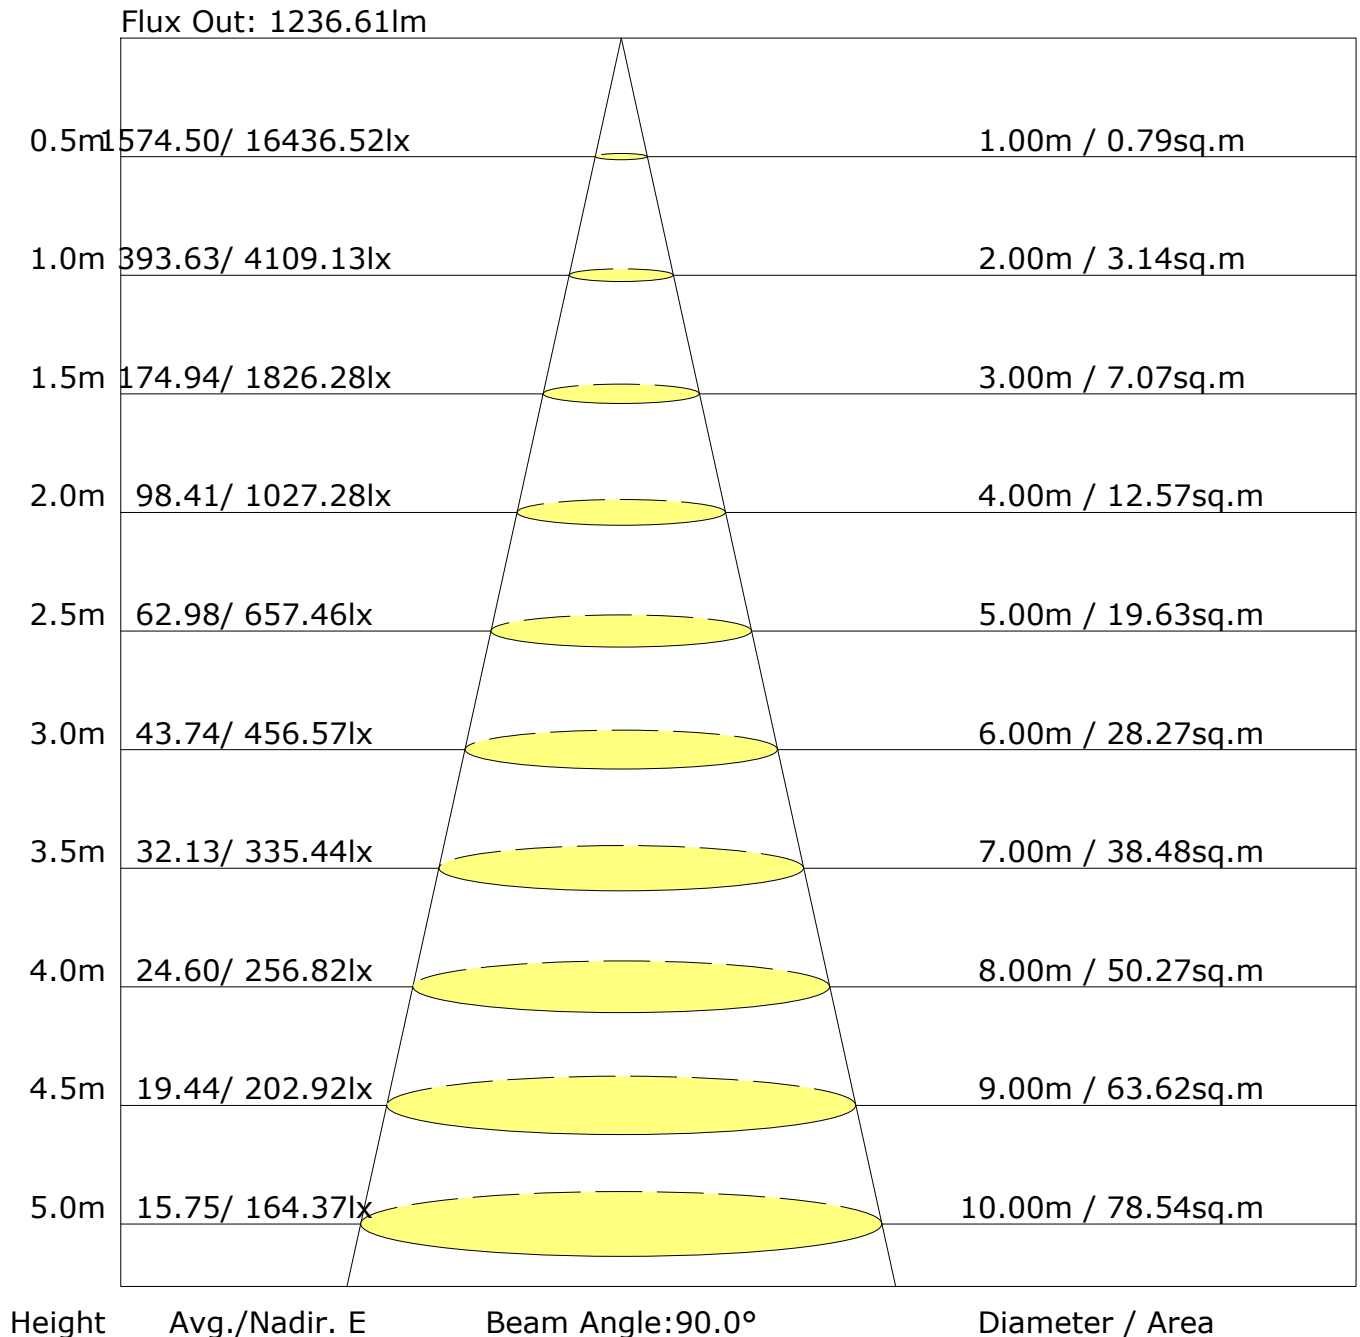

C Plane (°): 0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°): 0.0-180.0: 1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

UGR Table

Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	13.7	14.5	14.0	14.7	15.0	14.1	14.8	14.4	15.1	15.3
3H	16.8	17.5	17.2	17.8	18.1	17.2	17.9	17.5	18.2	18.5
4H	18.7	19.3	19.0	19.6	19.9	19.1	19.7	19.4	20.0	20.3
6H	20.7	21.4	21.1	21.7	22.0	21.2	21.8	21.5	22.1	22.4
8H	21.9	22.5	22.3	22.8	23.2	22.3	22.9	22.7	23.3	23.6
12H	23.2	23.8	23.6	24.1	24.5	23.7	24.2	24.1	24.6	25.0
X=4H Y=2H	14.9	15.6	15.3	15.9	16.2	15.2	15.8	15.5	16.1	16.4
3H	18.2	18.8	18.6	19.2	19.5	18.5	19.1	18.9	19.4	19.8
4H	20.2	20.7	20.6	21.1	21.5	20.5	21.0	21.0	21.4	21.8
6H	22.4	22.9	22.9	23.3	23.8	22.8	23.3	23.2	23.7	24.1
8H	23.7	24.1	24.1	24.5	25.0	24.0	24.5	24.5	24.9	25.4
12H	25.1	25.5	25.5	25.9	26.4	25.5	25.9	26.0	26.3	26.8
X=8H Y=4H	21.1	21.5	21.5	21.9	22.4	21.3	21.8	21.8	22.2	22.7
6H	23.6	23.9	24.1	24.4	24.9	23.8	24.2	24.3	24.7	25.2
8H	25.0	25.3	25.5	25.8	26.3	25.3	25.6	25.8	26.1	26.6
12H	26.6	26.9	27.1	27.4	27.9	26.9	27.2	27.5	27.7	28.3
X=12H Y=4H	21.3	21.7	21.8	22.2	22.7	21.5	21.9	22.0	22.4	22.9
6H	23.9	24.3	24.5	24.8	25.3	24.2	24.5	24.7	25.0	25.5
8H	25.5	25.7	26.0	26.3	26.8	25.7	26.0	26.3	26.5	27.1
Variations with the observer position at spacings:										
S=1.0H	+0.4/-0.4					+0.4/-0.4				
S=1.5H	+0.6/-0.8					+0.6/-0.8				
S=2.0H	+0.9/-1.1					+0.9/-1.1				

Calculate in accordance with CIE Pub.117. The table is revised with 1415lm ($8\log(F/F_0) = 1.2$).

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

FLUX DISTRIBUTION TABLE BASED ON THE IESNA LUMINAIRE CLASSIFICATION SYSTEM


	ZONE	LUMENS	% LAMP LUMENS
	FORWARD LIGHT	704	49.8
	FL (0°-30°)	602	42.5
	FM (30°-60°)	52	3.7
	FH (60°-80°)	33	2.3
	FVH (80°-90°)	18	1.2
	BACK LIGHT	675	47.7
	BL (0°-30°)	576	40.7
	BM (30°-60°)	50	3.5
	BH (60°-80°)	32	2.3
	BVH (80°-90°)	17	1.2
	UP LIGHT	36	2.5
	UL (90°-100°)	34	2.4
	UH (100°-180°)	2	0.1
	TRAPPED LIGHT	NA	NA

BUG(Backlight,Uplight,Glare) Rating Base On TM-15-07	
Asymmetrical Luminaire Types (Type I,II,III,IV)	B2 U2 G1
Quadrilateral Symmetrical Luminaire Types (Type V,Area Light)	B2 U2 G1

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

LCS Graph

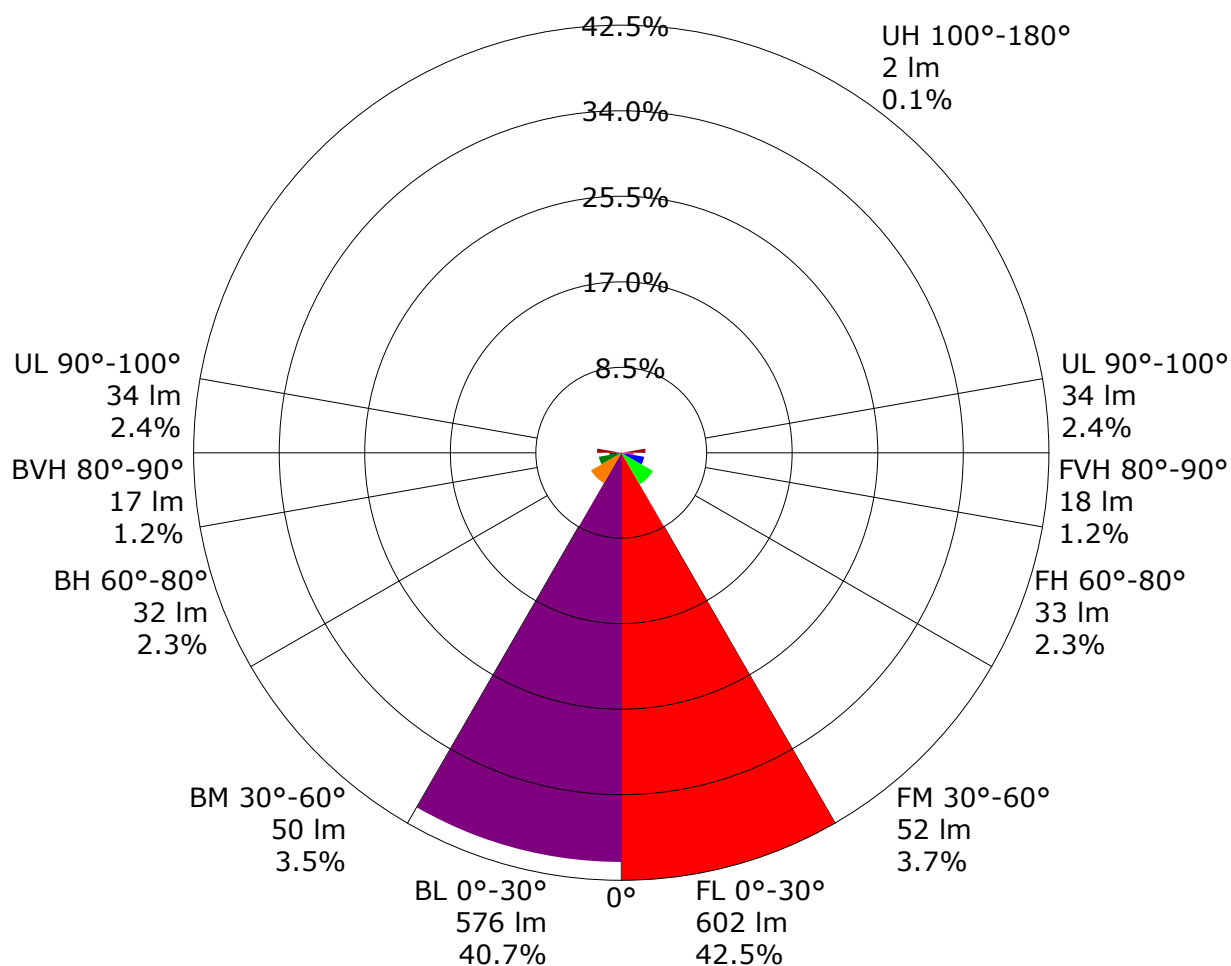

Back Light

Forward Light

Scale= MAX LCS%

Trapped Light:NA,NA

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Utilisation Factor Table(Floor cavity)

Utilisation Factors UF(F)			SHR NOM = 0.75									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.92	0.96	0.99	1.01	1.04	1.06	1.07	1.09	1.11	
	0.30		0.88	0.92	0.95	0.97	1.00	1.03	1.04	1.07	1.09	
	0.20		0.86	0.89	0.92	0.94	0.97	1.00	1.02	1.05	1.07	
0.50	0.50	0.20	0.91	0.94	0.96	0.98	1.00	1.02	1.03	1.05	1.06	
	0.30		0.87	0.91	0.93	0.95	0.98	1.00	1.01	1.03	1.04	
	0.20		0.85	0.88	0.91	0.92	0.95	0.97	0.99	1.01	1.03	
0.30	0.50	0.20	0.89	0.92	0.94	0.95	0.97	0.99	1.00	1.01	1.02	
	0.30		0.87	0.89	0.91	0.93	0.95	0.97	0.98	1.00	1.01	
	0.20		0.84	0.87	0.89	0.91	0.93	0.95	0.96	0.98	0.99	
0.00	0.00	0.00	0.83	0.85	0.87	0.88	0.90	0.91	0.92	0.93	0.94	
Rating:14W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

Utilisation Factor Table(Wall)

Utilisation Factors UF(W)			SHR NOM = 0.75									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.48	0.41	0.36	0.32	0.26	0.22	0.19	0.16	0.13	
	0.30		0.40	0.35	0.31	0.28	0.24	0.20	0.18	0.15	0.12	
	0.20		0.34	0.31	0.28	0.25	0.22	0.19	0.17	0.14	0.12	
0.50	0.50	0.20	0.45	0.38	0.33	0.29	0.24	0.24	0.18	0.14	0.12	
	0.30		0.38	0.33	0.29	0.26	0.22	0.19	0.17	0.13	0.11	
	0.20		0.33	0.29	0.26	0.24	0.20	0.18	0.16	0.13	0.11	
0.30	0.50	0.20	0.42	0.35	0.31	0.27	0.22	0.19	0.16	0.13	0.11	
	0.30		0.36	0.31	0.27	0.24	0.20	0.17	0.15	0.12	0.10	
	0.20		0.32	0.28	0.25	0.22	0.19	0.16	0.14	0.12	0.10	
0.00	0.00	0.00	0.17	0.15	0.13	0.12	0.10	0.09	0.08	0.06	0.05	
Rating:14W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

Utilisation Factor Table(Ceiling cavity)

Utilisation Factors UF(C)			SHR NOM = 0.75									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	0.14	0.16	0.18	0.19	0.20	0.21	0.22	0.23	0.24	
	0.30		0.11	0.13	0.15	0.16	0.18	0.19	0.20	0.21	0.22	
	0.20		0.09	0.11	0.12	0.14	0.16	0.17	0.18	0.20	0.21	
0.50	0.50	0.20	0.14	0.16	0.17	0.18	0.20	0.20	0.21	0.22	0.23	
	0.30		0.11	0.13	0.14	0.16	0.17	0.18	0.19	0.20	0.21	
	0.20		0.09	0.11	0.12	0.13	0.15	0.17	0.18	0.19	0.20	
0.30	0.50	0.20	0.14	0.15	0.17	0.17	0.19	0.20	0.20	0.21	0.22	
	0.30		0.11	0.13	0.14	0.15	0.17	0.18	0.19	0.20	0.20	
	0.20		0.09	0.10	0.12	0.13	0.15	0.16	0.17	0.18	0.19	
0.00	0.00	0.00	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	
Rating:14W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

Zonal Lumen

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	4099.1	3.9	3.9	0.28	0.28
1.0-2.0	4082.5	11.7	15.6	0.83	1.11
2.0-3.0	4048.8	19.4	35.0	1.37	2.47
3.0-4.0	3999.0	26.8	61.8	1.89	4.36
4.0-5.0	3934.2	33.8	95.6	2.39	6.76
5.0-6.0	3850.1	40.5	136.1	2.86	9.62
6.0-7.0	3749.4	46.5	182.6	3.29	12.90
7.0-8.0	3629.8	52.0	234.6	3.67	16.58
8.0-9.0	3496.1	56.7	291.3	4.00	20.58
9.0-10.0	3354.3	60.7	352.0	4.29	24.87
10.0-11.0	3192.0	63.8	415.8	4.51	29.38
11.0-12.0	3019.2	66.0	481.8	4.66	34.04
12.0-13.0	2839.9	67.4	549.2	4.76	38.80
13.0-14.0	2637.7	67.5	616.7	4.77	43.57
14.0-15.0	2424.0	66.6	683.3	4.70	48.27
15.0-16.0	2198.0	64.4	747.7	4.55	52.83
16.0-17.0	1963.1	61.1	808.8	4.32	57.15
17.0-18.0	1738.3	57.3	866.1	4.05	61.20
18.0-19.0	1508.1	52.5	918.6	3.71	64.90
19.0-20.0	1284.3	47.0	965.6	3.32	68.22
20.0-21.0	1084.2	41.6	1007.3	2.94	71.17
21.0-22.0	893.4	35.9	1043.2	2.54	73.70
22.0-23.0	723.3	30.4	1073.5	2.14	75.85
23.0-24.0	578.2	25.3	1098.8	1.79	77.63
24.0-25.0	456.1	20.7	1119.5	1.47	79.10
25.0-26.0	360.8	17.0	1136.6	1.20	80.30
26.0-27.0	281.0	13.7	1150.3	0.97	81.27
27.0-28.0	218.9	11.1	1161.4	0.78	82.06
28.0-29.0	174.6	9.1	1170.6	0.65	82.70
29.0-30.0	140.1	7.6	1178.1	0.53	83.24
30.0-31.0	114.5	6.4	1184.5	0.45	83.69
31.0-32.0	96.6	5.5	1190.0	0.39	84.08
32.0-33.0	83.1	4.9	1194.9	0.35	84.43
33.0-34.0	73.6	4.5	1199.4	0.31	84.74
34.0-35.0	66.3	4.1	1203.5	0.29	85.03
35.0-36.0	60.6	3.9	1207.4	0.27	85.30

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Zonal Lumen (Continue 1)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	56.5	3.7	1211.1	0.26	85.56
37.0-38.0	52.8	3.5	1214.6	0.25	85.81
38.0-39.0	49.6	3.4	1218.0	0.24	86.05
39.0-40.0	46.9	3.3	1221.2	0.23	86.28
40.0-41.0	44.9	3.2	1224.4	0.23	86.51
41.0-42.0	43.4	3.2	1227.6	0.22	86.73
42.0-43.0	41.6	3.1	1230.7	0.22	86.95
43.0-44.0	39.9	3.0	1233.7	0.21	87.16
44.0-45.0	38.1	2.9	1236.6	0.21	87.37
45.0-46.0	36.5	2.9	1239.5	0.20	87.57
46.0-47.0	35.3	2.8	1242.3	0.20	87.77
47.0-48.0	34.2	2.8	1245.0	0.20	87.97
48.0-49.0	33.3	2.7	1247.8	0.19	88.16
49.0-50.0	32.9	2.7	1250.5	0.19	88.35
50.0-51.0	32.5	2.7	1253.3	0.19	88.55
51.0-52.0	32.2	2.8	1256.0	0.20	88.74
52.0-53.0	32.1	2.8	1258.8	0.20	88.94
53.0-54.0	32.1	2.8	1261.7	0.20	89.14
54.0-55.0	32.2	2.9	1264.5	0.20	89.34
55.0-56.0	32.1	2.9	1267.4	0.21	89.55
56.0-57.0	32.1	2.9	1270.4	0.21	89.76
57.0-58.0	32.1	3.0	1273.3	0.21	89.97
58.0-59.0	32.2	3.0	1276.4	0.21	90.18
59.0-60.0	32.3	3.1	1279.4	0.22	90.39
60.0-61.0	32.2	3.1	1282.5	0.22	90.61
61.0-62.0	32.0	3.1	1285.6	0.22	90.83
62.0-63.0	31.8	3.1	1288.7	0.22	91.05
63.0-64.0	31.9	3.1	1291.8	0.22	91.27
64.0-65.0	32.1	3.2	1295.0	0.22	91.49
65.0-66.0	31.9	3.2	1298.1	0.22	91.72
66.0-67.0	31.9	3.2	1301.4	0.23	91.94
67.0-68.0	32.1	3.3	1304.6	0.23	92.17
68.0-69.0	32.0	3.3	1307.9	0.23	92.41
69.0-70.0	31.8	3.3	1311.1	0.23	92.64
70.0-71.0	31.8	3.3	1314.4	0.23	92.87
71.0-72.0	32.1	3.3	1317.8	0.24	93.10

C Plane (°):0.0-360.0: 90.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 8.443 m
Humidity:
Inspector:

Zonal Lumen (Continue 2)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	32.1	3.4	1321.1	0.24	93.34
73.0-74.0	31.9	3.4	1324.5	0.24	93.58
74.0-75.0	31.9	3.4	1327.9	0.24	93.82
75.0-76.0	32.1	3.4	1331.3	0.24	94.06
76.0-77.0	32.1	3.4	1334.7	0.24	94.30
77.0-78.0	31.8	3.4	1338.1	0.24	94.54
78.0-79.0	31.7	3.4	1341.5	0.24	94.78
79.0-80.0	31.8	3.4	1344.9	0.24	95.02
80.0-81.0	31.7	3.4	1348.4	0.24	95.27
81.0-82.0	31.6	3.4	1351.8	0.24	95.51
82.0-83.0	31.5	3.4	1355.2	0.24	95.75
83.0-84.0	31.6	3.4	1358.7	0.24	95.99
84.0-85.0	31.4	3.4	1362.1	0.24	96.24
85.0-86.0	31.3	3.4	1365.5	0.24	96.48
86.0-87.0	31.5	3.4	1369.0	0.24	96.72
87.0-88.0	31.5	3.5	1372.4	0.24	96.97
88.0-89.0	31.6	3.5	1375.9	0.24	97.21
89.0-90.0	31.4	3.4	1379.3	0.24	97.45
90.0-91.0	31.1	3.4	1382.7	0.24	97.69
91.0-92.0	31.3	3.4	1386.2	0.24	97.94
92.0-93.0	31.4	3.4	1389.6	0.24	98.18
93.0-94.0	31.2	3.4	1393.0	0.24	98.42
94.0-95.0	31.4	3.4	1396.5	0.24	98.66
95.0-96.0	31.7	3.5	1399.9	0.24	98.91
96.0-97.0	31.7	3.5	1403.4	0.24	99.15
97.0-98.0	31.7	3.4	1406.8	0.24	99.40
98.0-99.0	31.6	3.4	1410.2	0.24	99.64
99.0-100.0	31.6	3.4	1413.7	0.24	99.88
100.0-101.0	15.8	1.7	1415.4	0.12	100.00
101.0-102.0	0.0	0.0	1415.4	0.00	100.00
102.0-103.0	0.0	0.0	1415.4	0.00	100.00
103.0-104.0	0.0	0.0	1415.4	0.00	100.00
104.0-105.0	0.0	0.0	1415.4	0.00	100.00
105.0-106.0	0.0	0.0	1415.4	0.00	100.00
106.0-107.0	0.0	0.0	1415.4	0.00	100.00
107.0-108.0	0.0	0.0	1415.4	0.00	100.00

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Zonal Lumen (Continue 3)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
108.0-109.0	0.0	0.0	1415.4	0.00	100.00
109.0-110.0	0.0	0.0	1415.4	0.00	100.00
110.0-111.0	0.0	0.0	1415.4	0.00	100.00
111.0-112.0	0.0	0.0	1415.4	0.00	100.00
112.0-113.0	0.0	0.0	1415.4	0.00	100.00
113.0-114.0	0.0	0.0	1415.4	0.00	100.00
114.0-115.0	0.0	0.0	1415.4	0.00	100.00
115.0-116.0	0.0	0.0	1415.4	0.00	100.00
116.0-117.0	0.0	0.0	1415.4	0.00	100.00
117.0-118.0	0.0	0.0	1415.4	0.00	100.00
118.0-119.0	0.0	0.0	1415.4	0.00	100.00
119.0-120.0	0.0	0.0	1415.4	0.00	100.00
120.0-121.0	0.0	0.0	1415.4	0.00	100.00
121.0-122.0	0.0	0.0	1415.4	0.00	100.00
122.0-123.0	0.0	0.0	1415.4	0.00	100.00
123.0-124.0	0.0	0.0	1415.4	0.00	100.00
124.0-125.0	0.0	0.0	1415.4	0.00	100.00
125.0-126.0	0.0	0.0	1415.4	0.00	100.00
126.0-127.0	0.0	0.0	1415.4	0.00	100.00
127.0-128.0	0.0	0.0	1415.4	0.00	100.00
128.0-129.0	0.0	0.0	1415.4	0.00	100.00
129.0-130.0	0.0	0.0	1415.4	0.00	100.00
130.0-131.0	0.0	0.0	1415.4	0.00	100.00
131.0-132.0	0.0	0.0	1415.4	0.00	100.00
132.0-133.0	0.0	0.0	1415.4	0.00	100.00
133.0-134.0	0.0	0.0	1415.4	0.00	100.00
134.0-135.0	0.0	0.0	1415.4	0.00	100.00
135.0-136.0	0.0	0.0	1415.4	0.00	100.00
136.0-137.0	0.0	0.0	1415.4	0.00	100.00
137.0-138.0	0.0	0.0	1415.4	0.00	100.00
138.0-139.0	0.0	0.0	1415.4	0.00	100.00
139.0-140.0	0.0	0.0	1415.4	0.00	100.00
140.0-141.0	0.0	0.0	1415.4	0.00	100.00
141.0-142.0	0.0	0.0	1415.4	0.00	100.00
142.0-143.0	0.0	0.0	1415.4	0.00	100.00
143.0-144.0	0.0	0.0	1415.4	0.00	100.00

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Zonal Lumen (Continue 4)

Gamma [°]	I _{mean} [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
144.0-145.0	0.0	0.0	1415.4	0.00	100.00
145.0-146.0	0.0	0.0	1415.4	0.00	100.00
146.0-147.0	0.0	0.0	1415.4	0.00	100.00
147.0-148.0	0.0	0.0	1415.4	0.00	100.00
148.0-149.0	0.0	0.0	1415.4	0.00	100.00
149.0-150.0	0.0	0.0	1415.4	0.00	100.00
150.0-151.0	0.0	0.0	1415.4	0.00	100.00
151.0-152.0	0.0	0.0	1415.4	0.00	100.00
152.0-153.0	0.0	0.0	1415.4	0.00	100.00
153.0-154.0	0.0	0.0	1415.4	0.00	100.00
154.0-155.0	0.0	0.0	1415.4	0.00	100.00
155.0-156.0	0.0	0.0	1415.4	0.00	100.00
156.0-157.0	0.0	0.0	1415.4	0.00	100.00
157.0-158.0	0.0	0.0	1415.4	0.00	100.00
158.0-159.0	0.0	0.0	1415.4	0.00	100.00
159.0-160.0	0.0	0.0	1415.4	0.00	100.00
160.0-161.0	0.0	0.0	1415.4	0.00	100.00
161.0-162.0	0.0	0.0	1415.4	0.00	100.00
162.0-163.0	0.0	0.0	1415.4	0.00	100.00
163.0-164.0	0.0	0.0	1415.4	0.00	100.00
164.0-165.0	0.0	0.0	1415.4	0.00	100.00
165.0-166.0	0.0	0.0	1415.4	0.00	100.00
166.0-167.0	0.0	0.0	1415.4	0.00	100.00
167.0-168.0	0.0	0.0	1415.4	0.00	100.00
168.0-169.0	0.0	0.0	1415.4	0.00	100.00
169.0-170.0	0.0	0.0	1415.4	0.00	100.00
170.0-171.0	0.0	0.0	1415.4	0.00	100.00
171.0-172.0	0.0	0.0	1415.4	0.00	100.00
172.0-173.0	0.0	0.0	1415.4	0.00	100.00
173.0-174.0	0.0	0.0	1415.4	0.00	100.00
174.0-175.0	0.0	0.0	1415.4	0.00	100.00
175.0-176.0	0.0	0.0	1415.4	0.00	100.00
176.0-177.0	0.0	0.0	1415.4	0.00	100.00
177.0-178.0	0.0	0.0	1415.4	0.00	100.00
178.0-179.0	0.0	0.0	1415.4	0.00	100.00
179.0-180.0	0.0	0.0	1415.4	0.00	100.00

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G0.0	4109.1	4097.5	4109.1	4097.5	4109.1					
G1.0	4112.1	4105.9	4087.3	4074.6	4112.1					
G2.0	4096.4	4099.0	4046.0	4039.0	4096.4					
G3.0	4062.0	4074.9	3986.5	3986.8	4062.0					
G4.0	4012.2	4037.9	3912.9	3918.5	4012.2					
G5.0	3943.1	3987.0	3824.2	3838.1	3943.1					
G6.0	3853.0	3912.9	3713.1	3729.1	3853.0					
G7.0	3755.7	3824.9	3587.3	3619.4	3755.7					
G8.0	3627.9	3710.5	3432.4	3480.3	3627.9					
G9.0	3500.1	3596.4	3282.8	3338.8	3500.1					
G10.0	3352.7	3461.8	3118.5	3183.4	3352.7					
G11.0	3176.1	3305.5	2931.6	3006.6	3176.1					
G12.0	3007.9	3144.3	2761.7	2820.0	3007.9					
G13.0	2815.1	2976.7	2574.4	2619.2	2815.1					
G14.0	2594.7	2769.6	2357.1	2395.1	2594.7					
G15.0	2372.1	2576.1	2157.3	2170.2	2372.1					
G16.0	2129.1	2341.3	1922.1	1915.3	2129.1					
G17.0	1890.6	2124.0	1703.9	1678.2	1890.6					
G18.0	1665.5	1891.2	1497.5	1455.9	1665.5					
G19.0	1414.5	1647.8	1268.1	1224.4	1414.5					
G20.0	1207.0	1422.8	1069.5	1020.4	1207.0					
G21.0	1005.0	1218.2	895.2	835.3	1005.0					
G22.0	816.2	1001.5	717.5	658.7	816.2					
G23.0	657.7	832.5	575.3	527.3	657.7					
G24.0	517.0	663.8	449.0	403.2	517.0					
G25.0	411.0	540.1	346.8	317.7	411.0					
G26.0	320.8	435.3	265.4	249.4	320.8					
G27.0	245.6	338.6	199.1	193.4	245.6					
G28.0	193.4	268.3	155.8	157.3	193.4					
G29.0	155.9	213.0	125.5	127.5	155.9					
G30.0	124.6	168.5	100.6	105.2	124.6					
G31.0	104.7	136.9	86.2	89.7	104.7					
G32.0	89.5	112.4	74.3	79.1	89.5					
G33.0	77.9	94.8	66.8	70.2	77.9					
G34.0	70.9	83.6	60.9	63.9	70.9					
G35.0	63.5	73.5	55.0	59.2	63.5					
G36.0	58.6	67.3	51.6	56.1	58.6					

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G37.0	54.1	62.5	49.3	52.8	54.1					
G38.0	50.6	57.5	45.7	49.7	50.6					
G39.0	48.1	53.6	43.1	48.2	48.1					
G40.0	45.6	50.0	41.0	46.0	45.6					
G41.0	43.8	48.2	40.3	44.4	43.8					
G42.0	41.4	46.4	38.9	43.5	41.4					
G43.0	39.0	45.3	36.7	41.8	39.0					
G44.0	37.7	43.1	35.5	40.2	37.7					
G45.0	35.4	41.7	33.8	37.7	35.4					
G46.0	34.3	39.8	32.6	36.4	34.3					
G47.0	33.4	37.9	32.5	35.5	33.4					
G48.0	32.6	35.8	31.6	34.6	32.6					
G49.0	32.1	35.5	30.5	33.8	32.1					
G50.0	32.0	34.8	30.0	34.3	32.0					
G51.0	30.9	34.7	30.0	33.0	30.9					
G52.0	31.0	34.8	30.3	33.1	31.0					
G53.0	31.0	34.2	29.4	33.1	31.0					
G54.0	31.3	34.8	29.7	33.0	31.3					
G55.0	31.0	34.7	29.9	33.0	31.0					
G56.0	30.7	34.3	30.1	33.4	30.7					
G57.0	30.9	33.9	29.9	33.8	30.9					
G58.0	31.0	34.1	29.2	33.7	31.0					
G59.0	30.9	34.8	30.4	33.8	30.9					
G60.0	30.8	34.7	29.4	33.8	30.8					
G61.0	30.7	34.3	29.7	33.9	30.7					
G62.0	31.2	33.8	29.4	33.4	31.2					
G63.0	30.5	34.3	29.0	32.9	30.5					
G64.0	31.8	34.1	29.9	32.6	31.8					
G65.0	32.0	34.2	29.1	33.0	32.0					
G66.0	31.3	33.5	29.1	33.0	31.3					
G67.0	31.0	33.7	29.6	33.8	31.0					
G68.0	31.0	34.5	29.9	33.1	31.0					
G69.0	30.8	34.2	29.7	33.1	30.8					
G70.0	31.3	33.8	29.2	32.5	31.3					
G71.0	31.2	33.9	29.7	33.0	31.2					
G72.0	31.3	34.3	30.4	32.8	31.3					
G73.0	30.9	34.3	29.9	33.0	30.9					

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G74.0	30.5	34.1	29.7	33.0	30.5					
G75.0	30.5	33.9	30.0	33.5	30.5					
G76.0	31.4	34.3	30.1	33.3	31.4					
G77.0	31.7	34.3	28.8	32.9	31.7					
G78.0	30.7	34.6	28.2	33.3	30.7					
G79.0	31.3	33.7	28.8	33.1	31.3					
G80.0	31.8	33.9	29.2	32.5	31.8					
G81.0	31.0	33.3	28.4	33.5	31.0					
G82.0	30.8	34.5	28.6	32.8	30.8					
G83.0	30.8	33.8	28.4	32.8	30.8					
G84.0	30.7	34.6	28.6	33.1	30.7					
G85.0	30.9	32.4	28.0	33.1	30.9					
G86.0	30.7	33.8	28.8	32.6	30.7					
G87.0	31.2	34.1	27.6	33.1	31.2					
G88.0	31.3	34.1	27.8	33.0	31.3					
G89.0	30.8	34.5	27.6	33.5	30.8					
G90.0	30.7	33.4	28.0	32.5	30.7					
G91.0	30.3	34.3	28.0	31.8	30.3					
G92.0	31.3	33.9	29.0	31.8	31.3					
G93.0	30.9	34.1	28.6	31.8	30.9					
G94.0	30.5	33.8	28.0	32.0	30.5					
G95.0	31.4	33.9	29.1	32.2	31.4					
G96.0	31.6	34.5	28.6	32.1	31.6					
G97.0	31.4	33.9	29.5	32.2	31.4					
G98.0	31.0	34.5	28.4	32.5	31.0					
G99.0	31.2	35.0	28.0	32.2	31.2					
G100.0	31.3	34.6	28.3	32.5	31.3					
G101.0	0.0	0.0	0.0	0.0	0.0					
G102.0	0.0	0.0	0.0	0.0	0.0					
G103.0	0.0	0.0	0.0	0.0	0.0					
G104.0	0.0	0.0	0.0	0.0	0.0					
G105.0	0.0	0.0	0.0	0.0	0.0					
G106.0	0.0	0.0	0.0	0.0	0.0					
G107.0	0.0	0.0	0.0	0.0	0.0					
G108.0	0.0	0.0	0.0	0.0	0.0					
G109.0	0.0	0.0	0.0	0.0	0.0					
G110.0	0.0	0.0	0.0	0.0	0.0					

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Candlepower Table (Continue 3)

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G111.0	0.0	0.0	0.0	0.0	0.0					
G112.0	0.0	0.0	0.0	0.0	0.0					
G113.0	0.0	0.0	0.0	0.0	0.0					
G114.0	0.0	0.0	0.0	0.0	0.0					
G115.0	0.0	0.0	0.0	0.0	0.0					
G116.0	0.0	0.0	0.0	0.0	0.0					
G117.0	0.0	0.0	0.0	0.0	0.0					
G118.0	0.0	0.0	0.0	0.0	0.0					
G119.0	0.0	0.0	0.0	0.0	0.0					
G120.0	0.0	0.0	0.0	0.0	0.0					
G121.0	0.0	0.0	0.0	0.0	0.0					
G122.0	0.0	0.0	0.0	0.0	0.0					
G123.0	0.0	0.0	0.0	0.0	0.0					
G124.0	0.0	0.0	0.0	0.0	0.0					
G125.0	0.0	0.0	0.0	0.0	0.0					
G126.0	0.0	0.0	0.0	0.0	0.0					
G127.0	0.0	0.0	0.0	0.0	0.0					
G128.0	0.0	0.0	0.0	0.0	0.0					
G129.0	0.0	0.0	0.0	0.0	0.0					
G130.0	0.0	0.0	0.0	0.0	0.0					
G131.0	0.0	0.0	0.0	0.0	0.0					
G132.0	0.0	0.0	0.0	0.0	0.0					
G133.0	0.0	0.0	0.0	0.0	0.0					
G134.0	0.0	0.0	0.0	0.0	0.0					
G135.0	0.0	0.0	0.0	0.0	0.0					
G136.0	0.0	0.0	0.0	0.0	0.0					
G137.0	0.0	0.0	0.0	0.0	0.0					
G138.0	0.0	0.0	0.0	0.0	0.0					
G139.0	0.0	0.0	0.0	0.0	0.0					
G140.0	0.0	0.0	0.0	0.0	0.0					
G141.0	0.0	0.0	0.0	0.0	0.0					
G142.0	0.0	0.0	0.0	0.0	0.0					
G143.0	0.0	0.0	0.0	0.0	0.0					
G144.0	0.0	0.0	0.0	0.0	0.0					
G145.0	0.0	0.0	0.0	0.0	0.0					
G146.0	0.0	0.0	0.0	0.0	0.0					
G147.0	0.0	0.0	0.0	0.0	0.0					

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector:

Candlepower Table (Continue 4)

Unit: cd

G\C	C0.0	C90.0	C180.0	C270.0	C360.0					
G148.0	0.0	0.0	0.0	0.0	0.0					
G149.0	0.0	0.0	0.0	0.0	0.0					
G150.0	0.0	0.0	0.0	0.0	0.0					
G151.0	0.0	0.0	0.0	0.0	0.0					
G152.0	0.0	0.0	0.0	0.0	0.0					
G153.0	0.0	0.0	0.0	0.0	0.0					
G154.0	0.0	0.0	0.0	0.0	0.0					
G155.0	0.0	0.0	0.0	0.0	0.0					
G156.0	0.0	0.0	0.0	0.0	0.0					
G157.0	0.0	0.0	0.0	0.0	0.0					
G158.0	0.0	0.0	0.0	0.0	0.0					
G159.0	0.0	0.0	0.0	0.0	0.0					
G160.0	0.0	0.0	0.0	0.0	0.0					
G161.0	0.0	0.0	0.0	0.0	0.0					
G162.0	0.0	0.0	0.0	0.0	0.0					
G163.0	0.0	0.0	0.0	0.0	0.0					
G164.0	0.0	0.0	0.0	0.0	0.0					
G165.0	0.0	0.0	0.0	0.0	0.0					
G166.0	0.0	0.0	0.0	0.0	0.0					
G167.0	0.0	0.0	0.0	0.0	0.0					
G168.0	0.0	0.0	0.0	0.0	0.0					
G169.0	0.0	0.0	0.0	0.0	0.0					
G170.0	0.0	0.0	0.0	0.0	0.0					
G171.0	0.0	0.0	0.0	0.0	0.0					
G172.0	0.0	0.0	0.0	0.0	0.0					
G173.0	0.0	0.0	0.0	0.0	0.0					
G174.0	0.0	0.0	0.0	0.0	0.0					
G175.0	0.0	0.0	0.0	0.0	0.0					
G176.0	0.0	0.0	0.0	0.0	0.0					
G177.0	0.0	0.0	0.0	0.0	0.0					
G178.0	0.0	0.0	0.0	0.0	0.0					
G179.0	0.0	0.0	0.0	0.0	0.0					
G180.0	0.0	0.0	0.0	0.0	0.0					

C Plane (°):0.0-360.0: 90.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1600L

Distance: 8.443 m

Humidity:

Inspector: